

DEPARTMENT OF THE ARMY TECHNICAL BULLETIN

CALIBRATION PROCEDURE FOR TELETYPEWRITER TINT SET TS-799/UGM-1

Headquarters, Department of the Army, Washington D.C.
13 August 1976

TB 11-6625-620-35-1, 14 May 1974, is changed as follows:

Page 1. Paragraph 1-2, line 7. Change "AMSEL-MA-DS" to read "DRSEL-MA-Q."

Paragraph 1-3a. Line 3 is changed to read:

National stock number 6625-00-965-0196

Page 4. Paragraph 4-2 *a* (7), line 2. Add If not, perform *b* below.

Subparagraph *b* is superseded as follows:

b. Adjustments.

(1) Set % DISTORT control to 30.

(2) Adjust R2 on board 2A2A1 for a frequency indication of 8666.64 microseconds.

(3) Perform a(6) and (7) above and readjust R2, if necessary, until all settings are within tolerances.

By Order of the Secretary of the Army:

Official

PAUL T. SMITH
*Major General, United States Army
The Adjutant General*

FRED C. WEYAND
*General, United States Army
Chief of Staff*

Distribution:

To be distributed in accordance with DA Form 12-34A requirements for Calibration Procedures Publications.

This copy is a reprint which includes current pages from Change 1.

TB 11-6625-620-35-1

DEPARTMENT OF THE ARMY TECHNICAL BULLETIN

CALIBRATION PROCEDURE FOR TELETYPEWRITER TEST SET TS-799/UGM-1

Headquarters, Department of the Army, Washington, D.C.
14 May 1974

SECTION		Paragraph	Page
SECTION I.	IDENTIFICATION AND DESCRIPTION		
	Purpose and scope	1-1	1
	Reporting of technical bulletin improvements	1-2	1
	Descriptive data	1-4	2
	General instructions	1-4	2
	Difference among models	1-5	2
	II. EQUIPMENT REQUIREMENTS		
	Equipment required	2-1	2
	Accessories required	2-2	2
	III. PRELIMINARY OPERATIONS		
Precautions	3-1	3	
Telet Instrument controls	3-2	3	
SECTION IV.	CALIBRATION PROCESS		
	Baud rate frequency test	4-1	3
	Distortion generation test	4-2	4
	Power supply test	4-3	4
	Final procedure	4-4	4

SECTION I IDENTIFICATION AND DESCRIPTION

1-1. Purpose and Scope. This bulletin provides information for the periodic calibration of Teletypewriter Test Set TS-799/UGM-1. It is to be used by personnel trained and qualified in the use of calibration equipment. Since calibration personnel are trained and qualified in the usage of test and measuring equipment, detailed instructions concerning the operation and use of these equipments are not contained in this bulletin.

1-2. Reporting of Technical Bulletin Improvements. The reporting of errors, omissions, and recommendations for improving this bulletin is authorized and encouraged. Submit reports on DA Form 2028 (Recommended Changes to Publications and Blank Forms) direct Commander, US Army Elec-

tronics Command, ATTN: AMSEL-MA-DS, Fort Monmouth, NJ 07703.

1-3. Descriptive Data. Teletypewriter Test Set TS-799/UGM-1 is a transistorized test set, consisting of three main functional circuits: the test message generation logic, the distortion generation logic, and the output circuits. Additional data is listed in **a**, **b**, and **c** as follows:

a. Identification.

Nomenclature Test Set, Teletypewriter TS-799/UGM-1
Federal stock number 6625-975-0196
Size 8 2/32 x 17 1/8 x 8 7/16 in.
Weight 21 lbg
References TM 11-6625-620-12
TM 11-6625-620-45-1

b. Specifications.
 Output signal pattern Test message ("quick brown fox" message); selected characters, reversal (dot cycle)
 Output signal reversal (dot cycle) speeds 100, 75, 37.5, 37, 23 Hz
 Test message, alternate R and Y characters selected characters 7 unit code at 45 or 150 baud
 7.6 unit code at 45, 50, 74 or 75 bauds
 Signal distortion available Mark bias, space bias, space end mark end
 Percent of signal distortion available 0 to 50%
 Accuracy of signal distortion output ± 2%
 Types of output current:
 Neutral operation, internal supply 20 milliamperes (mA); 60 mA

Neutral operation, external loop used 60 mA, maximum
 Polar operation, external batteries required 30 mA
Power requirements:
 Voltage 115 or 230 volts ac ± 10%
 Frequency 50 to 60 Hz
 Power consumption 25.5 watts
c. Calibration.
 Time required
 Technique Dc-low frequency
 Interval In accordance with TB 43-180

1-4. General Instructions. *a.* Calibration Reporting. During the performance of this procedure, annotate DA Form 2416 (Calibration Data Card) in accordance with TM 38-750.

b. Test Instrument. Teletypewriter Test Set TS-799/UGM-1 will be referred to as the Test Instrument.

1-5. Difference Among Models. None

SECTION II EQUIPMENT REQUIREMENTS

NOTE

Minimum use specifications are the principal parameters required for performance of the calibration, and are included to assist in the selection of alternate equipment, which maybe used at the discretion of the calibrating activity. Satisfactory performance of alternate items shall be verified prior to use. All applicable equipment must bear evidence of current calibration.

2-1. Equipment Required. Equipment required for calibration performance tests is listed in table 2-1.

for calibration performance tests are listed in table 2-2.

2-2. Accessories Required. Accessories required

Table 2.1. Equipment Required

<i>Item</i>	<i>Minimum use specifications</i>	<i>Calibration equipment^a</i>
Frequency Meter	Range: 0 to 2 MHz Accuracy: ±1 count ± time base accuracy	AN/USM-207
Multimeter	Range: 15 to 250 Vdc Accuracy: ± 3% fs	TS-352B/U (Phoastron B)
Oscilloscope	Range: 2 Hz to 50 MHz Accuracy: ± 3%	OS-9C/U or AN/USM-281A

^a The calibration equipment utilized in this procedure was selected from those known to be available at Department of Defense facilities, and the listing by make or model number carries no implication of preference, recommendation, or approval by the Department of Defense for use by other agencies. It is recognized that equivalent equipment produced by other manufacturers may be capable of equally satisfactory performance in the procedure.

Table 2-2. Accessories Required

<i>Item</i>	<i>Description</i>
1 Cable Assembly, Radio Frequency	36 in. RG-58/U BNC and double banana plug termination FSN 4981-739-4412
2 Adapter	Double banana jack to phone plug FSN 4981-739-4421
3 Adapter	BNC Tee UG-274B/U FSN 5935-683-7892
4 Cable Assembly, Radio Frequency	30 in. RG-58/U BNC plug termination FSN 4981-843-2792
5 Attenuator	Tektronix part No. 011-0069-01 50 ohms, 2X, 2 watt

SECTION III PRELIMINARY OPERATIONS

NOTE

It is recommended that personnel familiarize themselves with the entire procedure before performing calibration.

3-1. Precaution. Before individual test equipment is connected into the calibration system, the following precautions should be taken to prevent damage to equipment.

CAUTION

Make certain that the power cable is not connected to 230 volts ac when the power switch locking guard device indicated the power toggle switch to be into the 115 volt position.

a. Connect power cable to the Test Instrument connection AC POWER.

b. Connect the other end of power cable to the 115 or 230 volt source required for proper operation, observing POWER switch position.

3-2. Test Instrument Controls. a. Set BAUDS RATE switch to 75 BAUDS.

b. Set MESSAGE SELECT switch to DOT CY.

c. Loosen % DISTORT LOCK.

d. Turn % DISTORT to 0.

e. Set DISTORT SELECT to BIAS SPACE.

f. Disregard all other switch positions.

g. Allow 5 minutes for equipment warmup.

SECTION IV CALIBRATION PROCESS

4-1. Baud Bate Frequency Test. a. Performance Check.

{1} Connect the Test Instrument as shown in figure 1.

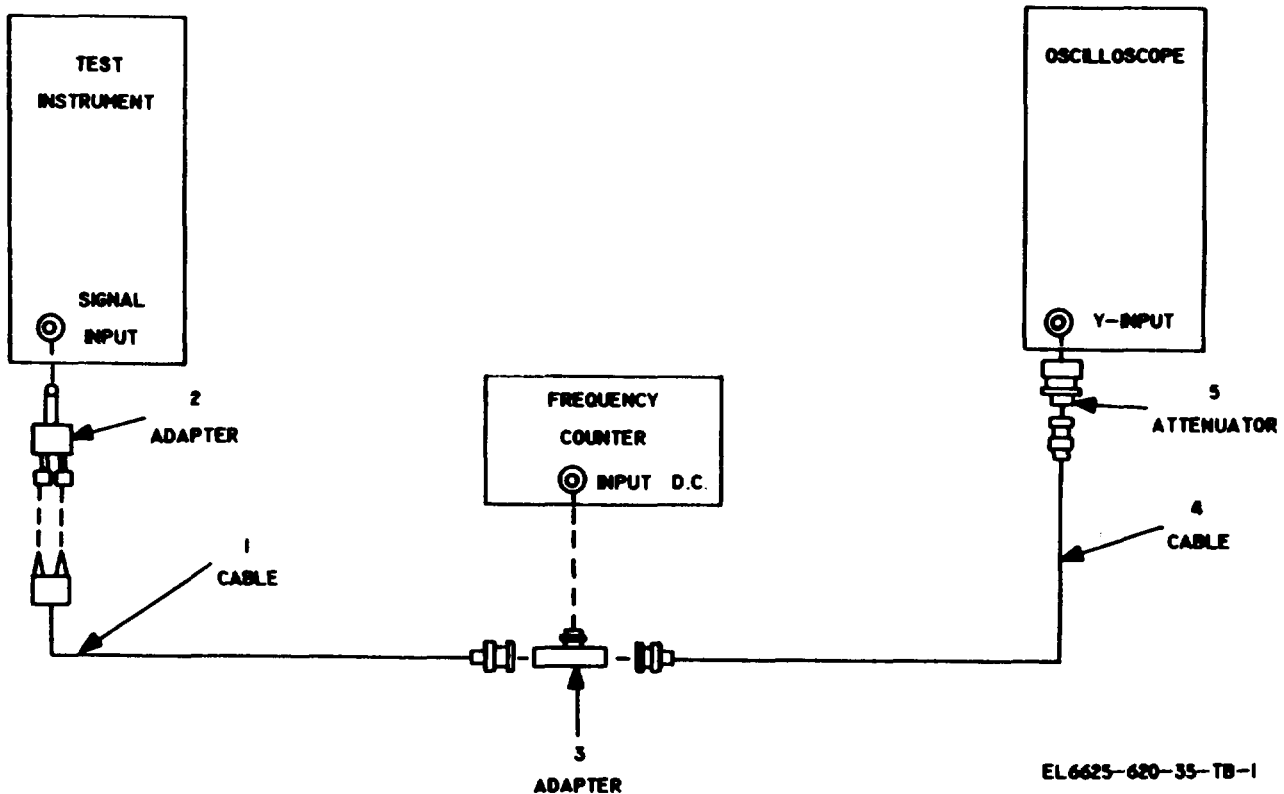


Figure 1. Teletypewriter Test Set TS-799/UGM-1, distortion and baud rate test equipment setup.

(2) Set MESSAGE SELECT switch to SELECTED PULSES.

(3) Set all five MARK SPACE toggle switches to SPACE.

(4) Set MESSAGE TRANSMIT switch to ON.

(5) Set CURRENT SELECT switch to 60.

(6) Set DISTORT SELECT switch to OFF.

(7) Adjust % DISTORT control to 0 settings.

(8) Turn BAUD RATE control to settings listed in table 4-1.

(9) Frequency counter indications in time interval shall be shown in table 4-1.

b. Adjustments. No adjustments can be made.

4-2. Distortion Generation Test. *a. Performance Check.*

(1) Using the same equipment setup, set MESSAGE SELECT switch to DOT CY.

(2) Set DISTORT SELECT switch to BIAS SPACE.

(3) Set MESSAGE TRANSMIT to ON.

(4) Set BAUDS RATE switch to 75 DOT CYCLES.

(5) On oscilloscope shall appear a series of mark and space pulses of equal width.

(6) Adjust % DISTORT control to settings as listed in table 4-2

(7) Frequency counter indications shall be as shown in table 4-2.

(8) Set DOT CYCLES switch to 22.

(9) Set the controls of the oscilloscope so that a pulse of 10 cm is displayed.

(10) Set the DOT CYCLES switch to 97.

(11) Observe that the oscilloscope displays a pulse of approx 6.2 cm.

(12) Set the DOT CYCLES switch to 37.5.

(13) observe that the oscilloscope displays a pulse of approx 6.2 cm.

(14) Set the DOT CYCLES switch to 75.

(15) Observe that the oscilloscope displays a pulse of approximately 3 cm.

(16) Set the DOT CYCLES switch to 100.

(17) Observe that the oscilloscope displays a puke of approximately 24 cm.

b. Adjustments. No adjustment can be made.

4-3. Power Supply Test

WARNING

HIGH VOLTAGE is used during the performance of this calibration. DEATH ON CONTACT may result if personnel fail to observe safety precautions.

Table 4-3. Power Supply Measurements

Test instrument connections	Multimeter indications (dc volts)	
	Minimum	Maximum
J1 and GRD	+ 14.25	+ 15.75
J3 and GRD	-14.25	-15.75
J4 and J5	+ 128.50	+ 136.50

Table 4.1. Baud Rate Frequencies

Test instrument	Frequency counter	
	Indication (milliseconds)	
	Minimum	Maximum
BAUDS RATE setting		
7.0/45.5	131.42	182.21
7.5/45.5	131.42	182.21
7.5/50	119.64	120.36
7.5/74.2	80.64	81.12
7.5/75	79.76	81.24
7.0/150	39.6	40.4

Table 4-2. Distortion Generation

Test instrument	Frequency counter	
	Indications (usec)	
	Minimum	Maximum
% DISTORT control settings		
0	6533.34	6799.98
10	7266.66	7399.98
20	7933.32	8066.64
30	8599.98	8733.30
40	9266.64	9399.96
50	9933.50	10066.62

a. Performance Check.

(1) Turn off Test Instrument, remove power cord and remove from protective case.

(2) Reconnect power cord and set POWER switch on Teat Instrument to 115V ON or 230V ON, depending on source of AC power. All other controls may be in any position.

(3) Position MESSAGE TRANSMIT switch to OFF.

(4) Teat Instrument connectors (lower rear chassis test points) measurements shall show the multimeter indications listed in table 4-3.

b. Adjustments. No adjustments can be made.

4-4. Final Procedure. *a.* Deenergize and disconnect all equipment.

b. Replace protective cover on Test Instrument.

c. In accordance with TM 38-750, annotate and affix DA Label 80 (US Army Calibration System). When the Teat Instrument cannot be adjusted-within tolerance, annotate and affix red tag, DA Form 2417 (Unserviceable or Limited Use Tag).

By Order of the Secretary of the Army:

Official:

VERNE L. BOWERS
Major General, *United States Army*
The Adjutant General

CREIGHTON W. ABRAMS
General, *United States Army*
Chief of Staff

Distribution:

To be distributed in accordance with DA Form 12-34 (qty rqr block no. 75) requirements for Calibration Procedures Publications.

* U.S. GOVERNMENT PRINTING OFFICE: 1992 - 311-831 (44508)

This fine document...

Was brought to you by me:



[Liberated Manuals -- free army and government manuals](#)

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals

- Sincerely
Igor Chudov
<http://igor.chudov.com/>
- [Chicago Machinery Movers](#)