

TECHNICAL MANUAL

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE
REPAIR PARTS AND SPECIAL TOOLS LISTS
FOR

RADIO SETS AN/ARC-134 (NSN 5821-00-937-1086)
AN/ARC-134A (NSN 5821-00-879-13771
AND
AN/ARC-134B (NSN 5821-00-181-0430)

HEADQUARTERS, DEPARTMENT OF THE ARMY
NOVEMBER 1978

**DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE
REPAIR PARTS AND SPECIAL TOOLS LISTS
FOR
RADIO SETS**

**AN/ARC-134 (NSN 5821-00-937-1086)
AN/ARC-134A (NSN 5821-00-879-1377)
AND
AN/ARC-134B (NSN 5821-00-181-0430)**

Current as of 12 June 1978

REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 located in the back of the manual. Simply tear out the self addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, New Jersey 07703.

In either case a reply will be furnished direct to you.

Table of Contents

		Page	Illus Figure
SECTION I. Introduction			
	II. Repair parts list.....	5	
Group	00 Radio Sets AN/ARC-134, AN/ARC-134A, AN/ARC-134B.....	5	1
	01 Receiver-Transmitter, Radio RT-857/ARC-134.....	7	2-6
	0101 Cable assembly, radio frequency (3W1).....	25	7
	0102 Power supply subassembly (3A7).....	27	8
	0103 Receiver-transmitter, exciter subassembly (3A8).....	31	9
	0104 Receiver-transmitter, power amplifier subassembly (3A9).....	35	10
	010401 Antenna filter subassembly (3A9A1).....	39	11
	010402 Driver assembly (3A9A5).....	41	12
	010403 Motor transmission control subassembly (3A9A6).....	45	13
	0105 Receiver assembly (3A10).....	51	14,15
	010501 Hundreth MHz oscillator subassembly (3A10A2).....	61	16
	010502 Tents MHz oscillator subassembly (3A10A3).....	65	17
	010503 Units MHz oscillator subassembly (3A10A4).....	69	18
	010504 Tens MHz oscillator subassembly (3A10A5).....	73	19
	010505 3,045-MHz oscillator subassembly (3A10A6).....	75	20
	0106001 3,045-MHz oscillator circuit assembly(3A10A6M).....	75	20
	010606 IF and AGC subassembly (3A10A7).....	79	21
	010607 Squelch and receiver audio subassembly (3A10A8).....	83	22
	010506 Bias tuning matrix subassembly (3A10A9).....	87	23
	0106 Modulator input subassembly (3 A11).....	91	24
	0107 Power control and sidetone amplifier subassemly (3A12).....	97	26
	02 Radio Set, Control, C-7197/ARC-134	101	26-29
	03 Mounting MT-3791A/ARC-134 and MT-3791B/ARC-134	113	30
SECTION	III. Special tools list (Not applicable)		
	IV. National stock number and part number index	114	

*This manual supersedes TM 11-5821-277-35P, 22 June 1970, Including all changes.

SECTION I

INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of direct support and general support maintenance of the AN/ARC-134, AN/ARC-134A, and AN/ARC-134B. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections

a. Section II. Repair Parts List A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. Section III. Special Tools List Not applicable.

c. Section IV. National Stock Number and Part Number Index. A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listing. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. Illustration. This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. Source, Maintenance, and Recoverability (SMR) Codes.

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows

<i>Code</i>	<i>Definition</i>
PA	Item procured and stocked for anticipated or known usage.
PD	Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues or outfittings. Not subject to automatic replenishment.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

<i>Code</i>	<i>Application/Explanation</i>
O	-Support item is removed, replaced, used at the organizational level.
F	-Support item is removed, replaced, used at the direct support level.
H	-Support item is removed, replaced, used at the general support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
O	—The lowest maintenance level capable of complete repair of the support item is the organizational level.
F	—The lowest maintenance level capable of complete repair of the support item is the direct support level.
H	—The lowest maintenance level capable of complete repair of the support item is the general support level.

Z —Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

<i>Recoverability Code</i>	<i>Definition</i>
Z	—Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
0	—Reparable item. When uneconomically repairable, condemn and dispose at organizational level.
F	—Reparable item. When uneconomically repairable,

**Recoverability
codes****Definition**

condemn and dispose at the direct support level.

H—Reparable item. When uneconomically repairable, condemn and dispose at the general support level.

c. National Stock Number. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. Part Number. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity], which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items,

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SE 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description Indicates the Federal item name and, if required, a minimum description to identify the item. When the part to be used differs between serial numbers of the same model, the effective serial numbers are shown as the last line of the description.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctions] group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that no specific quantity is applicable, (e.g., shims, spacers, etc).

4. Special Information

a. Usable on codes are shown in the description col-

umn. Uncoded items are applicable to all models. Identification of the usable on codes used in this publication are:

<i>Code</i>	<i>Used on</i>
5DE	AN/ARC-134
2AU	AN/ARC-134A
5DF	AN/ARC-134B

b. The following publications pertain to the AN/ARC-134, AN/ARC-134A, and AN/ARC-134B and its components:

TM 11-5821-277-20, Radio Sets AN/ARC-134 and AN/ARC-134A and AN/ARC-134B

TM 11-5821-277-20P, Radio Sets AN/ARC-134 and AN/ARC-134A

TM 11-5821-277-35, Radio Sets AN/ARC-134, AN/ARC-134A, and AN/ARC-134B

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.


(1) *First* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphabetic sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4)

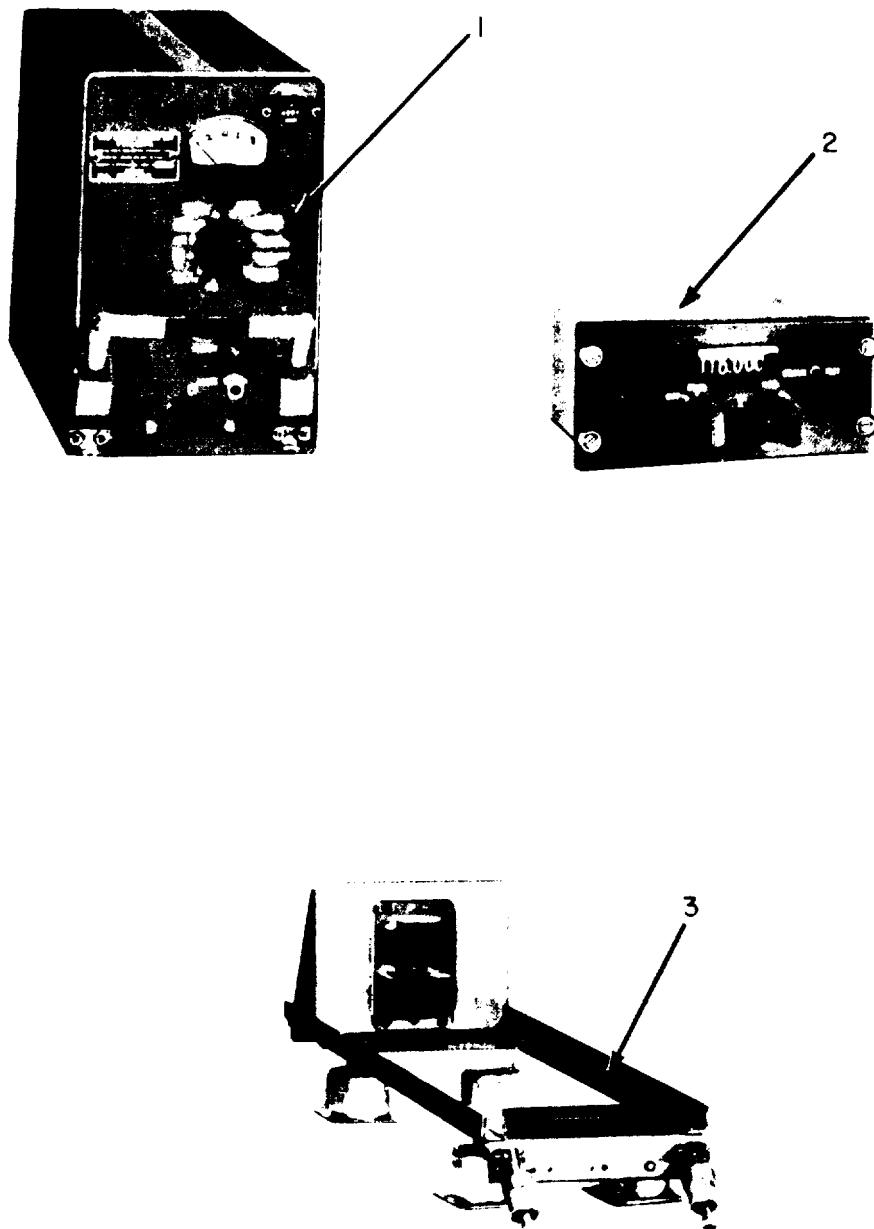

**NOTE: COAXIAL CABLE, FILTER, AND CONNECTOR CABLE CLAMPS NOT
USED ON MT-3791/ARC -134 AND MT-3791A/ARC-134.**

ELIJNOOI



Figure 1. Radio Sets AN/ARC-134, AN/ARC-134A and AN/ARC-134B.

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION <i>USABLE ON CODE</i>	(7) U/M	(8) QTY INC IN UNIT
						GROUP 00 RADIO SETS AN/ARC-134, AN/ARC-134A AND AN/ARC-134B		
1	1	PDOHH	5821-00-072-6108	RT-857/ARC-134	80058	RECEIVER-XMTR RADIO.....	EA	1
1	2	PDFHH	5821-00-905-9935	C-7197/ARC-134	80058	RADIO SET CONTROL	EA	1
1	3	PDOFF	5821-00-936-0924	MT-3791A/ARC-134	80058	BASE,SHOCK MT,ELEC.	2AU	1
1	3	PDOFF	5975-00-177-2077	MT3791BARC134	80058	BASE, SHOCK MT,ELEC	5D	1

6

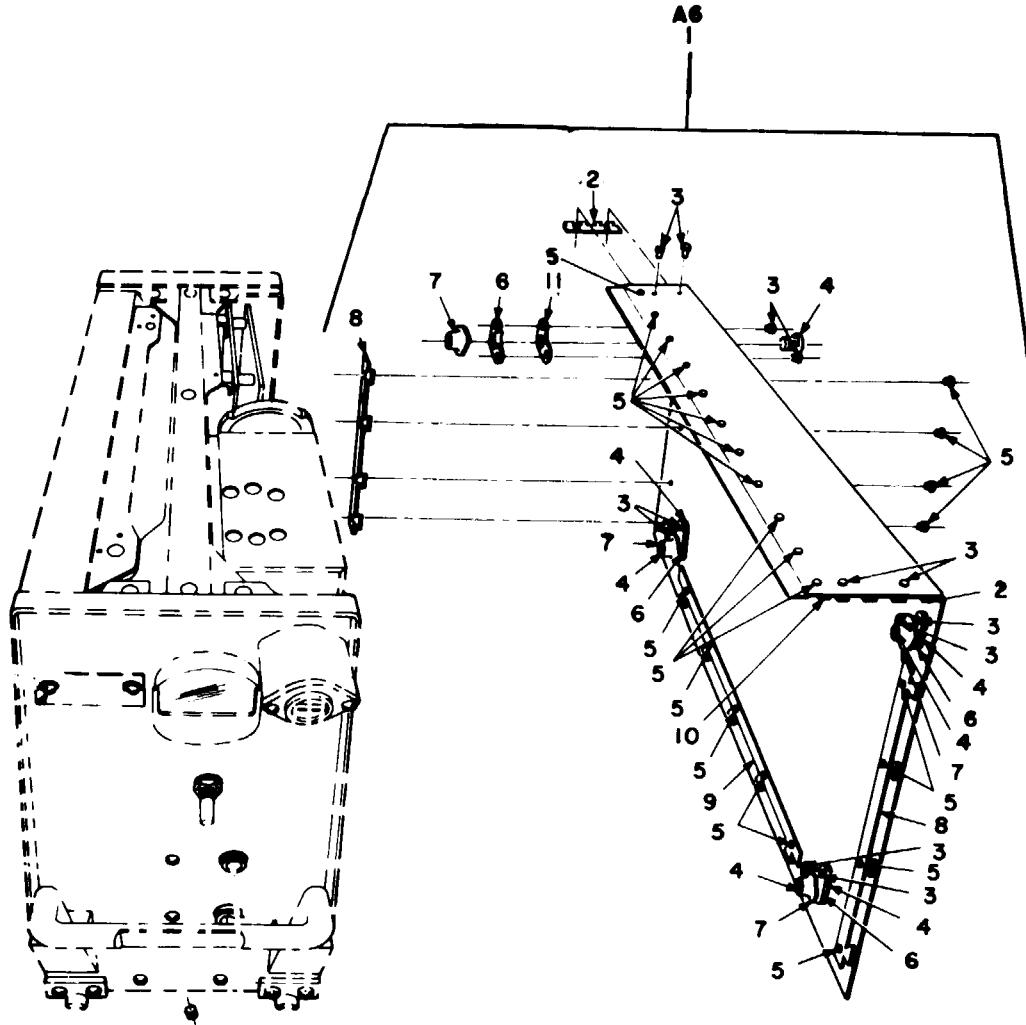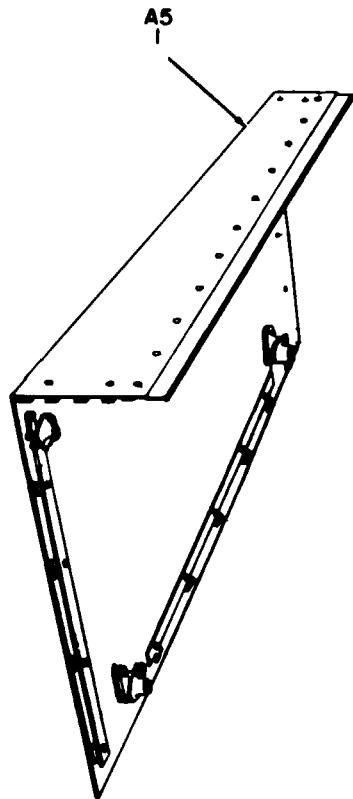

ELIJN002

Figure 2. Receiver-Transmitter, Radio RT-857/ARC-134.

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	
						GROUP 01 RECEIVER-TRANSMITTER,RADIO RT-857/ARC-134		
2	1	PAFFF	5821-00-736-6024	284403-2	65597	PANEL,TRANSCEIVER USED ON SERIAL NUMBERS 00001-08634	EA	2
2	1	PAFFF	5821-00-531-9250	285416-0002	65597	PANEL,TRANSCEIVER USED ON SERIAL NUMBERS 08635-UP.	EA	2
2	2	PAFZZ	5940-00-488-5403	288631-0001	65597	CONTACT,STRIP,RF USED ON SERIAL NUMBERS 08635-UP.	EA	4
2	3	PAFZZ	5320-00-820-9346	R3800-125	12014	RIVET,TUBULAR	EA	12
2	4	XDFZZ		AN507C632	88044	SCREW,MACHINE	EA	7
2	5	XDFZZ		R3553-078CADMIUM PLATECHROMATE	12014	RIVET,TUBULAR USED ON SERIAL NUMBERS 08635-UP.	EA	56
2	6	PAHZZ	5340-00-706-0315	AB6	53705	BLOCK, ANCHOR	EA	4
2	7	PAFZZ	5310-00-875-5555	LN6	03961	LATCH, NUT	EA	4
2	8	PAFZZ	5940-00-488-5402	288630-0001	65597	CONTACT,STRIP,RF USED ON SERIAL NUMBERS 08635-UP.	EA	2
2	9	PAFZZ	5940-00-488-5401	288629-0001	65597	CONTACT,STRIP,RF USED ON SERIAL NUMBERS 08635-UP.	EA	2
2	10	PAFZZ	5940-00-488-5400	288628-0001	65597	CONTACT STRIP,RF USED ON SERIAL NUMBERS 08635-UP.	EA	2
2	11	PAFZZ	5365-00-520-1679	270167-2	65597	SHIM	EA	2

7/(8blank)

7/(8blank)


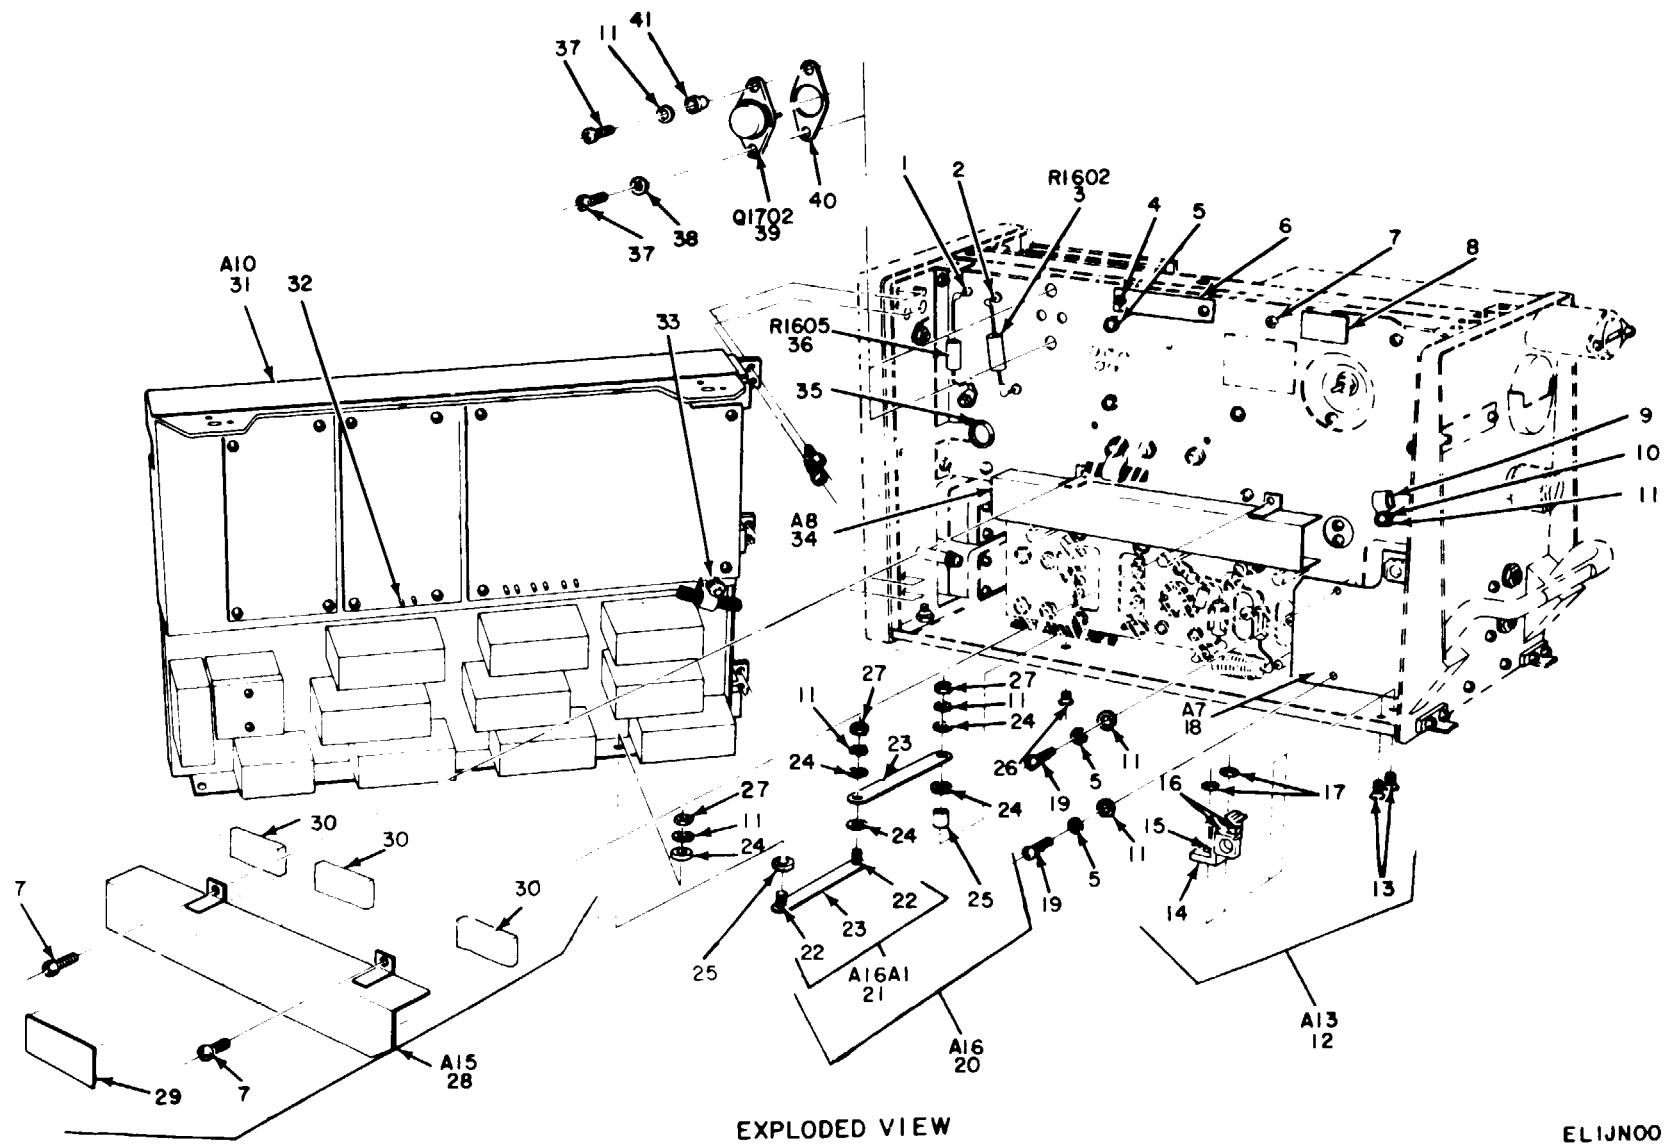


Figure 3. Receiver-Transmitter, Radio RT-857/ARC-134, Left Side View (Sheet 1 of 2).

८०

ELIJN003

TM 11-5821-277-34P

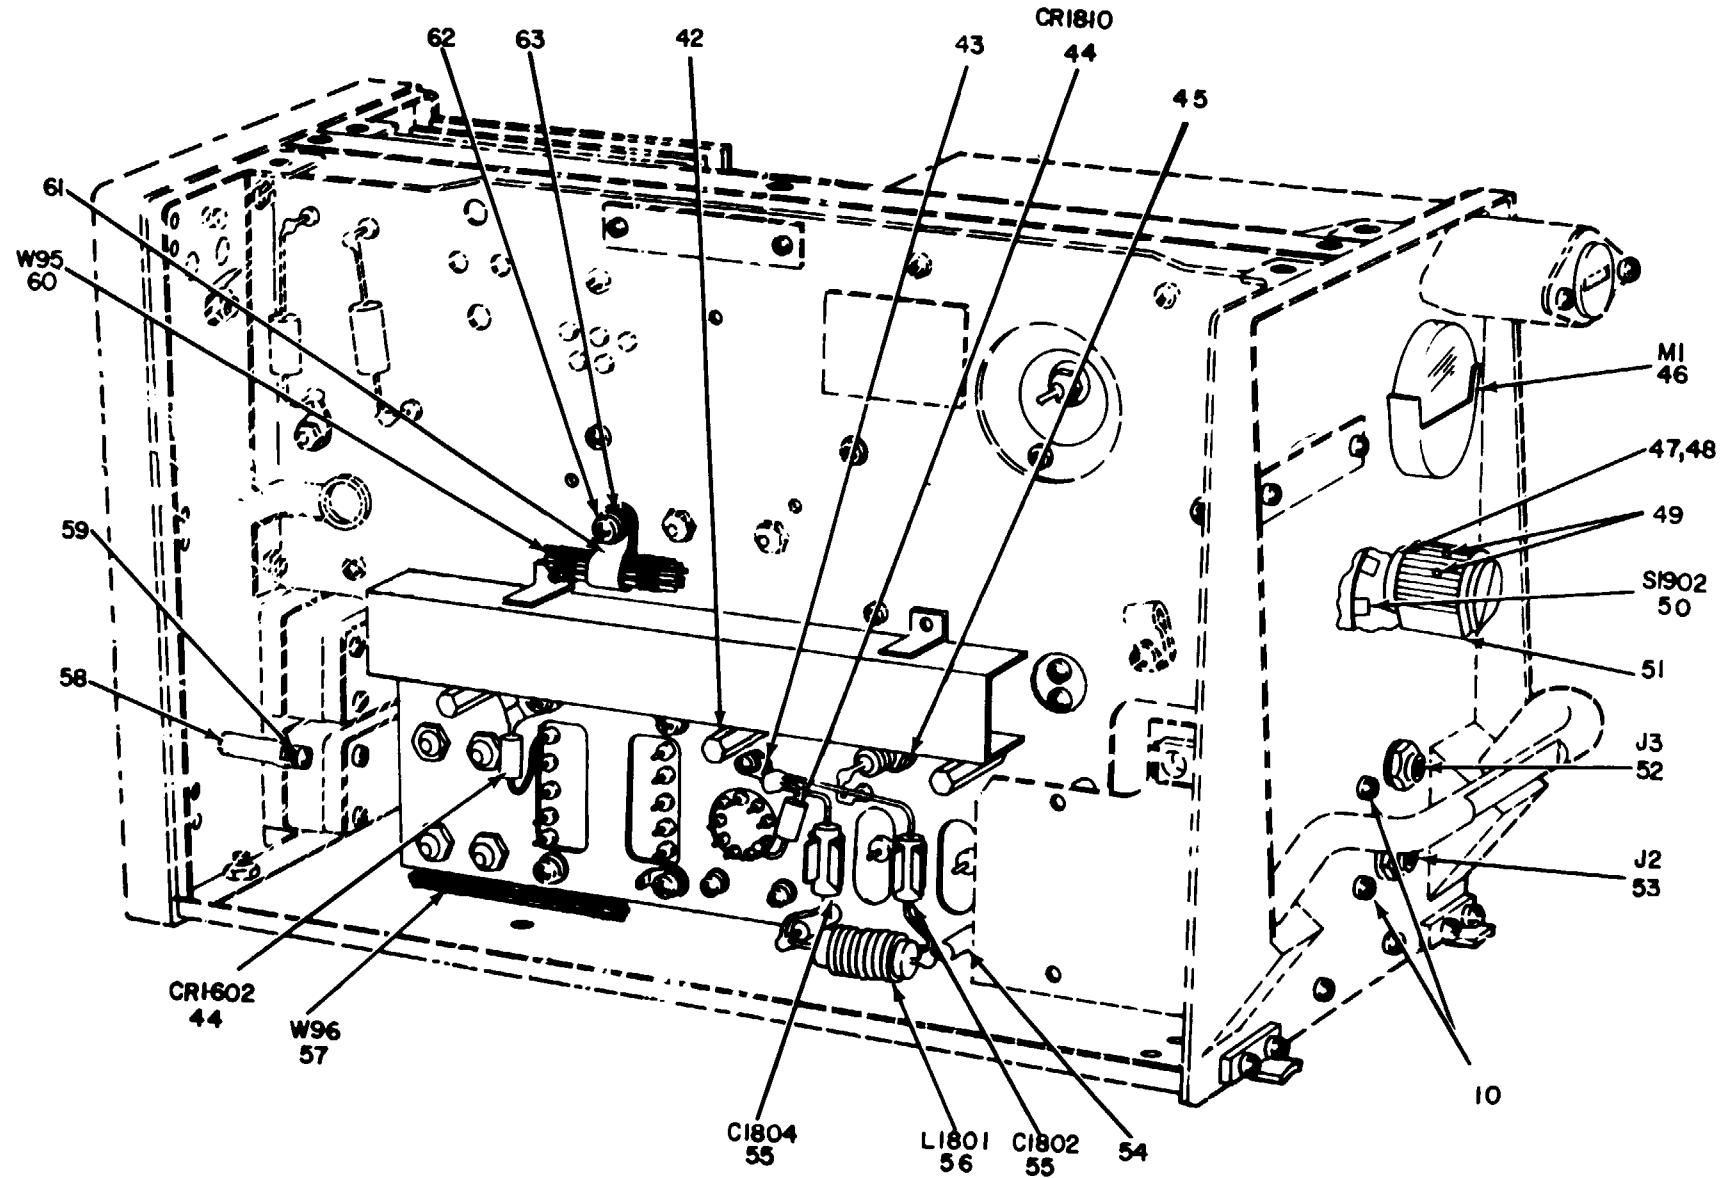

ADDITIONAL PARTS LOCATION

Figure 3. Receiver-Transmitter, Radio RT-857/ARC-134, Left Side View (Sheet 2 of 2). ELIJN004

SECTION II


TM 11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	QTY INC IN UNIT	
USABLE ON CODE U/M								
3	1	PAFZZ	5940-00-177-6730	50SL540-499	12615	TERMINAL,FEEDTHRU	EA	2
3	2	PAFZZ	5940-00-177-6732	50SL299-315	12615	TERMINAL,STUD	EA	7
3	3	PAFZZ	5905-00-279-3527	RC42GF470J	81349	RESISTOR, FXD,CMPSN.....	EA	1
3	4	XDHZZ	5305-00-066-7326	MS24693C24	96906	SCREW,MACHINE	EA	2
3	5	XDHZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK	EA	1
3	6	XDHZZ		267391-1	65597	PLATE,IDENT	EA	1
3	7	PAFZZ	5305-00-054-5647	MS51957-13	96906	SCREW,MACHINE	EA	2
3	8	XDHZZ		7011	65726	PLATE,IDENT	EA	1
3	9	PAFZZ	5340-00-619-7754	HP3N	09922	CLAMP,LOOP	EA	1
3	10	PAFZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE	EA	3
3	11	XDFZZ	5310-00-595-6211	MS15795-803	96906	WASHER, FLAT	EA	16
3	12	PAFFF	5325-00-732-3651	77941-2	65597	RECEPTACLE,TURNLOCK	EA	1
3	13	PAHZZ	5305-00-225-6400	MS24693C3	96906	SCREW,MACHINE	EA	2
3	14	XDFZZ		77941-1	65597	BLOCK,MOUNTING	EA	1
3	15	PAFZZ	5325-00-059-3794	294632	76530	RECEPTACLE,TURNLOCK	EA	2
3	16	PAFZZ	5320-00-817-0728	MS16535-53	96906	RIVET,TUBULAR	EA	4
3	17	PAFZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON.....	EA	14
3	18	PAFFF	5821-00-726-0425	117366-1	65597	POWER SPLY SUBASSY.....	EA	1
3	19	PAFZZ	5305-00-054-5648	MS51957-14	96906	SCREW,MACHINE.....	EA	2
3	20	PAFFF	5821-00-406-3437	117502-1	65597	STOP,CHASSIS	EA	1
3	21	XDFZZ		82349-2	65597	ARM,CHASSIS STOP	EA	1
3	22	PAFZZ	5307-00-475-1172	FHS440-6	46384	STUD,CAPTIVE	EA	2
3	23	XDFZZ		82349-1	65597	ARM,CHASSIS STOP.....	EA	2
3	24	PAFZZ	5310-00-241-4562	276327-1	65597	WASHER,NONMETALLIC.....	EA	6
3	25	XDFZZ		270302-1	65597	SPACER,SLEEVE	EA	1
3	26	PAFZZ	5305-00-908-2829	MS24693C8	96906	SCREW,MACHINE	EA	1
3	27	PAFZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON.....	EA	1
3	28	XDFFF		89704-2	65597	SHIELD,EXCITER	EA	1
3	29	XDFZZ		104842-0001	65597	PLATE,INSTRUCTION	EA	1
3	30	PAFZZ	5330-00-242-5860	65755-1	65597	PAD,CRYSTAL HLDN	EA	3
3	31	PAFFF	5821-00-406-7344	117384-1	65597	RECEIVER-XMTR	EA	1
3	32	XDFZZ		2829-75-2	98159	RUBBER SECTION	EA	7
3	33	PAFZZ	5310-00-857-5548	MS21044D04	96906	NUT,SLFLKG,HEXAGON	EA	1
3	34	PAFFF	5821-00-725-2703	117367-1	65597	RECEIVER SUBASSY	EA	1
3	35	XDHZZ		295111-8A	76530	GROMMET,PLSTC	EA	1
3	36	PAFZZ	5905-00-923-2910	882-3R33P0RM5PCT	44655	RESISTOR, FXD,WW	EA	1
3	37	PAFZZ	5305-00-054-5651	MS51957-17	96906	SCREW,MACHINE	EA	2
3	38	PAFZZ	5310-00-550-3715	MS35333-70	96906	WASHER,LOCK	EA	1
3	39	PAFZZ	5961-00-104-9899	2N1560	81349	TRANSISTOR	EA	1
3	40	PAHZZ	5961-00-923-7299	68129010	65597	TRANISPAD	EA	3

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
3	41	PAFZZ	5970-00-818-3486	2106300	83298	INSULATOR,BUSHING	EA	1
3	42	XDHZZ	5340-00-235-2464	270287-1	65597	POST,ELEC-MECH	EA	3
3	43	PAFZZ	5940-00-177-6731	50SL542-499	12615	TERMINAL,LUG	EA	1
3	44	PAFZZ	5961-00-772-7706	JAN1N4384	81349	SEMICONDUCTOR,DIODE	EA	2
3	45	PAHZZ	5310-00-524-0825	276191-0300	65597	WASHER,LOCK	EA	1
3	46	PAFZZ	6625-00-844-5430	MM1-1MASL4990	38315	AMMETER	EA	1
3	47	XDHZZ		100022-0200	65597	NUT,PLAIN,HEXAGON	EA	2
3	48	PAHZZ	5310-00-524-8024	276178-0300	65597	WASHER,LOCK	EA	2
3	49	XDOZZ	5305-00-805-9748	MS51053-112	96906	SETSCREW	EA	2
3	50	PAFZZ	5930-00-792-2491	10852-2	65597	SWITCH,ROTARY	EA	1
3	51	PAOZZ	5355-00-588-3095	70-5-2	49956	KNOB	EA	1
3	52	PAHZZ	5935-00-283-1269	SCIA	37942	JACK,TELEPHONE	EA	1
3	53	PAHZZ	5935-00-192-4729	JK33	80058	JACK,TELEPHONE	EA	1
3	54	PAFZZ	5940-00-834-9660	ST1000SL	98291	TERMINAL,STUD	EA	2
3	55	XDHZZ		137D476X0050F0	56289	CAPACITOR,ELCTLT	EA	2
3	56	PAHZZ	5950-00-717-3275	5220	76493	COIL,RF	EA	1
3	57	XDDZZ		432714-1	65597	WIRING,HARNESS,BR	EA	1
3	58	XDDZZ		94590-1	65597	POST,CABLE,MTG	EA	1
3	59	PAFZZ	5305-00-054-5652	MS51957-18	96906	SCREW,MACHINE	EA	1
3	60	PAHHH	5995-00-522-3943	432710-1	65597	WIRING HARNESS,BR	EA	1
3	61	PAFZZ	5340-00-598-0383	HP4N	09922	CLAMP,LOOP	EA	1
3	62	PAFZZ	5305-00-054-6655	MS51957-31	96906	SCREW,MACHINE	EA	1
3	63	PAFZZ	5310-00-722-5998	MS15795-805	96906	WASHER,FLAT	EA	2

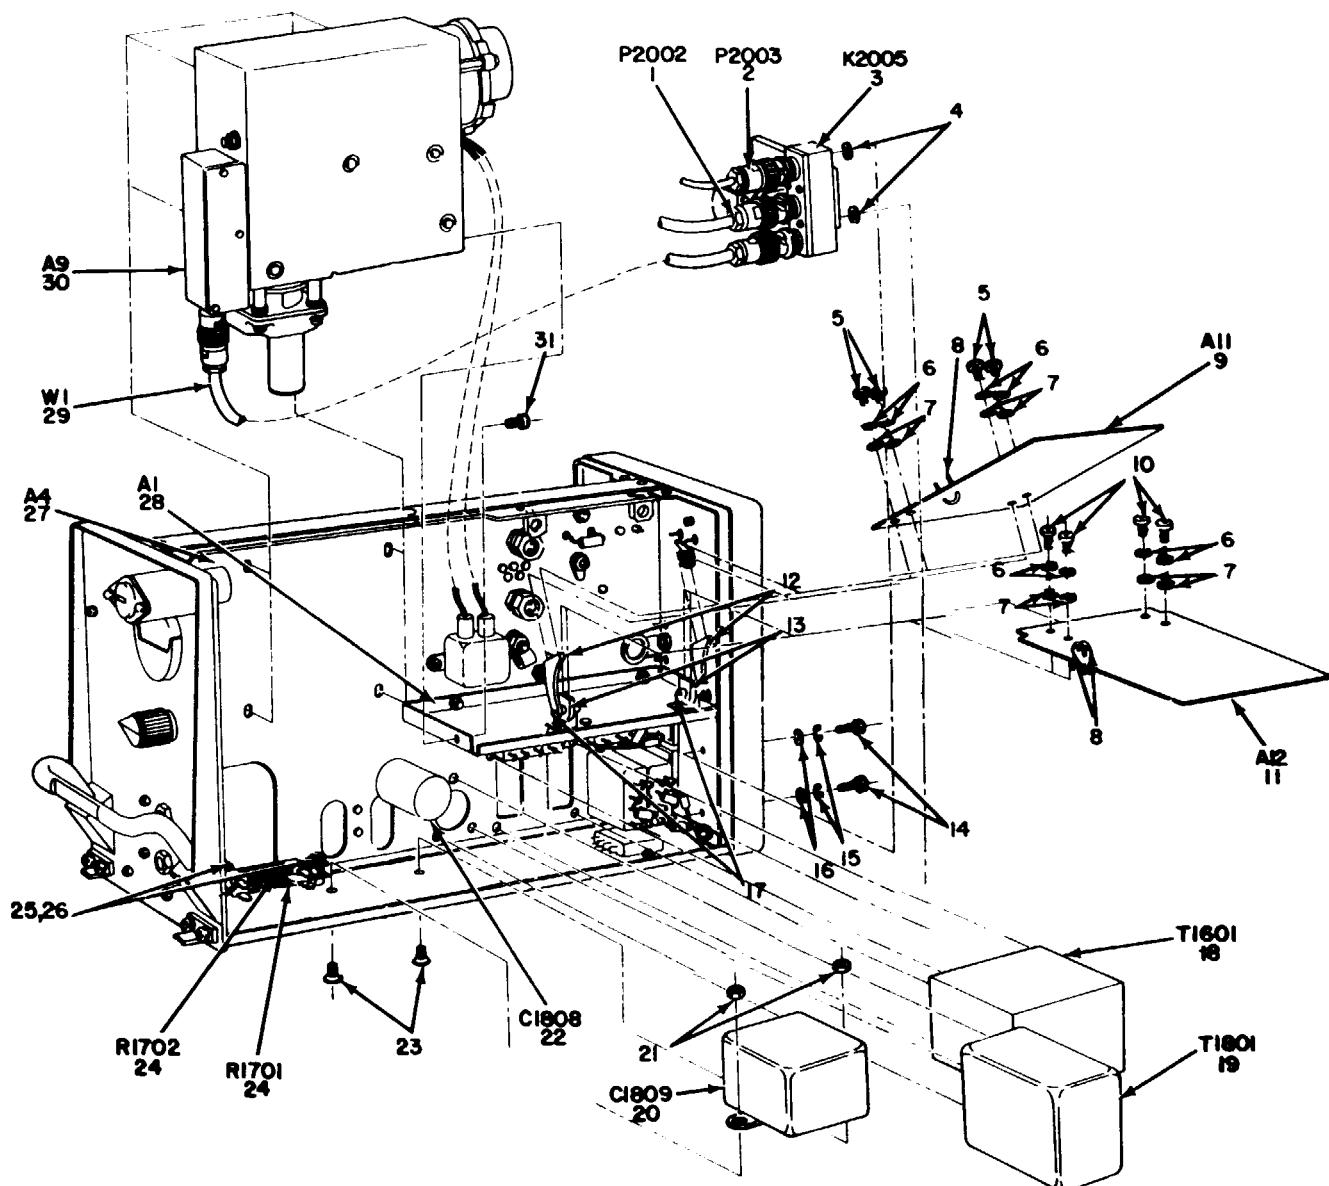

EXPLODED VIEW

ELIJNOOS

Figure 4. Receiver-Transmitter, Radio RT-857/ARC-134, Right Side View (Sheet 1 of 2).

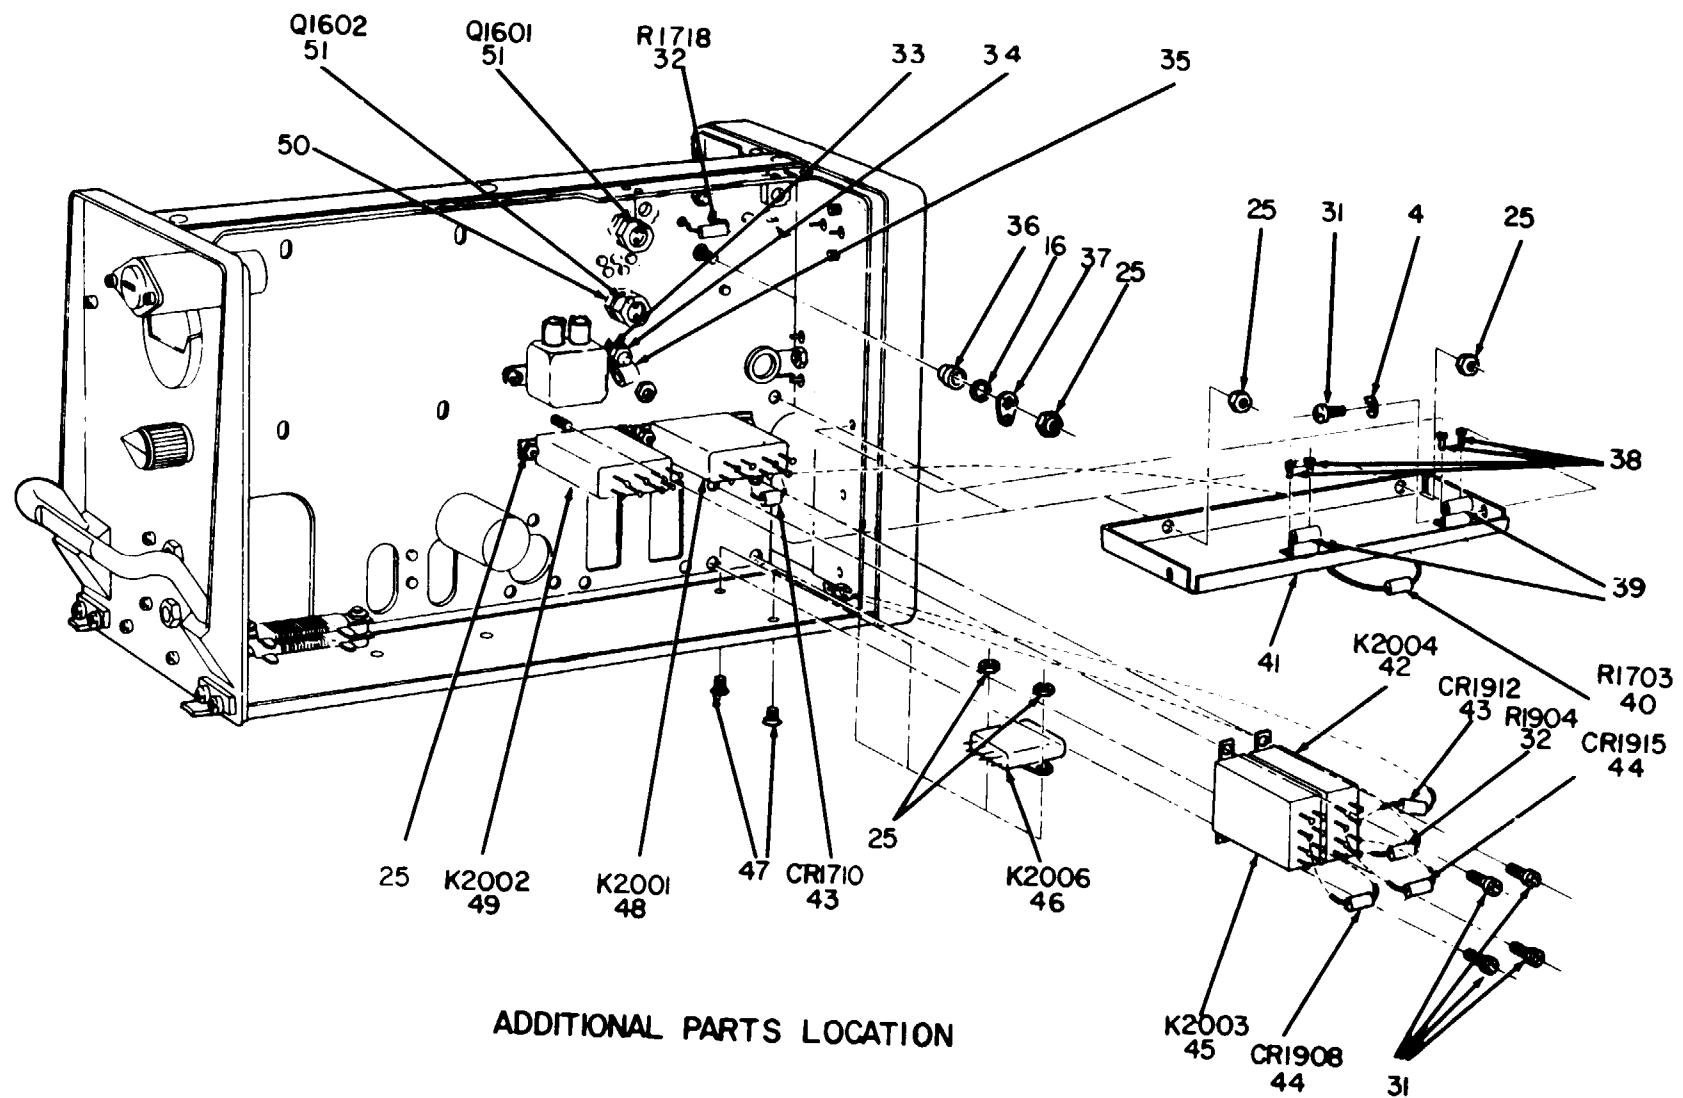


Figure 4. Receiver-Transmitter, Radio RT-857/ARC-134, Right Side View (Sheet 2 of 2).

ELIJN006

SECTION II


TM11-5821-277-34P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER		(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION		(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.						USABLE ON CODE			
4	1	PAHZZ	5935-00-823-0487	UG88EU	80058	CONNECTOR,PLUG,ELEC			EA	1
4	2	PAHZZ	5935-00-995-1394	228569-1	65597	CONNECTOR,PLUG,ELEC			EA	1
4	3	PAFZZ	5821-00-726-2818	12163-2	65597	SWITCH,RF XMSN			EA	1
4	4	XDFZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK			EA	28
4	5	XDFZZ	5305-00-054-5637	MS51957-3	96906	SCREW,MACHINE			EA	8
4	6	XDFZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK			EA	8
4	7	XDFZZ		276244-1	65597	WASHER,FLAT			EA	8
4	8	XDFZZ		2829-75-2	98159	RUBBER SECTION			EA	3
4	9	PAFFF	5821-00-725-2711	117424-1	65597	MODULATOR,INP			EA	1
4	10	PAFZZ	5305-00-054-5637	MS51957-3	96906	SCREW,MACHINE			EA	4
4	11	PAFFF	5821-00-725-2712	117425-1	65597	RECEIVER-T SUBASSY			EA	1
4	12	PAHZZ	5826-00-948-8397	77882-2	65597	BRACKET,MTG,CKT CD			EA	2
4	13	PAHZZ	5826-00-948-8398	77883-1	65597	BRACKET,MTG,CKT CD			EA	2
4	14	PAFZZ	5305-00-054-5651	MS51957-17	96906	SCREW,MACHINE			EA	6
4	15	PAFZZ	5310-00-550-3715	MS35333-70	96906	WASHER,LOCK			EA	5
4	16	PAFZZ	5310-00-595-6211	MS15795-803	96906	WASHER,FLAT			EA	2
4	17	PAHZZ	5315-00-222-1588	052-0625MDP	00287	PIN,SPRING			EA	2
4	18	PAFZZ	5950-00-759-9719	13548	07388	TRANSFORMER,AF			EA	1
4	19	PAFZZ	5950-00-765-4737	A14929	70674	TRANSFORMER,STPDN			EA	1
4	20	XDHZZ		248R53M6405	96733	CAPACITOR,MET PPR			EA	1
4	21	PAHZZ	5310-00-857-5548	MS21044D04	96906	NUT,SLFLKG,HEXAGON			EA	2
4	22	PAHZZ	5910-00-723-4414	69M3405AA	96733	CAPACITOR,MET PPR			EA	1
4	23	XDHZZ	5305-00-225-6400	MS24693C3	96906	SCREW,MACHINE			EA	4
4	24	PAFZZ	5905-00-764-4058	2TA51FS22	44655	RESISTOR,FXD,WW			EA	2
4	25	PAHZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON			EA	9
4	26	PAFZZ	5305-00-908-2829	MS24693C8	96906	SCREW,MACHINE			EA	3
4	27	XDHHH		117385-2	65597	FRAME SUBASSEMBLY			EA	1
4	28	XDFFF		80929-2	65597	CHASSIS,ELEC EQPT			EA	1
4	29	XDFFF		432711-1	65597	CABLE ASSY,RF			EA	1
4	30	XDFHH		117383-1	65597	RECEIVER-T SUBASSY			EA	1
4	31	XDFZZ	5305-00-054-5647	MS51957-13	96906	SCREW,MACHINE			EA	7
4	32	PAFZZ	5905-00-279-3517	RC20GF510J	81349	RESISTOR,FXD,CMPSN			EA	2
4	33	PAFZZ	5310-00-728-2434	68NM107-62	72962	NUT,SLFLKG,HEXAGON			EA	1
4	34	XDFZZ	5305-00-054-6655	MS51957-31	96906	SCREW,MACHINE			EA	11
4	35	PAFZZ	5340-00-975-1440	HP6N	09922	CLAMP,LOOP			EA	1
4	36	PAFZZ	5970-00-818-3486	2106300	83298	INSULATOR,BUSHING			EA	1
4	37	PAFZZ	5940-00-847-3138	2104-04-00	78189	TERMINAL,LUG			EA	6
4	38	XDFZZ		R37159-64CADNIUM PLATED	12014	RIVET,TUBULAR			EA	4
4	39	PAFZZ	5340-00-916-5067	77881-1	65597	LEAF,BUTT HINGE			EA	2

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG. NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION		USABLE ON CODE	QTY IN UNIT
								U/M	
4	40	PAFZZ	5905-00-686-3129	RC07GF104J	81349	RESISTOR,FXD,CMPSN.....			1
4	41	XDFZZ		80929-1	65597	CHASSIS,ELEC EQPT.....			1
4	42	PAFZZ	5945-00-733-3407	BR7Z800B7A20	09026	RELAY,ARMATURE.....			1
4	43	PAFZZ	5961-00-772-7706	JAN1N4384	81349	SEMICONDUCTOR,DIODE.....			2
4	44	PAFZZ	5961-00-556-2091	46122-1	65597	SEMICONDUCTOR,DIODE.....			2
4	45	PAFZZ	5945-00-733-3404	BR7Y380B7A21	09026	RELAY,ARMATURE.....			1
4	46	PAFZZ	5945-00-940-0547	30-02GZ	82768	RELAY,ARMATURE.....			1
4	47	PAFZZ	5305-00-993-9189	MS244693-C2	96906	SCREW,MACHINE.....			2
4	48	PAFZZ	5945-00-821-2978	BR7SX450D7-26VDC	09026	RELAY,ARMATURE.....			1
4	49	PAFZZ	5945-00-067-7917	BR7X300D7-26VDC	09026	RELAY,ARMATURE.....			1
4	50	PAMZZ	5895-00-141-3756	1103A	13103	HEAT SINK,ELEC.....			2
4	51	PAFZZ	5961-00-985-9073	2N3053	81349	TRANSISTOR.....			2

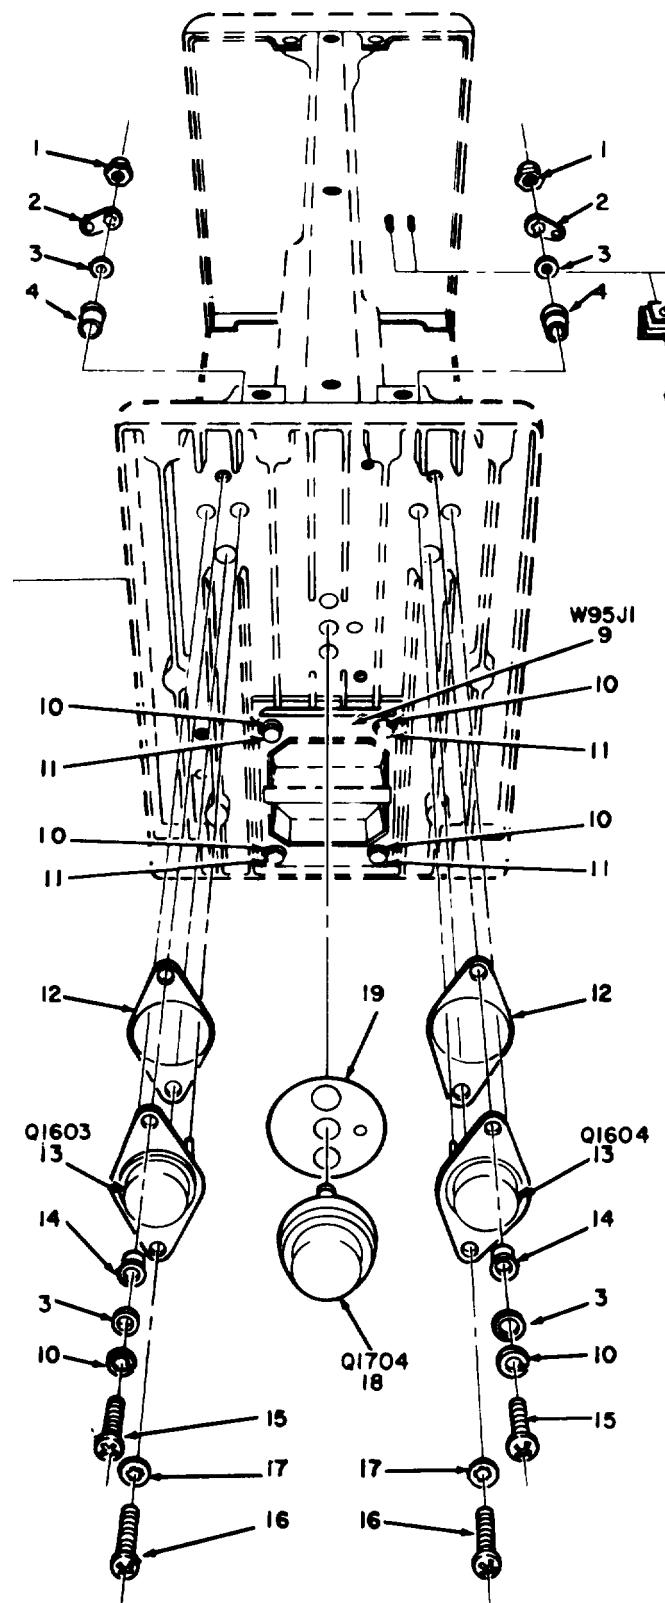

NOTE: FOR COMPLETE REFERENCE DESIGNATION
PREFIX WITH 3.


ELIJNO07

Figure 5. Receiver-Transmitter, Radio RT-857/ARC-134, Rear View.

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3) NATIONAL S T O C K N U M B E R	(4) P A R T N U M B E R	(5) F S C M	(6) D E S C R I P T I O N U S A B L E O N C O D E		(7)	(8) Q T Y I N C I N U N I T
(a) FIG NO.	(b) ITEM NO.	S M R C O D E						U/M	
5	1	PAFZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFKG,HEXAGON.....		EA	2
5	2	PAFZZ	5940-00-847-3138	2104-04-00	78189	TERMINAL,LUG.....		EA	3
5	3	PAFZZ	5310-00-167-0812	AN960C10L	88044	WASHER,FLAT.....		EA	1
5	4	PAHZZ	5970-00-725-2984	68129-11	65597	INSULATOR,BUSHING.....		EA	2
5	5	PAFZZ	5325-00-732-3651	77941-2	65597	RECEPTACLE,TURNLOCK.....		EA	1
5	6	PAHZZ	5320-00-817-0728	MS16535-53	96906	RIVET,TUBULAR.....		EA	2
5	7	PAFH	5325-00-059-3794	294632	76530	RECEPTACLE,TRNLK.....		EA	1
5	8	XDFHH		77941-1	65597	BLOCK,MOUNTING.....		EA	1
5	9	PAHZZ	5935-00-717-3127	DPX2F40C1PF40C1P 34B0003	71468	CONNECTOR,RCPT,ELEC.....		EA	1
5	10	PAFZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK.....		EA	5
5	11	PAFZZ	5305-00-054-5649	MS51957-15	96909	SCREW,MACHINE.....		EA	4
5	12	PAFZZ	5961-00-923-7299	68129-10	65597	TRANSIPAD.....		EA	2
5	13	PAFZZ	5961-00-199-6008	2N3055	81349	TRANSISTOR.....		EA	2
5	14	PAFZZ	5970-00-818-3486	2106300	83298	INSULATOR,BUSHING.....		EA	2
5	15	PAFZZ	5305-00-054-5651	MS51957-17	96906	SCREW,MACHINE.....		EA	2
5	16	PAFZZ	5305-00-054-5652	MS51957-18	96906	SCREW,MACHINE.....		EA	3
5	17	PAFZZ	5310-00-550-3715	MS35333-70	96906	WASHER,LOCK.....		EA	2
5	18	PAFZZ	5961-00-051-6157	2N2156	81349	TRANSISTOR.....		EA	1
5	19	PAFZZ	5865-00-896-1838	294665	76530	WASHER,KEY.....		EA	1
5	20	PAFZZ	5310-00-270-8810	MS35650-104	96906	NUT,PLAIN,HEXAGON.....		EA	1

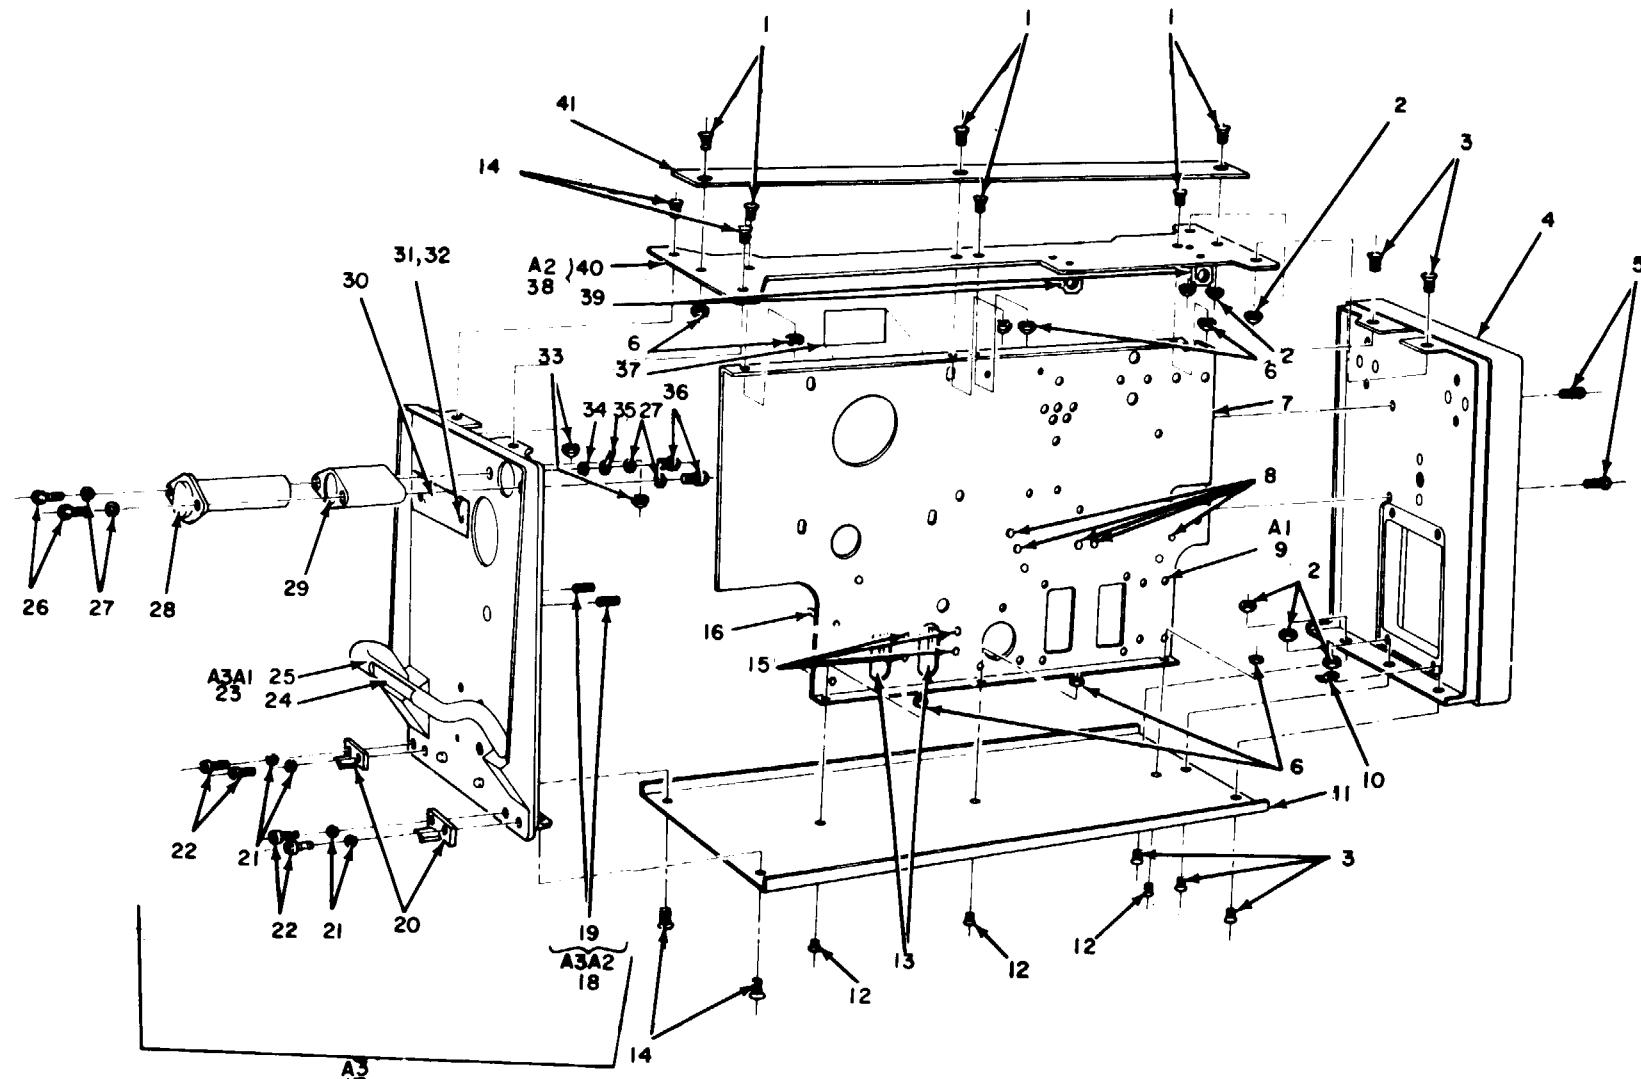

NOTE: FOR COMPLETE REFERENCE DESIGNATION
PREFIX WITH 3A4.

Figure 6. Receiver-Transmitter, Radio RT-857/ARC-134, Chassis Components.


ELIJNO08

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2) S M R ITEM NO.	(3) NATIONAL S T O C K N U M B E R	(4) P A R T N U M B E R	(5) F S C M	(6) D E S C R I P T I O N		(7) Q T Y U/M	(8) I N C I N U N I T
(a)	(b)					U S A B L E O N C O D E			
6	1	PAFZZ	5305-00-066-7328	MS24692C27	96906	SCREW,MACHINE.		EA	6
6	2	XDFZZ	5310-00-728-2434	68NM107-62	72962	NUT,SELF-LOCKING		EA	5
6	3	XDFZZ	5305-00-958-2918	MS24693C26	96906	SCREW,MACHINE.		EA	7
6	4	XDFZZ		284516-2	65597	PANEL,REAR.		EA	1
6	5	XDFZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE..		EA	2
6	6	PAFZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON.		EA	6
6	7	XDHZZ		80928-1	65597	CHASSIS,ELEC EQPT.		EA	1
6	8	PAHZZ	5307-00-570-7197	FHS440-5	46384	STUD,CAPTIVE.		EA	5
6	9	XDHHH		80928-2	65597	CHASSIS,ELEC EQPT.		EA	1
6	10	PAFZZ	5940-00-156-7344	2104-06-00	78189	TERMINAL,LUG.		EA	1
6	11	XDFZZ		284518-1	65597	PANEL,BOTTOM.		EA	1
6	12	XDFZZ	5305-00-225-6400	MS24693C3	96906	SCREW,MACHINE.		EA	6
6	13	PAHZZ	5340-00-933-4763	6009-18CT	91506	CLIP,SPRING, TENSION.		EA	2
6	14	XDHZZ	5305-00-066-7326	MS24693C24	96906	SCREW,MACHINE.		EA	2
6	15	XDHZZ		R3801-109	12014	RIVET, TUBULAR.		EA	4
6	16	PAHZZ	5365-00-488-3949	270262-1	65597	SPACER,CAPTIVE.		EA	2
6	17	XDHHH		284792-3	65597	PANEL ASSEMBLY,FR.		EA	1
6	18	XDHHH		284792-2	65597	PANEL,FRONT.		EA	1
6	19	PAHZZ	5307-00-570-7197	FHS440-5	46384	STUD,CAPTIVE.		EA	2
6	20	PAFZZ	5821-00-736-6030	60641-1	65597	HOOK,HOLDDOWN.		EA	2
6	21	PAFZZ	5310-00-929-6395	MS35338-136	96906	WASHER,LOCK.		EA	4
6	22	PAFZZ	5305-00-054-6651	MS51957-27	96906	SCREW,MACHINE.		EA	4
6	23	XDHHH		6 0 8 1 2 - 2	65597	HANDLE,BOW.		EA	1
6	24	XDHZZ		267158-1	65597	PLATE,INDENT.		EA	1
6	25	XDHZZ		60812-1	65597	HANDLE,BOW.		EA	1
6	26	XDFZZ	5305-00-066-7326	MS24693C24	96906	SCREW,MACHINE.		EA	2
6	27	PAFZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK.		EA	2
6	28	PAFZZ	6645-00-988-4427	MS17321-2	96906	METER,TIME TOTLZ.		EA	1
6	29	XDHZZ		78070-3	65597	ADAPTER,T TOTLZ MTR.		EA	1
6	30	XDHZZ		26739Z-23	65597	PLATE,INDENT.		EA	1
6	31	XDHZZ	5305-00-066-7326	MS24693C24	96906	SCREW,MACHINE.		EA	2
6	32	XDHZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK.		EA	2
6	33	XDFZZ	5310-00-728-2434	68NM107-62	72962	NUT,SELF-LOCKING.		EA	2
6	34	XDHZZ	5310-00-550-3715	MS35333-70	96906	WASHER,LOCK.		EA	1
6	35	PAHZZ	5940-00-159-1252	2522-04-00	78189	TERMINAL,LUG.		EA	1
6	36	XDFZZ	5305-00-054-5648	MS51957-14	96906	SCREW,MACHINE.		EA	2
6	37	XDFZZ		104843-0001	65597	PLATE,INSTRUCTION.		EA	1
6	38	XDHHH		284504-2	65597	PANEL,TOP.		EA	1
6	39	PAHZZ	5325-00-059-3794	294632	76530	RECEPTACLE,TURNLOCK.		EA	2
6	40	XDHZZ		284504-1	65597	PANEL,TOP.		EA	1

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)			(7)	(8)
(a) FIG NO.	(b) ITEM NO.	S M R CODE	N A T I O N A L S T O C K N U M B E R	P A R T N U M B E R	F S C M	D E S C R I P T I O N			U S A B L E O N	Q T Y I N C U/M
6	41	XDHZZ		77695-1	65597	B A R , S P A C E R			E A	3

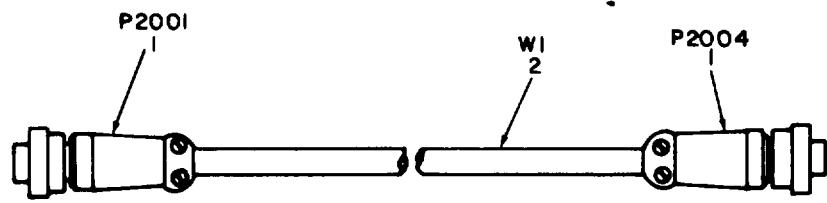


NOTE FOR COMPLETE REFERENCE DESIGNATIONS,
PREFIX WITH 3W1
ELIJN009

Figure 7. Cable Assembly, Radio Frequency (3W1).

Section II

TM11-5821-277-34P

(1) ILLUSTRATION (a) FIG. N O.	(2) ITEM N O.	(3) NATIONAL STOCK NUMBER	(4)	(5)	(6) D E S C R I P T I O N	U S A B L E O N C O D E S	(7) QTY INC I N U M N U M U N I T
					GROUP 0101 CABLE ASSEMBLY,RADIO FREQUENCY (3W1)		
7	1	PAFZZ	5935-00-823-0487	UG88EU	80058	CONNECTOR,PLUG,ELEC	EA 2
7	2	PAFZZ	6145-00-542-6092	RG58A/U	80058	CABLE,RF.....	EA 1

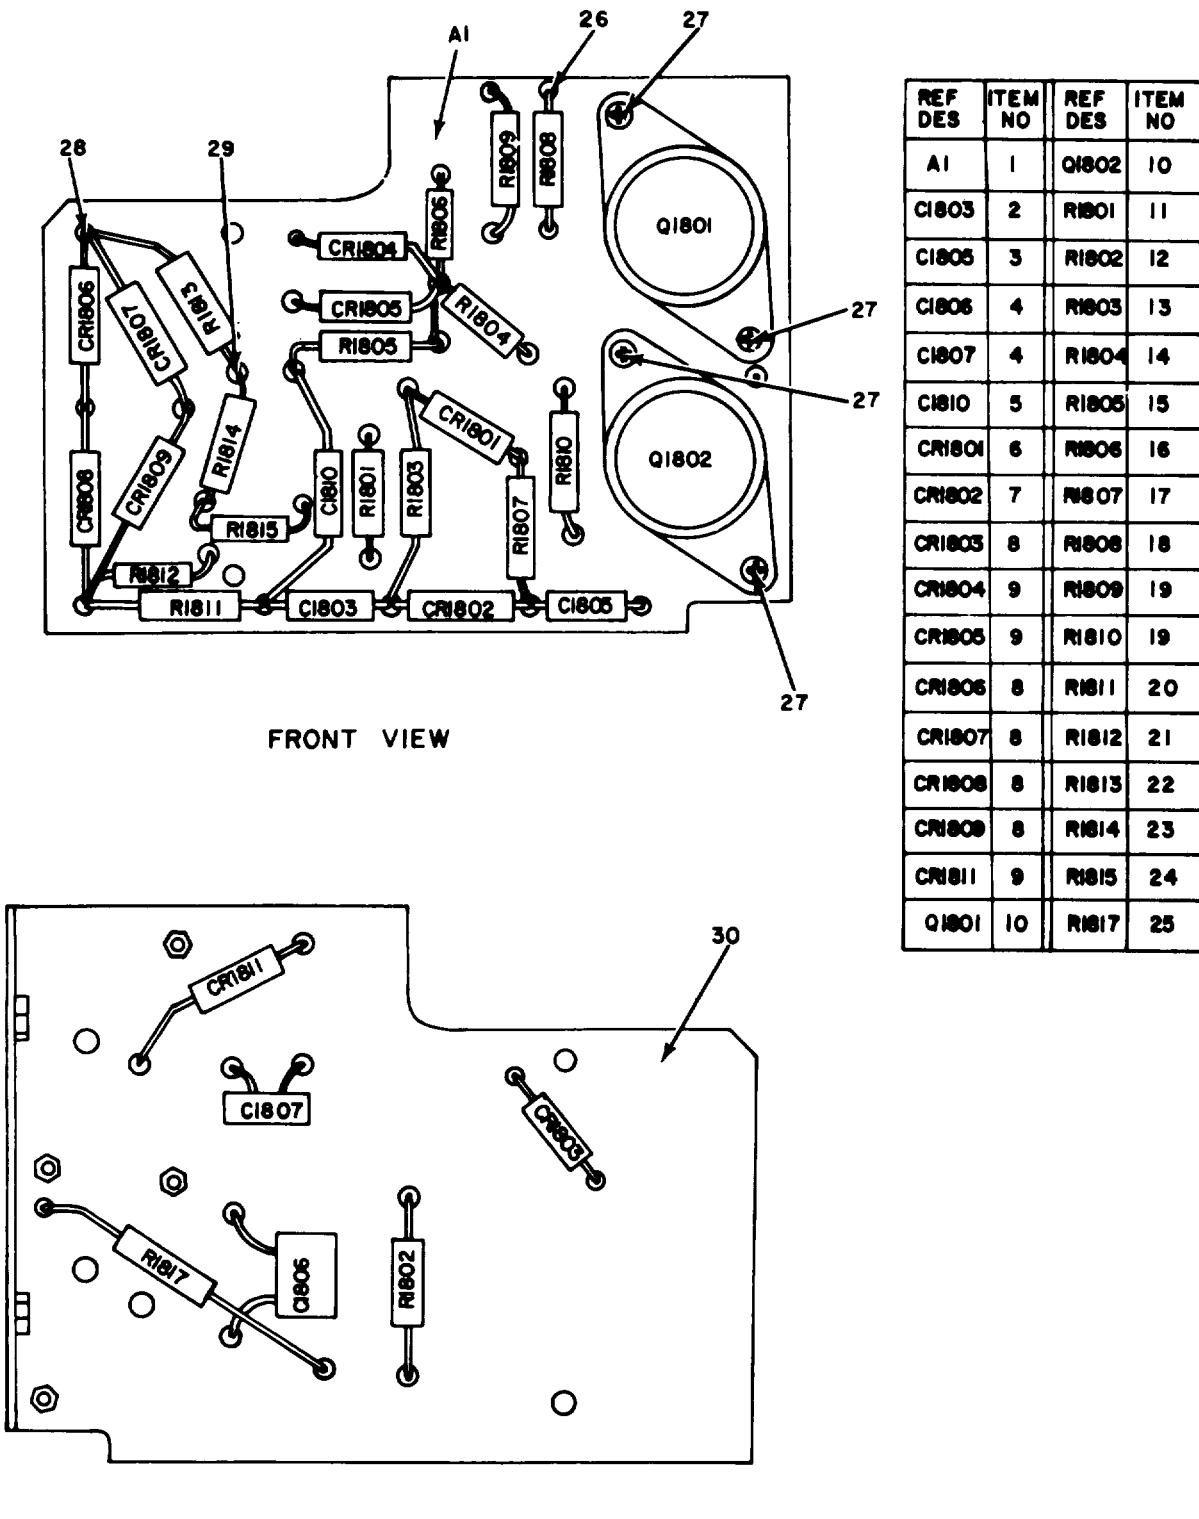

NOTE FOR COMPLETE REFERENCE DESIGNATION
PREFIX WITH 3A7

ELIJN010

Figure 8. Power Supply Subassembly (3A7).

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION (a) (b) FIG. ITEM NO. N.O.	(2) S M R CODE	(3) N A T I O N A L S T O C K N U M B E R	(4) P A R T N U M B E R	(5) F S C M	(6) D E S C R I P T I O N	(7) U S A B L E O N C O D E	(8) Q T Y I N C N N U M N U I T
					GROUP 0102 POWER SUPPLY SUBASSEMBLY (3A7)		
8	1	XDFFF	80927-2	65597	CHASSIS,ELEC EQPT	EA	1
8	2	PAFZZ	5910-00-809-4701	150D685X9035B2	CAPACITOR,ELCTLT.....	EA	1
8	3	PAFZZ	5910-00-064-0838	150D105X9050A2	CAPACITOR,ELCTLT..	EA	1
8	4	PAFZZ	5910-00-908-0286	K27P35	CAPACITOR, ELCTLT	EA	2
8	5	PAFZZ	5910-00-400-4991	M39006-09-6546	CAPACITOR, ELCTLT	EA	1
8	6	PAFZZ	5961-00-849-4186	1N3686A	SEMICONDUCTOR,DIODE	EA	1
8	7	PAFZZ	5961-00-577-6181	1N627	SEMICONDUCTOR,DIODE	EA	1
8	8	PAFZZ	5961-00-722-1486	4 6 2 3 1 - 1	SEMICONDUCTOR,DIODE	EA	5
8	9	PAFZZ	5961-00-772-7706	JAN1N4384	SEMICONDUCTOR,DIODE	EA	3
8	10	XDFZZ		2N1552	TRANSISTOR.....	EA	2
8	11	PAFZZ	5905-00-687-0000	RC07GF183J	RESISTOR,FXD,CMPSN SELECT FACTORY SELECT VALUE FOR RESISTOR R1801	EA	1
8	11	PAFZZ	5905-00-687-0002	RC07GF223J	RESISTOR,FXD,CMPSN SELECT FACTORY SELECT VALUE FOR RESISTOR R1801	EA	1
8	11	PAFZZ	5905-00-683-2246	RC07GF473J	RESISTOR,FXD,CMPSN SELECT FACTORY SELECT VALUE FOR RESISTOR R1801	EA	1
8	12	XDFZZ		RC32GF181J	RESISTOR,FXD,CMPSN SELECT FACTORY SELECT VALUE FOR RESISTOR R180.....	EA	1
8	12	PAFZZ	5905-00106-1247	R C 3 2 G F 2 2 1 J	RESISTOR,FXD,CMPSN SELECT FACTORY SELECT VALUE FOR RESISTOR R1802	EA	1
8	12	PAFZZ	5905-00-247-8732	RCR32G471JS	RESISTOR,FXD,CMPSN SELECT FACTORY SELECT VALUE FOR RESISTOR R1802	EA	1
8	13	PAFZZ	5905-00-246-9399	RCR33G202JS	RESISTOR,FXD,CMPSN.....	EA	1
8	14	PAFZZ	5905-00-686-3369	RC07GF331J	RESISTOR,FXD,CMPSN	EA	1
8	15	PAFZZ	5905-00-937-7960	BWHR36POR5PCT	RESISTOR,FXD,WW	EA	1
8	16	PAFZZ	5905-00-686-3129	RC07GF104J	RESISTOR,FXD,CMPSN	EA	1
8	17	PAFZZ	5905-00-121-9861	RC32GF102J	RESISTOR,FXD,CMPSN	EA	1
8	18	PAFZZ	5905-00-443-7032	882-3-1000PORM5P CT	RESISTOR,FXD,WW	EA	1
8	19	PAFZZ	5905-00-937-8560	882-3-5R6PORM5PC T	RESISTOR,FXD,WW	EA	2
8	20	PAFZZ	5905-00-101-7892	RC32GF3R3J	RESISTOR,FXD,CMPSN	EA	1
8	21	PAFZZ	5905-00-681-9969	RC07GF332J	RESISTOR,FXD,CMPSN	EA	1
8	22	PAFZZ	5905-00-279-1692	RC32GF100J	RESISTOR, FXD,CMPSN	EA	1
8	23	PAFZZ	5905-00-192-0390	RC20GF105J	RESISTOR ,FxD,CMPSN	EA	1
8	24	PAFZZ	5905-00-681-6462	RC07GF102J	RESISTOR,FXD,CMPSN	EA	1
8	25	PAFZZ	5905-00-682-4098	RC07GF392J	RESISTOR,FXD,CMPSN	EA	1
8	26	PAFZZ	5940-00-489-2731	2043-3	TERMINAL, STUD	EA	4
8	27	XDFZZ	5305-00-054-5649	MS51957-15	SCREW, MACHINE	EA	4
8	28	XDFZZ		50SL209-255	TERMINAL, STUD	EA	3
8	29	PAFZZ	5940-00-177-6733	50SL210-256	TERMINAL,FEEDTHRU	EA	23
8	30	XDFZZ		80927-1	CHASSIS,ELEC EQPT	EA	1

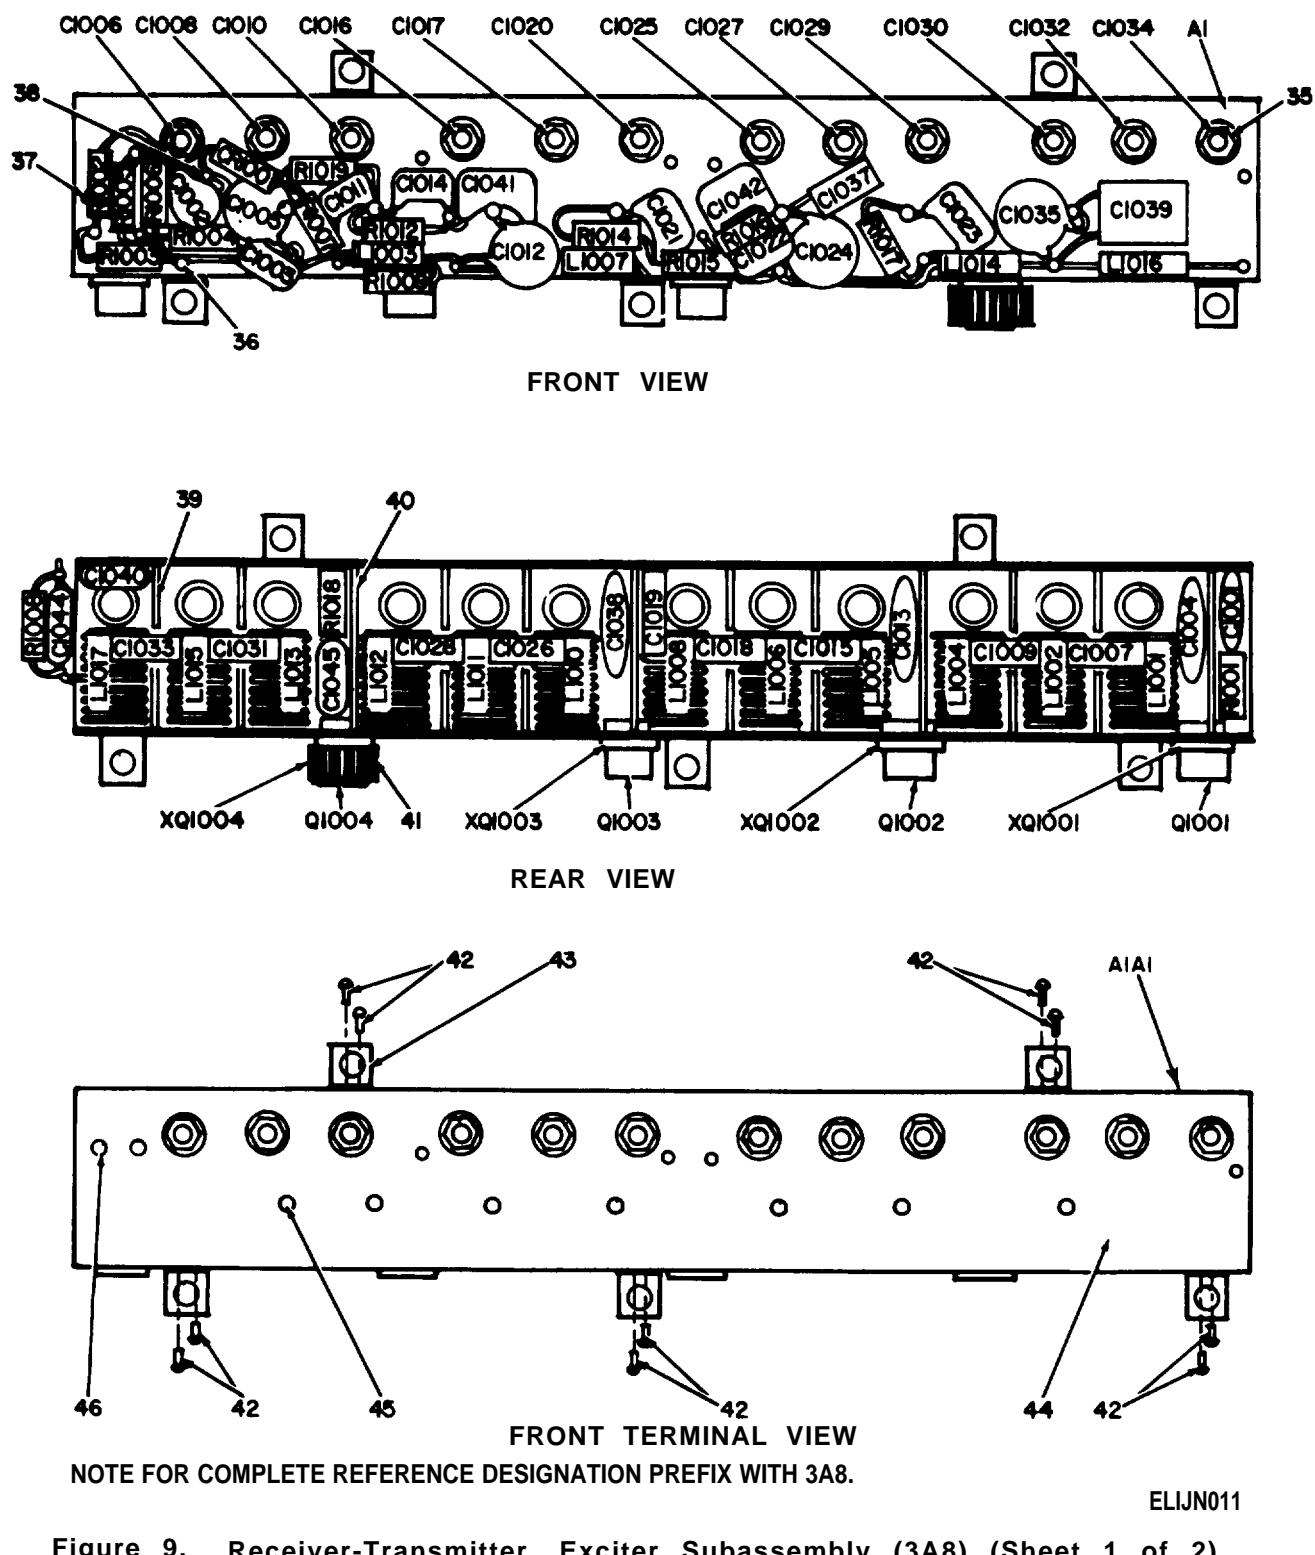


Figure 9. Receiver-Transmitter, Exciter Subassembly (3A8) (Sheet 1 of 2).

REF. DES.	ITEM NO.								
A1	1	C1017	6	C1035	4	L1010	13	R1007	21
A1A1	2	C1018	7	C1037	9	L1011	14	R1008	27
C1001	3	C1019	7	C1038	5	L1012	16	R1009	21
C1002	4	C1020	6	C1039	10	L1013	17	R1012	28
C1003	4	C1021	3	C1040	10	L1014	15	R1014	29
C1004	5	C1022	3	C1041	5	L1015	14	R1015	30
C1005	3	C1023	3	C1042	5	L1016	15	R1016	31
C1006	6	C1024	4	C1044	5	L10J7	18	R1017	27
C1007	7	C1025	6	C1045	4	Q1001	19	R1018	32
C1008	6	C1026	7	CR1001	12	Q1002	20	R1019	33
C1009	7	C1027	6	L1001	13	O1003	20	XQ1001	34
C1010	6	C1028	7	L1002	14	Q1004	20	XQ1002	34
C1011	3	C1029	6	L1003	15	R1001	21	XQ1003	34
C1012	4	C10030	6	L1004	16	R1002	22	XQ1004	34
C1013	5	C1031	8	L1005	17	R1003	23		
C1014	3	C1032	6	L1006	14	R1004	24		
C1015	7	C1033	8	L1007	15	R1005	25		
C1016	6	C1034	6	L1008	16	R1006	26		

ELIJN012

Figure 9. Receiver-Transmitter, Exciter Subassembly (3A8) (Sheet 2 of 2).

SECTION II


TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	S M R CODE	N A T I O N A L S T O C K N U M B E R	P A R T N U M B E R	F S C M	D E S C R I P T I O N U S A B L E O N C O D E	U/M	
						GROUP 0103 RECEIVER-TRANSMITTER,EXCITER SUBASSEMBLY (3A8)		
9	1	XDFFF		80930-2		CHASSIS,ELEC EQPT.....	EA	1
9	2	XDFFF		80930-1		CHASSIS,ELEC EQPT.....	EA	1
9	3	PAFZZ	5910-00-954-5508	CM05FD241G03		CAPACITOR,FXD,MICA.....	EA	7
9	4	PAFZZ	5910-00-832-8285	801-010W5R102K		CAPACITOR,FXD,CER.....	EA	6
9	5	PAFZZ	5910-00-890-8996	DM15C101G		CAPACITOR,FXD,MICA.....	EA	6
9	6	PAFZZ	5910-00-723-4529	VCJ2309		CAPACITOR,VAR,GLASS.....	EA	12
9	7	PAFZZ	5910-00-081-0274	GA2PFIFORM5PCT		CAPACITOR,FXD,CER.....	EA	7
9	8	PAFZZ	5910-00-617-9345	GA2-2PFIFORM5PCT		CAPACITOR,FXD,CER.....	EA	2
9	9	PAFZZ	5910-00-109-0034	M3-746-1		CAPACITOR,FXD,PLSTC.....	EA	1
9	10	PAFZZ	5910-00-109-0031	M3-660-15		CAPACITOR,FXD,PLSTC.....	EA	1
9	11	PAFZZ	5910-00-858-4859	DM10C040D0100WV4CR		CAPACITOR,FXD,MICA.....	EA	1
9	12	PAFZZ	5961-00-577-6181	1N627		SEMICONDUCTOR,DIODE.....	EA	1
9	13	PAFZZ	5950-00-249-8099	38969-2		COIL,RF.....	EA	2
9	14	PAFZZ	5950-00-249-8101	38969-3		COIL, RF	EA	4
9	15	PAFZZ	5950-00-717-3274	1537-714		COIL ,RF	EA	4
9	16	XDFZZ		38970-2		COI L, RF	EA	3
9	17	PAFZZ	5950-020-477-7563	38969-4		COIL,RF	EA	2
9	18	XDFZZ		38970-3		COIL, RF	EA	1
9	19	PAFZZ	5961-00-824-9946	2N1195		TRANSISTOR.....	EA	1
9	20	PAFZZ	5961-00-722-1390	2N3118		TRANSISTOR.....	EA	3
9	21	PAFZZ	5905-00-682-4098	RC07GF392J		RESISTOR,FXD,CMPSN.....	EA	3
9	22	PAFZZ	5905-00-681-6462	RC07GF102J		RESISTOR,FXD,CMPSN.....	EA	1
9	23	PAFZZ	5905-00-686-3798	RC07GF327J		RESISTOR,FXD,CMPSN.....	EA	1
9	24	PAFZZ	5905-00-682-4109	RC07GF561J		RESISTOR,FXD,CMPSN.....	EA	1
9	25	PAFZZ	5905-00-686-3370	RC07GF202J		RESISTOR,FXD,CMPSN.....	EA	1
9	26	PAFZZ	5905-00-801-8272	RC07GF511J		RESISTOR,FXD,CMPSN.....	EA	1
9	27	PAFZZ	5905-00-683-7720	RC07GF510J		RESISTOR,FXD,CMPSN.....	EA	2
9	28	PAFZZ	5905-00-683-2242	RC07GF471J		RESISTOR,FXD,CMPSN.....	EA	1
9	29	PAFZZ	5905-00-686-9996	RC07GF821J		RESISTOR,FXD,CMPSN.....	EA	1
9	30	PAFZZ	5905-00-682-4097	RC07GF302J		RESISTOR,FXD,CMPSN.....	EA	1
9	31	PAFZZ	5905-00-683-7721	RC07GF101J		RESISTOR,FXD,CMPSN.....	EA	1
9	32	PAFZZ	5905-00-817-7971	RC07GF100J		RESISTOR, FXD,CMPSN.....	EA	1
9	33	PAFZZ	5905-00-800-3481	RC07GF155J		RESISTOR,FXD,CMPSN.....	EA	1
9	34	PAFZZ	5935-00-989-9466	MP5173		SOCKET,DEVICE	EA	4
9	35	XDFZZ	5305-00-933-8120	MS35338-138		WASHER, LOCK	EA	1
9	36	PAFZZ	5970-00-235-2068	75599-2		INSULATOR,BUSHING	EA	7
9	37	PAFZZ	5940-00-270-3274	FTSMIL2		TERMINAL ,FEEDTHRU	EA	5

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) D E S C R I P T I O N	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	
9	38	PAFZZ	5940-00-901-1405	SE089B01	81349	TERMINAL,STUD.....	EA	5
9	39	XDFZZ		89681-1	65597	PLATE,ELEC, SHIELD.....	EA	8
9	40	XDFZZ		89680-1	65597	PLATE,ELEC SHIELD.....	EA	4
9	41	PAFZZ	5961-00-688-8080	TR101	14953	RADIATOR,TRANISTOR.....	EA	1
9	42	PAFZZ	5320-00-821-4992	MS16535-1	96906	RIVET,TUBULAR.....	EA	10
9	43	XDFZZ		92349-1	65597	BRACKET,MOUNTING.....	EA	5
9	44	XDFZZ		080930-0000	65597	CHASSIS,ELEC EQPT.....	EA	1
9	45	PAFZZ	5940-00-518-8569	2043-1	71279	TERMINAL,STUD.....	EA	11
9	46	PAFZZ	5940-00-904-4150	2040-1	71279	TERMINAL,STUD.....	EA	2

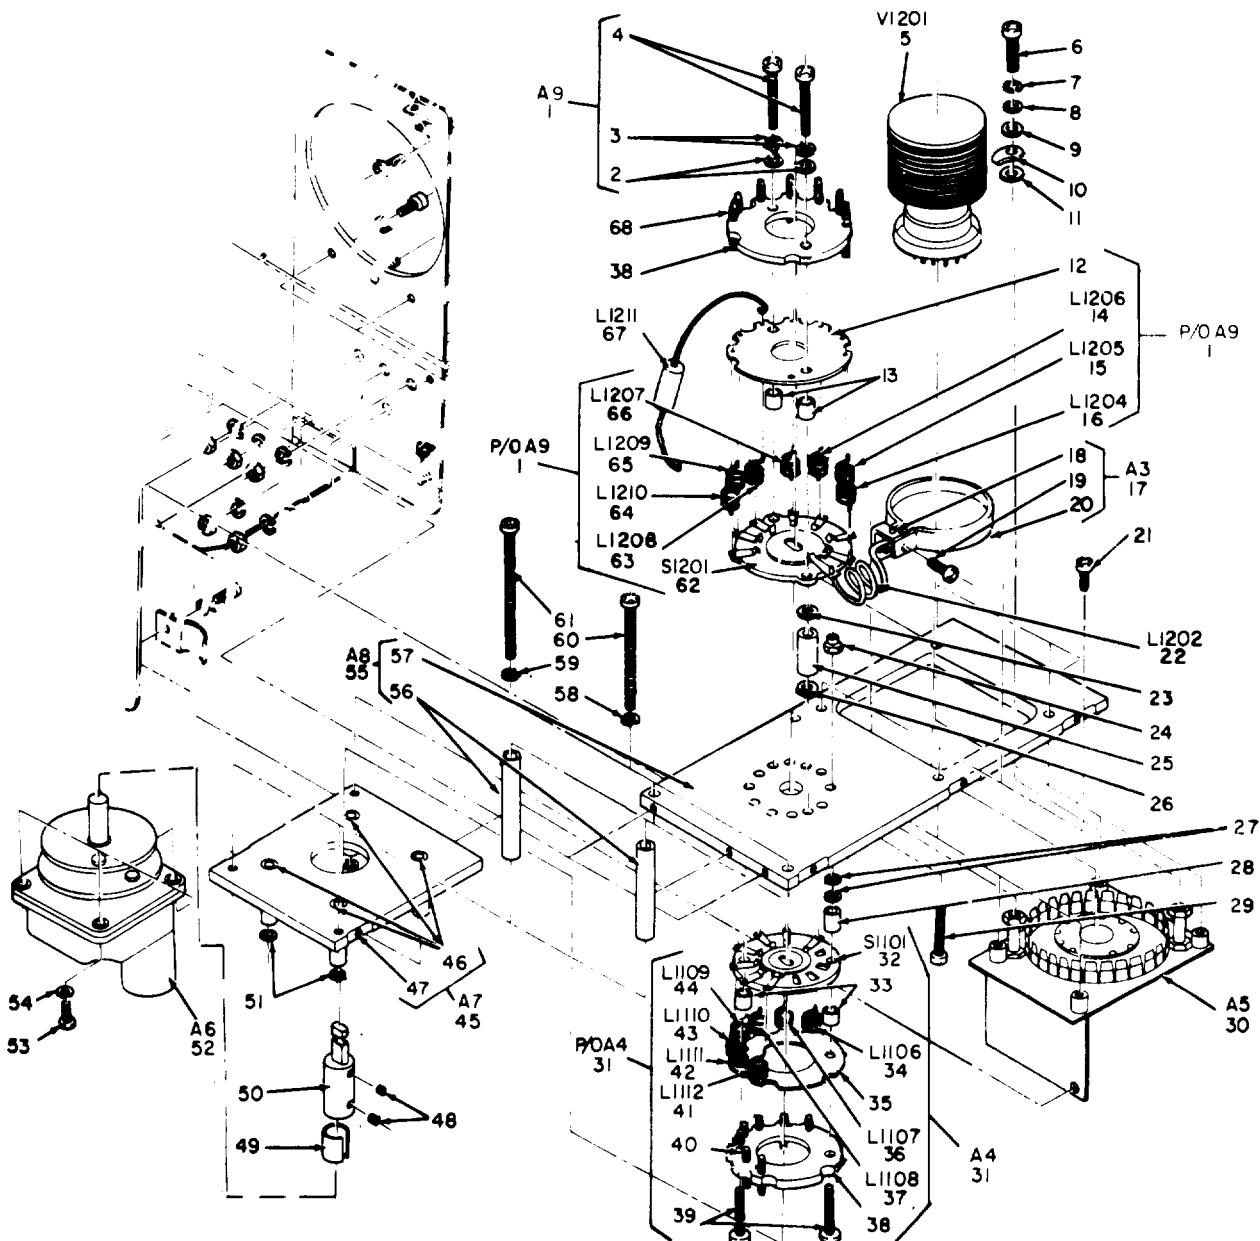


EXPLODED VIEW

NOTE FOR COMPLETE REFERENCE DESIGNATION PREFIX WITH 3A9

EL1JN013

Figure 10. Receiver-Transmitter, Power Amplifier Subassembly (3A9) (Sheet 1 of 2).

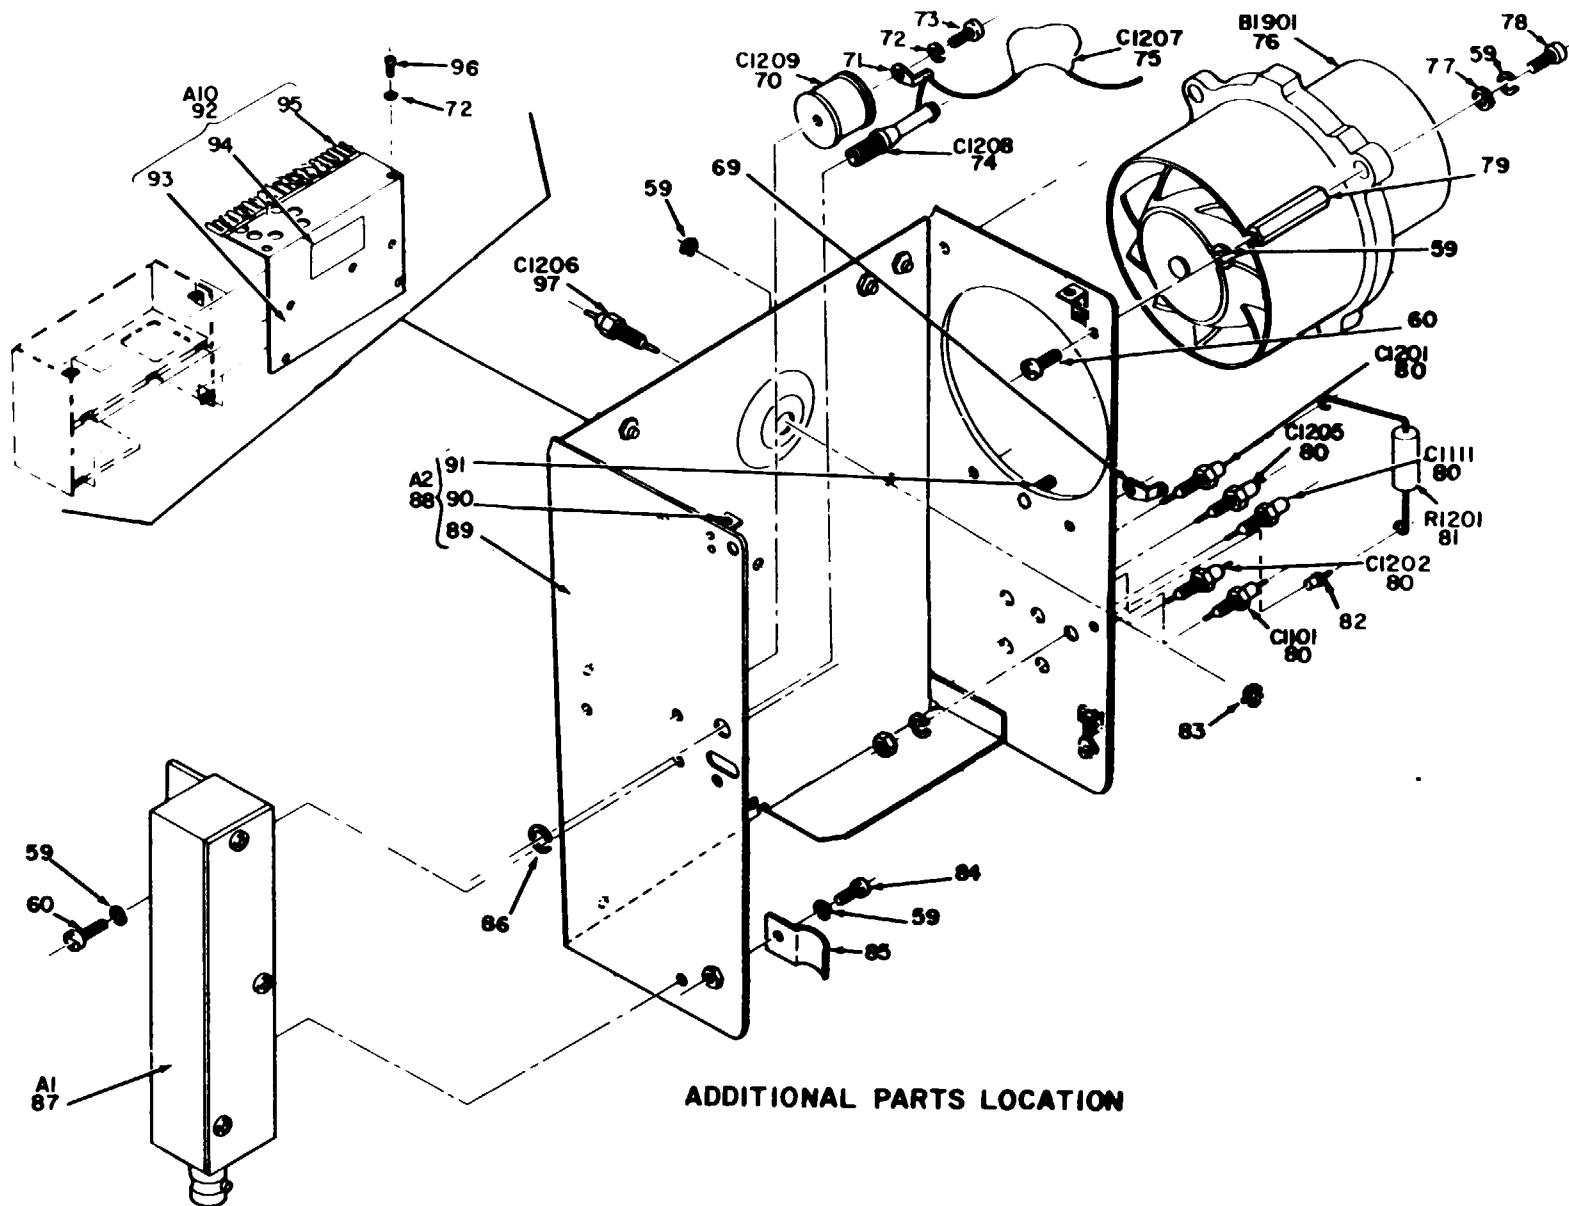

NOTE: FOR COMPLETE REFERENCE DESIGNATION PREFIX WITH 3A9.

Figure 10. Receiver-Transmitter, Power Amplifier Subassembly (3A9) (Sheet 2 of 2).

ELIJAH014

SECTION II


(1) ILLUSTRATION (a) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	FSCM	(6) D E S C R I P T I O N		(7) U/M	(8) QTY INC IN UNIT	
						U S A B L E O N C O D E				
GROUP 0104 RECEIVER-TRANSMITTER,POWER AMPLIFIER SUBASSEMBLY (3A9)										
10	1	PAHHH	5821-00-736-6082	117450-1	65597	SWITCH SUBASSY AMPL.....		EA	1	
10	2	PAHZZ	5310-00-595-6211	MS15795-803	96906	WASHER,FLAT.....		EA	2	
10	3	PAHZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK.....		EA	2	
10	4	XDHZZ	5305-00-054-5655	MS51957-21	96906	SCREW,MACHINE.....		EA	2	
10	5	PAHZZ	5960-00-722-1044	8121	86684	ELECTRON TUBE.....		EA	1	
10	6	PAFZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE.....		EA	1	
10	7	PAFZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK.....		EA	1	
10	8	PAFZZ	5310-00-595-6211	MS15795-803	96906	WASHER,FLAT.....		EA	1	
10	9	PAHZZ	5970-00-488-1796	276332-1	65597	INSULATOR,WASHER.....		EA	2	
10	10	PAHZZ	5340-00-235-2431	94591-1	65597	STRAP,RETAINING.....		EA	2	
10	11	PAHZZ	5970-00-221-5103	28222-1	65597	INSULATOR,BUSHING.....		EA	2	
10	12	XDHZZ		284517-1	65597	PLATE,COIL MOUNTING.....		EA	1	
10	13	XDHZZ		270266-2	65597	SPACER,COIL MTG PL.....		EA	2	
10	14	XDHZZ		42248-3	65597	COIL,RF.....		EA	1	
10	15	XDHZZ		42248-2	65597	COIL,RF.....		EA	1	
10	16	XDHZZ		42248-1	65597	COIL,RF.....		EA	1	
10	17	PAHHH	5999-00-724-4805	94575-2	65597	CLAMP,ELEC ASSY.....		EA	1	
10	18	XDHZZ		94576-1	65597	CONTACT,ELECTRICAL.....		EA	1	
10	19	XDHZZ	5305-00-054-5648	MS51957-14	96906	SCREW,MACHINE.....		EA	1	
10	20	XDHZZ		94575-1	65597	CLAMP,ELECTRICAL.....		EA	1	
10	21	XDHZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE.....		EA	8	
10	22	PAHZZ	5950-00-404-5561	42252-1	65597	COIL,RF.....		EA	1	
10	23	XDHZZ	5310-00-595-6211	MS15795-803	96906	WASHER,FLAT.....		EA	4	
10	24	PAHZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON.....		EA	2	
10	25	PAHZZ	5970-00-356-0550	X783A	71590	INSULATOR,STANDOFF.....		EA	2	
10	26	PAHZZ	5310-00-785-2129	76102	65597	WASHER,NONMETALLIC.....		EA	3	
10	27	PAHZZ	5310-00-595-6211	MS15795-803	96906	WASHER,FLAT.....		EA	4	
10	28	XDHZZ		270265-1	65597	SPACER,WAFER MTG.....		EA	2	
10	29	PAHZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE.....		EA	1	
10	30	PAHHH	5821-00-402-5305	117460-1	65597	ELECTRONIC CMPNT.....		EA	1	
10	31	PAHHH	5821-00-736-6146	117451-1	65597	DRIVER SW SUBASSY.....		EA	1	
10	32	XDHZZ		10857-1	65597	SWITCH SECTION,RTRY.....		EA	1	
10	33	XDHZZ		270266-1	65597	SPACER,COIL MTGPL.....		EA	2	
10	34	XDHZZ		38967-4	65597	COIL,RF.....		EA	1	
10	35	XDHZZ		284517-1	65597	PLATE,COIL MOUNTING.....		EA	1	
10	36	XDHZZ		38967-3	65597	COIL,RF.....		EA	1	
10	37	XDHZZ		38967-2	65597	COIL,RF.....		EA	1	
10	38	PAHZZ	5970-00-488-1819	28207-2	65597	INSULATOR,TUNER.....		EA	2	

SECTION II

TM11-5821-277-36P

(1) ILLUSTRATION	(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(6) ITEM NO.	SMR CODE					
10	39	XDHZZ	5305-00-054-5656	MS51957-22	96906 SCREW,MACHINE.....	EA	2
10	40	PAHZZ	5950-00-253-5110	302705-1	65597 CORE,ADJ TUNING.....	EA	7
10	41	XDHZZ		38968-1	65597 COIL,RF.....	EA	1
10	42	KDHZZ		38968-2	65597 COIL,RF.....	EA	1
10	43	KDHZZ		38968-3	65597 COIL,RF.....	EA	1
10	44	KDHZZ		38967-1	65597 COIL,RF.....	EA	1
10	45	XDHZZ		284530-2	65597 PLATE,PSNR MOUNTING.....	EA	1
10	46	XDHZZ		270281-1	65597 POST,EL EC-MECH EQPT.....	EA	4
10	47	XDHZZ		284530-1	65597 PLATE,PSNR MOUNTING.....	EA	1
10	48	XDHZZ	5305-00-719-5329	MS51963-20	96906 SETSCREW.....	EA	2
10	49	PAHZZ	3120-00-236-3549	75644-1	65597 BUSHING,SHAFT CPLG.....	EA	1
10	50	KDHZZ		117440-1	65597 EXTENSION SHAFT.....	EA	1
10	51	KDHZZ	5310-00-531-9514	AN960C6	88044 WASHER, FLAT.....	EA	4
10	52	KDHZZ		117453-1	65597 MOTOR-XMSN CONTROL.....	EA	1
10	53	KDHZZ	5305-00-054-6654	MS51957-30	96906 SCREW,MAC HINE.....	EA	4
10	54	KDHZZ	5310-00-929-6395	MS35338-136	96906 WASHER,LOCK.....	EA	7
10	55	KDHZZ		284529-2	65597 PLATE,TUNER MTG.....	EA	1
10	56	KDHZZ		270278-1	65597 POST,EL EC-MECH EQPT.....	EA	3
10	57	KDHZZ		284529-1	65597 PLATE,TUNER MOUTING.....	EA	1
10	58	PAHZZ	5310-00-722-5998	MS15795-805	96906 WASHER,LOCK.....	EA	3
10	59	PAHZZ	5310-00-933-8118	MS35338-135	96906 WASHER,LOCK.....	EA	14
10	60	KDHZZ	5305-00-054-5647	MS51957-13	96906 SCREW,MACH INE.....	EA	14
10	61	KDHZZ	5305-00-455-2642	NAS1635-06-36	80205 SCREW,MACHINE.....	EA	3
10	62	KDHZZ		10856-1	65597 SWITCH SECTION,RTRY.....	EA	1
10	63	KDHZZ		42247-1	65597 COIL,RF.....	EA	1
10	64	XDHZZ		42247-3	65597 COIL,RF.....	EA	1
10	65	XDHZZ		42247-2	65597 COIL, RF.....	EA	1
10	66	KDHZZ		42248-4	65597 COIL, RF.....	EA	1
10	67	PAHZZ	5950-00-717-3282	1537-713	99800 COIL,RF.....	EA	1
10	68	PAHZZ	5950-00-253-5111	302705-2	65597 CORE,ADJ TUNING.....	EA	7
10	69	PAHZZ	5940-00-847-3138	2104-04-00	78189 TERMINAL,LUG.....	EA	1
10	70	PAHZZ	5910-00-989-9515	DA853-074	71590 CAPACITOR,FXD,CER.....	EA	1
10	71	KDHZZ		256-02-00	78189 TERMINAL,LUG.....	EA	1
10	72	KDHZZ	5310-00-928-2690	MS35338-134	WASHER,LOCK.....	EA	14
10	73	XDHZZ	5305-00-054-5636	MS51957-2	96906 SCREW,MACHINE.....	EA	14
10	74	PAHZZ	510-00-702-8584	VC23GY	73899 CAPACITOR,VAR,GLASS.....	EA	1
10	75	PAHZZ	5910-00-723-5157	17389-1	65597 CAPACITOR, FXD,MICA.....	EA	1
10	76	PAHZZ	4140-00-726-9656	19A995	25140 FAN,VANEAXIAL.....	EA	1
10	77	PAHZZ	5310-00-595-6211	MS15795-803	96906 WASHER,FLAT.....	EA	3
10	78	XDHZZ	5305-00-054-5650	MS51957-16	96906 SCREW,MACHINE.....	EA	3

(1) ILLUSTRATION (a) FIG NO.	(2) SMR CODE (b) ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE		(7) U/M	(8) QTY INC IN UNIT
10	79	PAHZZ	5340-00-251-4233	270263-1	65597	POST,ELEC-MECH EQPT.....	EA	3
10	80	PAHZZ	5910-00-915-8497	287N1	91984	CAPACITOR,FXD,CER.....	EA	5
10	81	PAHZZ	5905-00-443-7032	882-3-1000PORM5P CT	44655	RESISTOR,FXD,WW.....	EA	1
10	82	PAHZZ	5940-00-177-6732	50SL299-315	12615	TERMINAL,STUD	EA	1
10	83	XDHZZ	5310-00-285-7037	MS122031	96906	WASHER,LOCK.....	EA	6
10	84	XDHZZ	5305-00-066-7326	MS24693C24	96906	SCREW,MACHINE.....	EA	1
10	85	PAHZZ	5340-00-247-4079	94579-1	65597	STRAP,RETAINING.....	EA	1
10	86	PAHZZ	5305-00-933-8120	MS35338-138	96906	WASHER,LOCK	EA	1
10	87	PAHHH	5821-00-736-6073	117427-1	65597	ANTENNA SUBASSEMBLY.....	EA	1
10	88	XDHHH		80931-2	65597	CHASSIS,ELEC EQPT	EA	1
10	89	KDHZZ		80931-1	65597	CHASSIS,ELEC EQPT	EA	1
10	90	XDHZZ		92350-1	65597	BRACKET,COVER, MTG.....	EA	3
10	91	PAHZZ	5307-00-570-7197	FHS440-5	46384	STUD,CAPTIVE	EA	1
10	92	XDHHH		089904-0002	65597	COVER,XMTR POWER	EA	1
10	93	XDHZZ		089904-0001	65597	COVER,XMTR POWER	EA	1
10	94	XDHZZ		104843-0002	65597	PLATE,INSTRUCTION	EA	1
10	95	XDHZZ		065946-0001	65597	CONTACT,ELECTRICAL	EA	1
10	96	XDHZZ		MS51957-2	65597	SCREW,MACHINE	EA	14
10	97	PAHZZ	5910-00-782-1996	BSF2BB1000	96906	CAPACITOR, FXD,CER	EA	1

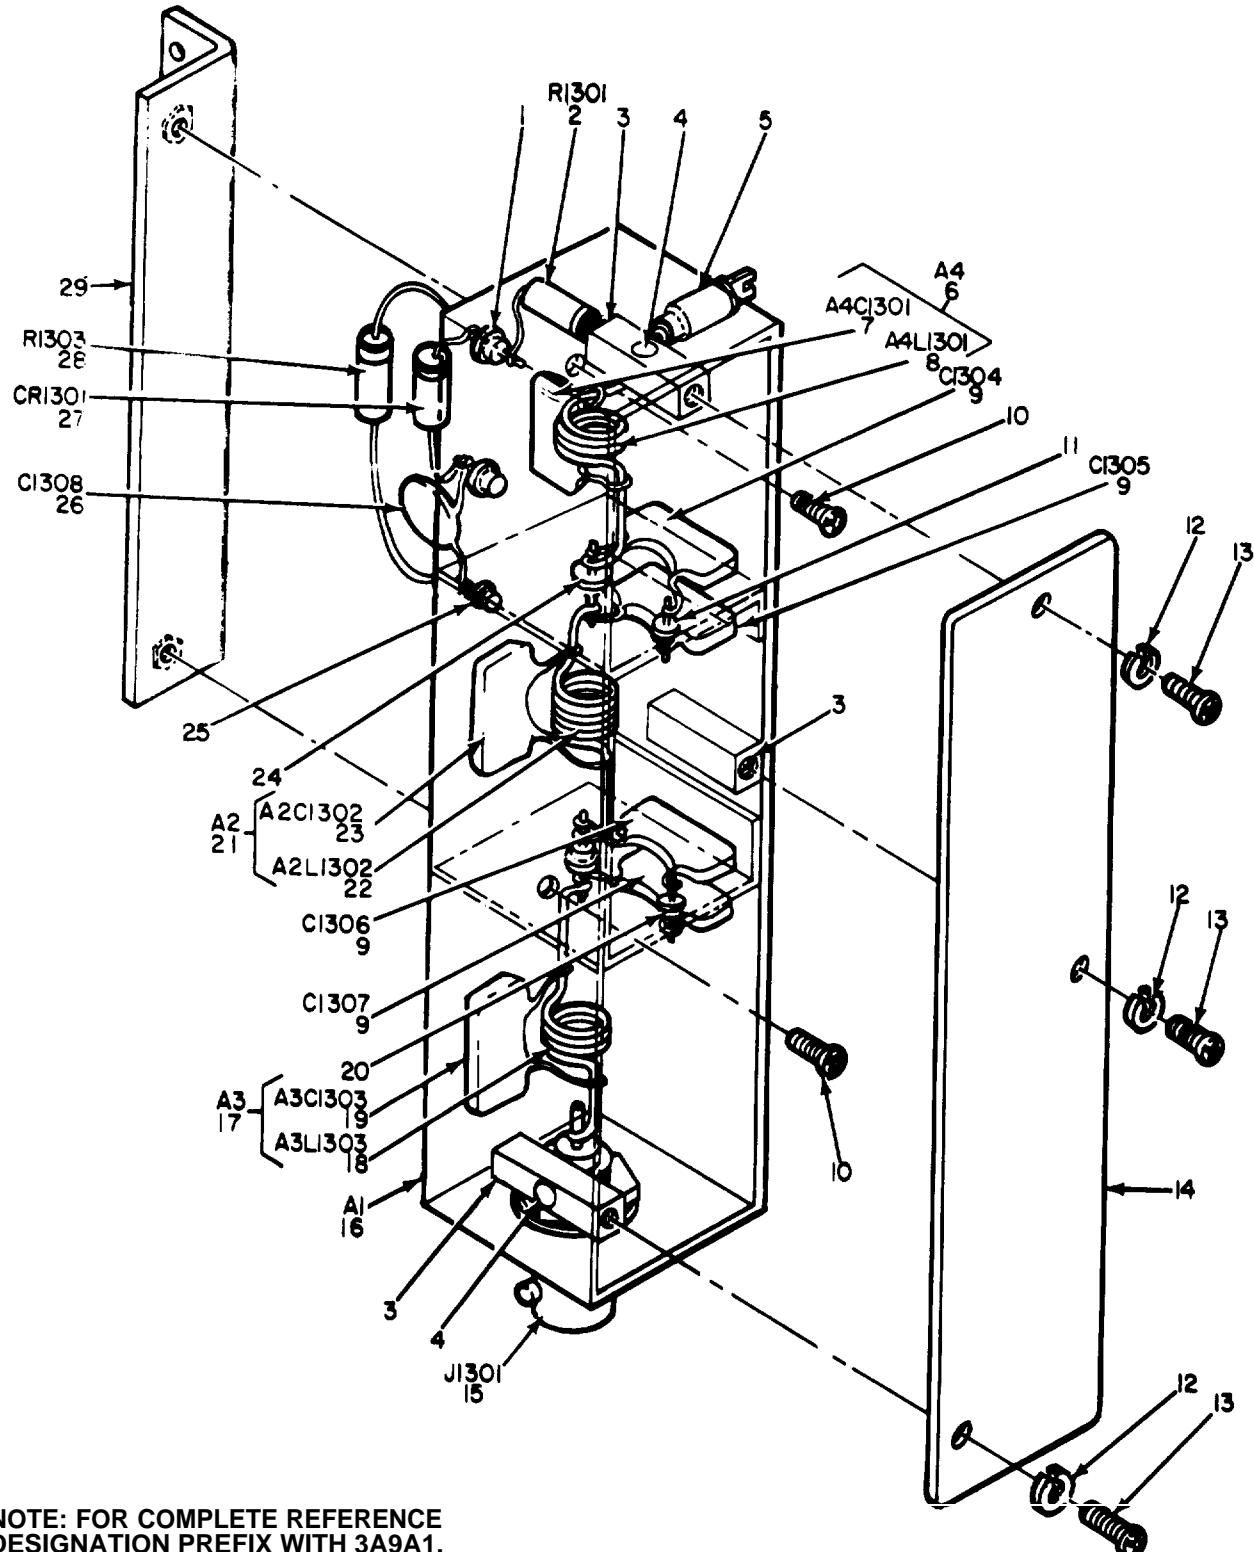

NOTE: FOR COMPLETE REFERENCE
DESIGNATION PREFIX WITH 3A9A1.

EL1JN015

Figure 11, Antenna Filter Subassembly (3A9A1).

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8) QTY IN IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMB CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	
						GROUP 010401 ANTENNA FILTER SUBASSEMBLY (3A9A1)		
11	1	XDHZZ	5940-00-270-3274	FTSM1L2	98291	TERMINAL,FEEDTHRU.....	.EA	1
11	2	PAHZZ	5905-00-902-4522	RL07S303G	81349	RESISTOR,FXD,FILMEA	1
11	3	XDHZZ		100916-1	65597	NUT,COVER MOUNTINGEA	3
11	4	XDHZZ		R3700-3-16CADMIU MPLATED	12014	RIVET,TUBULAREA	3
11	5	XDHZZ		FT1000SL		TERMINAL,FEEDTHRUEA	1
11	6	XDHHH	5950-00-433-5843	42251-2	65597	COIL,RFEA	1
11	7	PAHZZ	5305-00-054-5648	MS51957-14	96906	CAPACITOR,FXD,MICAEA	1
11	8	XDHZZ		42251-1	65597	COIL,RFEA	1
11	9	PAHZZ	5910-00-832-5145	DM15C100JP100WV4 CR	72136	CAPACITOR,FXD,MICAEA	4
11	10	XDHZZ	5305-00-066-7326	MS24693C24	96906	SCREW,MACHINEEA	2
11	11	XDHZZ	5940-00-904-4150	2040-1	71279	TERMINAL,STUDEA	2
11	12	XDHZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCKEA	3
11	13	XDHZZ	5305-00-054-5636	MS51957-2	96906	SCREW,MACHINEEA	3
11	14	XDHZZ		89685-1	65597	PLATE,ELEC SHIELDEA	1
11	15	PAHZZ	5933-00-665-5718	UG1094U	80058	CONNECTOR,RCPT, ELECEA	1
11	16	XDHHH		89687-2	65597	CAN,ANT SUBASSEMBLYEA	1
11	17	XDHHH	5950-00-468-2392	42250-2	65597	COIL, RFEA	1
11	18	XDHZZ		42250-1	65597	COIL,RFEA	1
11	19	PAHZZ	5910-00-832-5145	DM15C180J0300WV4 CR	72136	CAPACITOR,FXD,MICAEA	1
11	20	PAHZZ	5940-00-502-3726	STSM1	98291	TERMINAL,STUDEA	1
11	21	XDHHH	5950-00-422-3484	42249-2	65597	COIL,RFEA	1
11	22	XDHZZ		42249-1	65597	COIL,RFEA	1
11	23	PAHZZ	5910-00-948-8998	DM15C3R3D0300WV4 CR	72136	CAPACITOR,FXD,MICAEA	1
11	24	PAHZZ	5940-00-782-8942	FTSM1	98291	TERMINAL,FEEDTHUR.....	.EA	2
11	25	PAHZZ	5940-00-518-8569	2043-1	71279	TERMINAL,STUDEA	1
11	26	XDHZZ	5910-00-832-8285	801-010W5R102K	72982	CAPACITOR,FXD,CEREA	1
11	27	PAHZZ	5941-00-842-9864	1N914	81349	SEMICONDUCTOR,DIODEEA	1
11	28	PAHZZ	5905-00-775-0626	RL07S511G	81349	RESISTOR,FXD,FILMEA	1
11	29	XDHZZ		92351-2	65597	BRACKET,ANT SUBASSY.....	.EA	1

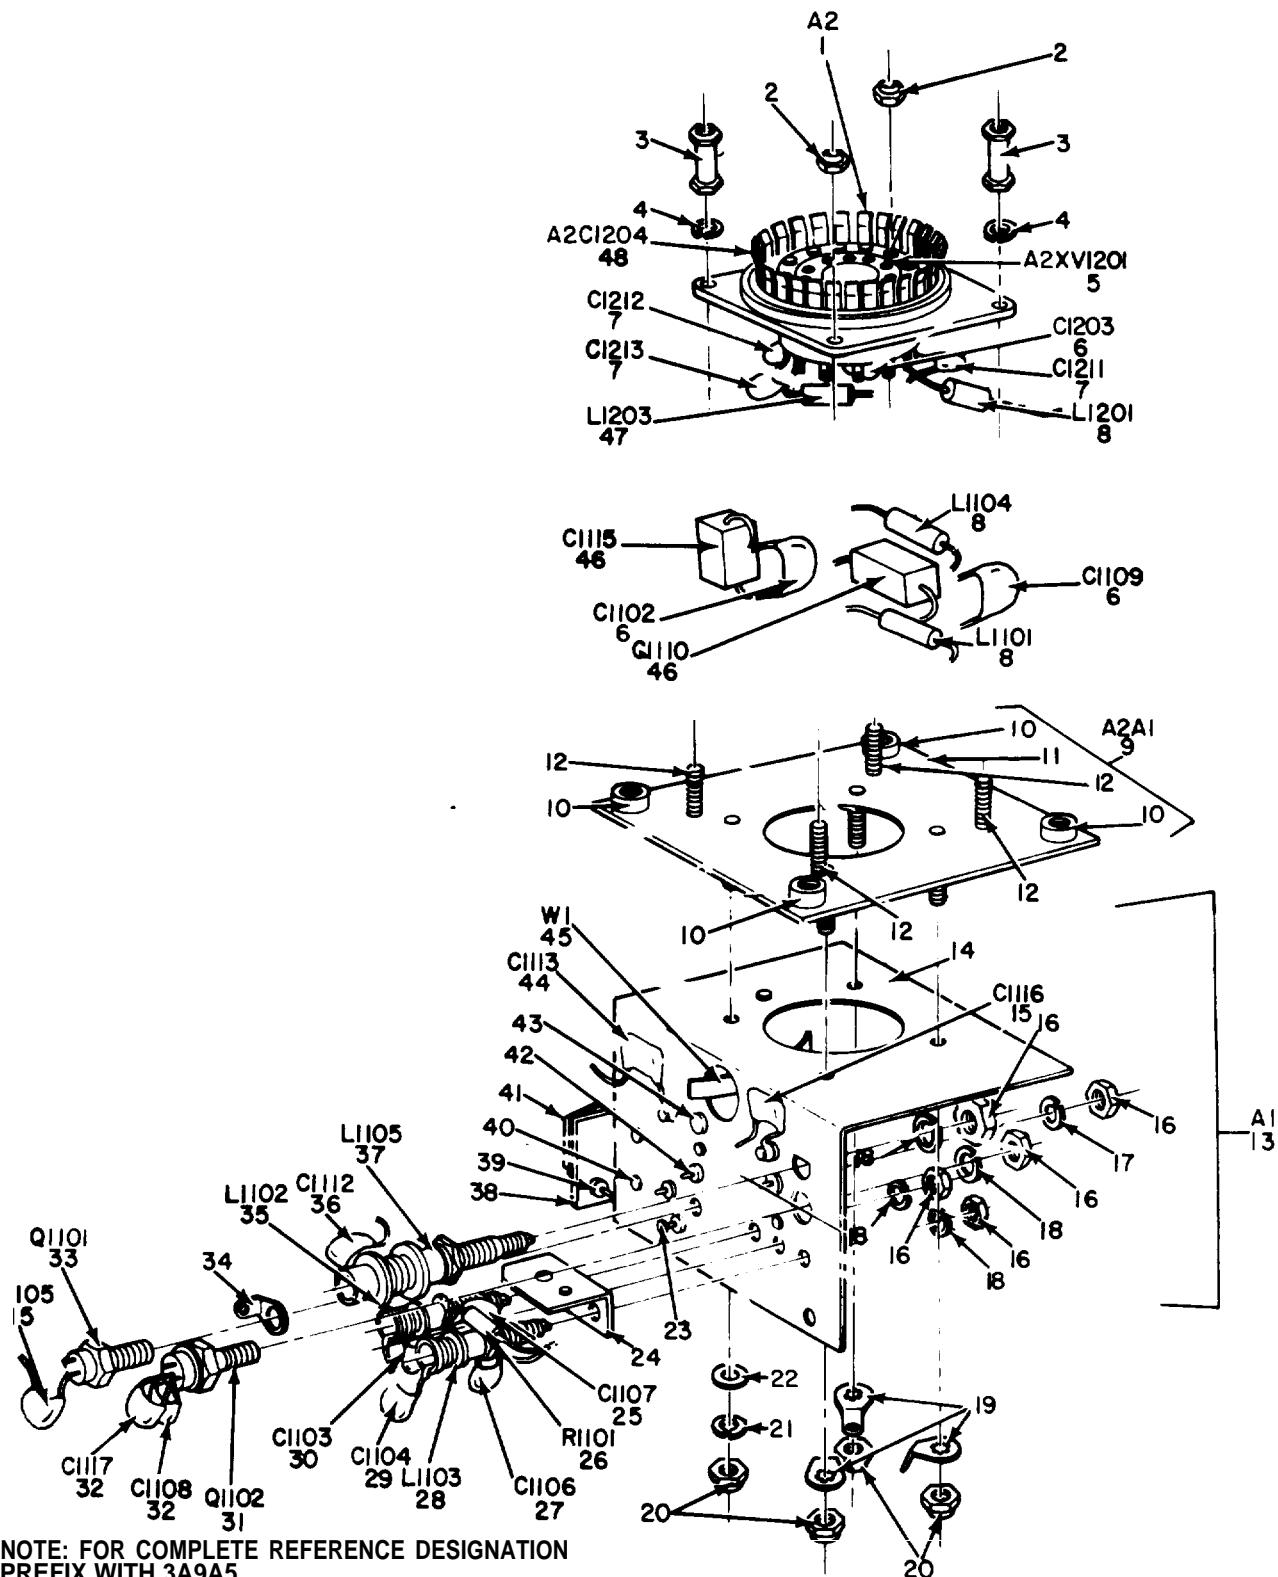


Figure 12. Driver Assembly (3A9A5).


SECTION II

(1) ILLUSTRATION (a) FIG. NO.	(2) ITEM NO. (b) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC I N UNIT
						U/M	
GROUP 010402 DRIVER ASSEMBLY (3A9A5)							
12	1 PAHHH	5821-00-944-3432	117554-1	65597	ELECTRONIC CMPNT	EA	1
12	2 PAHZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON	EA	2
12	3 XDHZZ		270306-1	65597	SPACER,SLEEVE	EA	2
12	4 PAHZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK	EA	2
12	5 PAHZZ	5935-00-832-7995	124-311-104	74970	SOCKET,ELEC TUBE	EA	1
12	6 PAHZZ	5910-00-890-8996	DM15C1016	84171	CAPACITOR,FXD,MICA	EA	3
12	7 PAHZZ	5910-00-078-6353	DD241	71590	CAPACITOR,FXD,CER	EA	3
12	8 PAHZZ	5950-00-717-3282	1537-713	99800	COIL,RF	EA	3
12	9 XDHHH		284666-2	65597	RETAINER,ELEC TUBE	EA	1
12	10 XDHZZ		270307-1	65597	SPACER,MOUNTING	EA	4
12	11 XDHZZ		284666-1	65597	RETAINER,ELEC TUBE	EA	1
12	12 PAHZZ	5307-00-570-7197	FHS440-5	46384	STUD,CAPTIVE	EA	8
12	13 XDHHH		80935-2	65597	CHASSIS,ELEC EQPT	EA	1
12	14 XDHZZ		80935-1	65597	CHASSIS,ELEC EQPT	EA	1
12	15 PAHZZ	5910-00-078-2023	CM04FD241G03	81349	CAPACITOR,FXD,MICA	EA	2
12	16 PAHZZ	5310-00-812-4292	NAS671C10	80205	NUT,PLAIN,HEXAGON	EA	5
12	17 XDHZZ	5305-00-933-8120	MS35338-138	96906	WASHER,LOCK	EA	1
12	18 XDHZZ	5310-00-933-8119	MS35338-137	96906	WASHER,LOCK	EA	4
12	19 PAHZZ	5940-00-847-3138	2104-04-00	78189	TERMINAL,LUG	EA	3
12	20 PAHZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON	EA	4
12	21 XDHZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK	EA	1
12	22 XDHZZ	5310-00-595-6211	MS15795-803	96906	WASHER,FLAT	EA	1
12	23 PAHZZ	5940-00-719-4142	2040-2	71279	TERMINAL,STUD	EA	1
12	24 PAHZZ	5950-00-404-5597	89700-1	65597	SHIELD,COIL	EA	1
12	25 XDHZZ		DM100360J0100WV1 CR	72136	CAPACITOR,FXD,MICA	EA	1
12	26 PAHZZ	5905-00-817-7971	RC07GF100J	81349	RESISTOR, F XD, CMP SN	EA	1
12	27 PAHZZ	5910-00-832-8285	801-010W5R102K	72982	CAPACITOR,FXD,CER	EA	1
12	28 PAHZZ	5950-00-990-5570	39064-1	65597	TRANSFORMER,RF	EA	1
12	29 PAHZZ	5910-00-453-4853	DM10C270K0100WV1 CR	72136	CAPACITOR,FXD,MICA	EA	1
12	30 PAHZZ	5910-00-089-7504	CM04CD100D03	81349	CAPACITOR,FXD,MICA	EA	1
12	31 PAHZZ	5961-00-722-1266	2 N 2 8 7 6	80131	TRANSISTOR	EA	1
12	32 PAHZZ	5910-00-110-7850	DM10E750K0100WV4 CR	72136	CAPACITOR,FXD,MICA FACTORY SELECTED VALUE FOR CAPACITOR C1117	EA	1
12	32 PAHZZ	5910-00-420-2899	DM10E820J0100WV4 CR	72136	CAPACITOR,FXD,MICA FACTORY SELECTED VALUE FOR CAPACITOR C1117	EA	1
12	32 PAHZZ	5910-00-420-2926	DM10F910J0100WV4 CR	72136	CAPACITOR,FXD,MICA FACTORY SELECTED VALUE FOR CAPACITOR C1117	EA	2
12	33 PAHZZ	5961-00-989-9528	2N3961	81349	TRANSISTOR	EA	1

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8) QTY IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	P A R T N U M B E R	FSCM	U S A B L E O N C O D E	U/M	
12	34	PAHZZ	5940-00-155-7685	2101-10-00	78189	TERMINAL,LUG	EA	1
12	35	PAHZZ	5950-00-852-1326	39063-1	65597	COIL,RF.....	EA	1
12	36	PAHZZ	5910-00-443-7059	DM10C050KP100WV4 CR	72136	CAPACITOR,FXD,MICA.....	EA	1
12	37	PAHZZ	5950-00-782-7242	38964-1	65597	COIL,RF	EA	1
12	38	XDHZZ		92354-1	65597	BRACKET,ANGLE	EA	1
12	39	PAHZZ	5940-00-177-6731	50SL542-499	12615	TERMINAL,STUD	EA	3
12	40	XDHZZ		R3715-9-64CANDMI UNPLATED	12014	RIVET,TUBULAR	EA	2
12	41	XDHZZ		82334-1	65597	CONTACT,ELECTRICAL.....	EA	1
12	42	PAHZZ	5940-00-082-4869	SE12XC01	81349	TERMINAL,STUD	EA	5
12	43	PAHZZ	5940-00-177-6732	50SL299-315	12615	TERMINAL,STUD	EA	3
12	44	PAHZZ	5910-00-462-6199	DM15E390J0300WV4 CR	72136	CAPACITOR,FXD,MICA.....	EA	1
12	45	PAHZZ	6150-00-134-5541	27271-1	65597	LEAD,ELECTRICAL	EA	1
12	46	PAHZZ	5910-00-059-1375	M3-485	13934	CAPACITOR,FXD,PLSTC.....	EA	2
12	47	PAHZZ	5950-00-717-3274	1537-714	99800	COIL,RF	EA	1
12	48	PAHZZ	5910-00-915-8628	17483-1	65597	CAPACITOR,BY-PASS	EA	1

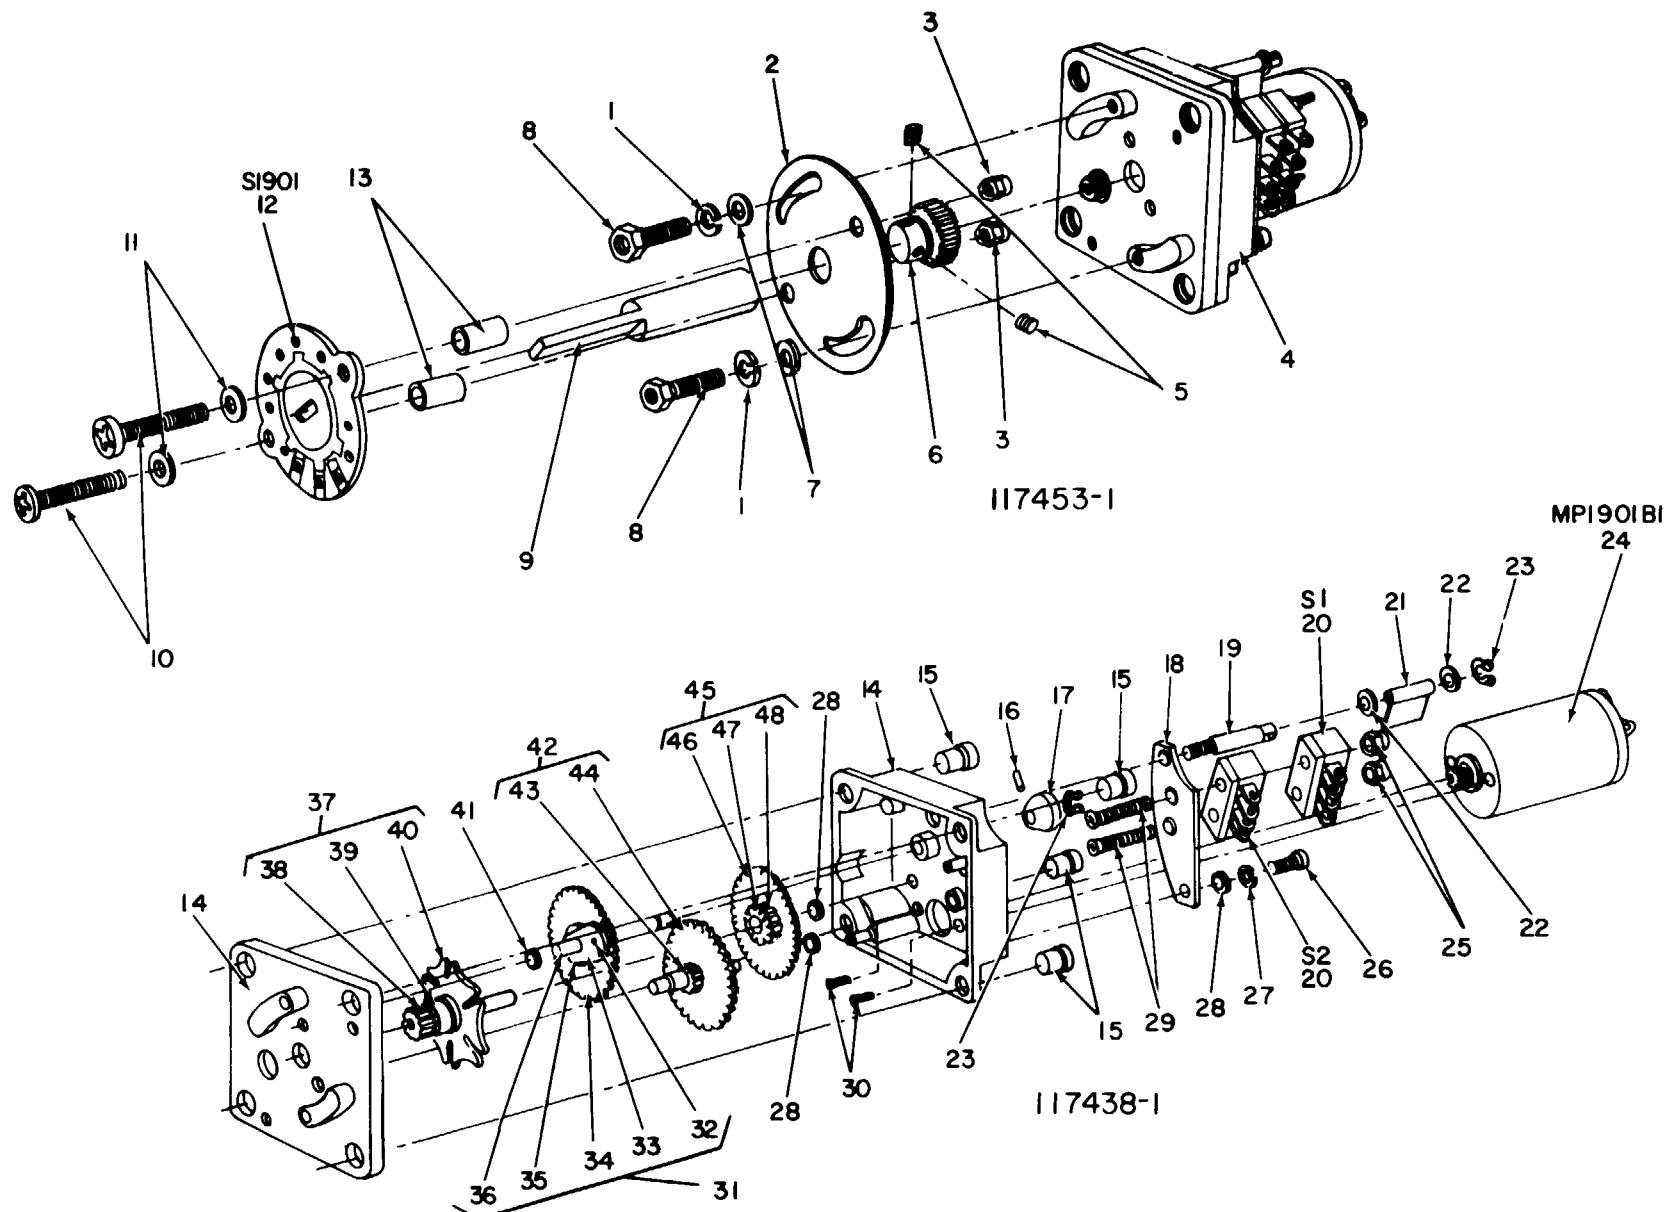

NOTE: FOR COMPLETE REFERENCE DESIGNATION PREFIX WITH 3A9A6.

ELIJNO17

Figure 13. Motor Transmission Control Assembly (3A9A6).

SECTION II


TM11-5821-277-34P

(1) ILLUSTRATION	(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMB CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	QTY INC IN UNIT U/M
						GROUP 010403 MOTOR TRANSMISSION CONTROL SUBASSEMBLY (3A9A6)	
13	1	XDHZZ	5310-00-929-6395	MS35338-136	96906	WASHER,LOCK.....	EA 2
13	2	KDHZZ		284523-1	65597	PLATE,ADPTR,SWITCH.....	EA 1
13	3	PAHZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON.....	EA 2
13	4	PAHHH	5821-00-725-2713	117438-1	65597	MOTOR-XMSN CONTROL.....	EA 1
13	5	XDHZZ	5305-00-805-9748	MS51053-112	96906	SETSCREW.....	EA 2
13	6	XDHZZ		72537-1	65597	GEAR,SPUR.....	EA 1
13	7	XDHZZ	5310-00-722-5998	MS15795-805	96906	WASHER,FLAT.....	EA 2
13	8	XDHZZ		101730-0400	65597	SCREW,MACHINE.....	EA 2
13	9	XDHZZ		71593-1	65597	EXTENSION SHAFT.....	EA 1
13	10	XDHZZ	5305-00-054-5652	MS51957-18	96906	SCREW,MACHINE.....	EA 2
13	11	PAHZZ	5310-00-785-2129	76102	65597	WASHER,NONMETALLIC.....	EA 2
13	12	PAHZZ	5930-00-792-2551	10853-1	65597	SWITCH SECTION RTRY.....	EA 1
13	13	XDHZZ		270280-1	65597	SPACER,SLEEVE.....	EA 2
13	14	XDHZZ		118173-0001	65597	HOUSING,MECH DRIVE.....	EA 1
13	15	XDHZZ		62410-1	65597	EYELET,METALLIC.....	EA 4
13	16	XDHZZ		052-0500MDP	00287	PIN,SPRING.....	EA 1
13	17	XDHZZ		73181-1	65597	CAM,SW ACTUATING.....	EA 1
13	18	XDHZZ		284520-1	65597	PLATE,SWITCH MTG.....	EA 1
13	19	XDHZZ		302022-1	65597	SCREW,ACTUATOR.....	EA 1
13	20	PAHZZ	5930-00-784-4206	16-4041	04426	SWITCH,SENSITIVE.....	EA 2
13	21	XDHZZ		82333-1	65597	ADAPTER,SW ACTUATOR.....	EA 1
13	22	PAHZZ	5310-00-728-2414	276319-1	65597	WASHER,FLAT.....	EA 2
13	23	PAHZZ	5365-00-200-2637	5100-12	79136	RING,RETAINING.....	EA 1
13	24	XDHZZ		41A346	25140	MOTOR,DIR CURRENT.....	EA 1
13	25	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT,SLFLKG, HEXAGON.....	EA 2
13	26	XDHZZ	5305-00-054-5636	MS51957-2	96906	SCREW,MACHINE.....	EA 1
13	27	XDHZZ	5310-00-928-2690	MS35338-134	96906	WASHER,LOCK.....	EA 1
13	28	XDHZZ		276244-1	65597	WASHER,FLAT.....	EA 1
13	29	XDHZZ		MS35190-217	96906	SCREW,MACHINE.....	EA 2
13	30	XDHZZ		103605-0400	65597	SCREW,MACHINE.....	EA 2
13	31	XDHHH		117435-1	65597	GENEVA LOCK SUBASSY.....	EA 1
13	32	XDHZZ		74352-1	65597	PIN,SHOULDER,HDLS.....	EA 1
13	33	XDHZZ		284522-1	65597	PLATE,LOCK SUBASSY.....	EA 1
13	34	XDHZZ		72534-1	65597	GEAR,SPUR.....	EA 1
13	35	XDHZZ		284521-1	65597	PLATE,LOCKING.....	EA 1
13	36	XDHZZ		71591-1	65597	SHAFT,STRAIGHT.....	EA 1
13	37	XDHHH		117436-1	65597	GEVEVA WHL SUBASSY.....	EA 1
13	38	XDHZZ		72535-1	65597	GEARSHAFT,SPUR.....	EA 1

SECTION II

TM11-5821-277-34P


(1) ILLUSTRATION (a) FIG NO.	(2) SMR CODE (b) ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) QTY INC IN UNIT U/M	(8)
13	39	XDHZZ	75641-1	65597	HUB,GENEVA WHEEL.....	EA	1
13	40	XDHZZ	73180-1	65597	WHEEL,GENEVA	EA	1
13	41	XDHZZ	270264-1	65597		V	
13	42	XDHHH	117434-1	65597	SECOND WHL SUBASSY.....	EA	1
13	43	XDHZZ	72532-1	65597	GEARSHAFT.....	EA	1
13	44	XDHZZ	72536-1	65597	GEAR,SPUR	EA	1
13	45	XDHHH	117437-1	65597	FIRST WHEEL SUBASSY.....	EA	1
13	46	XDHZZ	72531-1	65597	GEAR,SPUR	EA	1
13	47	XDHZZ	AA101-8	70417	BEARING,SLEEVE.....	EA	1
13	48	XDHZZ	72533-1	65597	GEAR,SPUR	EA	1

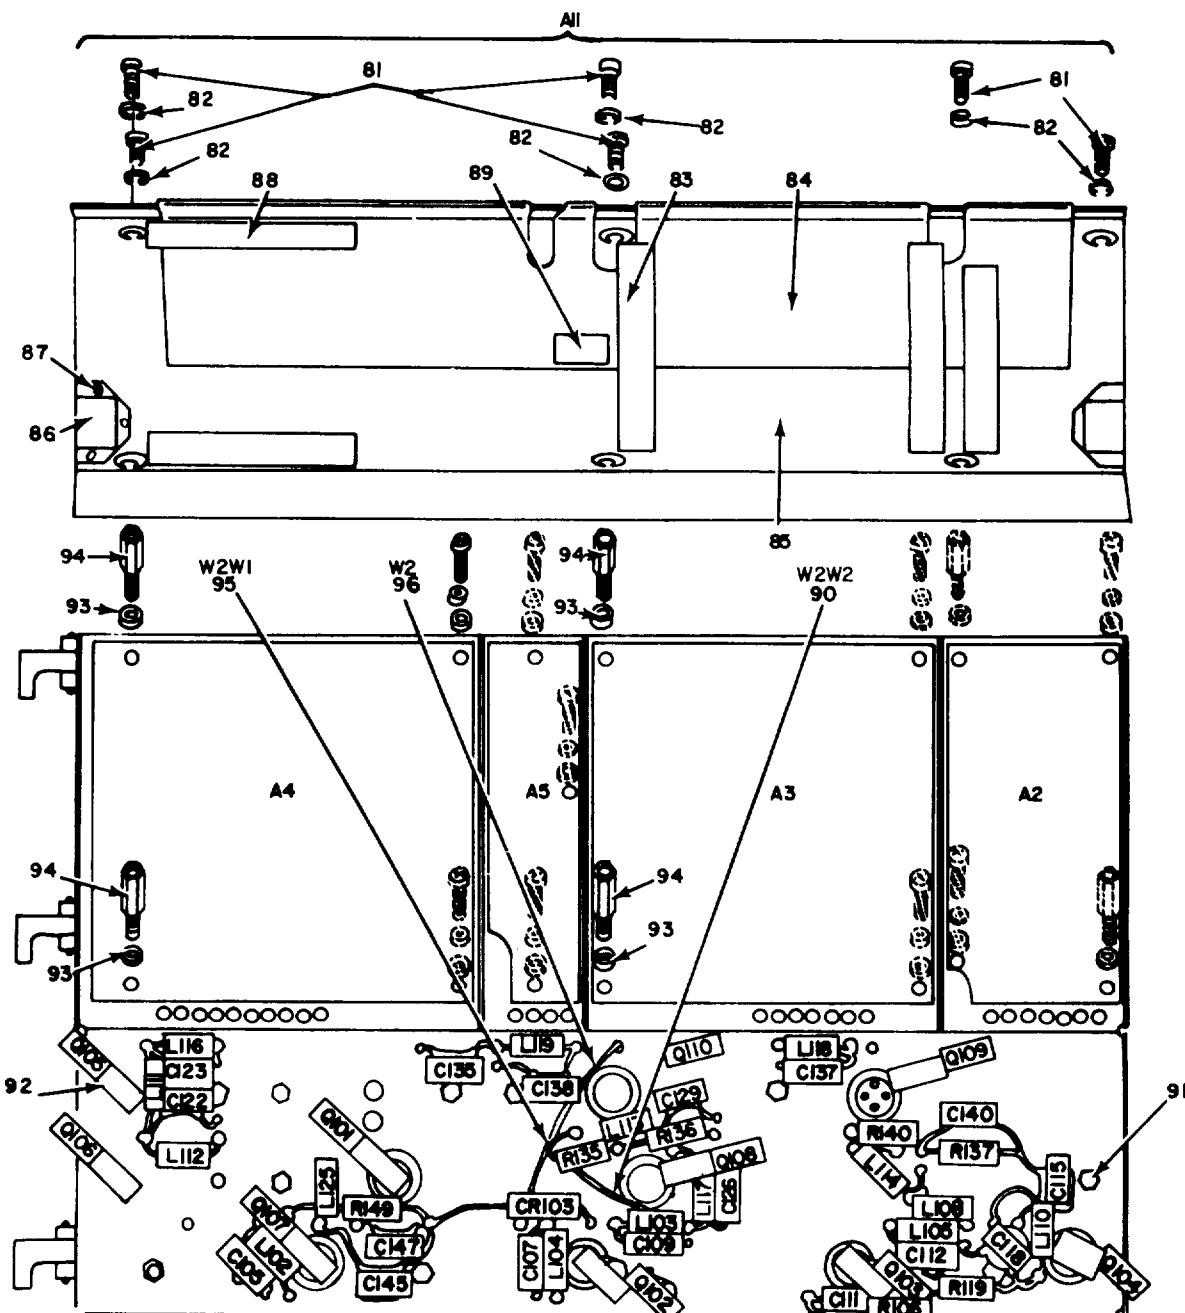

**NOTE : 1. FOR COMPLETE REFERENCE DESIGNATION PREFIX WITH 3A10.
2. ITEMS 90, 95, 97 P/O ITEM 96.** FRONT VIEW

FRONT VIEW

Figure 14. Receiver Assembly (3A10) (Sheet 1 of 4).

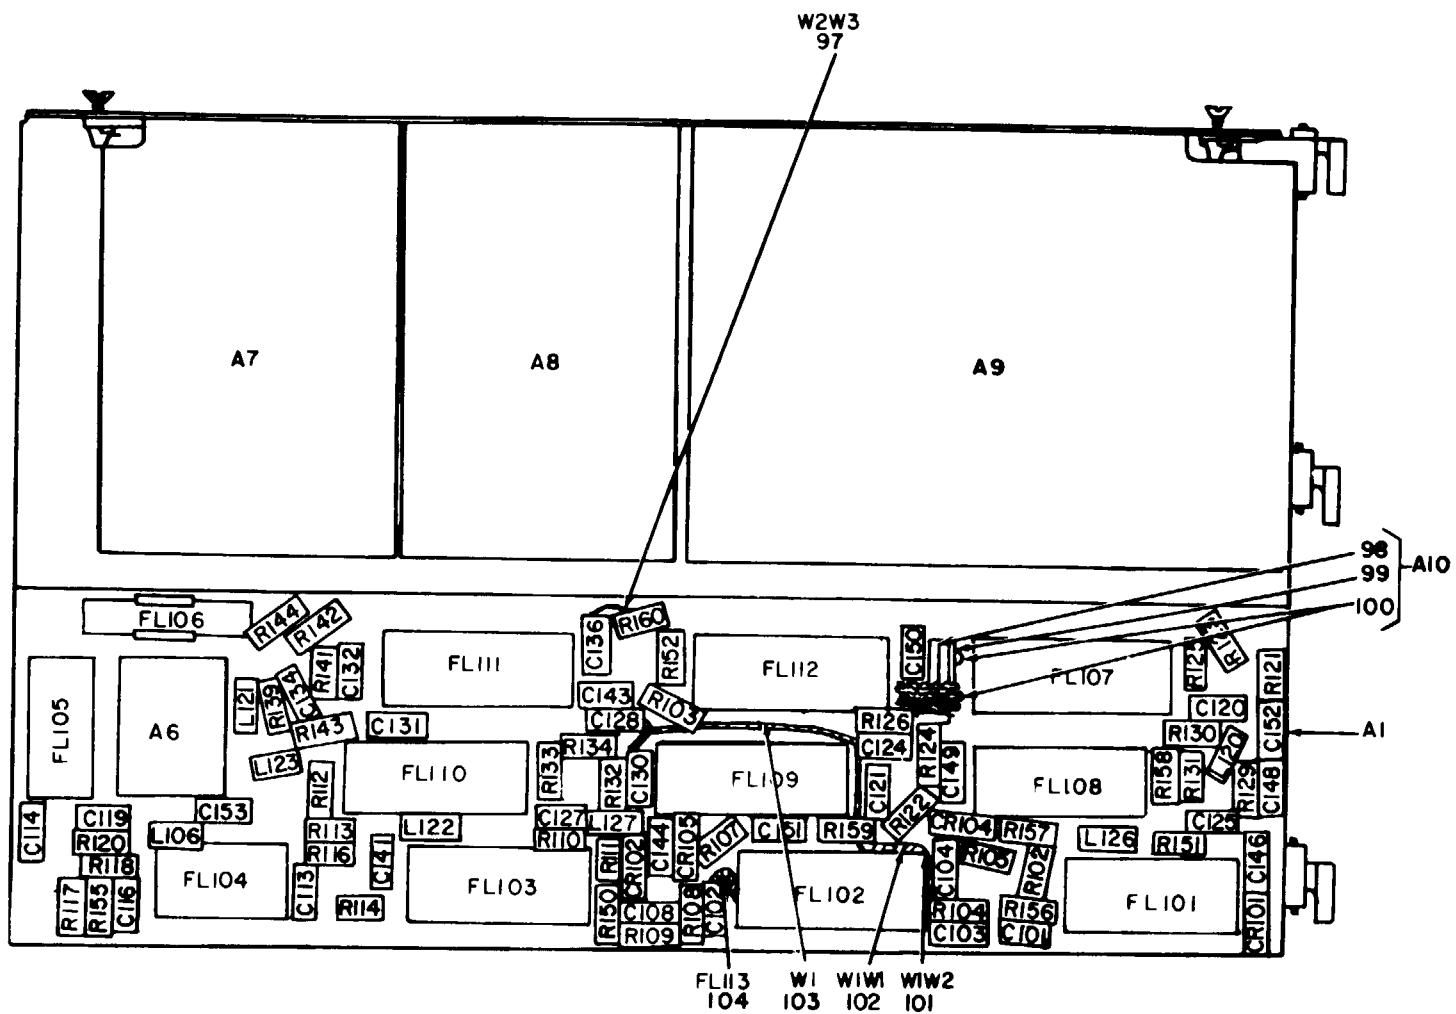

REAR VIEW

NOTE: FOR COMPLETE REFERENCE DESIGNATION PREFIX WITH 3A10.

Figure 14. Receiver Assembly (3A10) (Sheet 2 of 4).

ELIJNO19

REF. DES.	ITEM NO.										
A1	1	C112	13	C134	13	CRI03	31	L108	46	Q104	53
A2	2	C113	13	C135	15	CRI04	31	L110	47	Q105	52
A3	3	C114	14	C136	18	CRI05	31	L111	44	Q106	52
A4	4	C115	15	C137	13	FL101	32	L112	44	Q107	52
A5	5	C116	16	C138	12	FL102	33	L113	47	Q108	52
A6	6	C118	17	C140	23	FL103	34	L114	47	Q109	52
A7	7	C119	14	C141	19	FL104	35	L116	44	Q110	54
A8	8	C120	12	C143	12	FL105	36	L117	48	R102	55
A9	9	C121	18	C144	12	FL106	37	L118	45	R103	56
A10	10	C122	12	C145	12	FL107	38	L119	44	R104	57
A11	11	C123	12	C146	24	FL108	39	L120	49	R105	58
C101	12	C124	12	C147	12	FL109	40	L121	50	R106	59
C102	12	C125	12	C148	25	FL110	41	L122	47	R107	55
C103	12	C126	13	C149	26	FL111	42	L123	51	R108	60
C104	12	C127	13	C150	27	FL112	43	L125	44	R109	57
C105	12	C128	13	C151	28	L102	44	L126	49	R110	56
C107	13	C129	19	C152	29	L103	45	L127	50	R111	58
C108	13	C130	20	C153	30	L104	45	Q101	52	R112	61
C109	13	C131	21	CRI01	31	L105	45	Q102	52	R113	62
C111	13	C132	22	CRI02	31	L106	46	Q103	52	R114	63

ELIJN020

Figure 14. Receiver-Assembly (3A10) (Sheet 3 of 4).

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
R 116	6 4	R 130	6 7	R 143	7 4
R 117	6 3	R 131	7 0	R 144	7 0
R 118	6 5	R 132	6 7	R 149	7 5
R 119	6 6	R 133	5 9	R 150	6 7
R 120	6 4	R 134	6 7	R 151	7 6
R 121	6 0	R 135	7 1	R 152	7 1
R 122	6 7	R 136	7 2	R 155	6 3
R 123	6 8	R 137	6 6	R 156	7 8
R 124	6 7	R 139	6 6	R 157	6 2
R 125	6 9	R 140	7 3	R 158	7 9
R 126	5 9	R 141	6 7	R 159	7 9
R 129	6 7	R 142	6 7	R 160	8 0

ELIJN021

Figure 14. Receiver Assembly (3A10) (Sheet 4 of 4).

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION (a) FIG. NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION USABLE ON CODE	(7) (8) QTY IN UNIT U/M	
					GROUP 0105 RECEIVER ASSEMBLY (3A10)		
14	1	XDFFF		80926-2	CHASSIS,ELEC EQPT	EA	1
14	2	PAFFF	5821-00-725-2705	117416-1	OSCILLATOR SUBASSY	EA	1
14	3	PAFFF	5821-00-725-2706	117417-1	OSCILLATOR SUBASSY	EA	1
14	4	PAFFF	5821-00-725-2707	117418-1	OSCILLATOR SUBASSY	EA	1
14	5	PAFFF	5821-00-725-2708	117419-1	OSCILLATOR SUBASSY	EA	1
14	6	PAFFF	5821-00-477-9954	117429-1	OSCILLATOR SUBASSY	EA	1
14	7	PAFFF	5821-00-726-0426	117421-1	RECEIVER-T SUBASSY	EA	1
14	8	PAFFF	5821-00-725-2710	117422-1	RECEIVER-T SUBASSY	EA	1
14	9	PAFFF	5821-00-726-2816	117423-1	RECEIVER-T SUBASSY	EA	1
14	10	PAFFF	5821-00-401-9643	117459-1	SHIELD ASSY,RF	EA	1
14	11	XDFFF		89677-2	COVER, OSCILLATOR	EA	1
14	12	PAFZZ	5910-00-954-5508	DM10F241G0100WV4 CR	CAPACITOR,FXD,MICA	EA	15
14	13	PAFZZ	5910-00-059-1378	M3-492-8	CAPACITOR,FXD,PLSTC	EA	11
14	14	PAFZZ	5910-00-059-1375	M3-485	CAPACITOR,FXD,PLSTC	EA	2
14	15	PAFZZ	5910-00-964-1346	601PE1040-5W2	CAPACITOR,FXD,PLSTC	EA	2
14	16	PAFZZ	5910-00-022-6000	DM10C560JP100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	17	PAFZZ	5910-00-723-4438	805Y5T202M	CAPACITOR,FXD,CER	EA	1
14	18	PAFZZ	5910-00-089-3284	DM15F471J0300WV4 CR	CAPACITOR,FXD,MICA	EA	2
14	19	PAFZZ	5910-00-068-3871	DM10F331J0100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	20	XDFZZ		DM10F181J0100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	21	PAFZZ	5910-00-777-4651	DM15F561J0100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	22	PAFZZ	5910-00-940-7392	DM15D102JP100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	23	PAFZZ	5910-00-064-4706	DM10F121J0100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	24	PAFZZ	5910-00-954-5508	CM05FD241G03	CAPACITOR,FXD,MICA	EA	1
14	25	PAFZZ	5910-00-104-5849	DM10C180J0100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	26	PAFZZ	5910-00-957-6961	601PE6839-5STYLE 4	CAPACITOR,FXD,PLSTC	EA	1
14	27	PAFZZ	5910-00-934-2861	DM10C300J0100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	28	PAFZZ	5910-00-420-2899	DM10E820J0100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	29	PAFZZ	5910-00-068-3887	DM10C101J0100WV4 CR	CAPACITOR,FXD,MICA	EA	1
14	30	XDFZZ		137D476X0050F0	CAPACITOR,ELCTLTLT	EA	1
14	31	PAFZZ	5961-00-556-2091	46122-1	SEMICONDUCTOR,DIODE	EA	5
14	32	PAFZZ	5915-00-725-2955	44275-1	FILTER,BAND PASS	EA	1

SECTION II


TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	
14	33	PAFZZ	5915-00-725-2956	44276-1	65597	FILTER,BAND PASS	EA	1
14	34	PAFZZ	5915-00-725-2952	44272-1		FILTER,BAND PASS	EA	1
14	35	PAFZZ	5915-00-939-2073	44271-2	65597	FILTER,BAND PASS	EA	1
14	36	PAFZZ	5915-00-725-2954	44273-1	65597	FILTER,BAND PASS	EA	1
14	37	PAFZZ	5915-00-078-7291	TL-40D55A	06961	FILTER,BAND PASS	EA	1
14	38	PAFZZ	5915-00-727-2601	44268-2	65597	FILTER,BAND PASS	EA	1
14	39	PAFZZ	5915-00-725-2957	44277-1	65597	FILTER,BAND PASS	EA	1
14	40	PAFZZ	5915-00-725-2959	44277-2	65597	FILTER,BAND PASS	EA	1
14	41	PAFZZ	5915-00-725-6522	44267-1	65597	FILTER,BAND PASS	EA	1
14	42	PAFZZ	5915-00-725-2938	44270-1	65597	FILTER,BAND PASS	EA	1
14	43	PAFZZ	5915-00-725-2969	44278-1	65597	FILTER,BAND PASS	EA	1
14	44	PAFZZ	5950-00-717-3274	1537-714		COIL,RF	EA	6
14	45	PAFZZ	5950-00-717-3279	38952-13	65597	COIL,RF	EA	4
14	46	PAFZZ	5950-00-053-8542	1537-744	99800	COIL,RF	EA	2
14	47	PAFZZ	5950-00-734-3934	1537-718	99800	COIL,RF	EA	4
14	48	PAFZZ	5950-00-053-8540	1537-725	99800	COIL,RF	EA	1
14	49	PAFZZ	5950-00-717-3282	1537-713		COIL,RF	EA	2
14	50	PAFZZ	5950-00-945-3443	1537-709	99800	COIL,RF	EA	2
14	51	PAFZZ	5950-00-053-0543	1537-730	99800	COIL,RF	EA	1
14	52	PAFZZ	5961-00-939-4216	2N3283	80131	TRANSISTOR	EA	8
14	53	PAFZZ	5961-00-934-4217	2N3323	80131	TRANSISTOR	EA	1
14	54	PAFZZ	5961-00-722-1175	2N2398	80131	TRANSISTOR	EA	1
14	55	PAFZZ	5905-00-682-4098	RC07GF392J	81349	RESISTOR,FXD,CMPSN	EA	2
14	56	PAFZZ	5905-00-800-8063	RC07GF112J	81349	RESISTOR,FXD,CMPSN	EA	2
14	57	PAFZZ	5905-00-683-2236	RC07GF391J	81349	RESISTOR,FXD,CMPSN	EA	2
14	58	PAFZZ	5905-00-805-9714	RC07GF362J	81349	RESISTOR,FXD,CMPSN	EA	2
14	59	PAFZZ	5905-00-686-3370	RC07GF202J	81349	RESISTOR,FXD,CMPSN	EA	3
14	60	PAFZZ	5905-00-110-7622	RCR07G682JS	81349	RESISTOR,FXD,CMPSN	EA	2
14	61	PAFZZ	5905-00-683-7721	RC07GF101J	81349	RESISTOR,FXD,CMPSN	EA	1
14	62	PAFZZ	5905-00-686-9994	RC07GF122J	81349	RESISTOR,FSD,CMPSN	EA	2
14	63	PAFZZ	5905-00-681-8818	RC07GF153J	81349	RESISTOR,FXD,CMPSN	EA	3
14	64	PAFZZ	5905-00-752-3186	RC07GF163J	81349	RESISTOR,FXD,CMPSN	EA	2
14	65	PAFZZ	5905-00-686-3798	RC07GF272J	81349	RESISTOR,FXD,CMPSN	EA	1
14	66	PAFZZ	5905-00-835-1635	RC07GF620J	81349	RESISTOR,FXD,CMPSN	EA	3
14	67	PAFZZ	5905-00-683-2238	RC07GF103J	81349	RESISTOR,FXD,CMPSN	EA	9
14	68	PAFZZ	5905-00-726-4413	RC07GF123J	81349	RESISTOR,FXD,CMPSN	EA	1
14	69	PAFZZ	5905-00-682-4097	RC07GF302J	81349	RESISTOR,FXD,CMPSN	EA	1
14	70	PAFZZ	5905-00-686-9998	RC07GF472J	81349	RESISTOR,FXD,CMPSN	EA	2
14	71	PAFZZ	5905-00-727-8001	RC07GF681J	81349	RESISTOR,FXD,CMPSN	EA	1
14	72	PAFZZ	5905-00-683-2239	RC07GF201J	81349	RESISTOR,FXD,CMPSN	EA	1

SECTION II

TM11-5821-277-34P


(1) ILLUSTRATION (a) FIG. NO.	(2) ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) D E S C R I P T I O N		(7) QTY IN U/M	(8) INC IN UNIT
						USABLE ON CODE		
14	73	PAFZZ	5905-00-683-7723	RC07GF152J	81349	RESISTOR,FXD,CMPSN	EA	1
14	74	PAFZZ	5905-00-801-8272	RC07GF511J	81349	RESISTOR,FXD,CMPSN	EA	1
14	75	PAFZZ	5905-00-683-2242	RC07GF471J	81349	RESISTOR,FXD,CMPSN	EA	1
14	76	PAFZZ	5905-00-686-3838	RC07GF273J	81349	RESISTOR,FXD,CMPSN	EA	1
14	77	PAFZZ	5905-00-683-7724	RC07GF242J	81349	RESISTOR,FXD,CMPSN	EA	1
14	78	PAFZZ	5905-00-683-2241	RC07GF512J	81349	RESISTOR,FXD,CMPSN	EA	1
14	79	PAFZZ	5905-00-835-1631	RC07GF200J	81349	RESISTOR,FXD,CMPSN	EA	2
14	80	PAFZZ	5905-00-807-4954	RC07GF751J	81349	RESISTOR,FXD,CMPSN	EA	1
14	81	XDFZZ	5305-00-054-5637	MS51957-3	96906	SCREW,MACHINE	EA	33
14	82	XDFZZ	5310-00-524-8024	276178-0300	65597	WASHER,LOCK	EA	33
14	83	PAFZZ	5330-00-242-5852	65755-2	65597	PAD,CRYSTAL HLDN	EA	2
14	84	XDFZZ		89711-1	65597	SHIELD,OSCILLATOR	EA	1
14	85	XDFZZ		89677-1	65597	COVER,OSCILLATOR	EA	1
14	86	XDFZZ		89676-1	65597	COVER,PANEL FSTNR	EA	2
14	87	PAFZZ	5320-00-821-4992	R3700-3-32	12014	RIVET,TUBULAR	EA	6
14	88	PAFZZ	5330-00-242-5856	65755-3	65597	PAD,CRYSTAL HLDN	EA	3
14	89	PAFZZ	5330-00-242-5860	65755-1	65597	PAD,CRYSTAL HLDN	EA	1
14	90	PAFZZ	6145-00-855-4467	MILW16878TYPEE22 WHITEBLACKGREEN	81349	WIRE,ELECTRICAL	FT	V
14	91	PAFZZ	5310-00-614-3500	68-1660-40	72962	NUT,SLFLKG,HEXAGON	EA	14
14	92	PAFZZ	5961-00-944-3627	7717-18NWWHITE	13103	PAD,MTG,TRANISTOR	EA	9
14	93	XDFZZ		276244-1	65597	WASHER,FLAT	EA	31
14	94	PAFZZ	5821-00-736-5998	270224-1	65597	SPACER,BOARD	EA	6
14	95	XDFZZ		MIC17-71	81349	CABLE,RF	EA	1
14	96	PAFFF	5995-00-235-2098	432713-1	65597	CABLE ASSY,RF	EA	1
14	97	PAFZZ	6145-00-855-4667	MILW16878TYPEE22 WHITEBLACKORANGE	81349	WIRE, ELEC TRICAL	FT	V
14	98	XDFZZ		89703-1	65597	BLOCK,SHIELD MTG	EA	1
14	99	XDFZZ		89702-1	65597	SHIELD,RF	EA	1
14	100	XDFZZ		R3700-3-16CADMIU MPLATED	12014	RIVET,TUBULAR	EA	2
14	101	XDFZZ		MILW16878TYPEE20 BLACK	81349	WIRE. ELECT RICAL	FT	V
14	102	XDFZZ		MIC17-71	81349	CABLE,RF	EA	1
14	103	PAFFF	5995-00-235-2097	432712-1	65597	CABLE AS SY. RF	EA	1
14	104	PAFZZ	5950-00-902-3253	56-590-65-4A	02114	BEAO, SHI EL DING	EA	1

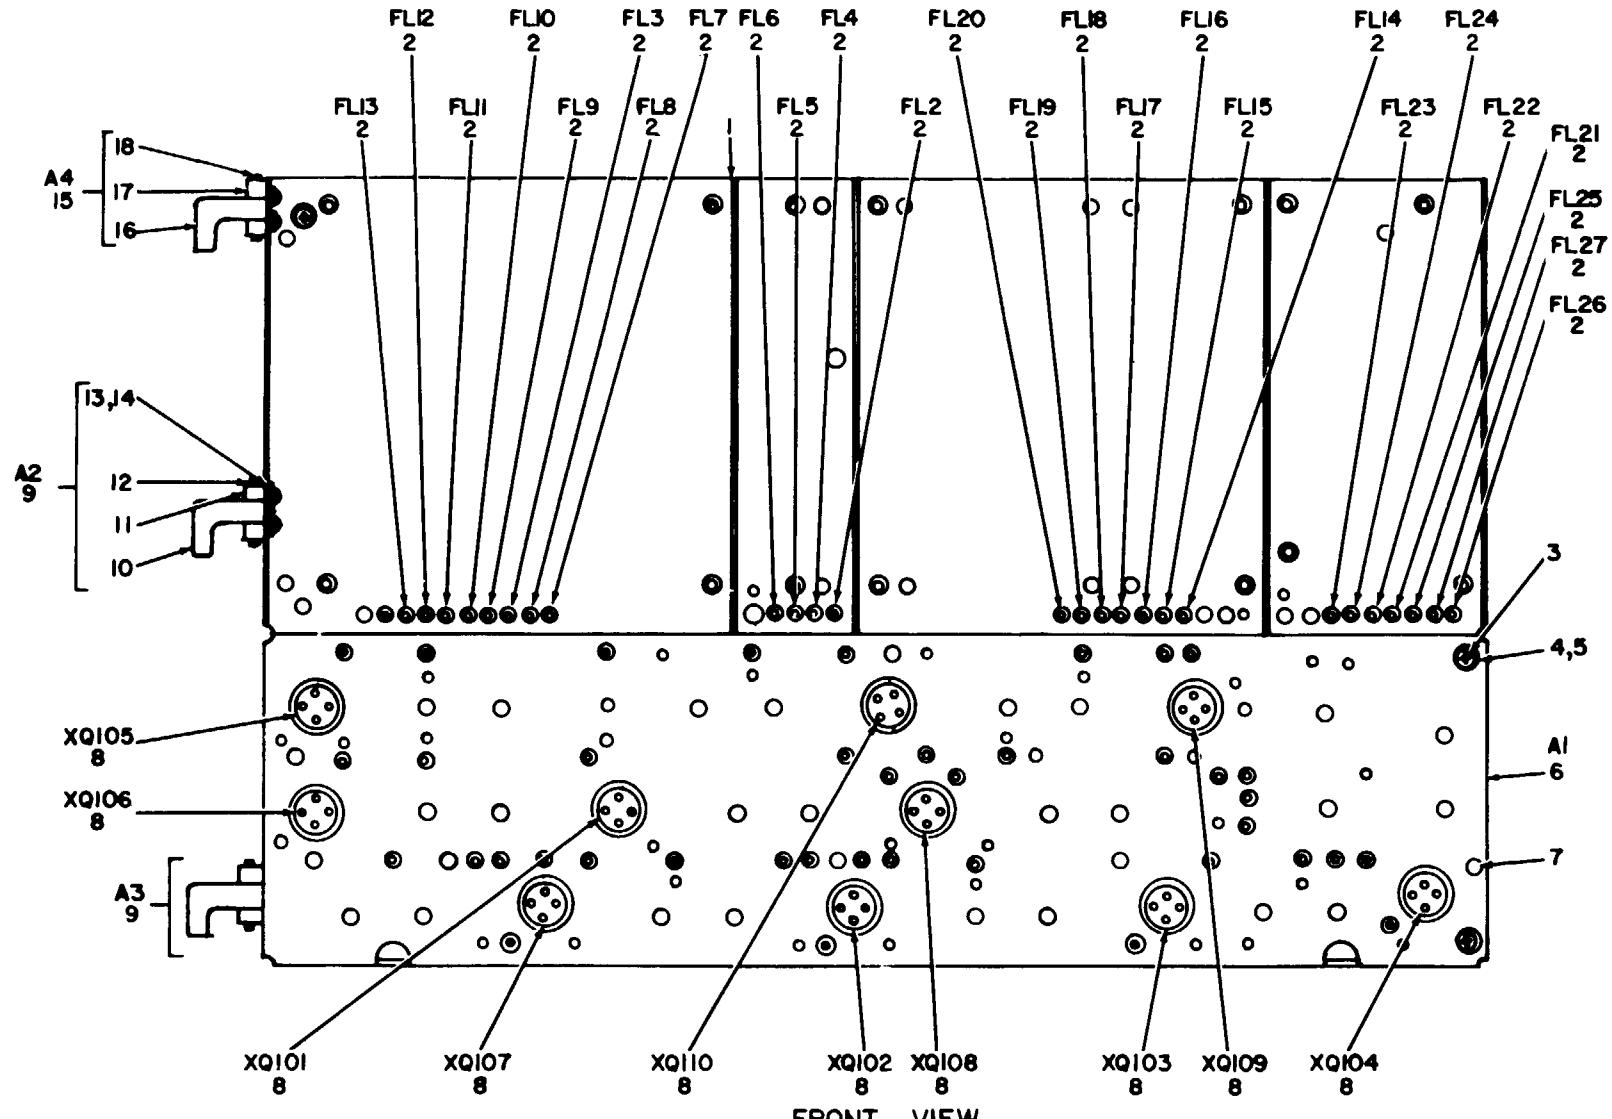

NOTE: FOR COMPLETE REFERENCE DESIGNATION
PREFIX WITH 3A10A1.

ELIJN022

Figure 15. Receiver Assembly (3A10), Chassis, Electrical Equipment (3A10A1) (Sheet 1 of 2).

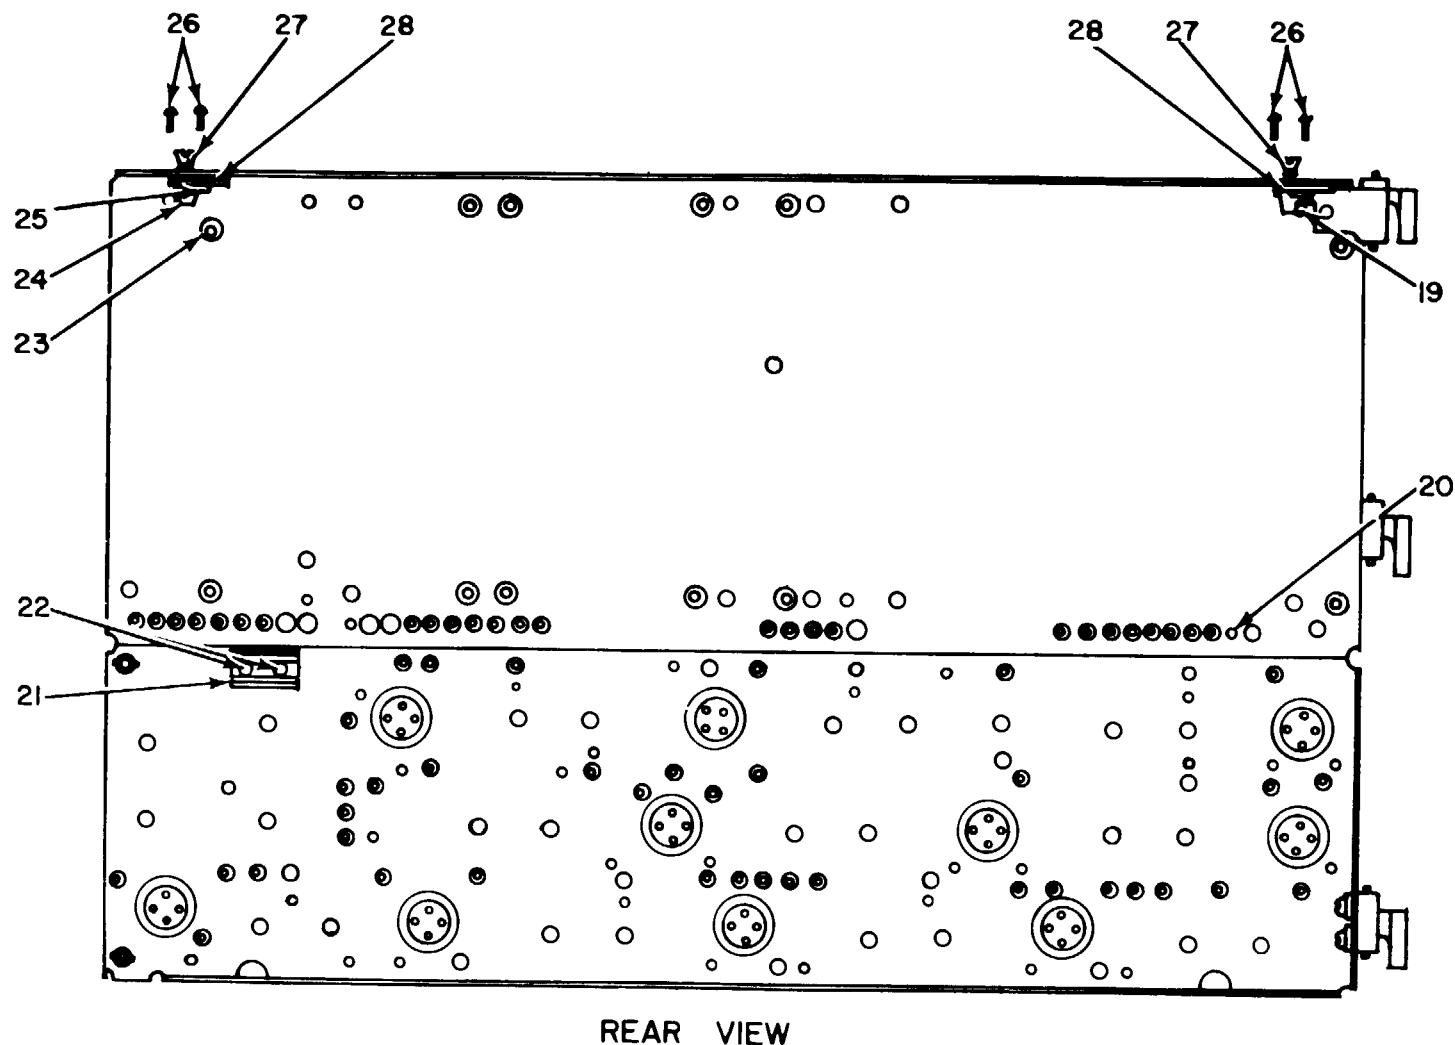

NOTE: FOR COMPLETE REFERENCE DESIGNATION PREFIX WITH 3A10A1.


Figure 15. Receiver Assembly (3A10), Chassis, Electrical Equipment (3A10A1) (Sheet 2 of 2).

ELIJN023

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION (a) FIG. NO.	(2) SMR CODE (b) ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY IN UNIT
15 1	XDFZZ		89670-1	65597	PLATE,ELEC, SHIELD.....		1
15 2	PAFZZ	5915-00-052-8412	023311-0001	72982	FILTER,LOW PASS.....		26
15 3	XDFZZ		294424	76530	PIN,GROOVED HDLS.....		2
15 4	PAFZZ	5325-00-727-5899	294422-3-270	76530	STUD,TURNLK FSTNR.....		2
15 5	PAFZZ	5360-00-958-8757	LC032C2MW	84830	SPRING,HLCPS.....		2
15 6	XDFFF		80926-1	65597	CHASSIS,ELEC EQPT.....		1
15 7	PAFZZ	5940-00-177-6732	50SL299-315	12615	TERMINAL,STUD.....		16
15 8	PAFZZ	5935-00-989-9467	MP5174	06776	SOCKET,TRANSISTOR.....		10
15 9	PAFFF	5340-00-736-6031	60835-1	65597	HINGE ASSY,XCVR.....		2
15 10	PAFZZ	5340-00-221-6464	60834-2	65597	LEAF,BUTT HINGE.....		2
15 11	PAFZZ	5340-00-221-6467	60833-1	65597	LEAF,BUTT HINGE.....		2
15 12	XDFZZ		GP5-093X500-12	73957	PIN,GROOVED,HDLS.....		2
15 13	XDFZZ		MS35337-78	96906	WASHER,LOCK.....		7
15 14	XDFZZ	5305-00-054-5647	MS51957-13	96906	SCREW,MACHINE.....		7
15 15	PAFFF	5340-00-061-2016	60835-2	65597	HINGE ASSY,XCVR.....		1
15 16	PAFZZ	5340-00-221-6459	60935-2	65597	LEAF,BUTT HINGE.....		1
15 17	PAFZZ	5340-00-221-6467	60833-1	65597	LEAF,BUTT HINGE.....		1
15 18	XFFZZ		GP5-093X500-12	73957	PIN,GROOVED,HDLS.....		1
15 19	XDFZZ		270223-5	65597	POST,ELEC-MECH.....		15
15 20	PAFZZ	5940-00-082-4869	SE12XC01	81349	TERMINAL, STUD.....		33
15 21	PAFZZ	5340-00-933-4763	6009-18CT	91506	CLIP,SPRING TENSION.....		2
15 22	XDFZZ		R3801-109	12014	RIVET,TUBULAR.....		2
15 23	PAFZZ	5365-00-488-3948	270223-6	65597	POST,ELEC-MECH.....		12
15 24	PAFZZ	5310-00-875-5555	LN6	53705	LATCH,NUT.....		2
15 25	PAFZZ	5340-00-706-0315	AB6	53705	BLOCK,ANCHOR.....		2
15 26	PAFZZ	5320-00-820-9346	R3800-125	12014	RIVET,TUBULAR.....		4
15 27	XDFZZ	5305-00-958-2918	MS24693C26	96906	SCREW,MACHINE.....		2
15 28	PAFZZ	5365-00-520-1679	270167-2	65597	SHIM.....		2

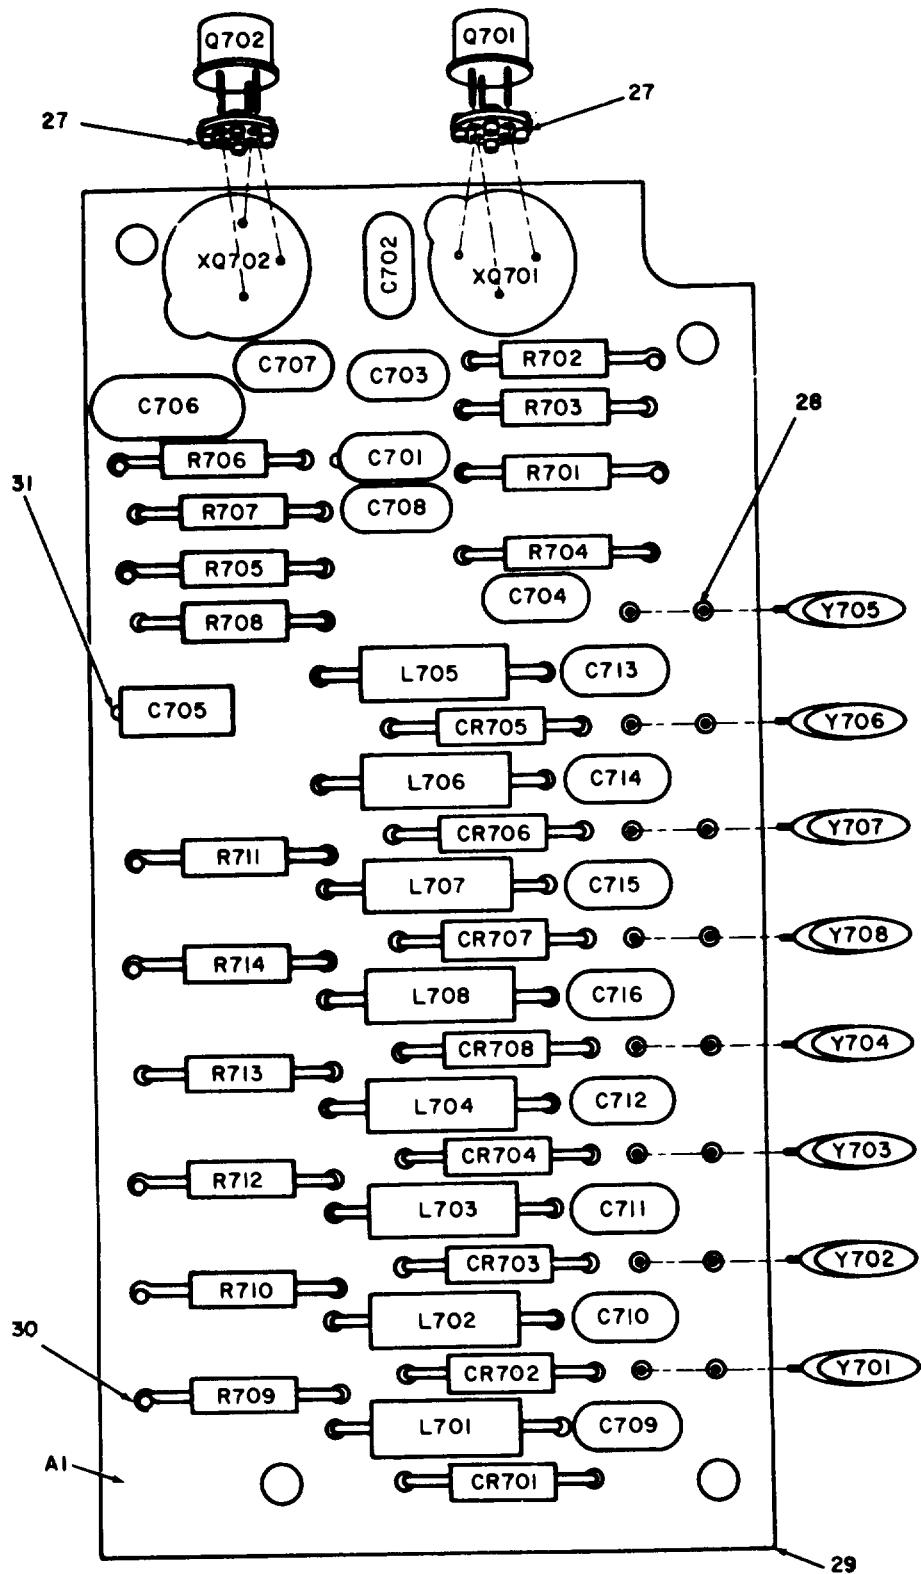

NOTE:
PREFIX ALL PARTIAL REFERENCE DESIGNATIONS WITH 3A10A2

ELIJN024

Figure 16. Hundreth MHz Oscillator Subassembly (3A10A2) (Sheet 1 of 2).

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
A1	I	CR704	10	R706	14
C701	2	CR705	10	R707	15
C702	3	CR706	10	R708	13
C703	4	CR707	10	R709	16
C704	5	CR708	10	R710	16
C705	5	L701	II	R711	17
C706	6	L702	II	R712	17
C707	7	L703	II	R713	17
C708	5	L704	II	R714	17
C709	8	L705	II	XQ701	18
C710	8	L706	II	XQ702	18
C711	8	L707	II	Y701	19
C712	8	L708	II	Y702	20
C713	9	Q701	12	Y703	21
C714	9	Q702	12	Y704	22
C715	9	R701	13	Y705	23
C716	9	R702	14	Y706	24
CR701	10	R703	15	Y707	25
CR702	10	R704	13	Y708	26
CR703	10	R705	13		

ELIJN025


Figure 16. Hundreth MHz Oscillator Subassembly (3A10A2) (Sheet 2 of 2).

SECTION II

TM11-5821-277-34P

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	QTY INC IN UNIT
USABLE ON CODE							
						GROUP 010501 HUNDRETH MHZ OSCILATOR	
						SUBASSEMBLY (3A10A2)	
16	1	XDFFF		284505-3	65597	PRINTED WIRING BD.....	EA 1
16	2	PAFZZ	5910-01-010-7561	CMR05E510G0DR	81349	CAPACITOR,FXD,MICA	EA 1
16	3	PAFZZ	5910-00-060-1189	DM10F271J0100WV1 CR	72136	CAPACITOR,FXD,MICA	EA 1
16	4	PAFZZ	5910-00-890-8996	DM15C101G	84171	CAPACITOR,FXD,MICA	EA 1
16	5	PAFZZ	5910-00-109-0034	M3-746-1	13934	CAPACITOR,FXD,PLSTC	EA 3
16	6	PAFZZ	5910-00-952-6432	DM15F561J0100WV1 CR	72136	CAPACITOR,FXD,MICA	EA 1
16	7	PAFZZ	5910-00-832-8285	801-010W5R102K	72982	CAPACITOR,FXD,CER	EA 1
16	8	PAFZZ	5910-00-941-8072	DM10C330G0100WV1 CR	72136	CAPACITOR,FXD,MICA	EA 4
16	9	PAFZZ	5910-00-420-2897	DM10D360G0100WV1 CR	72136	CAPACITOR,FXD,MICA	EA 4
16	10	PAFZZ	5961-00-556-2091	46122-1	65597	SEMICONDUCTOR,DIODE	EA 8
16	11	PAFZZ	5950-00-727-9228	1537-740	99800	COIL,RF	EA 8
16	12	PAFZZ	5961-00-939-4217	2N3323	80131	TRANSISTOR	EA 2
16	13	PAFZZ	5905-00-686-3798	RC07GF272J	81349	RESISTOR,FXD,CMPSN	EA 4
16	14	PAFZZ	5905-00-681-8818	RC07GF153J	81349	RESISTOR,FXD,CMPSN	EA 2
16	15	PAFZZ	5905-00-686-3356	RC07GF823J	81349	RESISTOR,FXD,CMPSN	EA 2
16	16	PAFZZ	5905-00-807-4954	RC07GF751J	81349	RESISTOR,FXD,CMPSN	EA 2
16	17	PAFZZ	5905-00-683-7723	RC07GF152J	81349	RESISTOR,FXD,CMPSN	EA 4
16	18	PAFZZ	5935-00-110-7466	NS503-19-1	06776	SOCKET,TRANSISTOR.....	EA 2
16	19	PAFZZ	5955-00-443-2981	247295-6002	65597	CRYSTAL UNIT,QUARTZ	EA 1
16	20	PAFZZ	5955-00-443-2977	247295-6001	65597	CRYSTAL UNIT,QUARTZ.....	EA 1
16	21	PAFZZ	5955-00-443-2982	247295-6003	65597	CRYSTAL UNIT,QUARTZ	EA 1
16	22	PAFZZ	5955-00-078-7785	247295-6006	65597	CRYSTAL UNIT,QUARTZ	EA 1
16	23	PAFZZ	5955-00-824-0047	247299-3003	65597	CRYSTAL UNIT,QUARTZ	EA 1
16	24	PAFZZ	5955-00-824-0091	247299-3004	65597	CRYSTAL UNIT,QUARTZ	EA 1
16	25	PAFZZ	5955-00-823-9999	247299-3002	65597	CRYSTAL UNIT,QUARTZ	EA 1
16	26	PAFZZ	5955-00-823-9998	247299-3001	65597	CRYSTAL UNIT,QUARTZ	EA 1
16	27	PAFZZ	5961-00-944-3627	352-9552-260	13499	PAD,MTG,TRANSISTOR.....	EA 2
16	28	XDFZZ		PS256-9	06776	CONTACT,ELECTRICAL	EA 16
16	29	XDFZZ		284505-2	65597	PRINTED WIRING BD.....	EA 1
16	30	PAFZZ	5940-00-280-0600	2042-2	71279	TERMINAL,STUD	EA 9
16	31	PAFZZ	5940-00-761-1462	30588-1	65597	TERMINAL,STUD	EA 2

61/(62 blank)

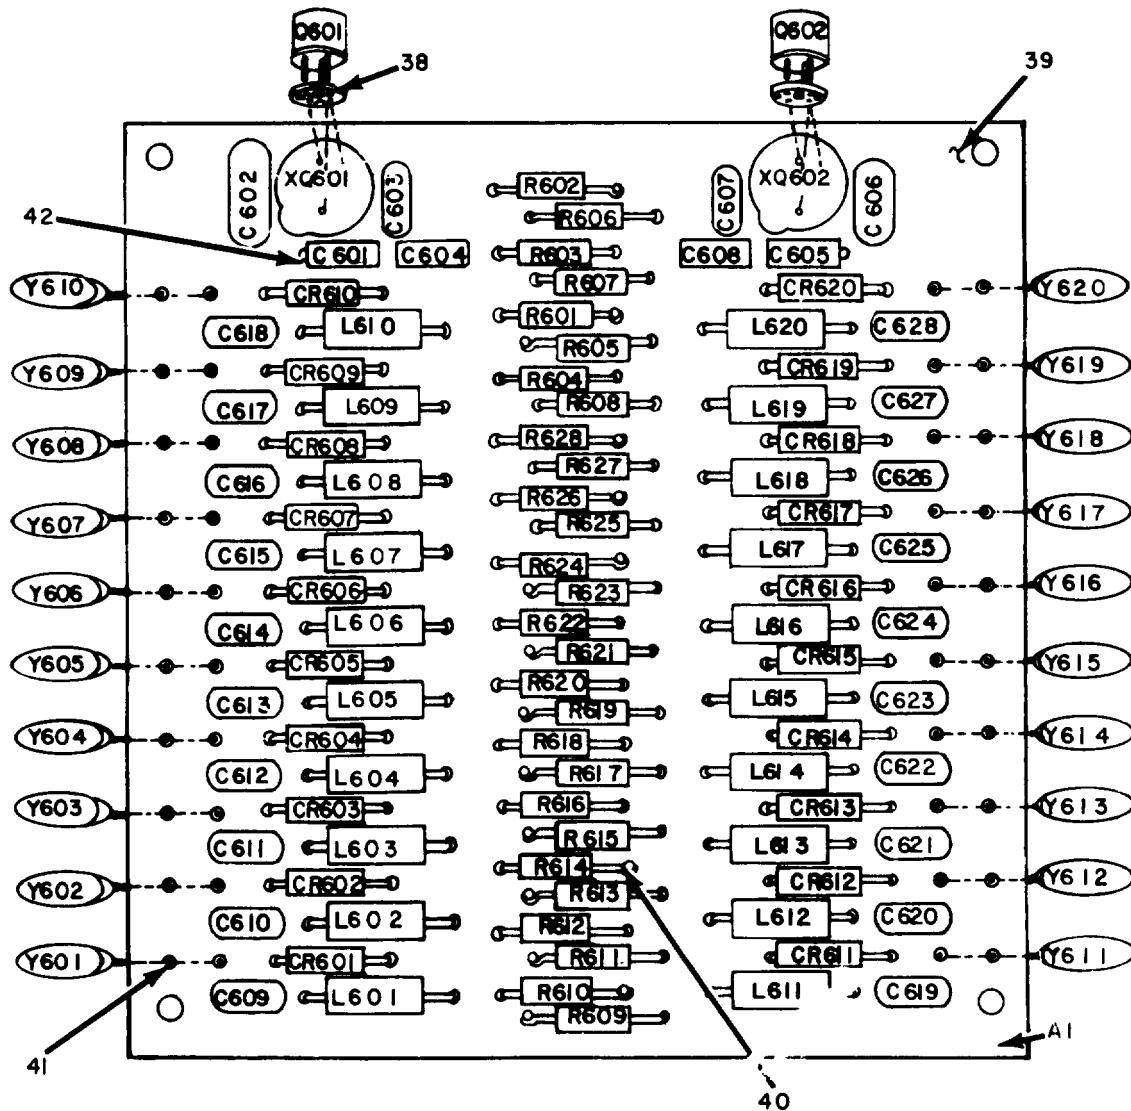

ELIJN026

Figure 17. Tenth MHz Oscillator Subassembly (3A10A3) (Sheet 1 of 2).

REF. DES.	ITEM NO.										
A1	1	C621	8	CR614	9	L615	10	R614	16	Y605	22
C601	2	C622	8	CR615	9	L616	10	R615	16	Y606	23
C602	3	C623	8	CR616	9	L617	10	R616	16	Y607	24
C603	4	C624	8	CR617	9	L618	10	R617	16	Y608	25
C604	2	C625	8	CR618	9	L619	10	R618	16	Y609	26
C605	2	C626	8	CR619	9	L620	10	R619	16	Y610	27
C606	5	C627	8	CR620	9	Q601	11	R620	16	Y611	28
C607	6	C628	8	L601	10	Q602	11	R621	16	Y612	29
C608	2	CR601	9	L602	10	R601	12	R622	16	Y613	30
C609	7	CR602	9	L603	10	R602	13	R623	16	Y614	31
C610	7	CR603	9	L604	10	R603	14	R624	16	Y615	32
C611	7	CR604	9	L605	10	R604	12	R625	16	Y616	33
C612	7	CR605	9	L606	10	R605	15	R626	16	Y617	34
C613	7	CR606	9	L607	10	R606	13	R627	16	Y618	35
C614	7	CR607	9	L608	10	R607	13	R628	16	Y619	36
C615	7	CR608	9	L609	10	R608	12	XQ601	17	Y620	37
C616	7	CR609	9	L610	10	R609	16	XQ602	17		
C617	7	CR610	9	L611	10	R610	16	Y601	18		
C618	7	CR611	9	L612	10	R611	16	Y602	19		
C619	8	CR612	9	L613	10	R612	16	Y603	20		
C620	8	CR613	9	L614	10	R613	16	Y604	21		

ELIJN027

Figure 17. Tenth's MHz Oscillator Subassembly (3A10A3) (Sheet 2 of 2).



SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION (a) FIG. NO.	(2) ITEM NO. (b) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) QTY IN UNIT U/M	(8) QTY IN UNIT	
					GROUP 010502 TENTHS MHZ OSCILLATOR SUBASSEMBLY (3A10A3)			
17	1	XDFFF	2 8 4 5 0 6 - 3	65597	PRINTED WIRING BD.....	EA	1	
17	2	PAFZZ	M 3 - 7 4 6 - 1	13934	CAPACITOR,FXD,PLSTC.....	EA	4	
17	3	PAFZZ	5910-00-456-8280	72136	CAPACITOR,FXD,MICA	EA	1	
17	4	PAFZZ	5910-00-832-6125	72136	CAPACITOR,FXD,MICA	EA	1	
17	5	XDFZZ	CR	72136	CAPACITOR,FXD,MICA SELECT FACTORY SELECTED VALUE FOR CAPACITOR C606	EA	1	
17	5	PAFZZ	DM10C101J0100WV4	72136	CAPACITOR,FXD,MICA SELECT FACTORY SELECTED VALUE FOR CAPACITOR C606	EA	1	
17	5	PAFZZ	5910-00-893-0196	81349	CAPACITOR,FXD,MICA SELECT FACTORY SELECTED VALUE FOR CAPACITOR C606	EA	1	
17	5	PAFZZ	CM04FD111G03	81349	CAPACITOR,FXD,MICA SELECT FACTORY SELECTED VALUE FOR CAPACITOR C606	EA	1	
17	6	PAFZZ	CM04FD910G03	81349	CAPACITOR,FXD,MICA	EA	1	
17	6	PAFZZ	5910-00-453-4854	72136	CAPACITOR,FXD,MICA	EA	1	
17	7	PAFZZ	DM10C301J0100WV4	72136	CAPACITOR,FXD,MICA	EA	10	
17	7	PAFZZ	CR	72136	CAPACITOR,FXD,MICA	EA	10	
17	8	PAFZZ	DM10C33G0100WV1	72136	CAPACITOR,FXD,MICA	EA	10	
17	8	PAFZZ	CR	72136	CAPACITOR,FXD,MICA	EA	10	
17	9	PAFZZ	5961-00-556-2091	46122-1	SEMICONDUCTOR,DIODE	EA	20	
17	10	PAFZZ	5950-00-727-9228	1537-740	COIL,RF	EA	20	
17	11	PAFZZ	5961-00-824-9946	2N1195	TRANSISTOR	EA	2	
17	12	PAFZZ	5905-00-686-3798	RC07GF272J	RESISTOR,FXD,CMPSN	EA	3	
17	13	PAFZZ	5905-00-681-8818	RC07GF153J	RESISTOR,FXD,CMPSN	EA	3	
17	14	PAFZZ	5905-00-686-3356	RC07GF823J	RESISTOR,FXD,CMPSN	EA	1	
17	15	PAFZZ	5905-00-686-3370	RC07GF202J	RESISTOR,FXD, CMPSN	EA	1	
17	16	PAFZZ	5905-00-683-7723	RC07GF152J	RESISTOR,FXD.CMPSN	EA	20	
17	17	PAFZZ	5935-00-110-7466	NS503-19-1	SOCKET,TRANSISTOR	EA	2	
17	18	PAFZZ	5955-00-824-0175	247295-6008	CRYSTAL UNIT,QUARTZ	EA	1	
17	19	PAFZZ	5955-00-824-0177	247295-6010	CRYSTAL UNIT,QUARTZ	EA	1	
17	20	PAFZZ	5955-00-824-0179	247295-6012	CRYSTAL UNIT,QUARTZ	EA	1	
17	21	PAFZZ	5955-00-824-0181	247295-6014	CRYSTAL UNIT,QUARTZ	EA	1	
17	22	PAFZZ	5955-00-456-8391	247295-6016	CRYSTAL UNIT,QUARTZ	EA	1	
17	23	PAFZZ	5955-00-489-9994	247295-6009	CRYSTAL UNIT,QUARTZ	EA	1	
17	24	PAFZZ	5955-00-824-0180	247295-6013	CRYSTAL UNIT,QUARTZ	EA	1	
17	25	PAFZZ	5955-00-824-0172	247295-6007	CRYSTAL UNIT,QUARTZ	EA	1	
17	26	PAFZZ	5955-00-824-0178	247295-6011	CRYSTAL UNIT,QUARTZ	EA	1	
17	27	PAFZZ	5955-00-457-7300	247295-6015	CRYSTAL UNIT,QUARTZ	EA	1	
17	28	PAFZZ	5955-00-824-0184	CR-69/U-19.80MC	81349	CRYSTAL UNIT,QUARTZ	EA	1
17	29	PAFZZ	5955-00-946-9301	247295-7004	CRYSTAL UNIT,QUARTZ	EA	1	
17	30	PAFZZ	5955-00-078-7753	CR-69/U-20.20MC	81849	CRYSTAL UNIT,QUARTZ	EA	1
17	31	PAFZZ	5955-00-078-7756	CR-69/U-20.40MC	81349	CRYSTAL UNIT ,QUARTZ	EA	1
17	32	PAFZZ	5955-00-078-7767	CR-69/U-20.60MC	81349	CRYSTAL UNIT,QUARTZ	EA	1

SECTION II

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	
17	33	PAFZZ	5955-00-498-5371	247295-7003	65597	CRYSTAL UNIT,QUARTZ.....	EA	1
17	34	PAFZZ	5955-00-078-7754	CR-69/U-20.30MC	81349	CRYSTAL UNIT,QUARTZ.....	EA	1
17	35	PAFZZ	5955-00-498-8169	247295-7001	65597	CRYSTAL UNIT,QUARTZ.....	EA	1
17	36	PAFZZ	5955-00-078-7752	CR-69/U-20.10MC	81349	CRYSTAL UNIT,QUARTZ.....	EA	1
17	37	PAFZZ	5955-00-078-7758	CR-69/U-20.50MC	81349	CRYSTAL UNIT,QUARTZ.....	EA	1
17	38	PAFZZ	5961-00-944-3627	352-9552-260	13499	PAD,MTG,TRANSISTOR.....	EA	2
17	39	XDFZZ		284506-2	65597	PRINED WIRING BD.....	EA	1
17	40	XDFZZ		2042-3	71279	TERMINAL,STUD.....	EA	16
17	41	XDFZZ		PS256-9	06776	CONTACT,ELECTRICAL	EA	40
17	42	XDFZZ	5940-00-761-1462	30588-1		TERMINAL,STUD	EA	2

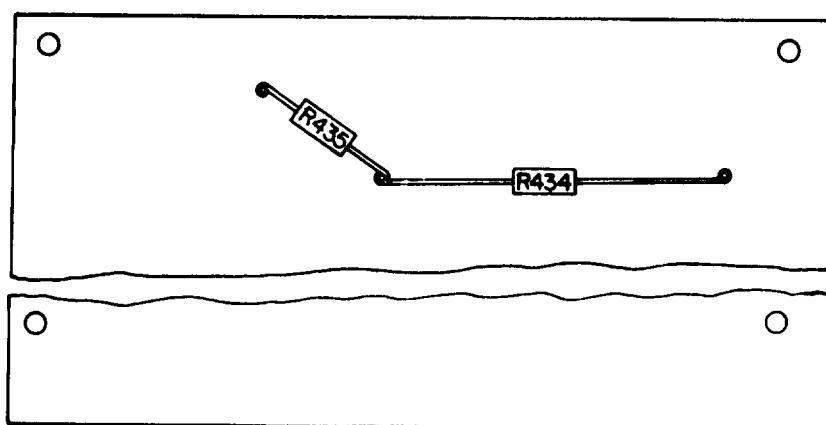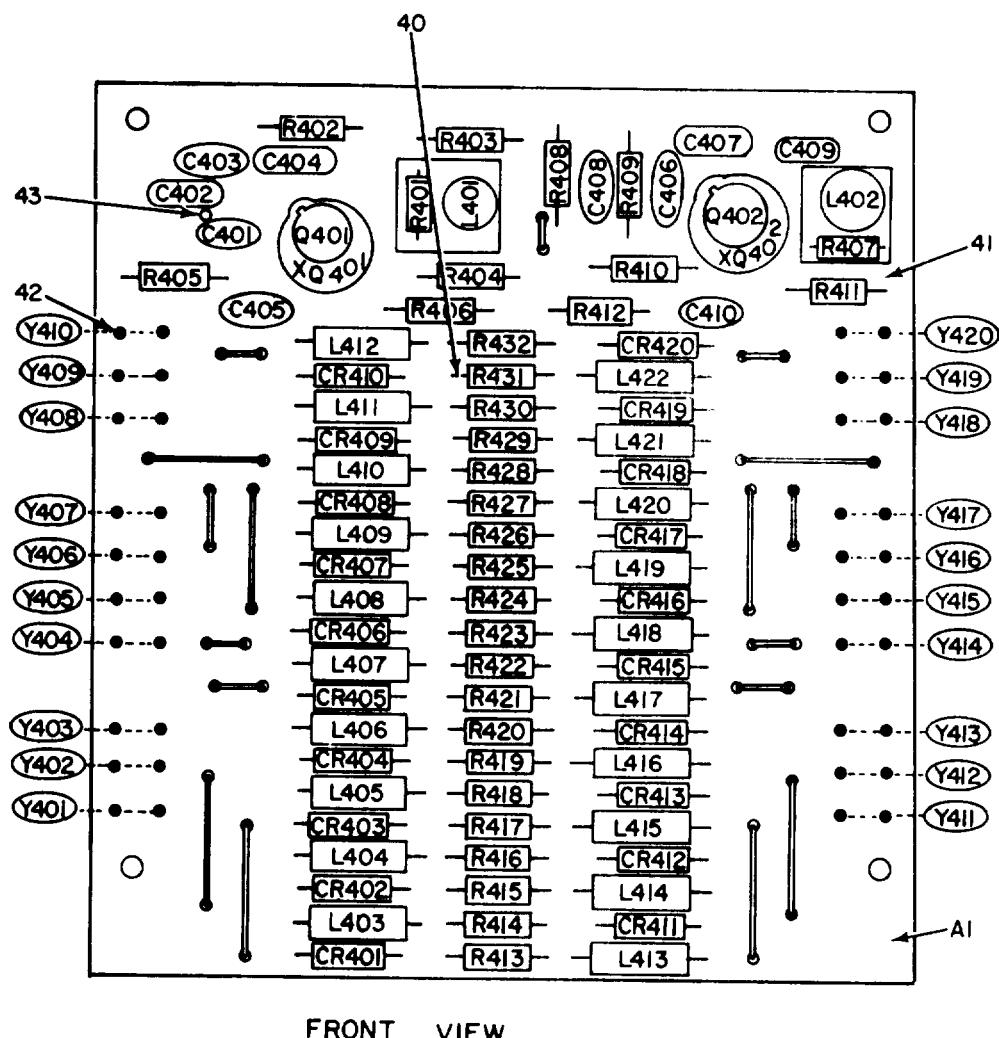

NOTE: FOR COMPLETE REFERENCE DESIGNATION
PREFIX WITH 3A10A4.

ELIJN028

Figure 18. Units MHz Oscillator Subassembly (3A10A4) (Sheet 1 of 2).

REF DES.	ITEM NO	REF DES	ITEM NO								
AI	1	CR409	7	L408	10	R403	14	R422	17	Y405	24
C401	2	CR410	7	L409	10	R404	15	R423	17	Y406	25
C402	3	CR411	7	L410	10	R405	15	R424	17	Y407	26
C403	2	CR412	7	L411	10	R406	16	R425	17	Y408	27
C404	4	CR413	7	L412	10	R407	12	R426	17	Y409	28
C405	2	CR414	7	L413	10	R408	13	R427	17	Y410	29
C406	2	CR415	7	L414	10	R409	14	R428	17	Y411	30
C407	5	CR416	7	L415	10	R410	15	R429	17	Y412	31
C408	2	CR417	7	L416	10	R411	15	R430	17	Y413	32
C409	6	CR418	7	L417	10	R412	16	R431	17	Y414	33
C410	2	CR419	7	L418	10	R413	17	R432	17	Y415	34
CR401	7	CR420	7	L419	10	R414	17	R434	18	Y416	35
CR402	7	L401	8	L420	10	R415	17	R435	18	Y417	36
CR405	7	L402	9	L421	10	R416	17	XQ401	19	Y418	37
CR404	7	L403	10	L422	10	R417	17	XQ402	19	Y419	38
CR405	7	L404	10	Q401	II	R418	17	Y401	20	Y420	39
CR406	7	L405	10	Q402	II	R419	17	Y402	21		
CR407	7	L406	10	R401	12	R420	17	Y403	22		
CR408	7	L407	10	R402	13	R421	17	Y404	23		

ELIJN029

Figure 18. Units MHz Oscillator Subassembly (3A10A4) (Sheet 2 of 2).

SECTION II


TM11-5821-277-34P

(1) ILLUSTRATION (a) FIG. NO.	(2) SMR CODE (b) ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
					GROUP 010503 UNITS MHZ OSCILLATOR SUBASSEMBLY (3A10A4)		
18	1	XDFFF	284507-3	65597	PRINTED WIRING BD.	EA	1
18	2	PAFZZ	5910-00-832-8285	801-01W5R102K	CAPACITOR,FXD,CER	EA	6
18	3	PAFZZ	5910-00-832-5719	DM10C240J0100WV1 CR	CAPACITOR,FXD,MICA	EA	1
18	4	PAFZZ	5910-00-723-5151	DM10C06D0100WV1 CR	CAPACITOR,FXD,MICA	EA	1
18	5	PAFZZ	5910-00-723-5153	DM10E320J0100WV1 CR	CAPACITOR,FXD,MICA.	EA	1
18	6	XDFZZ		DM10C100J0100WV1 CR	CAPACITOR,FXD,MICA.	EA	1
18	7	PAFZZ	5961-00-556-2091	46122-1	SEMICONDUCTOR,DIODE.	EA	20
18	8	PAFZZ	5950-00-762-6600	38962-1	COIL,RF.	EA	1
18	9	PAFZZ	5950-00-762-6601	38963-1	COIL,RF	EA	1
18	10	PAFZZ	5950-00-734-3934	1537-718	COIL,RF.	EA	20
18	11	PAFZZ	5961-00-824-9946	2N1195	TRANSISTOR	EA	2
18	12	PAFZZ	5905-00-682-4097	RC07GF302J	RESISTOR,FXD,CMPSN.	EA	2
18	13	PAFZZ	5905-00-683-7721	RC07GF101J	RESISTOR,FXD,CMPSN	EA	2
18	14	PAFZZ	5905-00-681-6462	RC07GF102J	RESISTOR,FXD,CMPSN.	EA	2
18	15	PAFZZ	5905-00-683-2238	RC07GF103J	RESISTOR,FXD,CMPSN	EA	4
18	16	PAFZZ	5905-00-688-3738	RC07GF182J	RESISTOR,FXD,CMPSN.	EA	2
18	17	PAFZZ	5905-00-683-7723	RC07GF152J	RESISTOR,FXD,CMPSN.	EA	20
18	18	PAFZZ	5905-00-683-2239	RC07GF201J	RESISTOR,FXD,CMPSN	EA	2
18	19	PAFZZ	5935-00-110-7466	NS503-19-1	SOCKET,TRANSISTOR.	EA	2
18	20	PAFZZ	5955-00-998-4587	CR-67/U-57.95MC	CRYSTAL UNIT,QUARTZ.	EA	1
18	21	PAFZZ	5955-00-824-0113	CR-67/U-58.95MC	CRYSTAL UNIT,QUARTZ	EA	1
18	22	PAFZZ	5955-00-998-4590	CR-67/U-59.95MC	CRYSTAL UNIT,QUARTZ	EA	1
18	23	PAFZZ	5955-00-998-4592	CR-67/U-60.95MC	CRYSTAL UNIT,QUARTZ	EA	1
18	24	PAFZZ	5955-00-998-4594	CR-67/U-61.95MC	CRYSTAL UNIT,QUARTZ.	EA	1
18	25	PAFZZ	5955-00-998-4588	CR-67/U-58.45MC	CRYSTAL UNIT,QUARTZ	EA	1
18	26	PAFZZ	5955-00-998-4591	CR-67/U-60.45MC	CRYSTAL UNIT,QUARTZ.	EA	1
18	27	PAFZZ	5955-00-998-4586	CR-67/U-57.45MC	CRYSTAL UNIT,QUARTZ.	EA	1
18	28	PAFZZ	5955-00-998-4589	CR-67/U-59.45MC	CRYSTAL UNIT,QUARTZ	EA	1
18	29	PAFZZ	5955-00-998-4593	CR-67/U-61.45MC	CRYSTAL UNIT,QUARTZ.	EA	1
18	30	PAFZZ	5955-00-998-4577	CR-67/U-52.95MC	CRYSTAL UNIT,QUARTZ.	EA	1
18	31	PAFZZ	5955-00-998-4579	CR-67/U-53.95MC	CRYSTAL UNIT,QUARTZ	EA	1
18	32	PAFZZ	5955-00-998-4581	CR-67/U-54.95MC	CRYSTAL UNIT,QUARTZ	EA	1
18	33	PAFZZ	5955-00-998-4583	CR-67/U-55.95MC	CRYSTAL UNIT,QUARTZ	EA	1
18	34	PAFZZ	5955-00-998-4585	CR-67/U-56.95MC	CRYSTAL UNIT,QUARTZ	EA	1
18	35	PAFZZ	5955-00-998-4578	CR-67/-53.45MC	CRYSTAL UNIT,QUARTZ.	EA	1
18	36	PAFZZ	5955-00-998-4582	CR-67/U-55.45MC	CRYSTAL UNIT,QUARTZ.	EA	1

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
18	37	PAFZZ	5955-00-998-4576	CR-67/U-52.45MC	81349	CRYSTAL UNIT,QUARTZ.....	EA	1
18	38	PAFZZ	5955-00-998-4580	CR-67/U-54.45MC	81349	CRYSTAL UNIT,QUARTZ.....	EA	1
18	39	PAFZZ	5955-00-998-4584	CR-67/U-56.45MC	81349	CRYSTAL UNIT,QUARTZ.....	EA	1
18	40	PAFZZ	5940-00-761-1462	30588-1	65597	TERMINAL,STUD	EA	2
18	41	XDFZZ		284507-2	65597	PRINTED WIRING BD	EA	1
18	42	XDFZZ		PS256-9	06776	CONTACT,ELECTRICAL.....	EA	40
18	43	XDFZZ		2042-3	71279	TERMINAL,STUD	EA	1

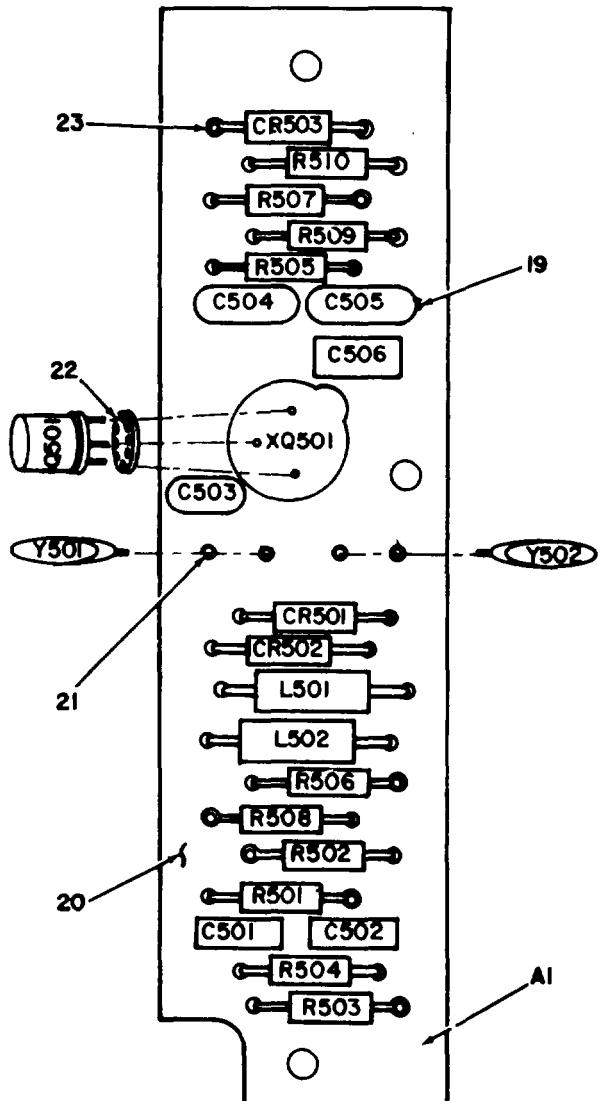

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
AI	1	R501	9
C501	2	R502	9
C502	2	R503	10
C503	3	R504	10
C504	4	R505	11
C505	5	R506	12
C506	2	R507	13
CR501	6	R508	12
CR502	6	R509	14
CR503	6	R510	15
L501	7	XQ501	16
L502	7	Y501	17
Q501	8	Y502	18

NOTE: FOR COMPLETE REFERENCE DESIGNATION PREFIX WITH 3A10A5.

ELIJN030

Figure 19. Tens MHz Oscillator Subassembly (3A10A5).

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							
						GROUP 010504 TENS MHZ OSCILLATOR SUBASSEMBLY (3A10A5)		
19	1	XDFFF		284508-3	65597	PRI NTED WI RING BD.	EA	1
19	2	PAFZZ	5910-00-109-0034	M3-746-1	13934	CAPACITOR, FXD, PLSTC	EA	3
19	3	PAFZZ	5910-00-050-7367	DM10E300G0100WV1 CR	72136	CAPACITOR, FXD, MICA	EA	1
19	4	PAFZZ	5910-00-952-6432	DM15F561J0100WV1 CR	72136	CAPACITOR, FXD, MICA	EA	1
19	5	PAFZZ	5910-00-957-9909	DM100391J0100WV1 CR	72136	CAPACITOR, FXD, MICA	EA	1
19	6	PAFZZ	5961-00-556-2091	46122-1	65597	SEMI CONDUCTOR, DIODE	EA	3
19	7	PAFZZ	5950-00-053-8543	1537-730		COIL, RF	EA	2
19	8	PAFZZ	5961-00-939-4217	2N3323	81349	TRANSISTOR	EA	1
19	9	PAFZZ	5905-00-686-9998	RC07GF472J	81349	RESISTOR, FXD, CMPSN	EA	2
19	10	PAFZZ	5903-00-683-7724	RC07GF242J	81349	RESISTOR, FXD, CMPSN	EA	2
19	11	PAFZZ	5905-00-681-8818	RC07GF153J	81349	RESISTOR, FXD, CMPSN	EA	1
19	12	PAFZZ	5905-00-683-7723	RC07GF152J	81349	RESISTOR, FXD, CMPSN	EA	2
19	13	PAFZZ	5905-00-686-3356	RC07GF823J	81349	RESISTOR, FXD, CMPSN	EA	1
19	14	PAFZZ	5905-00-684-3798	RC07GF272J	81349	RESISTOR, FXD, CMPSN	EA	1
19	15	PAFZZ	5903-00-808-6136	RC07GF361J	81349	RESISTOR, FXD, CMPSN	EA	1
19	16	PAFZZ	5935-00-110-7446	NS503-19-1	06776	SOCKET, TRANSISTOR	EA	1
19	17	PAFZZ	5955-00-824-0171	247295-6005	65597	CRYSTAL UNIT, QUARTZ	EA	1
19	18	PAFZZ	5955-00-998-4595	247295-6004	65597	CRYSTAL UNIT, QUARTZ	EA	1
19	19	PAFZZ	5940-00-761-1462	30588-1	65597	TERMINAL, STUD	EA	1
19	20	XDFZZ		284508-2	65597	PRI NTED WI RING BD.	EA	1
19	21	XDFZZ		PS256-9	06776	CONTACT, ELECTRICAL	EA	4
19	22	PAFZZ	5961-00-944-3627	352-9552-260	13499	PAD, MTG, TRANSISTOR	EA	1
19	23	PAFZZ	5940-00-280-0600	2642-2	71279	TERMINAL, STUD	EA	7


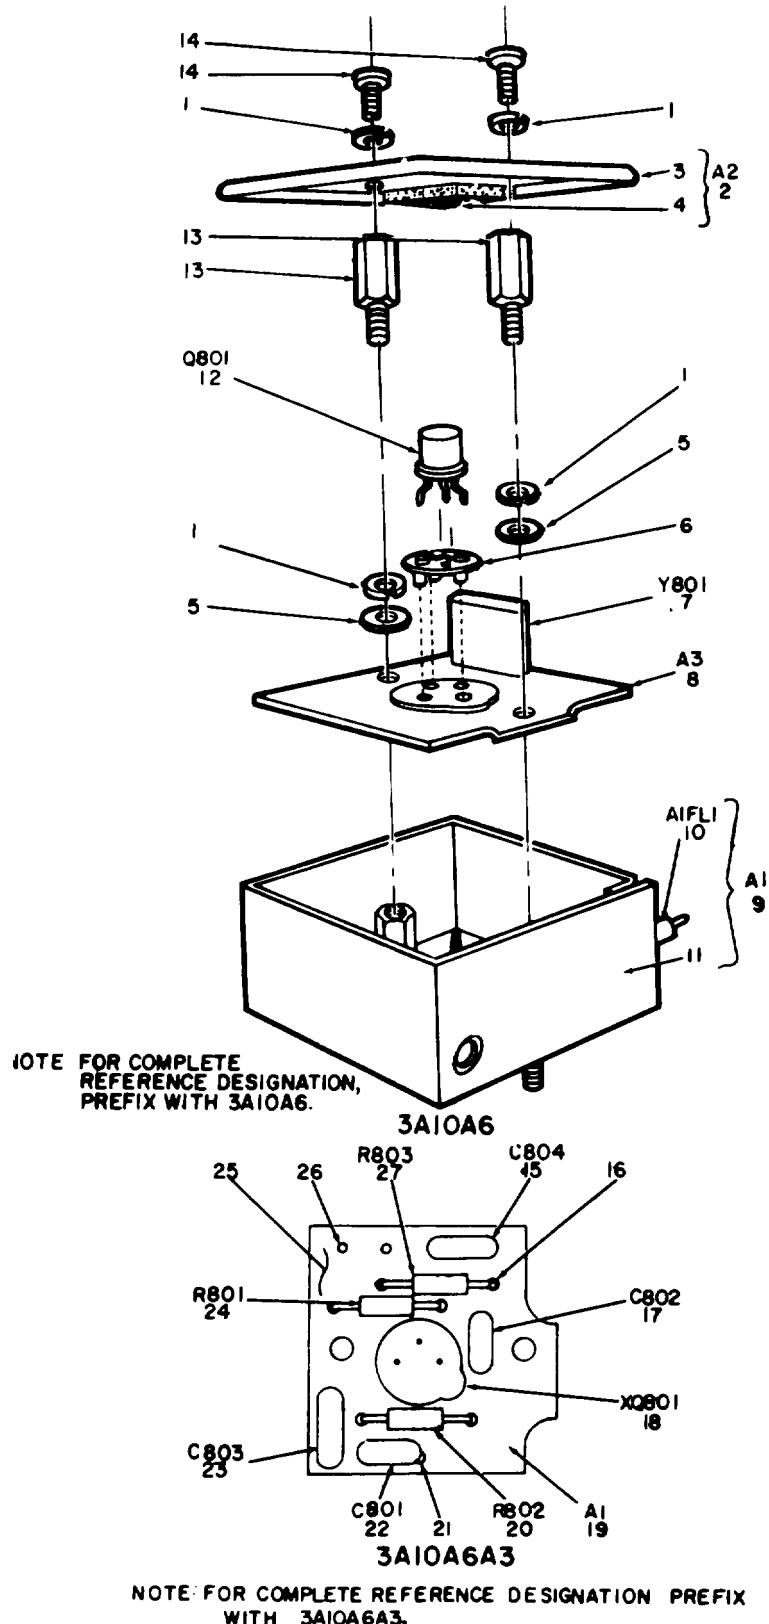


Figure 20. 3.045 MHz Oscillator Subassembly (3A10A6) and 3.045 MHz Oscillator Circuit Card Assembly (3A10A6A3).


(1) ILLUSTRATION [3] FIG NO.	(2) SMR CODE [4] ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION [5] USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
					GROUP 010505 3.045-MHZ OSCI LLATOR SUBASSEMBLY (3A10A6)		
20 1	XDFZZ	5310-00-058-2950	MS35337-77	96906	WASHER, LOCK	EA	4
20 2	XDFFF		89679-2	65597	COVER, OSCI LLATOR	EA	1
20 3	XDFZZ		89679-1	65597	COVER, OSCI LLATOR.	EA	1
20 4	XDFZZ	5330-00-242-5860	65755-1	65597	PAD, CRYSTAL HLON.	EA	1
20 5	XDFZZ		276244-1	65597	WASHER, FLAT.	EA	2
20 6	PAFZZ	5961-00-944-3627	352-9552-260	13499	PAD, MTG, TRANSI STOR.	EA	1
20 7	PAFZZ	5955-00-762-7575	247298-4001	65597	CRYSTAL UNI T, QUARTZ.	EA	1
20 8	PAFFF	5821-00-725-2709	117420-1	65597	OSCI LLATOR SUBASSY.	EA	1
20 9	XDFFF		89678-3	65597	CAN, OSC SUBASSEMBLY	EA	1
20 10	PAFZZ	5915-00-052-8412	023311-0001	72982	FILTER, LOW PASS.	EA	1
20 11	XDFZZ		89678-2	65597	CAN, OSC SUBASSEMBLY	EA	1
20 12	PAFZZ	5961-00-939-4217	2N3323	81349	TRANSI STOR	EA	1
20 13	PAFZZ	5821-00-736-5998	2T0224-1	65597	SPACER, BOARD	EA	2
20 14	XDFZZ	5305-00-054-5636	MS35233-2	96906	SCREW, MACHINE	EA	2
					GROUP 01050501 3.045-MHZ OSCI LLATOR CIRCUIT CARD ASSEMBLY (3A10A6A3)		
20 15	PAFZZ	5910-00-068-1332	DM10D390GO100WV1 CR	72136	CAPACITOR, FXD, MICA	EA	1
20 16	PAFZZ	5940-00-280-0600	2042-2	71279	TERMINAL, STUD	EA	1
20 17	PAFZZ	5910-00-723-4438	805Y5T202M	72982	CAPACITOR, FXD, CER	EA	1
20 18	PAFZZ	5935-00-110-7466	NS503-19-1	06776	SOCKET, TRANSI STOR.	EA	1
20 19	XDFFF		284509-3	65597	PRINTED WIRING BD.	EA	1
20 20	PAFZZ	5905-00-686-3798	RC07GF272J	81349	RESISTOR, CMPSN.	EA	1
20 21	PAFZZ	5940-00-761-1462	30588-1	65597	TERMINAL, STUD	EA	1
20 22	PAFZZ	5910-00-109-0034	M3-746-1	13934	CAPACITOR, FXD, PLSTC	EA	1
20 23	PAFZZ	5910-00-832-6125	DM15F751J0100WV1 CR	72136	CAPACITOR, FXD, MICA	EA	1
20 24	PAFZZ	5905-00-681-8818	RC07GF153J	81349	RESISTOR, FXD, CMPSN	EA	1
20 25	XDFZZ		284509-2	65597	PRINTED WIRING BD	EA	1
20 26	XDFZZ		PS256-9	06776	CONTACT, ELECTRICAL	EA	2
20 27	PAPZZ	5905-00-686-3356	RC07GF823J	81349	RESISTOR, FXD, CMPSN	EA	1

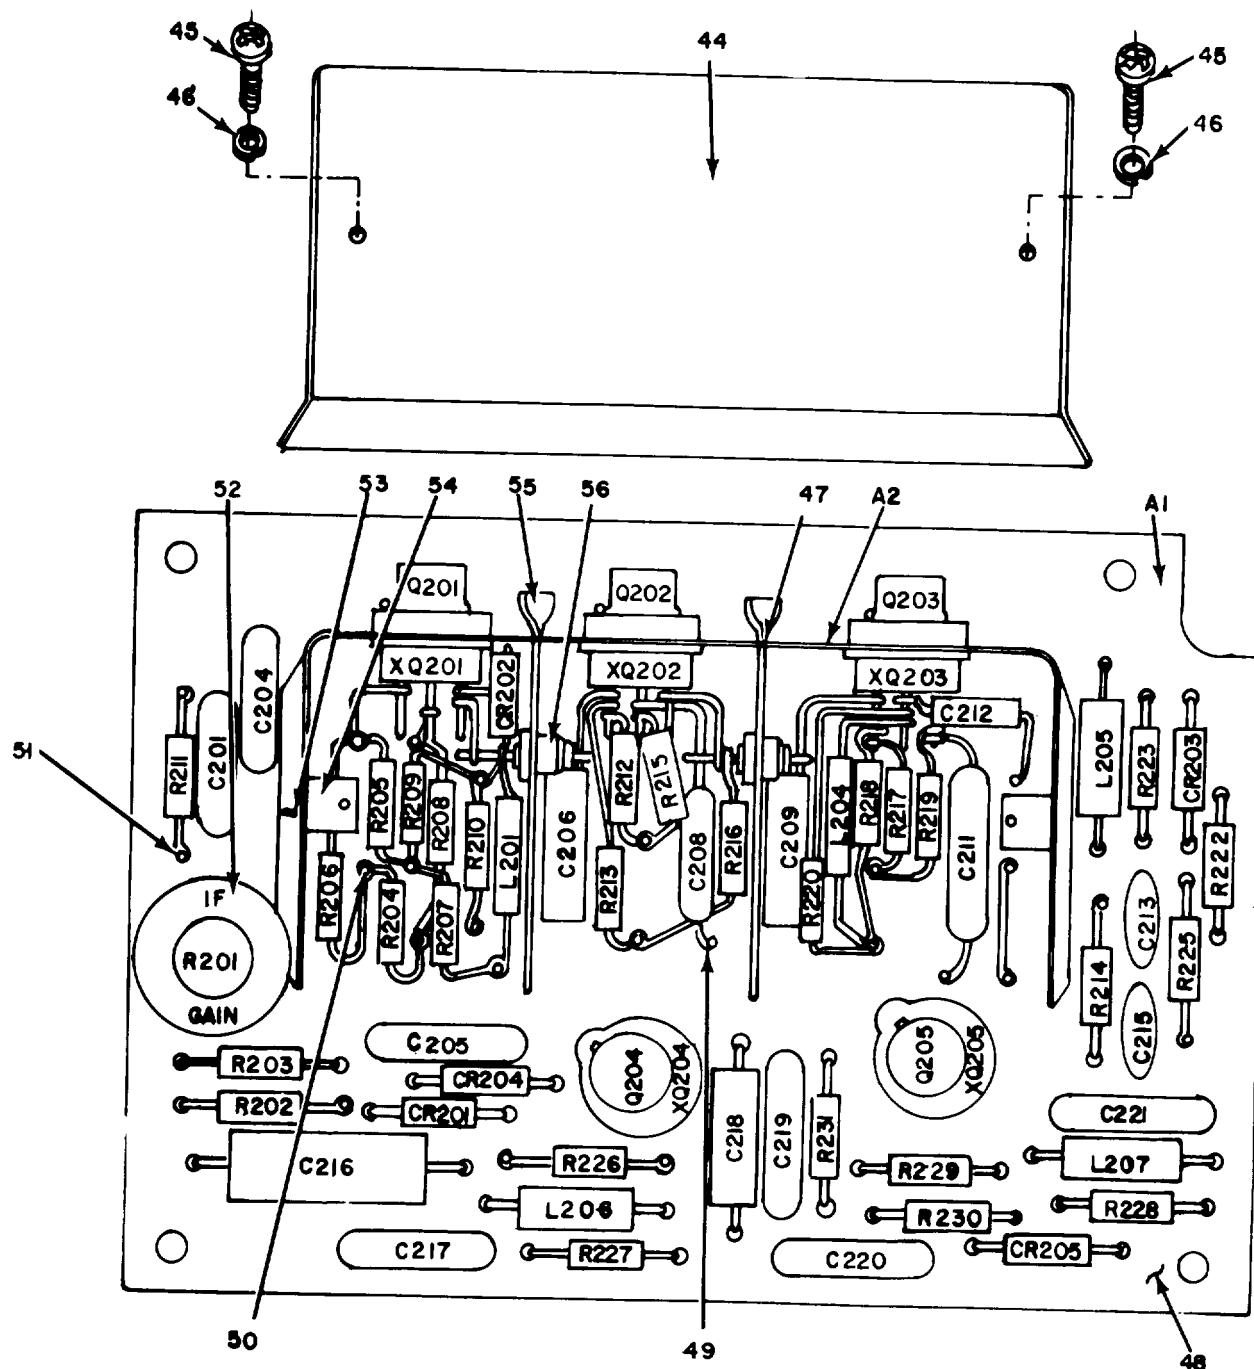

FRONT VIEW

ELIJN032

Figure 21. IF and AGC Subassembly (3A10A7) (Sheet 1 of 3).

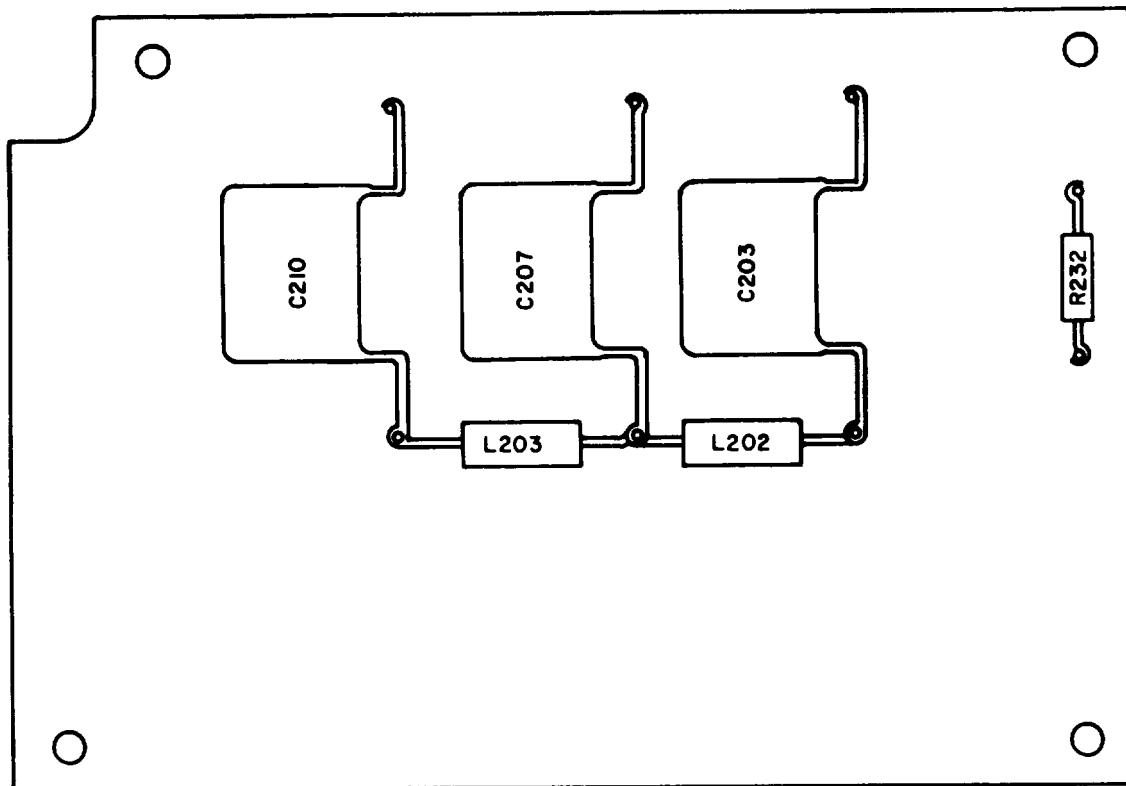

REAR VIEW

**NOTE : FOR COMPLETE REFERENCE DESIGNATION
PREFIX WITH 3A10A7.**

ELIJN047

Figure 21. IF and AGC Subassembly (3A10A7) (Sheet 2 of 3).

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
A1	1	C221	3	R203	21	R225	35
A2	2	CR201	10	R204	22	R226	33
C201	3	CR202	11	R205	23	R227	38
C203	3	CR203	12	R206	24	R228	39
C204	3	CR204	10	R207	25	R229	40
C205	3	CR205	12	R208	24	R230	36
C206	4	L201	13	R209	26	R231	36
C207	3	L202	13	R210	27	R232	41
C208	5	L203	13	R211	28	XQ201	42
C209	4	L204	14	R212	29	XQ202	42
C210	3	L205	14	R213	30	XQ203	42
C211	3	L206	13	R214	26	XQ204	43
C212	6	L207	14	R215	31	XQ205	43
C213	7	Q201	15	R216	25		
C215	7	Q202	16	R217	32		
C216	8	Q203	17	R218	33		
C217	3	Q204	18	R219	34		
C218	9	Q205	16	R220	35		
C219	3	R201	19	R222	36		
C220	3	R202	20	R223	37		

ELIJN033

Figure 21. IF and AGC Subassembly (3A10A7) (Sheet 3 of 3).

SECTION II

(1) ILLUSTRATION (3) FIG NO.	(2) SMR CODE (4) ITEM NO.	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE		(7) U/M	(8) QTY INC IN UNIT
					D E S C R I P T I O N			
					GROUP 010506 IF AND AGC SUBASSEMBLY (3A10A7)			
21	1	XDFFF	284510-3	65597	PRI NTED WI RING BD.		EA	1
21	2	XDFFF	89483-2	65597	SHIELD, AUTO CONT BD		EA	1
21	3	PAFZZ	5910-00-964-1346	601PE1040-5W2	CAPACITOR, FXD, PLSTC.		EA	11
21	4	PAFZZ	5910-00-064-8492	M3-660-12	CAPACITOR, FXD, PLSTC		EA	2
21	5	PAFZZ	5910-00-832-5720	DM19F502J0100WV1CR	CAPACITOR, FXD, MI CA		EA	1
21	6	PAFZZ	5910-00-059-1378	M3-492-8	CAPACITOR, FXD, PLSTC.		EA	1
21	7	PAFZZ	5910-00-832-8285	801-010W5R102K	CAPACITOR, FXD, CER		EA	2
21	8	PAFZZ	5910-00-834-8493	150D476X0035S2	CAPACITOR, ELCTLT		EA	1
21	9	PAFZZ	5910-00-685-9700	150D225X003582	CAPACITOR, ELCTLT		EA	1
21	10	PAFZZ	5961-00-577-6181	1N627	SEMI CONDUCTOR, DIODE		EA	2
21	11	PAFZZ	5961-00-836-6667	1N816	SEMI CONDUCTOR, DIODE		EA	1
21	12	PAFZZ	5961-00-556-2091	46122-1	SEMI CONDUCTOR, DIODE		EA	2
21	13	PAFZZ	5950-00-053-8543	1537-744	COIL, RF		EA	4
21	14	PAFZZ	5950-00-053-8538	1537-756	COIL, RF		EA	3
21	15	PAFZZ	5961-00-824-9946	48595-1	TRANSISTOR		EA	1
21	16	PAFZZ	5961-00-752-0150	2N69	TRANSISTOR		EA	2
21	17	PAFZZ	5961-00-089-0499	2N2218	TRANSISTOR		EA	1
21	18	PAFZZ	5961-00-855-1551	2N1132	TRANSISTOR		EA	1
21	19	PAFZZ	5905-00-824-3057	FP102U	RESISTOR, VARIABLE		EA	1
21	20	PAFZZ	5905-00-807-4954	RC07GF751J	RESISTOR, FXD, CMPSN		EA	1
21	21	PAFZZ	5905-00-683-2236	RC07GF391J	RESISTOR, FXD, CMPSN		EA	1
21	22	PAFZZ	5905-00-688-3738	RC07GF182J	RESISTOR, FXD, CMPSN		EA	1
21	23	PAFZZ	5905-00-682-4097	RC07GF302J	RESISTOR, FXD, CMPSN		EA	1
21	24	PAFZZ	5905-00-683-7723	RC07GF152J	RESISTOR, FXD, CMPSN		EA	2
21	25	PAFZZ	5905-00-686-9996	RC07GF821J	RESISTOR, FXD, CMPSN		EA	2
21	26	PAFZZ	5905-00-686-3370	RC07GF202J	RESISTOR, FXD, CMPSN		EA	2
21	27	PAFZZ	5909-00-682-4101	RC07GF752J	RESISTOR, FXD, CMPSN		EA	1
21	28	PAFZZ	5905-00-686-3358	RC07GF393J	RESISTOR, FXD, CMPSN		EA	1
21	29	PAFZZ	5905-00-686-9998	RC07GF472J	RESISTOR, FXD, CMPSN		EA	1
21	30	PAFZZ	5905-00-726-4413	RC07GF123J	RESISTOR, FXD, CMPSN		EA	1
21	31	PAFZZ	5905-00-682-4109	RC07GF561J	RESISTOR, FXD, CMPSN		EA	1
21	32	PAFZZ	5905-00-683-2241	RC07GF512J	RESISTOR, FXD, CMPSN		EA	1
21	33	PAFZZ	5905-00-686-3368	RC07GF203J	RESISTOR, FXD, CMPSN		EA	2
21	34	PAFZZ	5905-00-683-2240	RC07GF221J	RESISTOR, FXD, CMPSN		EA	1
21	35	PAFZZ	5905-00-681-9969	RC07GF332J	RESISTOR, FXD, CMPSN		EA	2
21	36	PAFZZ	5903-00-683-2238	RC07GF103J	RESISTOR, FXD, CMPSN		EA	3
21	37	PAFZZ	5905-00-110-7622	RRC07G682JS	RESISTOR, FXD, CMPSN		EA	1

SECTION II

TM11-5821-277-34P

(1) ILLUSTRATION (a) FIG NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY IN UNIT
21 38	PAFZZ	5905-00-686-3121	RC07GF820J	81349	RESI STOR, FXD, CMPSN.	EA	1
21 39	PAFZZ	5905-00-681-8818	RC07GF153J	81349	RESI STOR, FXD, CMPSN.	EA	1
21 40	PAFZZ	5905-00-727-8001	RC07GF681J	81349	RESI STOR, FXD, CMPSN.	EA	1
21 40	PAFZZ	5905-00-681-9817	RC07GF105J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232.	EA	1
21 41	PAFZZ	5905-00-681-8957	RC07GF474J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232	EA	1
21 41	PAFZZ	5905-00-681-8856	RC07GF514J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232	EA	1
21 41	PAFZZ	5905-00-681-8958	RC07GF564J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232	EA	1
21 41	PAFZZ	5905-00-252-1673	RC07GF624J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232.	EA	1
21 41	PAFZZ	5905-00-681-8823	RC07GF684J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232	EA	1
21 41	PAFZZ	5905-00-681-9022	RC07GF754J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232	EA	1
21 41	PAFZZ	5905-00-681-9021	RC07GF824J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232	EA	1
21 41	PAFZZ	5905-00-681-8857	RC07GF914J	81349	RESI STOR, FXD, CMPSN SELECT FACTORY SELECTED VALUE FOR RESI STOR R232	EA	1
21 42	PAFZZ	5935-00-989-9466	MP5173	06776	SOCKET, TRANSI STOR.	EA	3
21 43	PAFZZ	5935-00-110-7466	NS503-19-1	06776	SOCKET, TRANSI STOR	EA	2
21 44	XDFZZ		92350-1	65597	BRACKET, ANGLE	EA	2
21 45	XDFZZ	5305-00-054-5635	MS51957-1	96906	SCREW, MACHINE.	EA	2
21 46	XDFZZ	5310-00-928-2690	MS35338-134	96906	WASHER, LOCK	EA	2
21 47	XDFZZ		89683-1	65597	SHIELD, AUTO CONT BD.	EA	1
21 48	XDFZZ		284510-2	65597	PRI NTED WI RING BD	EA	1
21 49	PAFZZ	5940-00-082-4833	SE11XC01	81349	TERMINAL, STUD.	EA	1
21 50	PAFZZ	5940-00-082-4869	SE12XC01	81349	TERMINAL, STUD.	EA	16
21 51	PAFZZ	5940-00-719-4142	2040-2	71279	TERMINAL, STUD	EA	10
21 52	XDFZZ		104808-11	65597	PLATE, DESIGNATION.	EA	1
21 53	PAFZZ	5320-00-821-4992	R3700-3-32	12014	RIVET, TUBULAR.	EA	2
21 54	XDFZZ		89620-1	65597	SHIELD, AUTO CONT BD.	EA	2
21 55	XDFZZ		89682-1	65597	COVER, INTMD FREQ.	EA	1
21 56	PAFZZ	5940-00-177-6730	50SL540-499	12615	TERMINAL, FEEDTHUR.	EA	2

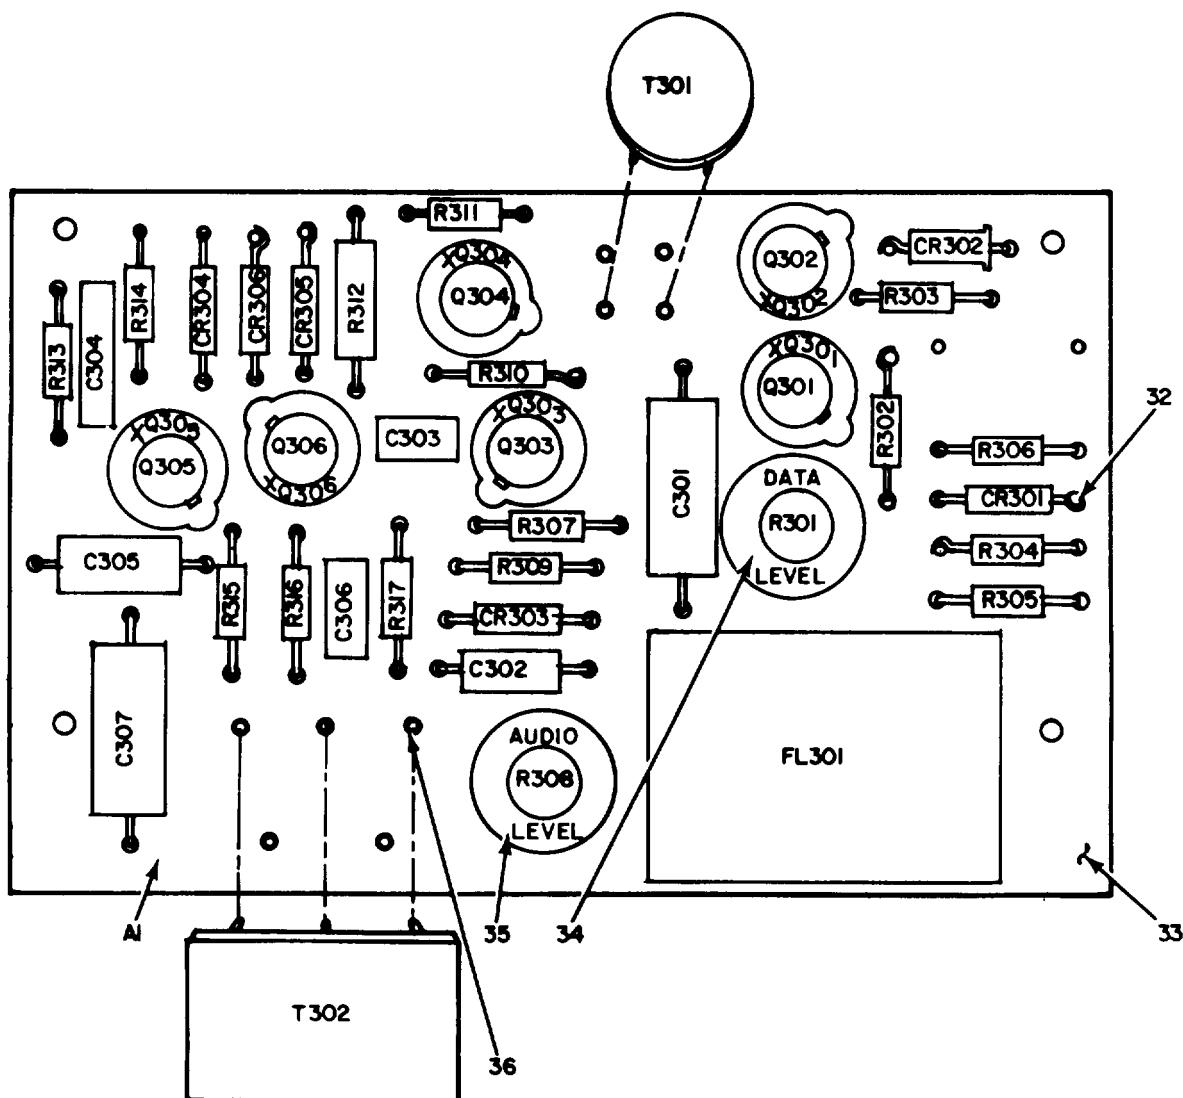



Figure 22. Squelch and Receiver Audio Subassembly (3A10A8) (Sheet 1 of 2).

REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
A1	I	Q302	12	R312	25
C301	2	Q303	13	R313	26
C302	3	Q304	13	R314	26
C303	4	Q305	13	R315	27
C304	5	Q306	14	R316	27
C305	6	R301	15	R317	20
C306	4	R302	16	T301	29
C307	2	R303	17	T302	30
CR301	7	R304	18	XQ301	31
CR302	8	R305	19	XQ302	31
CR303	9	R306	20	XQ303	31
CR304	9	R307	21	XQ304	31
CR305	7	R308	22	XQ305	31
CR306	7	R309	17	XQ306	31
FL301	10	R310	23		
Q301	II	R311	24		

ELIJN035

Figure 22. Squelch and Receiver Audio Subassembly (3A10A8) (Sheet 2 of 2).

(1) ILLUSTRATION (a) FIG NO.	(2) SMR CODE	(3) NATIONAL S T O C K NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY IN UNIT
					GROUP 010507 SQUELCH AND RECEIVER AUDIO SUBASSEMBLY (3A10A8)		
22	1	XDFFF	284511-3	65597	PRI NTED WI RING BD	EA	1
22	2	PAFZZ	5910-00-113-5689	M39003-01-3015	81349 CAPACITOR, ELCTLT	EA	2
22	3	PAFZZ	5910-00-104-0144	1500105X9035AZ	56289 CAPACITOR, ELCTLT	EA	1
22	4	PAFZZ	5910-00-109-0034	M3-746-1	13934 CAPACITOR, FXD, PLSTC	EA	2
22	5	PAFZZ	5910-00-957-6961	601PE6839-5STYLE 4	84411 CAPACITOR, FXD, PLSTC.	EA	1
22	6	PAFZZ	5910-00-805-3618	150D276X901082	56289 CAPACITOR, ELCTLT	EA	1
22	7	PAFZZ	5961-00-577-6181	1N627	81349 SEMI CONDUCTOR, DIODE	EA	3
22	8	PAFZZ	5961-00-051-8921	1N3712	81349 SEMI CONDUCTOR, DIODE	EA	1
22	9	PAFZZ	5961-00-836-6667	1N816	80131 SEMI CONDUCTOR, DIODE.	EA	2
22	10	PAFZZ	5915-00-731-8211	38179-1	65597 FILTER, BAND PASS.	EA	1
22	11	PAFZZ	5961-00-852-5171	2N1711	80131 TRANSISTOR	EA	1
22	12	PAFZZ	5961-00-773-7926	2N1143	81349 TRANSISTOR	EA	1
22	13	PAFZZ	5961-00-686-8578	2N338	80131 TRANSISTOR.	EA	3
22	14	PAFZZ	5961-00-855-1551	2N1132	80131 TRANSISTOR	EA	1
22	15	PAFZZ	5905-00-764-4884	FP501U	01121 RESISTOR, VARIABLE	EA	1
22	16	PAFZZ	5905-00-682-4108	RC07GF241J	81349 RESISTOR, FXD, CMPSN.	EA	1
22	17	PAFZZ	5905-00-683-2238	RC07GF103J	81349 RESISTOR, FXD, CMPSN	EA	2
22	18	PAFZZ	5905-00-683-2241	RC07GF512J	81349 RESISTOR, FXD, CMPSN	EA	1
22	19	PAFZZ	5905-00-682-4098	RC07GF392J	81349 RESISTOR, FXD, CMPSN.	EA	1
22	20	PAFZZ	5905-00-831-6134	RC07GF822J	81349 RESISTOR, FXD, CMPSN.	EA	1
22	21	PAFZZ	5905-00-681-8854	RC07GF304J	81349 RESISTOR, FXD, CMPSN	EA	1
22	22	PAFZZ	5905-00-937-8556	FP402U	01121 RESISTOR, VARIABLE.	EA	1
22	23	PAFZZ	5905-00-686-3129	RC07GF104J	81349 RESISTOR, FXD, CMPSN	EA	1
22	24	PAFZZ	5905-00-807-6269	RC07GF131J	81349 RESISTOR, FXD, CMPSN	EA	1
22	25	PAFZZ	5905-00-190-8881	RC20GF182J	81349 RESISTOR, FXD, CMPSN	EA	1
22	26	PAFZZ	5909-00-683-7723	RC07GF152J	81349 RESISTOR, FXD, CMPSN.	EA	2
22	27	PAFZZ	5905-00-723-5251	RC07GF222J	81349 RESISTOR, FXD, CMPSN.	EA	2
22	28	PAFZZ	5905-00-683-7721	RC7GF101J	81349 RESISTOR, FXD, CMPSN	EA	1
22	29	PAFZZ	5950-00-725-3051	13600	07388 TRANSFORMER, AF	EA	1
22	30	PAFZZ	5950-00-735-1803	40196-1	65597 TRANSFORMER, AF	EA	1
22	31	PAFZZ	5935-00-110-7466	NS503-19-1	06776 SOCKET, TRANSISTOR.	EA	6
22	32	PAFZZ	5940-00-280-0600	2042-2	71279 TERMINAL, STUD	EA	10
22	33	XDFZZ		284511-2	65597 PRINTERED WIRING BD.	EA	1
22	34	XDFZZ		104808-32	65597 PLATE, DESIGNATION.	EA	1
22	35	XDFZZ		104808-12	65597 PLATE, DESIGNATION.	EA	1
22	36	PAFZZ	5940-00-761-1462	30588-1	65597 TERMINAL, STUD.	EA	6

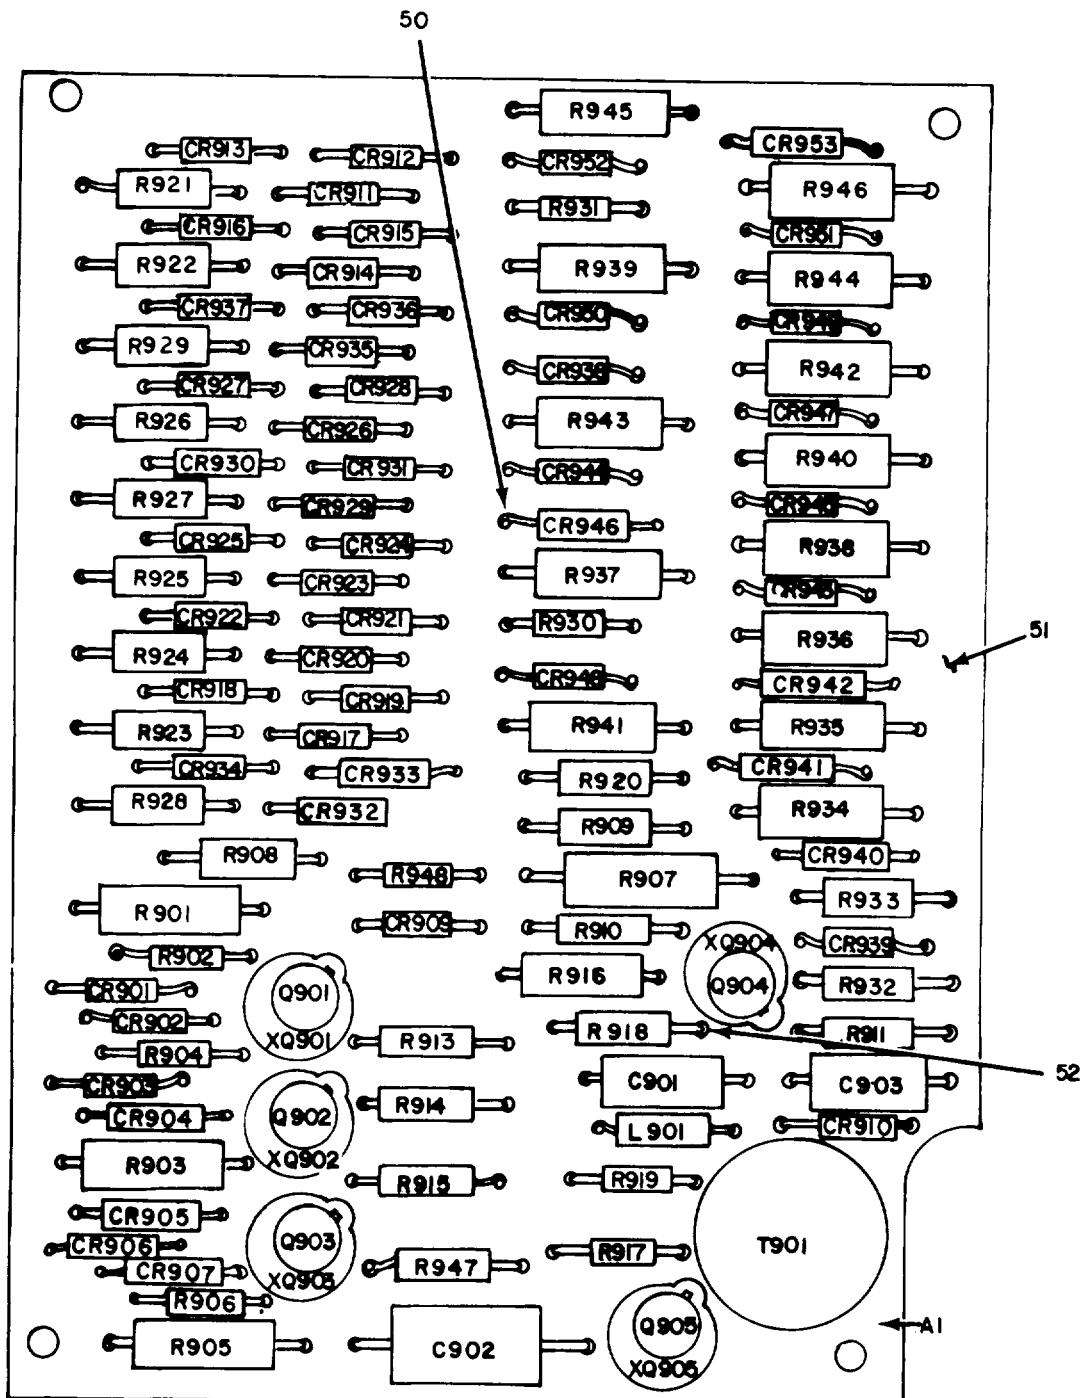


FRONT VIEW

NOTE: FOR COMPLETE REFERENCE
DESIGNATION, PREFIX WITH 3A10A9.

ELIJ036

Figure 23. Bias Tuning Matrix Subassembly (3A10A9) (Sheet 1 of 3).

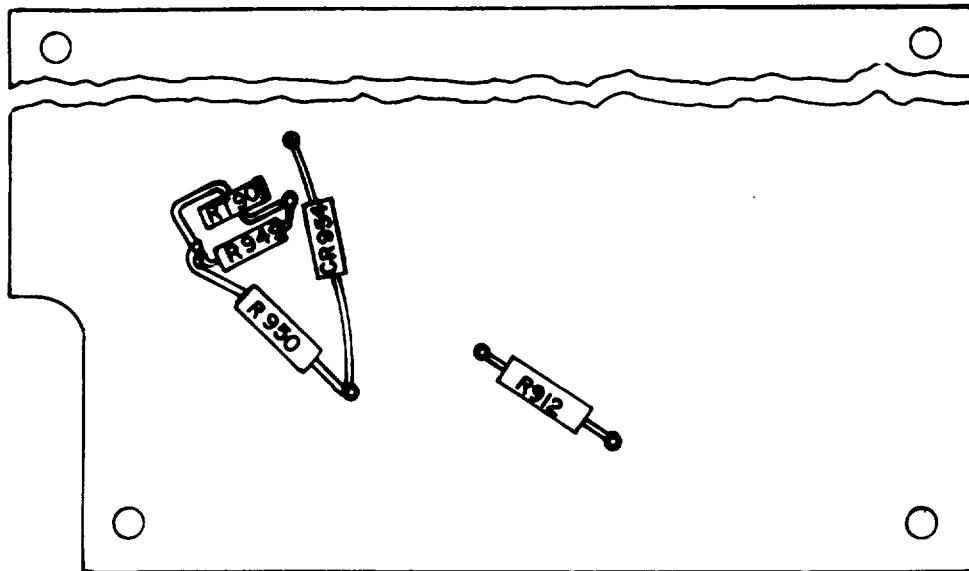

REAR VIEW

NOTE: FOR COMPLETE REFERENCE DESIGNATION
PREFIX WITH 3A10A9.

ELIJN048

Figure 23. Bias Tuning Matrix Subassembly (3A10A9) (Sheet 2 of 3).



REF. DES.	ITEM NO.										
A1	1	CR918	5	CR938	8	Q903	10	R918	27	R938	41
C901	2	CR919	5	CR939	5	Q904	11	R919	28	R939	41
C902	3	CR920	5	CR940	5	Q905	12	R920	29	R940	41
C903	4	CR921	5	CR941	5	R901	13	R921	30	R941	42
CR901	5	CR922	5	CR942	5	R902	14	R922	31	R942	41
CR902	5	CR923	5	CR943	5	R903	13	R923	32	R943	41
CR903	5	CR924	5	CR944	5	R904	14	R924	33	R944	41
CR904	5	CR925	5	CR945	5	R905	13	R925	34	R945	42
CR905	5	CR926	5	CR946	5	R906	15	R926	35	R946	41
CR906	5	CR927	5	CR947	5	R907	16	R927	36	R947	43
CR907	5	CR928	5	CR948	5	R908	17	R928	37	R948	44
CR909	6	CR929	5	CR949	5	R909	18	R929	38	R949	45
CR910	7	CR930	5	CR950	5	R910	19	R930	39	R950	46
CR911	5	CR931	5	CR951	5	R911	20	R931	39	RT901	47
CR912	5	CR932	5	CR952	5	R912	21	R932	40	T901	48
CR913	5	CR933	5	CR953	5	R913	22	R933	40	XQ901	49
CR914	5	CR934	5	CR954	7	R914	23	R934	41	XQ902	49
CR915	5	CR935	5	L901	9	R915	24	R935	41	XQ903	49
CR916	5	CR936	5	Q901	10	R916	25	R936	41	XQ904	49
CR917	5	CR937	5	Q902	10	R917	26	R937	41	XQ905	49

ELIJN037

Figure 23. Bias Tuning Matrix Subassembly (3A10A9) (Sheet 3 of 3).

(1) ILLUSTRATION (a) FIG NO.	(2) ITEM NO.	SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT U/M
						GROUP 010508 BIAS TUNING MATRIX SUBASSEMBLY (3A10A9)		
23	1	XDFFF		28512-3	65597	PRI NTED WI RING BD		EA 1
23	2	PAFZZ	5910-00-809-4701	150D685X903582	56289	CAPACI TOR, ELCTLT		EA 1
23	3	PAFZZ	5910-00-059-1377	M3-492-10	13934	CAPACI TOR, FXD, PLSTC.		EA 1
23	4	PAFZZ	5910-00-723-4453	150D335X007582	56289	CAPACI TOR, ELCTLT		EA 1
23	5	PAFZZ	5961-00-087-6047	1N645	80131	SEMI CONDUCTOR, DIODE.		EA 49
23	6	PAFZZ	5961-00-989-9465	SG3440	03877	SEMI CONDUCTOR, DIODE		EA 1
23	7	PAFZZ	5961-00-729-5499	46232-1	65597	SEMI CONDUCTOR, DIODE		EA 2
23	8	PAFZZ	5961-00-556-2091	46122-1	65597	SEMI CONDUCTOR, DIODE		EA 1
23	9	PAFZZ	5950-00-053-8542	1537-744	99800	COIL, RF		EA 1
23	10	PAFZZ	5961-00-752-0150	2N697	80131	TRANSISTOR.		EA 3
23	11	PAFZZ	5961-00-902-7971	2N2586	80131	TRANSISTOR.		EA 1
23	12	PAFZZ	5961-00-985-9073	2N3053	81349	TRANSISTOR		EA 1
23	13	PAFZZ	5905-00-121-9861	RC32GF102J	81349	RESISTOR, FXD, CMPSN		EA 3
23	14	PAFZZ	5905-00-686-3368	RC07GF203J	81349	RESISTOR, FXD, CMPSN		EA 2
23	15	PAFZZ	5905-00-683-2238	RC07GF103J	81349	RESISTOR, F XD, CMPSN		EA 1
23	16	PAFZZ	5905-00-840-7607	RN6C4021F	81349	RESISTOR, FXD, FILM		EA 1
23	17	PAFZZ	5905-00-844-1423	RN60C7500F	81349	RESISTOR, FXD, FILM.		EA 1
23	18	PAFZZ	5905-00-926-8504	RN60C3792F	81349	RESISTOR, FXD, FILM.		EA 1
23	19	PAFZZ	5905-00-847-2116	RN60C7151F	81349	RESISTOR, FXD, FILM		EA 1
23	20	PAFZZ	5905-00-686-3387	RN60C5111F	81349	RESISTOR, FXD, FILM.		EA 1
23	21	PAFZZ	5905-00-810-1008	RN60C1103F	81349	RESISTOR, FXD, FILM.		EA 1
23	22	PAFZZ	5905-00-854-8117	RN60C6192F	81349	RESISTOR, FXD, FILM		EA 1
23	23	PAFZZ	5905-00-844-0818	RN60C2152F	81349	RESISTOR, FXD, FILM		EA 1
23	24	PAFZZ	5905-00-833-8357	RN60C7871F	81349	RESISTOR, FXD, FILM		EA 1
23	25	PAFZZ	5909-00-847-5053	RN60C8061F	81349	RESISTOR, FXD, FILM.		EA 1
33	26	PAFZZ	5905-00-702-4439	RC07GF133J	81349	RESISTOR, FXD, CMPSN.		EA 1
23	27	PAFZZ	5909-00-924-8504	RN60C5562F	81349	RESISTOR, FXD, FILM		EA 1
23	28	PAFZZ	5905-00-727-8001	RC07GF681J	81349	RESISTOR, FXD, CMPSN		EA 1
23	29	PAFZZ	5905-00-780-7883	RN60C2292F	81349	RESISTOR, FXD, FILM		EA 1
23	30	PAFZZ	5905-00-812-2483	RN60C1502F	81349	RESISTOR, FXD, FILM		EA 1
23	31	PAFZZ	5905-00-926-8506	RN60C1982F	81349	RESISTOR, FXD, FILM		EA 1
23	32	PAFZZ	5905-00-702-6458	RN60C2492F	81349	RESISTOR, FXD, FILM.		EA 1
23	33	PAFZZ	5905-00-926-8505	RN60C3122F	81349	RESISTOR, FXD, FILM.		EA 1
23	34	PAFZZ	5905-00-894-4086	RN60C4422F	81349	RESISTOR, FXD, FILM		EA 1
23	35	XDFZZ		RN60C5972F	81349	RESISTOR, FXD, FILM		EA 1
23	36	PAFZZ	5905-00-926-8504	RN60C9202F	81349	RESISTOR, FXD, FILM		EA 1
23	37	PAFZZ	5905-00-852-2590	RN60C1473F	81349	RESISTOR, FXD, FILM		EA 1
23	38	PAFZZ	5905-00-842-6861	RN60C2613F	81349	RESISTOR, FXD, FILM.		EA 1

(1) ILLUSTRATION		(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION <i>USABLE ON CODE</i>	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE						
23	39	PAFZZ	5905-00-686-3798	RC07GF272J	81349	RESI STOR, FXD, CMPSN	EA	2
23	40	PAFZZ	5905-00-190-8887	RC20GF202J	81349	RESI STOR, FXD, CMPSN	EA	2
23	41	PAFZZ	5905-00-940-0737	882-3-560PORM5PC	44655	RESI STOR, FXD, WW.	EA	11
23	42	PAFZZ	5905-00-940-0738	50994-1	65597	RESI STOR, FXD, WW.	EA	2
23	43	PAFZZ	5905-00-809-8685	RN60C1623F	81349	RESI STOR, FXD, FI LM	EA	1
23	44	PAFZZ	5905-00-683-7721	RC07GF101J	81349	RESI STOR, FXD, CMPSN	EA	1
23	45	PAFZZ	5905-00-682-4097	RC7GF302J	81349	RESI STOR, FXD, CMPSN	EA	1
23	46	PAFZZ	5905-00-681-8853	RC07GF683J	81349	RESI STOR, FXD, CMPSN	EA	1
23	47	PAFZZ	5905-00-926-8504	J825J1	15801	RESI STOR, THERMAL	EA	1
23	48	PAFZZ	5950-00-921-5893	13802	07388	TRANSFORMER, PULSE	EA	1
23	49	PAFZZ	5935-00-110-7466	NS503-19-1	06776	SOCKET, TRANSI STOR.	EA	5
23	50	PAFZZ	5940-00-280-0600	2042-2	71279	TERMI NAL, STUD	EA	44
23	51	XDFZZ		284512-2	65597	PRI NTED WI RI NG BD.	EA	1
23	52	PAFZZ	5940-00-761-1462	30588-1	65597	TERMI NAL, STUD	EA	2

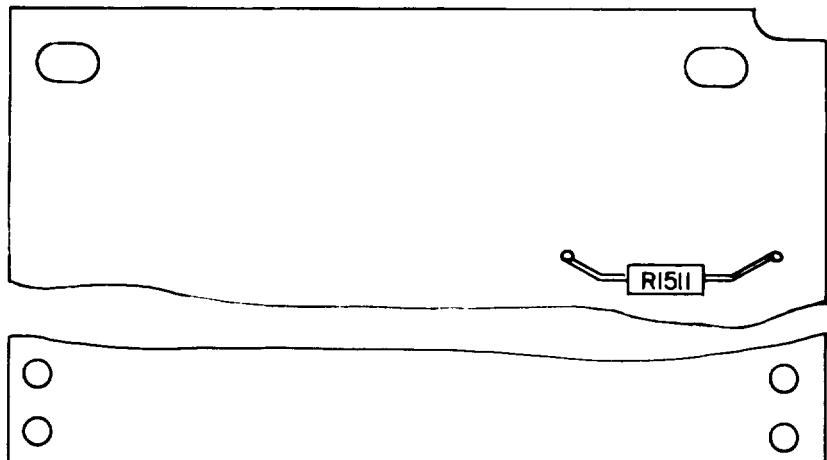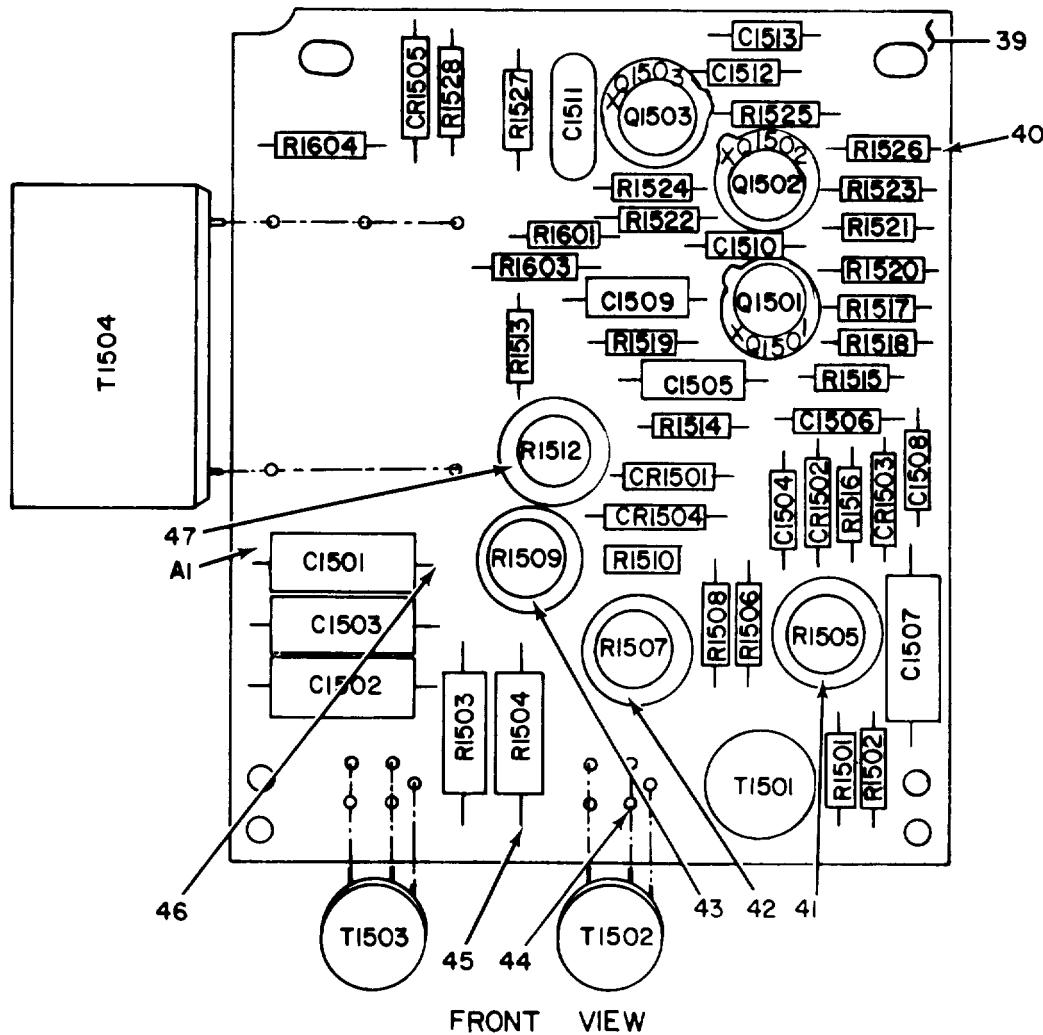

NOTE: FOR COMPLETE REFERENCE DESIGNATION,
PREFIX WITH 3AII.

ELIJN038

Figure 24. Modulator Input Subassembly (3A11) (Sheet 1 of 2).


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
AI	1	Q1502	13	R1519	25
C1501	2	Q1503	13	R1520	26
C1502	2	R1501	14	R1521	27
C1503	2	R1502	14	R1522	28
C1504	3	R1503	15	R1523	28
C1505	4	R1504	16	R1524	28
C1506	3	R1505	17	R1525	30
C1507	5	R1506	18	R1526	31
C1508	6	R1507	17	R1527	32
C1509	7	R1508	18	R1526	33
C1510	8	R1509	17	R1601	30
C1511	9	R1510	18	R1603	30
C1512	6	R1511	19	R1604	34
C1513	10	R1512	20	T1501	35
CR1501	11	R1513	21	T1502	36
CR1502	11	R1514	21	T1503	35
CR1503	11	R1515	22	T1504	37
CR1504	12	R1516	23	XQ1501	38
CR1505	12	R1517	24	XQ1502	38
Q1501	13	R1518	19	XQ1503	38

ELIJN039

Figure 24. Modulator Input Subassembly (3A11) (Sheet 2 of 2).

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL S T O C K N U M B E R	(4) P A R T N U M B E R	(5) F S C M	(6) DESCRIPTION U S A B L E O N C O D E	(7) U M	(8) Q T Y I N U N I T
						GROUP 0106 MODULATOR INPUT SUBASSEMBLY (3A11)		
24	1	XDFFF	5910-00-752-4249	284513-3	65597	PRI NTED WI RING BD.....	EA	1
24	2	PAFZZ	5910-00-456-4454	150D226X0035R2	56289	CAPACI TOR, ELCTLT	EA	3
24	3	XDFZZ	5910-00-901-2820	150D335X0015A0	56289	CAPACI TOR, ELCTLT	EA	2
24	4	PAFZZ	5910-00-104-0144	150D226X001582	56289	CAPACI TOR, ELCTLT	EA	1
24	5	PAFZZ	5910-00-104-0144	150D276X902R2	56289	CAPACI TOR, ELCTLT	EA	1
24	6	PAFZZ	5910-00-950-2368	150D105X9035A2	56289	CAPACI TOR, ELCTLT	EA	2
24	7	XDFZZ	5910-00-752-4249	150D276X001082	56289	CAPACI TOR, ELCTLT	EA	1
24	8	PAFZZ	5910-00-781-1154	150D475X0010A2	56289	CAPACI TOR, ELCTLT	EA	1
24	9	PAFZZ	5910-00-781-1154	DM19F152K0100W4CR	72136	CAPACI TOR, FXD, MI CA	EA	1
24	10	PAFZZ	5910-00-067-4411	M39003-01-2347	81349	CAPACI TOR, ELCTLT	EA	1
24	11	PAFZZ	5961-00-836-6667	1N816	80131	SEMI CONDUCTOR, DI ODE	EA	3
24	12	PAFZZ	5961-00-617-8864	1N252	80131	SEMI CONDUCTOR, DI ODE	EA	2
24	13	PAFZZ	5961-00-752-0150	2N697	80131	TRANSI STOR.....	EA	3
24	14	PAFZZ	5905-00-801-2377	RC07GF750J	81349	RESI STOR, FXD, CMPSN	EA	2
24	15	PAFZZ	5905-00-279-1724	RC32GF151J	81349	RESI STOR, FXD, CMPSN	EA	1
24	16	PAFZZ	5905-00-247-8722	RCR32G271JS	81349	RESI STOR, FXD, CMPSN	EA	1
24	17	PAFZZ	5905-00-781-9160	FP501M	01121	RESI STOR, VARI ABLE	EA	3
24	18	PAFZZ	5905-00-686-3798	RC07GF272J	81349	RESI STOR, FXD, CMPSN	EA	3
24	19	PAFZZ	5905-00-688-3738	RC07GF182J	81349	RESI STOR, FXD, CMPSN	EA	2
24	20	PAFZZ	5905-00-780-2506	FP502M	01121	RESI STOR, VARI ABLE	EA	1
24	21	PAFZZ	5905-00-807-4954	RC07GF751J	81349	RESI STOR, FXD, CMPSN	EA	2
24	22	PAFZZ	5905-00-686-9996	RC07GF821J	81349	RESI STOR, FXD, CMPSN	EA	1
24	23	PAFZZ	5905-00-825-5592	RC07GF161J	81349	RESI STOR, FXD, CMPSN	EA	1
24	24	PAFZZ	5905-00-682-4100	RC07GF622J	81349	RESI STOR, FXD, CMPSN	EA	1
24	25	PAFZZ	5905-00-805-9713	RC07GF431J	81349	RESI STOR, FXD, CMPSN	EA	1
24	26	PAFZZ	5905-00-723-5251	RC07GF222J	81349	RESI STOR, FXD, CMPSN	EA	1
24	27	PAFZZ	5905-00-721-0597	RC07GF243J	81349	RESI STOR, FXD, CMPSN	EA	1
24	28	PAFZZ	5905-00-682-4098	RC07GF392J	81349	RESI STOR, FXD, CMPSN	EA	2
24	29	PAFZZ	5905-00-801-6998	RC07GF621J	81349	RESI STOR, FXD, CMPSN	EA	1
24	30	PAFZZ	5905-00-686-3122	RC07GF301J	81349	RESI STOR, FXD, CMPSN	EA	3
24	31	PAFZZ	5905-00-835-1632	RC07GF240J	81349	RESI STOR, FXD, CMPSN	EA	1
24	32	PAFZZ	5905-00-279-3509	RC20GF911J	81349	RESI STOR, FXD, CMPSN	EA	1
24	33	PAFZZ	5905-00-937-8859	T1-2-5R1PORM5PCT	12463	RESI STOR, FXD, WW	EA	1
24	34	PAFZZ	5905-00-681-9969	RC07GF332J	81349	RESI STOR, FXD, CMPSN	EA	1
24	35	PAFZZ	5950-00-759-9730	LB019	07388	TRANSFORMER, AF	EA	2
24	36	PAFZZ	5950-00-759-9731	LB020	07388	TRANSFORMER, AF	EA	1
24	37	PAFZZ	5950-00-735-1804	13621	07388	TRANSFORMER, AF	EA	1

(1) ILLUSTRATION		(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION <i>USABLE ON CODE</i>	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE						
24	38	PAFZZ	5935-00-110-7466	NS503-19-1	06776	SOCKET, TRANSISTOR	EA	3
24	39	XDFZZ		284513-2	65597	PRI NTED WI RING BD	EA	1
24	40	PAFZZ	5940-00-280-0600	2042-2	71279	TERMI NAL, STUD	EA	10
24	41	XDFZZ		104808-32	65597	PLATE, DESI GNATI ON	EA	1
24	42	XDFZZ		104808-34	65597	PLATE, DESI GNATI ON.	EA	1
24	43	XDFZZ		104808-33		PLATE, DESI GNATI ON.	EA	1
24	44	PAFZZ	5940-00-761-1462	30588-1	65597	TERMI NAL, STUD	EA	4
24	45	XDFZZ		30588-4	65597	TERMI NAL, STUD	EA	5
24	46	PAFZZ	5940-00-719-4142	2040-2	71279	TERMI NAL, STUD	EA	1
24	47	XDFZZ		104808-35	65597	PLATE, DESI GNATI ON	EA	1

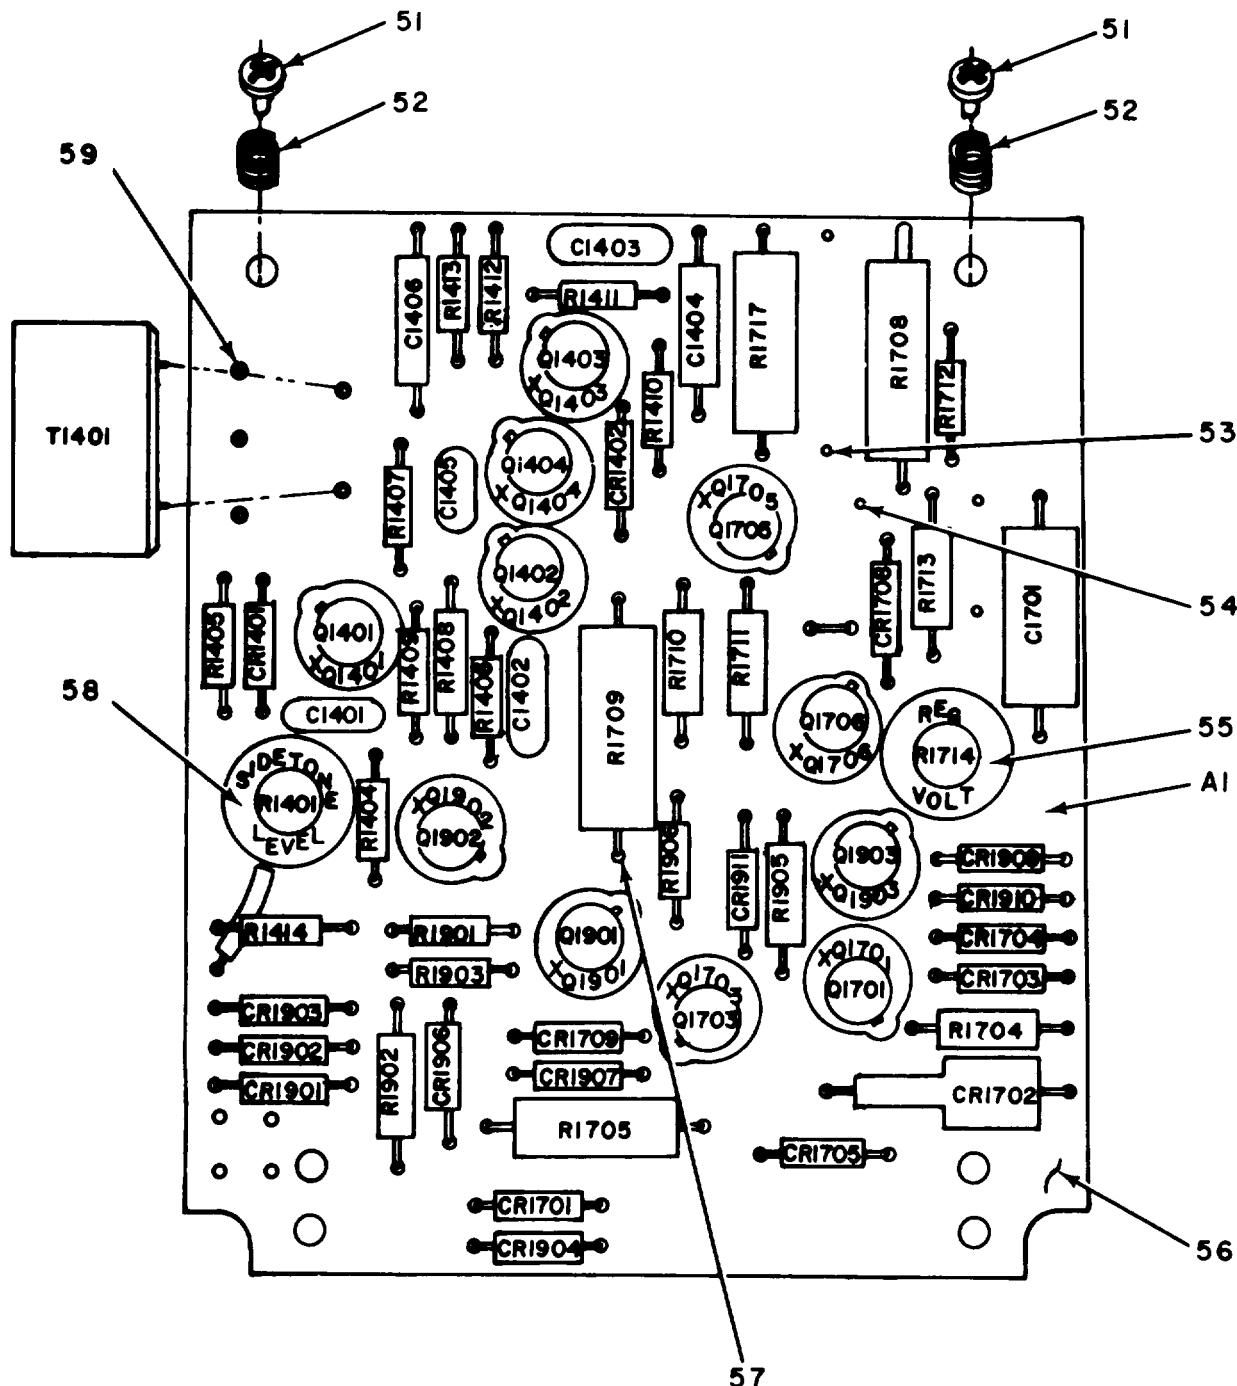


FRONT VIEW

**NOTE: FOR COMPLETE REFERENCE DESIGNATION
PREFIX WITH 3A12.**

ELIJN040

Figure 25. Power Control and Sidetone Amplifier Subassembly (3A12)
(Sheet 1 of 3).

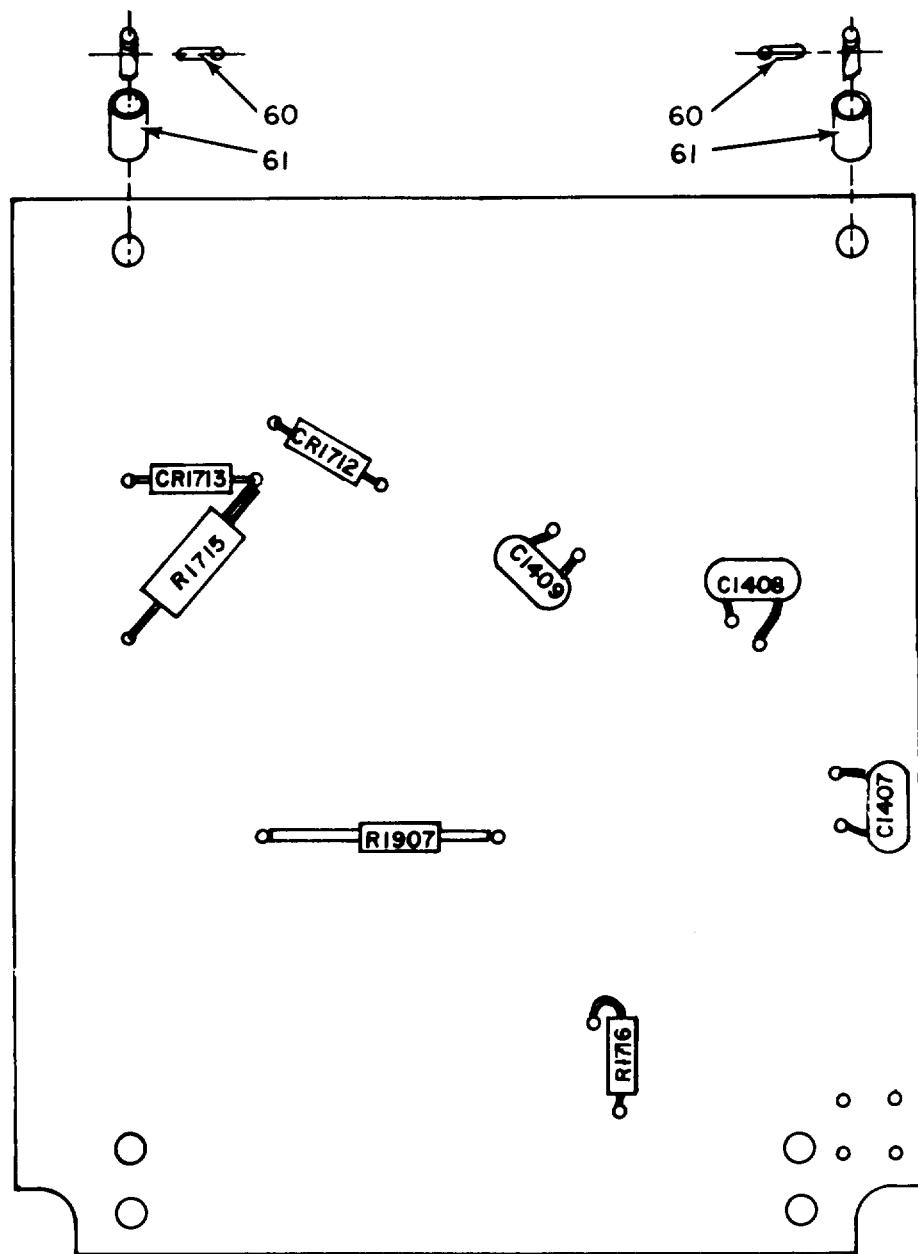

REAR VIEW

E L I J N O 4 9

Figure 25. Power Control and Sidetone Amplifier Subassembly
(3A12) (Sheet 2 of 3).


REF DES	ITEM NO						
A1	1	CRI713	14	R1401	22	R1715	39
C1401	2	CRI901	9	R1404	23	R1716	40
C1402	2	CRI902	9	R1405	24	R1717	41
C1403	3	CRI903	9	R1406	25	R1901	42
C1404	4	CRI904	9	R1407	26	R1902	43
C1405	5	CRI906	15	R1408	27	R1903	44
C1406	4	CRI907	14	R1409	28	R1905	45
C1407	6	CRI909	16	R1410	29	R1906	46
C1408	6	CRI910	9	R1411	29	R1907	47
C1409	6	CRI911	12	R1412	30	T1401	48
C1701	7	Q1401	17	R1413	30	XQ1401	49
CRI1401	8	Q1402	17	R1414	31	XQ1402	49
CRI1402	8	Q1403	18	R1704	32	XQ1403	49
CRI1701	9	Q1404	19	R1705	33	XQ1404	49
CRI1702	10	Q1701	20	R1708	34	XQ1701	49
CRI1703	11	Q1703	21	R1709	35	XQ1703	50
CRI1704	12	Q1705	19	R1710	32	XQ1705	49
CRI1705	9	Q1706	18	R1711	36	XQ1706	49
CRI1706	13	Q1901	18	R1712	25	XQ1901	49
CRI1709	14	Q1902	18	R1713	37	XQ1902	49
CRI1712	9	Q1903	18	R1714	38	XQ1903	49


ELIJN041

Figure 25. Power Control and Sidelone Amplifier Subassembly
(3A12) (Sheet 3 of 3).

(1) ILLUSTRATION (a) FIG. NO.		(2) SMB CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION		(7) U/M	(8) QTY IN UNIT
(b) ITEM NO.						USABLE ON CODE			
						GROUP 0107 POWER CONTROL AND SI DETONE			
						AMPLIFIER SUBASSEMBLY (3A12)			
25	1	XDFFF		284514-3	65597	PRINTED WIRING BD.		EA	1
25	2	PAFZZ	5910-00-899-4190	601PE3330R5W4	84411	CAPACITOR, FXD, PLSTC		EA	2
25	3	PAFZZ	5910-00-957-6961	601PE6839-5STYLE 4	84411	CAPACITOR, FXD, PLSTC		EA	1
25	4	PAFZZ	5910-00-456-4454	150D226X0015B2	56289	CAPACITOR, ELCTLT		EA	2
25	5	PAFZZ	5910-00-723-5144	601PE1530-5STYLE 2	84411	CAPACITOR, FXD, PLSTC		EA	1
25	6	PAFZZ	5910-00-078-2023	CM04FD241G03	81349	CAPACITOR, FXD, MICA		EA	3
25	7	PAFZZ	5910-00-400-4991	M39006-09-6546	81349	CAPACITOR, ELCTLT		EA	1
25	8	PAFZZ	5961-00-836-6667	1N816	80131	SEMI CONDUCTOR, DIODE.		EA	2
25	9	PAFZZ	5961-00-087-6047	1N645	80131	SEMI CONDUTOR, DIODE.		EA	8
25	10	PAFZZ	5961-00-852-5170	1N3032B	80131	SEMI CONDUCTOR, DIODE.		EA	1
25	11	PAFZZ		1N4370	80131	SEMI CONDUCTOR, DIODE.		EA	1
25	12	PAFZZ	5961-00-556-2091	46122-1	65597	SEMI CONDUCTOR, DIODE		EA	2
25	13	PAFZZ	5961-00-879-3091	46197-1	65597	SEMI CONDUCTOR, DIODE.		EA	1
25	14	PAFZZ	5961-00-772-7706	JAN1N4384	81349	SEMI CONDUCTOR, DIODE		EA	3
25	15	PAFZZ	5961-00-847-1900	1N749A	80131	SEMI CONDUCTOR, DIODE		EA	1
25	16	XDFZZ		1N748	80131	SEMI CONDUCTOR, DIODE		EA	1
25	17	PAFZZ	5961-00-686-8578	2N338	80131	TRANSISTOR		EA	2
25	18	PAFZZ	5961-00-752-0150	2N697	80131	TRANSISTOR		EA	5
25	19	PAFZZ	5961-00-855-1551	2N1132	80131	TRANSISTOR		EA	2
25	20	PAFZZ	5961-00-808-6241	2N398A	80131	TRANSISTOR		EA	1
25	21	PAFZZ	5961-00-722-1186	2N2567	80131	TRANSISTOR		EA	1
25	22	PAFZZ	5905-00-781-9160	FP501N	01121	RESISTOR, VARIABLE		EA	1
25	23	PAFZZ	5905-00-686-3131	RC07GF334J	81349	RESISTOR, FXD, CMPSN		EA	1
25	24	PAFZZ	5905-00-683-2238	RC07GF103J	81349	RESISTOR, FXD, CMPSN		EA	1
25	25	PAFZZ	5905-00-686-3129	RC07GF104J	81349	RESISTOR, FXD, CMPSN		EA	2
25	26	PAFZZ	5905-00-683-7721	RC07GF101J	81349	RESISTOR, FXD, CMPSN		EA	1
25	27	PAFZZ	5905-00-190-8881	RC20GF182J	81349	RESISTOR, FXD, CMPSN		EA	1
25	28	PAFZZ	5905-00-807-6269	RC07GF131J	81349	RESISTOR, FXD, CMPSN		EA	1
25	29	PAFZZ	5905-00-683-7723	RC07GF152J	81349	RESISTOR, FXD, CMPSN		EA	2
25	30	PAFZZ	5905-00-723-5251	RC07GF222J	81349	RESISTOR, FXD, CMPSN		EA	2
25	31	PAFZZ	5905-00-835-1635	RC07GF620J	81349	RESISTOR, FXD, CMPSN		EA	1
25	32	PAFZZ	5905-00-195-6806	RC20GF102J	81349	RESISTOR, FXD, CMPSN		EA	2
25	33	PAFZZ	5905-00-279-2552	RC32GF162J	81349	RESISTOR, FXD, CMPSN		EA	1
25	34	PAFZZ	5905-00-775-0790	C42S241J	16299	RESISTOR, FXD, FILM		EA	1
25	35	PAFZZ	5905-00-975-1296	C42S122J	16299	RESISTOR, FXD, FILM		EA	1
25	36	PAFZZ	5905-00-279-1870	RC20GF132J	81349	RESISTOR, FXD, CMPSN		EA	1

(1) ILLUSTRATION (a) FIG. NO.		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) QTY U/M	(8) QTY IN UNIT
25	37	PAFZZ	5905-00-766-8364	RL20S361J	81349	RESISTOR, FIBERGLASS...	EA	1
25	38	PAFZZ	5905-00-937-7356	FP101M	01121	RESISTOR, VARIABLE...	EA	1
25	39	PAFZZ	5905-00-455-7690	C5-301J	16299	RESISTOR, FIBERGLASS...	EA	1
25	40	PAFZZ	5905-00-817-7971	RC07GF100J	81349	RESISTOR, FIBERGLASS...	EA	1
25	41	PAFZZ	5905-00-937-8860	PW2-2R0J	11502	RESISTOR, FIBERGLASS...	EA	1
25	42	PAFZZ	5905-00-681-8818	RC07GF153J	81349	RESISTOR, FIBERGLASS...	EA	1
25	43	PAFZZ	5905-00-190-8880	RC20GF122J	81349	RESISTOR, FIBERGLASS...	EA	1
25	44	PAFZZ	5905-00-691-0195	RC07GF562J	81349	RESISTOR, FIBERGLASS...	EA	1
25	45	PAFZZ	5905-00-279-3506	RC20GF332J	81349	RESISTOR, FIBERGLASS...	EA	1
25	46	PAFZZ	5905-00-686-3368	RC07GF203J	81349	RESISTOR, FIBERGLASS...	EA	1
25	47	PAFZZ	5905-00-682-4101	RC07GF752J	81349	RESISTOR, FIBERGLASS...	EA	1
25	48	PAFZZ	5950-00-735-1803	40196-1	65597	TRANSFORMER	EA	1
25	49	PAFZZ	5935-00-110-7466	NS503-19-1	06776	SOCKET, TRANSISTOR	EA	10
25	50	PAFZZ	5935-00-867-0972	NS503-8	06776	SOCKET, DEVICE	EA	1
25	51	PAFZZ	5325-00-727-5900	294422-8-780	76530	STUD, NICKEL PLATED	EA	2
25	52	PAFZZ	5360-00-958-8757	LC032C2MW	84830	SPRING, NICKEL PLATED	EA	2
25	53	PAFZZ	5940-00-280-0600	2042-2	71279	TERMINAL, FPC	EA	24
25	54	PAFZZ	5940-00-082-4869	SE12XC01	81349	TERMINAL, STAINLESS STEEL	EA	3
25	55	XDFZZ		104808-14	65597	PLATE, DESIGNATOR	EA	1
25	56	XDFZZ		284514-2	65597	PRINTED WIRING BOARD	EA	1
25	57	XDFZZ		30588-4	65597	TERMINAL, STAINLESS STEEL	EA	1
25	58	XDFZZ		104808-35	65597	PLATE, DESIGNATION	EA	1
25	59	PAFZZ	5940-00-761-1462	30588-1	65597	TERMINAL, STAINLESS STEEL	EA	2
25	60	XDFZZ		294424	76530	PIN, GROOVED MOLD	EA	2
25	61	XDFZZ		270225-1	65597	SPACER, ALUMINUM	EA	2



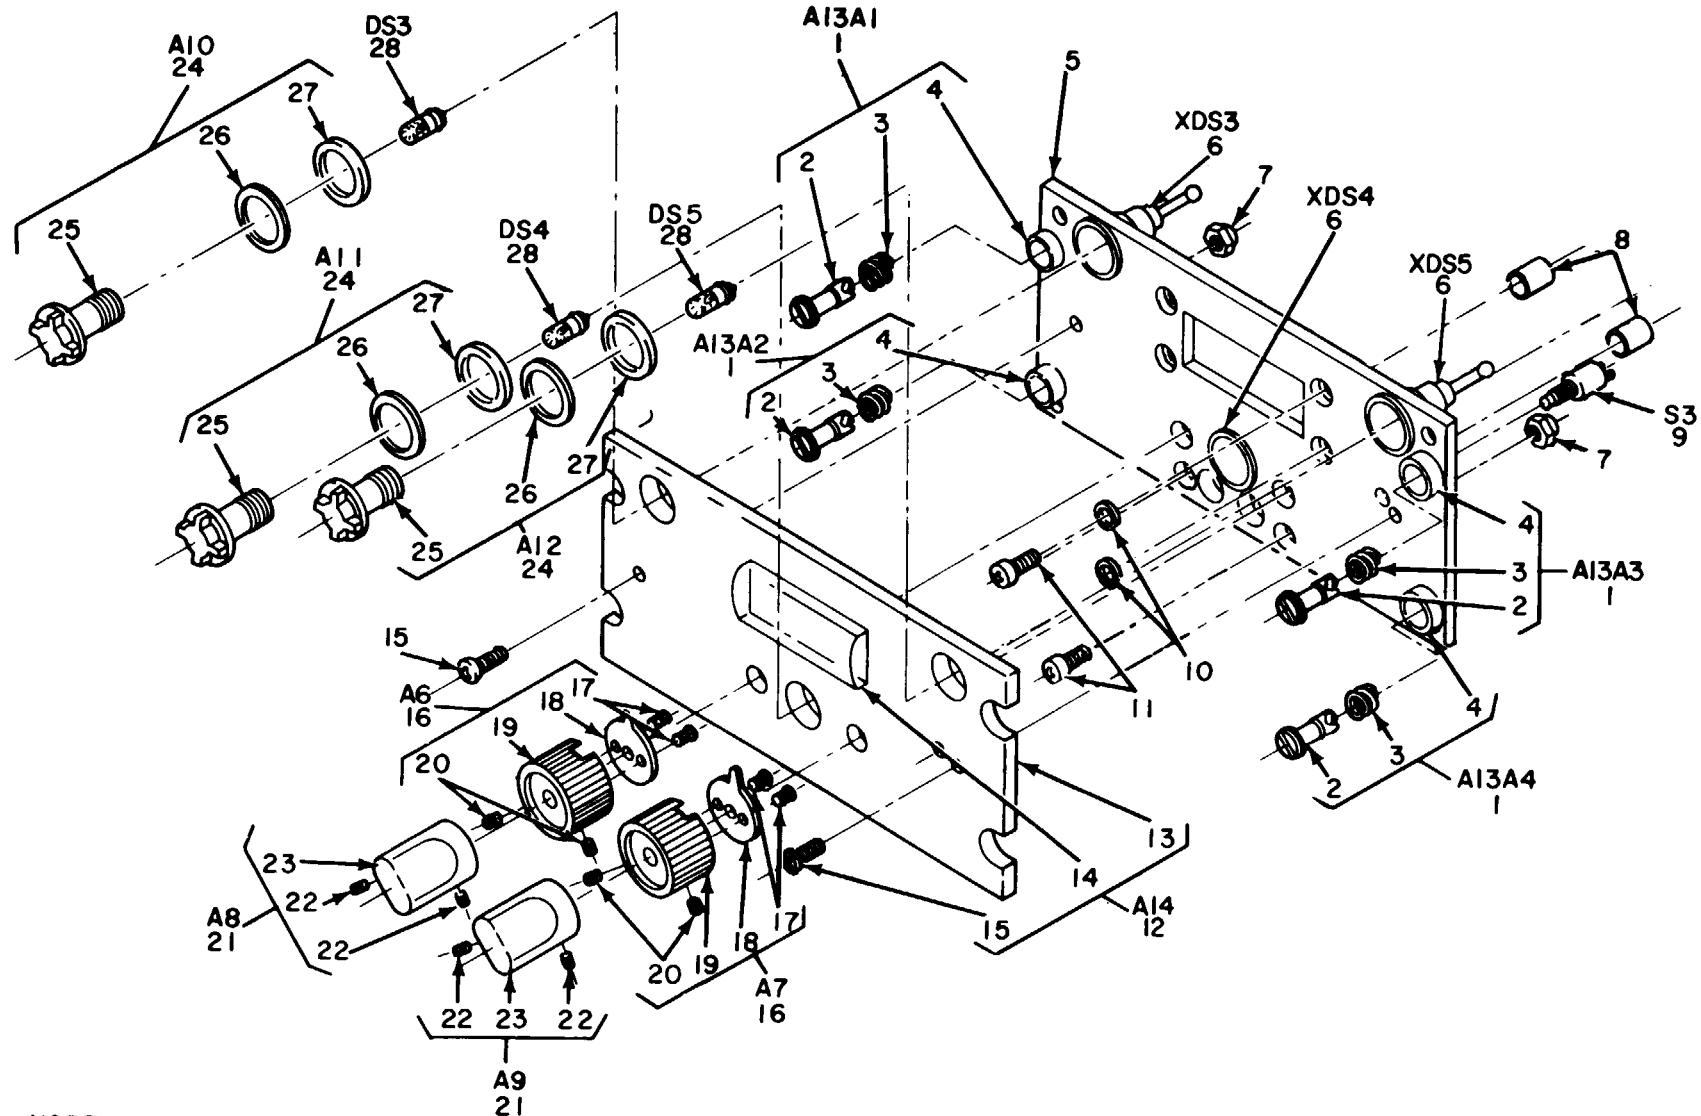


NOTE: FOR COMPLETE REFERENCE
DESIGNATION, PREFIX WITH 2.

ELIJN042

Figure 26. Radio Set, Control, C-7197/ARC-134, Front Panel.

(1) (a) FIG NO.	(2) (b) ITEM NO.	(3) NATIONAL S T O C K NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION		(7) U/M	(8) QTY INC IN UNIT
					USABLE ON CODE			
					GROUP 02 RADIO SET, CONTROL, C-7197/ARC-134			
26	1	XDHHH	60695-1	65597	STUD ASSY, TURNLOCK		EA	4
26	2	PAHZZ	5325-00-543-2418	72294	STUD, TURNLOCK FSTNR.		EA	4
26	3	PAHZZ	5360-00-201-0272	72794	SPRING, HLCPS		EA	4
26	4	PAHZZ	5325-00-291-9360	72794	REAINER, TURNLOCK		EA	4
26	5	XDHHH	284789-1	65597	PANEL ASSY, FR, PANEL		EA	1
26	6	PAHZZ	6210-00-824-5595	96906	BASE, MTG, LT, PANEL		EA	3
26	7	PAHZZ	5310-00-982-4999	MS21044C04	96906 NUT, SLFLKG, HEXAGON		EA	6
26	8	XDHZZ		270247-1	65597 SPACER, SLEEVE		EA	2
26	9	XDHZZ		10854-1	65597 SWITCH, PUSH		EA	1
26	10	XDHZZ		MS35337-78	96906 WASHER, LOCK		EA	4
26	11	XDHZZ	5305-00-054-5652	MS51957-18	96906 SCREW, MACHINE		EA	2
26	12	PAHHH	5821-00-944-3437	284788-1	65597 PANEL ASSY, RAD SET		EA	1
26	13	XDHZZ		284790-1	65597 PANEL, FRONT		EA	1
26	14	XDHZZ		65776-1	65597 WINDOW, DI AL		EA	1
26	15	XDHZZ	5305-00-207-7463	MS35214-15	96906 SCREW, MACHINE		EA	2
26	16	PA000	5355-00-913-9601	60825-2	65597 KNOB ASSEMBLY		EA	2
26	17	XDOZZ	5305-00-959-2727	MS35191-201	96906 SCREW, MACHINE		EA	4
26	18	XDOZZ		60828-1	65597 POINTER, KNOB		EA	2
26	19	XDOZZ		60825-1	65597 KNOB		EA	2
26	20	XDOZZ		MS51053-127	96906 SETSCREW		EA	8
26	21	PA000	5356-00-728-6448	60827-2	65597 KNOB ASSEMBLY		EA	2
26	22	XDOZZ		MS351053-127	96906 SETSCREW		EA	4
26	23	XDOZZ		60827-1	65597 KNOB		EA	2
26	24	PA000	6210-00-832-7216	117670-1	65597 LAMPHOLDER		EA	3
26	25	PAOZZ	6210-00-725-6530	80050-2	87034 LANDHOLDER		EA	3
26	26	PAOZZ	5330-00-971-7983	2-110C147-7	83259 PACKING, PREFORMED		EA	3
26	27	PAOZZ	5310-00-245-8804	276344-1	65597 WASHER, NONMETALLIC		EA	3
26	28	PAOZZ	6240-00-080-2012	327AS15	71744 LAMP, INCANDESCENT		EA	3

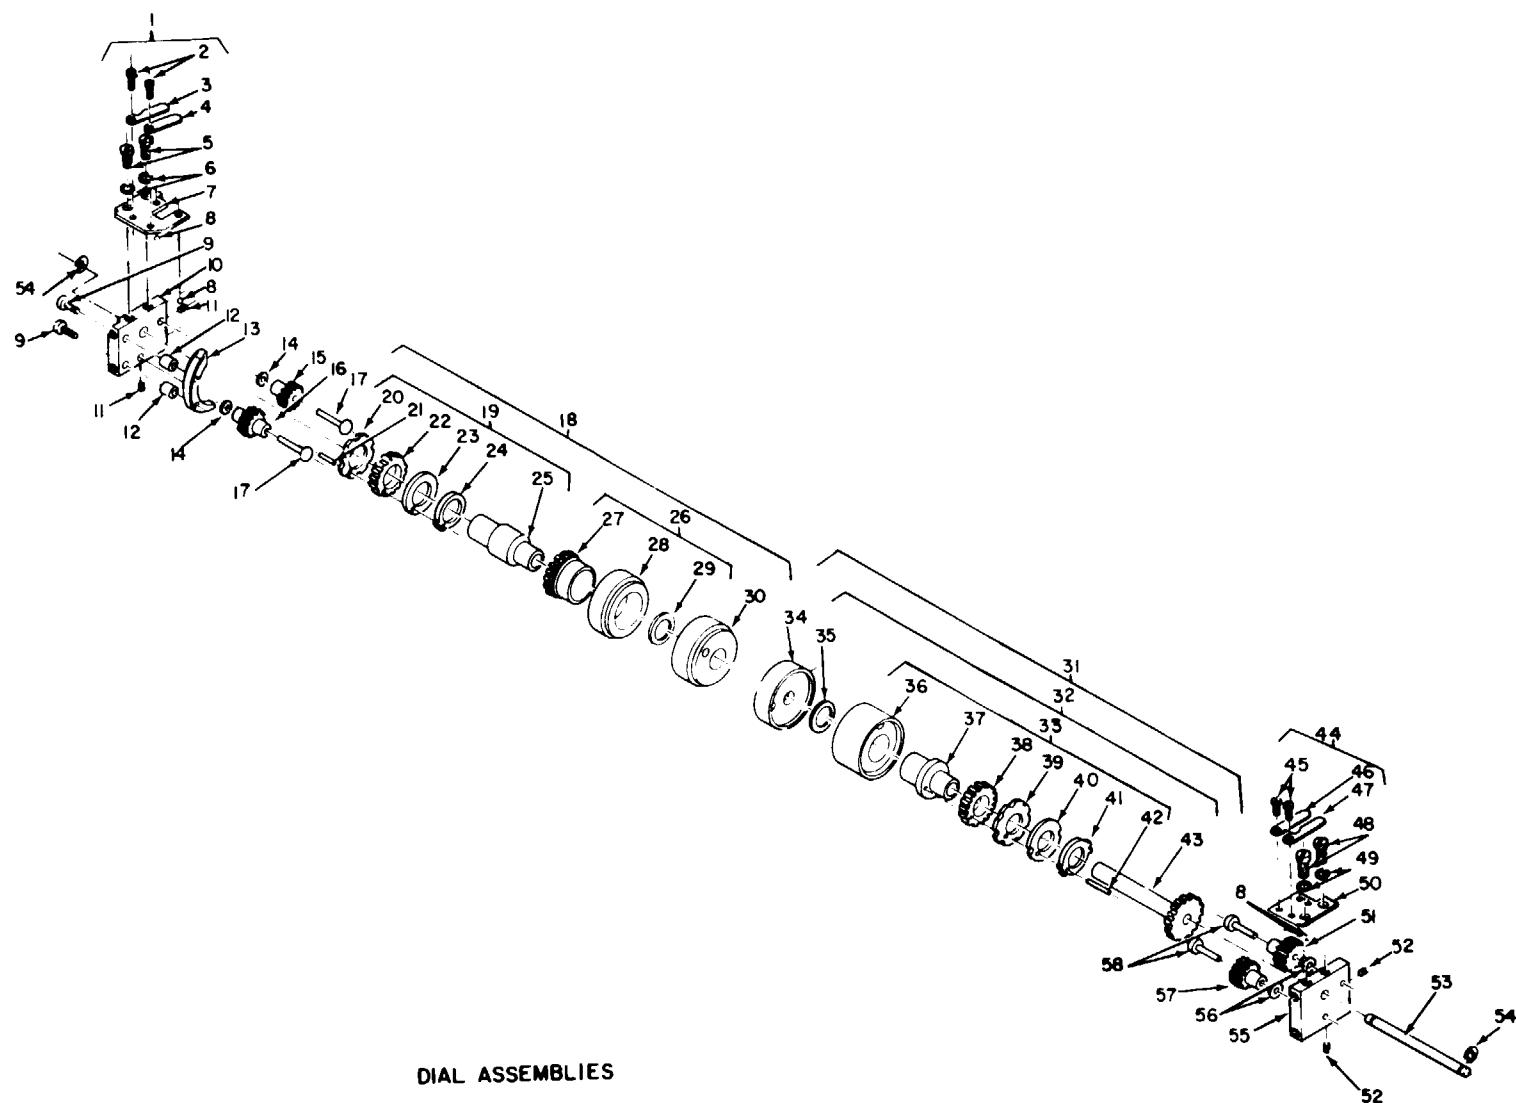


ELIN043

Figure 27. Radio Set, Control, C-7197/ARC-134, Dial Assemblies.

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION <i>USABLE ON CODE</i>	(7) UM	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							
27		XDHZZ		72541-1	65597	GEAR, DIAL, DIALING.	EA	1
27		XDHZZ		GP1-047X312-12	73957	PIN, GRVD, HEADLESS.	EA	1
27		XDHZZ		75632-1	65597	GAER, SPUR	EA	1
27		XDHZZ		117662-1	65597	BLOCK SUBASSEMBLY	EA	1
27		PAHZZ	5305-00-840-9313	302711-1	65597	SCREW, MACHINE	EA	1
27		PAHZZ	5360-00-023-9508	61239-1	65597	SPRING, FLAT	EA	1
27		PAHZZ	5360-00-023-9379	61238-1		SPRING, FLAT	EA	1
27		PAHZZ	5305-00-524-0750	101001-0400	65597	SCREW, MACHINE	EA	2
27		XDHZZ	5310-00-543-4652	MS35333-69	96906	WASHER, LOCK	EA	1
27		XDHZZ		284526-1	65597	PLATE, FRAC DIAL DTT	EA	1
27		XDHZZ		72543-1	65597	GEAR, SPUR	EA	1
27		XDHZZ		302720-1	65597	SETSCREW	EA	2
27		PAHZZ	3040-00-880-0497	71595-1	65597	SHAFT, STRAIGHT	EA	1
27		PAHZZ	5365-00-816-4239	5133-12MD	79136	RING, RETAINING	EA	2
27		XDHZZ		78071-1	65597	BLOCK, SWITCH	EA	1
27		PAHZZ	5365-00-935-8945	276373-0001		SHIM	EA	V
27		XDHZZ		2539-1	65597	GEAR, HELICAL	EA	1
27		XDHZZ		302019-1	65597	STUD, XFR PIN MTG	EA	2

(1) ILLUSTRATION		(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE						
27	1	PAHHH	5821-00-738-2856	117447	65597	BLOCK, MOUNTING	EA	1
27	2	PAHZZ	5305-00-840-3913	302711-1	65597	SCREW, MACHINE	EA	2
27	3	PAHZZ	5360-00-023-9508	61239-1	65597	SPRING, FLAT	EA	1
27	4	PAHZZ	5360-00-023-9387	61237-1	65597	SPRING, FLAT	EA	1
27	5	PAHZZ	5305-00-524-0750	101001-0400	65597	SCREW, MACHINE	EA	2
27	6	XDHZZ	5310-00-543-4652	MS35333-69	96906	WASHER, LOCK	EA	2
27	7	XDHZZ		284525-1	65597	PLATE, DIAL DETENT	EA	1
27	8	PAHZZ	3110-00-183-7537	MS19060-17	96906	BALL, BEARING	EA	4
27	9	XDHZZ	5305-00-725-4191	MS51959-7	96906	SCREW, MACHINE	EA	2
27	10	XDHZZ		77917-1	65597	BLOCK, SWITCH LEFT	EA	1
27	11	XDHZZ		302720-1	65597	SETScrew	EA	2
27	12	XDHZZ		270255-1	65597	SPACER, SLEEVE	EA	2
27	13	XDHZZ		82316-1	65597	DIAL SEG, NUM ONE	EA	1
27	14	PAHZZ	5365-00-935-8945	276373-0001	65597	SHIM	EA	V
27	15	XDHZZ		72530-1	65597	GEAR, SPUR	EA	1
27	16	XDHZZ		72538-1	65597	GEAR, HELICAL	EA	1
27	17	XDHZZ		302019-1	65597	STUD, XFR PIN MTG	EA	2
27	18	PAHHH	5821-00-736-5879	117405-1	65597	DIAL ASSEMBLY	EA	1
27	19	XDHHH		75630-1	65597	SLEEVE ASSY	EA	1
27	20	XDHZZ		10841-1	65597	DETENT, DIAL	EA	1
27	21	XDHZZ		GP1-047X312-12	73957	PIN, GRVD, HEADLESS	EA	1
27	22	XDHZZ		72527-1	65597	GEAR, HELICAL	EA	1
27	23	XDHZZ		10838-1	65597	DISC, DIAL LOCKING	EA	1
27	24	XDHZZ		72540-1	65597	GEAR, DIAL DRIVING	EA	1
27	25	XDHZZ		77935-1	65597	DIAL MECHANISM BODY	EA	1
27	26	XDHHH		118042-001	65597	DIAL ASSY, TENS, FREQ	EA	1
27	27	XDHZZ		75639-1	65597	GEAR, SPUR	EA	1
27	28	XDHZZ		82326-1	65597	DIAL, CONTROL	EA	1
27	29	XDHZZ		276343-1	65597	SHIM	EA	1
27	30	XDHZZ		82327-1	65597	DIAL CONTROL	EA	1
27	31	PAHHH	5821-00-736-5877	117404-1	65597	DIAL ASSEMBLY	EA	1
27	32	XDHHH		119044-0001	65597	DIAL ASSEMBLY	EA	1
27	33	XDHHH		75631-1	65597	SLEEVE ASSEMBLY	EA	1
27	34	XDHZZ		82330-1	65597	DIAL, CONTROL	EA	1
27	35	XDHZZ		276343-1	65597	SHIM	EA	1
27	36	XDHZZ		82328-1	65597	DIAL, CONTROL	EA	1
27	37	XDHZZ		77936-1	65597	DIAL MECHANISM BODY	EA	1
27	38	XDHZZ		72544-1	65597	GEAR, HELICAL	EA	1
27	39	XDHZZ		10842-1	65597	DENTENT, DIAL	EA	1
27	40	XDHZZ		10837-1	65597	DISC, DIAL LOCK	EA	1

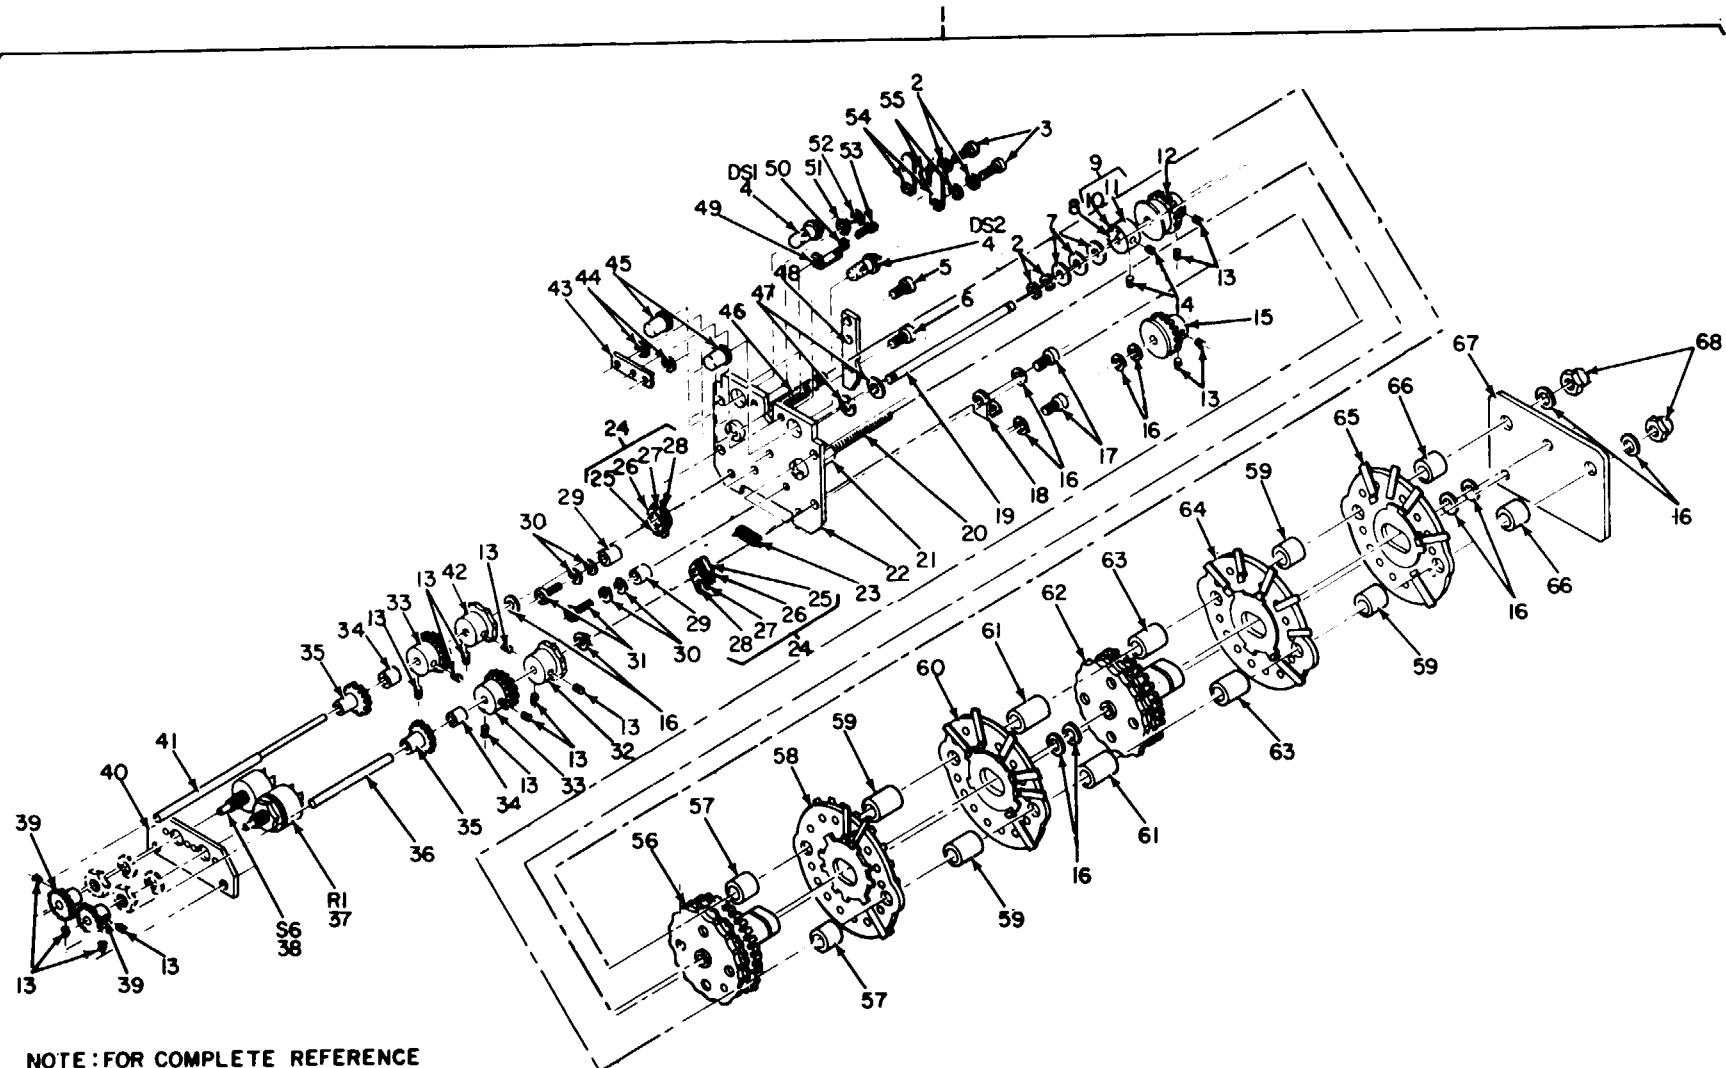

ELIJN044


Figure 28. Radio Set, Control, C-7197/ARC-134, Switch Assembly.

(1) ILLUSTRATION	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION	(7)	(8) QTY INC IN UNIT
						USABLE ON CODE	
(1) FIG. NO.	(2) ITEM NO.						
28	1	PAHHH	5930-00-832-6461	117666-1	65597	SWI TCH ASSEMBLY	EA 1
28	2	XDHZZ	5310-00-595-6211	MS15795-803	96906	WASHER, FLAT	EA 2
28	3	PAHZZ	5305-00-054-5649	MS51957-15	96906	SCREW, MACHINE	EA 2
28	4	PAHZZ	6240-00-080-2012	327AS15	71744	LAMP, INCANDESCENT	EA 2
28	5	XDHZZ		302718-1	65597	SCREW, MACHINE	EA 1
28	6	XDHZZ	5305-00-922-8778	MS35275-203		SCREW, MACHINE	EA 1
28	7	XDHZZ		60829-1	65597	WASHER, KEY	EA 3
28	8	XDHZZ		60830-3	65597	PIN, STR, HEADLESS	EA 1
28	9	XDHZZ	5821-00-890-0444	72520-2	65597	GEARSECTOR ASSY	EA 1
28	10	PAHZZ	5970-00-905-9220	75646-1	65597	INSULATOR, BUSHING	EA 2
28	11	XDHHH		60830-4	65597	COLLAR, STOP	EA 1
28	12	XDHZZ		60830-5	65597	COLLAR, STOP	EA 1
28	13	XDHZZ		302720-1	65597	SETSCREW	EA 16
28	14	XDHZZ		MS51053-127		SETSCREW	EA 2
28	15	XDHZZ	5821-00-736-5855	72521-1	65597	GEAR SECTOR ASSY.	EA 1
28	16	XDHZZ	5310-00-880-5976	MS15795-806		WASHER, FLAT	EA V
28	17	XDHZZ	5905-00-066-7326	MS24693C24	96906	SCREW, MACHINE	EA 2
28	18	PAHZZ	5940-00-156-7431	75-120	79963	TERMINAL, LUG	EA 1
28	19	XDHZZ		71590-1	65597	SHAFT, STRAIGHT.	EA 1
28	20	XDHZZ		302710-1	65597	SCREW, COMM MFR STK.	EA 2
28	21	XDHZZ		270283-1	65597	POST, ELEC-MECH.	EA 1
28	22	XDZHZ		284483-2	65597	PLATE, SWI TCH MTG.	EA 1
28	23	PAHZZ	5360-00-023-9545	10851-1	65597	SPRING, HLEXT	EA 1
28	24	PAHHH	5821-00-736-5887	117443-1	65597	ARM ASSEMBLY, DETENT	EA 2
28	25	XDHZZ		10850-1	65597	ANCHOR, SPRING	EA 2
28	26	XDHZZ		10847-1	65597	ARM, DETENT LEVER.	EA 4
28	27	XDHZZ		10848-1	65597	SAPCER, SLEEVE	EA 2
28	28	XDHZZ		10849-1	65597	SLEEVE, ROLLER BRG	EA 2
28	29	XDHZZ		75645-1	65597	SPACER, SLEEVE	EA 2
28	30	PAHZZ	5310-00-785-2129	76102	65597	WASHER, NONMETALLIC	EA 4
28	31	XDHZZ	5305-00-054-5649	MS3557-15	96906	SCREW, MACHINE.	EA 2
28	32	XDHZZ	5821-00-736-5872	10846-1	65597	DETENT, TRANSCIVER.	EA 1
28	33	XDHZZ	3020-00-736-5792	72515-1	65597	GEAR, HELICAL.	EA 2
28	34	XDHZZ		270282-1	65597	SPACER, SLEEVE.	EA 2
28	35	XDHZZ	3020-00-736-5967	72545-1	65597	GEAR, SPUR.	EA 2
28	36	XDHZZ		71580-1	65597	SHAFT, SHOULDERED.	EA 1
28	37	PAHZZ	5905-00-878-4666	GA2G032F5018A	01121	RESISTOR, VARIABLE.	EA 1
28	38	PAHZZ	5930-00-947-7378	10939	17870	SWI TCH, ROTARY	EA 1
28	39	XDHZZ		72514-1	65597	GEAR, SPUR.	EA 2
28	40	XDHZZ		284485-1	65597	PLATE, MTG, RES-SW	EA 1

SECTION III

TM11-5821-277-34P

(1) ILLUSTRATION	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER		(6) DESCRIPTION	(7) U/M	(8) QTY INC IN UNIT
28 41	XDHZZ		71587-1	65597	SHAFT, SHOULDERED	EA	1
28 42	XDHZZ	5821-00-736-5871	10845-1	65597	DETENT, TRANSCEIVER	EA	1
28 43	XDHZZ		77937-1	65597	TAP BAR, DI AL LI GHT	EA	1
28 44	PAHZZ	5365-00-935-8945	276373-0001	65597	SHIM	EA	V
28 45	PAHZZ	6210-00-832-9039	1813-2AVI ATIONRE D	97539	FILTER, PANEL LI GHT	EA	2
28 46	XDHZZ		270448-0001	65597	POST, ELEC-MECH EOPT.	EA	1
28 47	PAHZZ	5365-00-816-4239	5133-12ND	79136	RING, RETAINER.	EA	1
28 48	XDHZZ		284852-2	65597	PLATE, REAR BAR.	EA	1
28 49	XDHZZ	5940-00-259-9057	341-098	79963	TERMINAL, LUG	EA	1
28 50	XDHZZ		1947-1	71279	TERMINAL, STUD.	EA	1
28 51	XDHZZ	5310-00-550-3715	MS35333-70	96906	WASHER, LOCK	EA	2
28 52	PAHZZ	5310-00-928-2690	MS35338-134	96906	WASHER, LOCK	EA	2
28 53	XDHZZ	5305-00-054-5635	MS51957-1	96906	SCREW, MACHINE.	EA	1
28 54	PAHZZ	5999-00-401-9608	82335-1	65597	CONTACT, ELECTRICAL.	EA	2
28 55	XDHZZ		MS35337-78	96906	WASHER, LOCK	EA	2
28 56	XDHZZ	5821-00-890-0442	072576-0001	65597	GEAR, MAIN SHAFT	EA	1
28 57	PAHZZ	5970-00-723-9685	270288-3	65597	INSULATOR, BUSHING	EA	2
28 58	PAHZZ	5930-00-811-8250	34992-720LR	82104	SWITCH SECTION, RTRY	EA	1
28 59	PAHZZ	5970-00-723-9686	270288-4	65597	INSULATOR, BUSHING	EA	4
28 60	XDHZZ		34995-720LR	82104	SWITCH SECTION, RTRY	EA	1
28 61	PAHZZ	5970-00-904-6251	270288-5	65597	INSULATOR, BUSHING	EA	2
28 62	XDHZZ	5821-00-890-0443	072576-0002	65597	GEAR, MAIN SHAFT	EA	1
28 63	PAHZZ	5970-00-723-9684	270288-2	65597	INSULATOR, BUSHING	EA	2
28 64	XDHZZ		34994-720LR	82104	SWITCH SECTION, RTRY.	EA	1
28 65	PAHZZ	5930-00-811-8251	34993-720LR	82104	SWITCH SECTION, RTRY	EA	1
28 66	PAHZZ	5970-00-723-9683	270288-1	65597	INSULATOR, BUSHING	EA	2
28 67	XDHZZ		284494-1	65597	STOP PLATE, VHF COMM.	EA	1
28 68	PAHZZ	5310-00-274-8321	22NKM62	72962	NUT, SLFLKG, CAP	EA	2

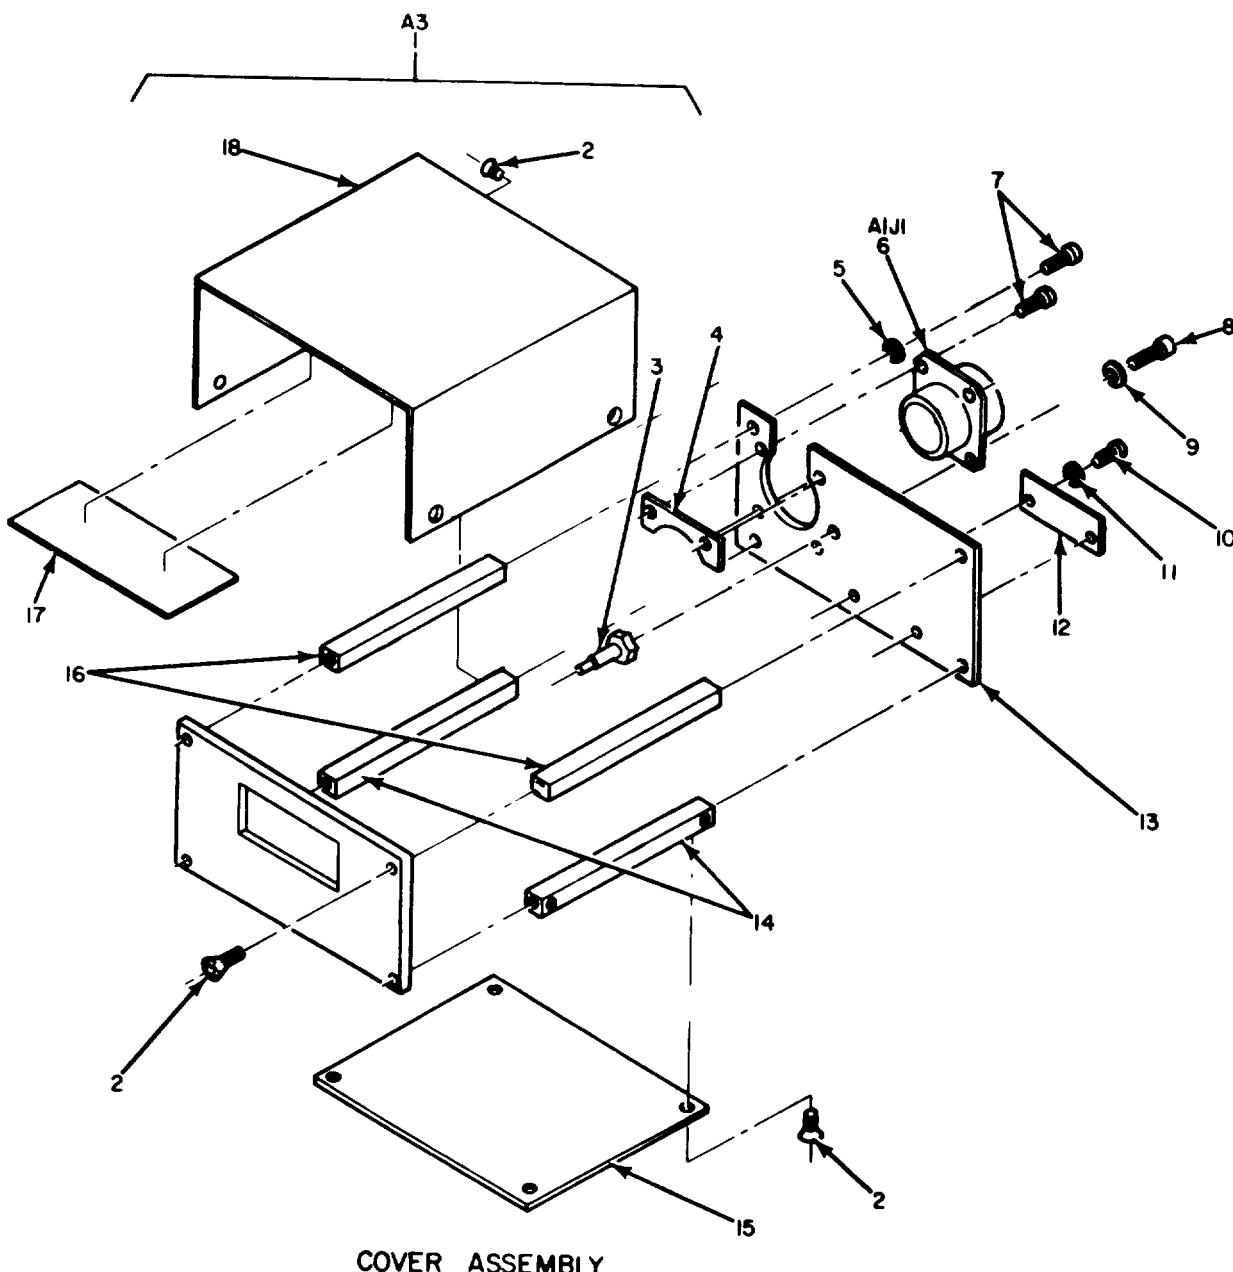

NOTE: FOR COMPLETE REFERENCE DESIGNATION PREFIX WITH 2

ELIJNO45

Figure 29. Radio Set, Control, C-7197/ARC-134, Cover Assembly.

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) QTY U/M	(8) INC IN UNIT
29	1	XDH ^{HH}		89800-2	65597	COVER, ELEC SWI TCH.	EA	1
29	2	XDH ^{ZZ}	5305-00-770-2533	AN505C4R4	88044	SCREW, MACHI NE.	EA	12
29	3	XDH ^{ZZ}	5999-00-401-9608	82335-1	65597	CONTACT, ELECTRI CAL	EA	1
29	4	XDH ^{ZZ}		284786-1	65597	PLATE, COVER STRI P.	EA	1
29	5	XDH ^{ZZ}	5310-00-93-8118	MS35338-135	96906	WASHER, LOCK	EA	4
29	6	PAH ^{ZZ}	5935-00-051-4779	PT02A20-39PY	77820	CONNECTOR, RCPT, ELEC.	EA	1
29	7	XDH ^{ZZ}	5305-00-054-5648	MS51957-14	96906	SCREW, MACHI NE.	EA	4
29	8	XDH ^{ZZ}	5305-00-054-5649	MS51957-15	96906	SCREW, MACHI NE.	EA	1
29	9	XDH ^{ZZ}		MS35333-70	96906	WASHER, FLAT	EA	1
29	10	XDH ^{ZZ}	5305-00-054-5635	MS51957-1	96906	SCREW, MACHI NE.	EA	2
29	11	XDH ^{ZZ}	5310-00-928-2690	MS35338-134		WASHER, LOCK.	EA	2
29	12	XDH ^{ZZ}		267393-23	65597	PLATE, I DENT	EA	1
29	13	XDH ^{ZZ}		284787-2	65597	PLATE, RTNG, ELEC.	EA	1
29	14	PAH ^{ZZ}	5340-00-236-3837	77934-1	65597	POST, ELEC-MECH EOPT	EA	2
29	15	XDH ^{ZZ}		89696-1	65597	COVER, ELEC SWITCH	EA	1
29	16	PAH ^{ZZ}	5340-00-251-4229	078221-0001	65597	POST, ELEC-MECH EOPT	EA	2
29	17	XDH ^{ZZ}		28225-1	65597	INSULATOR, PLATE	EA	1
29	18	XDH ^{ZZ}		89800-1	65597	COVER, ELEC SWI TCH.	EA	1

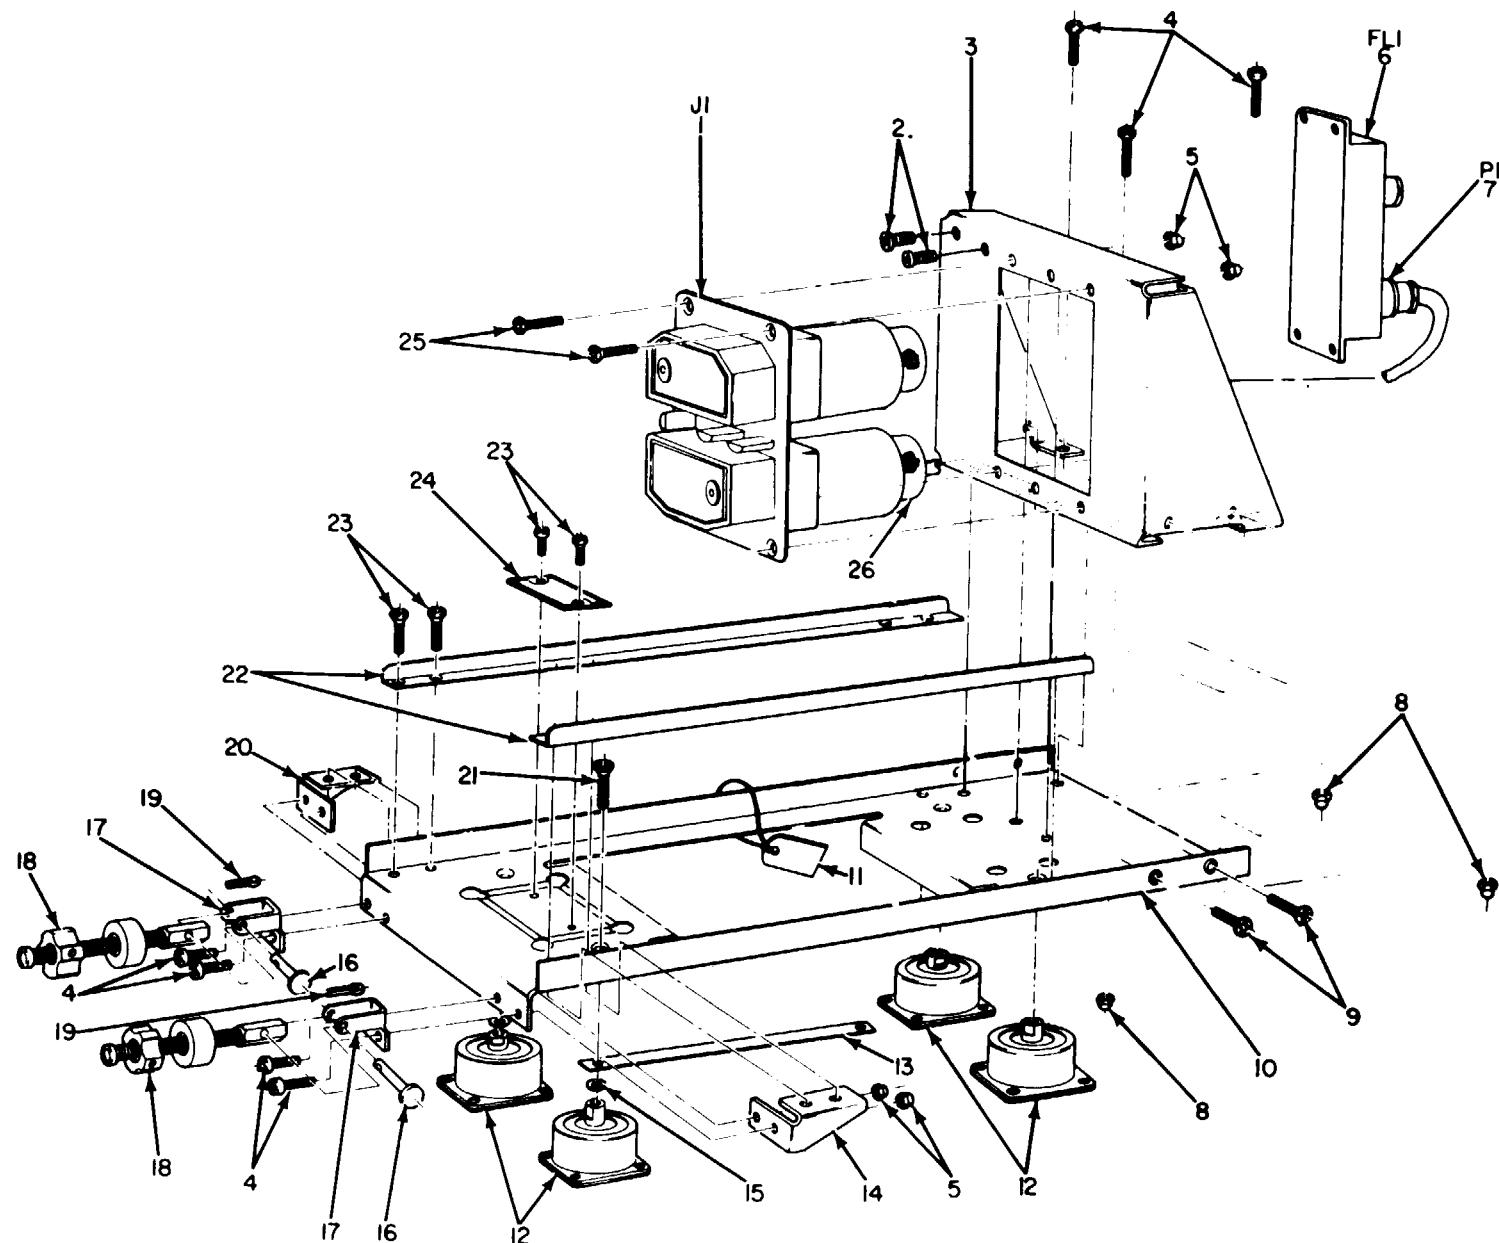


Figure 30. Mountings MT-3791A/ARC-134 and MT-3791B/ARC-134.

ELIJN046

(1) ILLUSTRATION (a) FIG NO.		(2) SMR CODE	(3) NATIONAL S T O C K NUMBER	(4) P A R T NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
30	1	XDFZZ	5935-00-951-5033	DPX2F40C1SF40C1S 33B0003	71468	GROUP 03 MOUNTING MT-3791A/ARC-134 AND MT-37918/ARC-134 CONNECTOR, RCPT, ELEC.	2AU,5DE	EA 1
30	1	PAFZZ	5935-00-412-9251	DPX2J44877	71648	CONNECTOR, RCPT, ELEC.	5DF	EA 1
30	2	XDFZZ	5305-00-054-5648	MS51957-14	96906	SCREW, MACHINE.		EA 6
30	3	XDFZZ		092640-0001	65597	BRACKET, CONN MTG.		5DF EA 1
30	3	XDFZZ		092640-0002	65597	BRACKET, CONN MTG.		EA 1
30	4	XDFZZ	5305-00-054-6652	MS51957-28	96906	SCREW, MACHINE		EA 10
30	5	XDFZZ	5310-00-982-4999	MS21044C04	96906	NUT, SLFLKG, HEXAGON		EA 4
30	6	PAFFF	5915-00-494-3405	5451D	70998	FI LTER, LOW PASS.		EA 1
30	7	PAFZZ	5935-00-835-0508	UG88GU	80058	CONNECTOR, PLUG, ELEC.		5DF EA 1
30	8	XDFZZ	5310-00-728-2434	68NM107-62	72962	NUT, SLFLKG, HEXAGON		EA 10
30	9	XDFZZ	5305-00-225-6400	MS24693C3	96906	SCREW, MACHINE		EA 6
30	10	XDFZZ	5821-00-165-3042	088418-0001	65597	RACK, SHOCK MOUNT.		EA 1
30	11	XDFZZ		104839-0002	65597	PLATE, I NSTRUCTI ON.		EA 1
30	12	PAFZZ	5340-00-089-6335	J5572-243	76005	MOUNT, RESILI ENT.		EA 4
30	13	XDFZZ		81572	65597	STRAP, BONDING		EA 1
30	14	XDFZZ		082534-0001	65597	GUSSET, RI GHT		EA 1
30	15	XDFZZ	5310-00-167-0812	AN960C10L	88044	WASHER, FLAT		EA 4
30	16	XDFZZ	5315-00-811-1265	MS20392-1C15	96906	PIN, STRAI GHT, HEADED		EA 2
30	17	PAFZZ	5340-00-075-3894	60876-1	65597	HINGE, HOLDOWN.		EA 2
30	18	XDFZZ	5325-00-966-9555	1288-245	04665	CLAMP, HOLDOWN		EA 2
30	19	XDFZZ		AN381-1-8	88044	PIN, COTTER		EA 2
30	20	XDFZZ		082534-0002	65597	GUSSET, LEFT		EA 1
30	21	XDFZZ	5305-00-079-5835	MS24693C50	96906	SCREW, MACHINE		EA 4
30	22	XDFZZ		81545	65597	RAIL, GUI DE		EA 2
30	23	XDFZZ	5305-00-056-9961	MS42693C4	96906	SCREW, MACHINE		EA 4
30	24	XDFZZ		266015-0004	65597	PLATE, I DENT.	2AU,5DE	EA 1
30	24	XDFZZ		266093-0001	65597	PLATE, I DENT.		5DF EA 1
30	25	XDFZZ	5305-00-066-7325	MS24693C5	96906	SCREW, MACHINE		EA 4
30	26	PAFZZ	5935-00-755-5793	DPX2-20745-8	71468	SHIELD, ELEC CONN.		EA 2

SECTION IV
NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX

TM11-5821-277-34P

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5910-00-022-6000	14	16	5910-00-059-1377	23	3
5360-00-023-9379	27	47	5910-00-059-1378	14	13
5360-00-023-9387	27	4	5910-00-059-1378	21	6
5360-00-023-9508	27	3	5325-00-059-3794	3	15
5360-00-023-9508	27	46	5325-00-059-3794	5	7
5360-00-023-9545	28	23	5910-00-060-1189	6	39
5910-00-050-7367	19	3	5340-00-061-2016	16	3
5935-00-051-4779	29	6	5910-00-064-0838	15	15
5961-00-051-6157	5	18	5910-00-064-4706	8	3
5961-00-051-8921	22	8	5910-00-064-8492	21	23
5950-00-053-8538	21	14	5305-00-066-7325	21	4
5950-00-053-8540	14	48	5305-00-066-7326	30	25
5950-00-053-8542	14	46	5305-00-066-7328	6	14
5950-00-053-8542	21	13	5945-00-067-7917	6	1
5950-00-053-8542	23	9	5910-00-068-1332	4	49
5950-00-053-8543	14	51	5910-00-068-3871	20	15
5950-00-053-8543	19	7	5910-00-068-3887	14	19
5950-00-053-8543	19	51	5340-00-075-3894	30	29
5950-00-053-8543	19	7	5910-00-078-6353	30	17
5950-00-053-8543	19	7	5915-00-078-7291	12	7
5950-00-053-8543	19	7	5955-00-078-7752	14	37
5950-00-053-8543	19	7	5955-00-078-7753	17	36
5950-00-053-8543	19	7	5955-00-078-7754	17	30
5305-00-054-5635	21	45	5955-00-078-7756	17	34
5305-00-054-5635	28	53	5955-00-078-7758	17	31
5305-00-054-5635	29	10	5955-00-078-7767	17	37
5305-00-054-5636	10	73	5955-00-078-7785	17	32
5305-00-054-5636	11	13	5305-00-079-5835	16	22
5305-00-054-5636	13	26	6240-00-080-2012	30	21
5605-00-054-5636	20	14	6240-00-080-2012	26	28
5305-00-054-5637	4	5	5910-00-081-0274	28	4
5305-00-054-5637	4	10	5961-00-089-0499	9	7
5305-00-054-5637	14	81	5910-00-089-3284	21	17
5305-00-054-5637	14	81	5340-00-089-6335	14	18
5305-00-054-5637	14	81	5905-00-101-7892	30	12
5305-00-054-5637	14	81	5910-00-104-0144	8	20
5305-00-054-5637	14	81	5910-00-104-0144	22	3
5305-00-054-5637	14	81	5910-00-104-0144	24	6
5305-00-054-5637	14	81	5910-00-104-5849	14	25
5305-00-054-5647	3	7	5905-00-106-1247	8	12
5305-00-054-5647	4	31	5910-00-109-0031	9	10
5305-00-054-5647	10	60	5910-00-109-0034	9	9
5305-00-054-5647	15	14	5910-00-109-0034	16	5
5305-00-054-5648	3	19	5910-00-109-0034	17	2
5305-00-054-5648	6	36	5910-00-109-0034	19	2
5305-00-054-5648	10	19	5910-00-109-0034	20	22
5305-00-054-5648	10	19	5910-00-109-0034	22	4
5305-00-054-5648	11	7	5935-00-110-7466	16	18
5305-00-054-5648	26	11	5935-00-110-7466	17	17
5305-00-054-5648	29	7	5935-00-110-7466	18	19
5305-00-054-5648	30	2	5935-00-110-7466	19	16
5305-00-054-5649	3	10	5935-00-110-7466	20	18
5305-00-054-5649	5	11	5935-00-110-7466	21	43
5305-00-054-5649	6	5	5935-00-110-7466	22	31
5305-00-054-5649	8	27	5935-00-110-7466	23	49
5305-00-054-5649	10	6	5935-00-110-7466	24	38
5305-00-054-5649	10	21	5935-00-110-7466	25	49
5305-00-054-5649	10	29	5910-00-110-7850	12	32
5305-00-054-5649	10	29	5905-00-121-9861	8	17
5305-00-054-5649	28	3	5905-00-121-9861	23	13
5305-00-054-5649	28	31	6150-00-134-5541	12	45
5305-00-054-5649	29	8	5898-00-141-3756	4	50
5305-00-054-5650	10	78	5940-00-155-7685	12	34
5305-00-054-5651	3	37	5940-00-156-7344	6	10
5305-00-054-5651	4	14	5940-00-156-7431	28	18
5305-00-054-5651	5	15	5940-00-159-1252	6	35
5305-00-054-5652	3	59	5821-00-165-3042	30	10
5305-00-054-5652	5	16	5310-00-167-0812	5	3
5305-00-054-5652	13	10	5310-00-167-0812	30	15
5305-00-054-5652	26	11	5975-00-177-2077	1	3
5305-00-057-5655	10	4	5940-00-177-6730	3	1
5305-00-054-5656	10	39	5940-00-177-6730	21	56
5305-00-054-6651	6	22	5940-00-177-6731	3	43
5305-00-054-6652	30	4	5940-00-177-6731	12	39
5305-00-054-6654	10	53	5940-00-177-6732	3	2
5305-00-054-6655	3	62	5940-00-177-6732	10	82
5305-00-056-9961	30	23	5940-00-177-6732	12	43
5310-00-058-2950	20	1	5940-00-177-6732	15	7
5910-00-059-1375	12	46	5940-00-177-6733	8	29
5910-00-059-1375	14	14	3110-00-183-7537	27	8

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-190-8880	25	43	5910-00-420-2926	12	32
5905-00-190-8881	22	25	5950-00-422-3484	11	21
5905-00-190-8881	25	27	5950-00-433-5843	11	6
5905-00-190-8887	23	40	5955-00-443-2977	16	20
5905-00-192-0390	8	23	5955-00-443-2981	16	19
5935-00-192-4729	3	53	5955-00-443-2982	16	21
5905-00-195-6806	25	32	5905-00-443-7032	1	18
5961-00-199-6008	5	13	5910-00-443-7059	12	36
5365-00-200-2637	13	23	5910-00-453-4853	12	29
5360-00-201-0272	26	3	5910-00-453-4854	17	6
5305-00-207-7463	26	15	5305-00-455-2642	10	61
5970-00-221-5103	10	11	5905-00-455-7690	25	39
5340-00-221-6459	15	16	5910-00-456-4454	24	4
5340-00-221-6464	15	10	5910-00-456-4454	25	4
5340-00-221-6467	15	11	5910-00-456-8280	17	3
5340-00-221-6467	15	17	5955-00-456-8391	17	22
5315-00-222-1588	4	17	5955-00-457-7300	17	27
5305-00-225-6400	3	13	5910-00-462-6199	12	44
5305-00-225-6400	4	23	5950-00-468-2392	11	17
5305-00-225-6400	6	12	5307-00-475-1172	3	22
5305-00-225-6400	30	9	5950-00-477-7563	9	17
5970-00-235-2068	9	36	5821-00-477-9954	14	6
5995-00-235-2097	14	103	5970-00-488-1796	10	9
5995-00-235-2098	14	96	5970-00-488-1819	10	38
5340-00-235-2431	10	10	5365-00-488-3948	15	23
5340-00-235-2464	3	42	5365-00-488-3949	6	16
3120-00-236-3549	10	49	5940-00-488-5400	22	10
5340-00-236-3837	29	14	5940-00-488-5401	22	9
5310-00-241-6562	3	24	5940-00-488-5402	2	8
5330-00-242-5852	14	83	5940-00-488-5403	8	2
5330-00-242-5856	14	88	5940-00-489-2731	8	26
5330-00-242-5860	3	30	5955-00-489-9994	17	23
5330-00-242-5860	14	89	5915-00-494-3405	30	6
5330-00-242-5860	20	4	5955-00-498-5371	17	33
5310-00-245-8804	26	27	5955-00-498-8169	17	35
5340-00-247-4079	10	85	5940-00-502-3726	11	20
5950-00-249-8099	9	13	5940-00-518-8569	9	45
5950-00-249-8101	9	14	5940-00-518-8569	11	25
5340-00-251-4229	29	16	5365-00-520-1679	2	11
5340-00-251-4233	10	79	5365-00-520-1679	15	28
5905-00-252-1673	21	41	5995-00-522-3943	3	60
5950-00-253-5110	10	40	5305-00-524-0750	27	5
5950-00-253-5111	10	68	5305-00-524-0750	27	48
5940-00-259-9057	28	49	5310-00-524-0825	3	45
5940-00-270-3274	9	37	5310-00-524-8024	3	48
5940-00-270-3274	11	1	5310-00-524-8024	14	82
5310-00-270-8810	5	20	5821-00-531-9250	2	1
			5310-00-531-9514	10	51
			5325-00-543-2418	26	2
5905-00-279-1692	8	22	5310-00-543-4652	27	6
5905-00-279-1724	24	15	5310-00-543-4652	27	49
5905-00-279-1870	25	36	5310-00-550-3715	3	38
5905-00-279-2552	25	33	5310-00-550-3715	4	15
5905-00-279-3506	25	45	5310-00-550-3715	5	17
5905-00-279-3509	24	32	5310-00-550-3715	6	34
5905-00-279-3517	4	32	5310-00-550-3715	28	51
5905-00-279-3527	3	3	5961-00-556-2091	4	44
5940-00-280-0600	16	30	5961-00-556-2091	14	31
5940-00-280-0600	19	23	5961-00-556-2091	16	10
5940-00-280-0600	20	16	5961-00-556-2091	17	9
5940-00-280-0600	22	32	5961-00-556-2091	18	7
5940-00-280-0600	23	50	5961-00-556-2091	19	6
5940-00-280-0600	24	40	5961-00-556-2091	21	12
5940-00-280-0600	25	53	5961-00-556-2091	23	8
5935-00-283-1269	3	52	5961-00-556-2091	25	12
5310-00-285-7037	10	83	5307-00-570-7197	6	8
5325-00-291-9360	26	4	5307-00-570-7197	6	19
5970-00-356-0550	10	25	5307-00-570-7197	10	91
5999-00-401-9608	28	54	5307-00-570-7197	12	12
5999-00-401-9608	29	3	5961-00-577-6181	8	7
5821-00-401-9643	14	10	5961-00-577-6181	21	12
5821-00-402-5305	10	30	5961-00-577-6181	21	10
5950-00-404-5561	10	22	5961-00-577-6181	22	7
5950-00-404-5597	12	22	5355-00-588-3095	3	51
5821-00-406-3437	3	20	5310-00-595-6211	3	11
5821-00-406-7344	3	31	5310-00-595-6211	4	16
5935-00-412-9251	30	1	5310-00-595-6211	10	2
5910-00-420-2897	16	9	5310-00-595-6211	10	8
5910-00-420-2899	12	32	5310-00-595-6211	10	23
5910-00-420-2899	14	28	5310-00-595-6211	10	27

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5310-00-595-6211	10	77	5905-00-683-7721	22	28
5310-00-595-6211	12	24	5905-00-683-7721	23	44
5310-00-595-6211	28	2	5905-00-683-7721	25	26
5340-00-598-0383	3	61	5905-00-683-7723	14	73
5310-00-614-3500	3	17	5905-00-683-7723	16	17
5310-00-614-3500	3	27	5905-00-683-7723	17	16
			5905-00-683-7723	18	17
5310-00-614-3500	4	25	5905-00-683-7723	19	12
5310-00-614-3500	5	1	5905-00-683-7723	21	24
5310-00-614-3500	6	6	5905-00-683-7723	22	26
5310-00-614-3500	10	24	5905-00-663-7723	25	29
5310-00-614-3500	12	2	5905-00-683-7724	14	77
5310-00-614-3500	12	20	5905-00-683-7724	19	10
5310-00-614-3500	13	3	5910-00-685-9700	21	9
5310-00-614-3500	14	91	5905-00-686-3121	21	38
5961-00-617-8864	24	12	5905-00-686-3122	24	30
5910-00-617-9345	9	8	5905-00-686-3129	4	40
5340-00-619-7754	3	9	5905-00-686-3129	8	16
5310-00-622-1724	13	25	5905-00-686-3129	22	23
5935-00-665-5718	11	15	5905-00-686-3129	25	25
5905-00-681-6462	8	24	5905-00-686-3131	25	23
5905-00-681-6462	9	22	5905-00-686-3356	16	15
5905-00-681-6462	18	14	5905-00-686-3356	17	14
5905-00-681-8817	21	41	5905-00-686-3356	19	13
5905-00-681-8818	14	63	5905-00-686-3356	20	27
5905-00-681-8818	16	14	5905-00-686-3358	21	28
5905-00-681-8818	17	13	5905-00-686-3368	21	33
5905-00-681-8818	19	11	5905-00-686-3368	23	14
5905-00-681-8818	20	24	5905-00-686-3368	25	46
5905-00-681-8818	21	39	5905-00-686-3369	8	14
5905-00-681-8818	25	42	5905-00-686-3370	9	25
5905-00-681-8823	21	41	5905-00-686-3370	14	59
5905-00-681-8853	23	46	5905-00-686-3370	17	15
5905-00-681-8854	22	21	5905-00-686-3370	21	26
5905-00-681-8856	21	41	5905-00-686-3387	23	20
5905-00-681-8857	21	41	5905-00-686-3798	9	23
5905-00-681-8957	21	41	5905-00-686-3798	14	65
5905-00-681-8958	21	41	5905-00-686-3798	16	13
5905-00-681-9021	21	41	5905-00-686-3798	17	12
5905-00-681-9022	21	41	5905-00-686-3798	19	14
5905-00-681-9969	8	21	5905-00-686-3798	20	20
5905-00-681-9969	21	35	5905-00-686-3798	23	39
5905-00-681-9969	24	34	5905-00-686-3798	24	18
5905-00-682-4097	9	30	5905-00-686-3838	14	76
5905-00-682-4097	14	69	5905-00-686-9994	14	62
5905-00-682-4097	18	12	5905-00-686-9996	9	29
5905-00-682-4097	21	23	5905-00-686-9996	21	25
5905-00-682-4097	23	45	5905-00-686-9996	24	22
5905-00-682-4098	8	25			
5905-00-682-4098	9	21			
5905-00-682-4098	14	55	5905-00-686-9998	14	70
5905-00-682-4098	22	19	5905-00-686-9998	19	9
5905-00-682-4098	24	28	5905-00-686-9998	21	29
5905-00-682-4100	24	24	5905-00-687-0000	8	11
5905-00-682-4101	21	27	5905-00-687-0002	8	11
5905-00-682-4101	25	47	5905-00-688-3738	18	16
5905-00-682-4108	22	16	5905-00-688-3738	21	22
5905-00-682-4109	9	24	5905-00-688-3738	24	19
5905-00-682-4109	21	31	5961-00-688-8080	9	41
5903-00-683-2236	14	57	5905-00-691-0195	25	44
5905-00-683-2236	21	21	5905-00-702-4439	23	26
5905-00-683-2238	14	67	5905-00-702-6458	23	32
5905-00-683-2238	18	15	5910-00-702-8584	10	74
5905-00-683-2238	21	36	5340-00-706-0315	2	6
5905-00-683-2238	22	17	5340-00-706-0315	15	25
5905-00-683-2238	23	15	5935-00-717-3127	5	9
5905-00-683-2238	25	24	5950-00-717-3274	9	15
5905-00-683-2239	14	72	5950-00-717-3274	12	47
5905-00-683-2239	18	18	5950-00-717-3274	14	44
5905-00-683-2240	18	34	5950-00-717-3275	3	56
5905-00-683-2241	14	78	5950-00-717-3279	14	45
5905-00-683-2241	21	32	5950-00-717-3282	10	67
5905-00-683-2241	22	18	5950-00-717-3282	12	8
5905-00-683-2242	9	28	5950-00-717-3282	14	49
5905-00-683-2242	14	75	5940-00-719-4142	12	23
9505-00-683-2246	8	11	5940-00-719-4142	21	51
5905-00-683-7720	9	27	5940-00-719-4142	24	46
5905-00-683-7721	9	31	5905-00-721-0597	24	27
5905-00-683-7721	14	61	5960-00-722-1044	10	5
5905-00-683-7721	18	13	5961-00-722-1175	14	54

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5961-00-722-1186	25	21	5821-00-736-5871	28	42
5961-00-722-1266	12	31	5821-00-736-5872	28	32
5961-00-722-1390	9	20	5821-00-736-5877	27	31
5961-00-722-1486	8	8	5821-00-736-5879	27	18
5310-00-722-5998	3	63	5821-00-736-5887	28	24
5310-00-722-5998	10	58	3020-00-736-5967	28	35
5310-00-722-5998	13	7	5821-00-736-5998	14	94
5910-00-723-4414	4	22	5821-00-736-5998	20	13
5910-00-723-4438	14	17	5821-00-736-6024	2	1
5910-00-723-4438	20	17	5621-00-736-6030	6	20
5910-00-723-4453	23	4	5340-00-736-6031	15	9
5910-00-723-4529	9	6	5821-00-736-6073	10	87
5910-00-723-5144	25	5	5821-00-736-6082	10	1
5910-00-723-5151	18	4	5821-00-736-6146	10	31
5910-00-723-5153	18	5	5821-00-738-2856	27	1
5910-00-723-5157	10	75	5961-00-752-0150	21	16
5905-00-723-5251	22	27	5961-00-752-0150	23	10
5905-00-723-5251	24	26	5961-00-752-0150	24	13
5905-00-723-5251	25	30	5961-00-752-0150	25	18
5970-00-723-9683	28	66	5905-00-752-3186	14	64
5970-00-723-9684	28	63	5910-00-752-4249	24	2
5970-00-723-9685	28	57	5935-00-755-5793	30	26
5970-00-723-9686	28	59	5950-00-759-9719	4	18
5821-00-725-2703	3	34	5950-00-759-9730	24	35
5821-00-725-2705	14	2	5950-00-759-9731	24	36
5821-00-725-2706	14	3	5940-00-761-1462	16	31
5821-00-725-2707	14	4	5940-00-761-1462	17	42
5821-00-725-2708	14	5	5940-00-761-1462	18	40
5821-00-725-2709	20	8	5940-00-761-1462	19	19
5821-00-725-2710	14	8	5940-00-761-1462	20	21
5821-00-725-2711	4	9	5940-00-761-1462	22	36
5821-00-725-2712	4	11	5940-00-761-1462	23	52
5821-00-725-2713	13	4	5940-00-761-1462	24	44
5915-00-725-2938	14	42	5940-00-761-1462	25	59
5915-00-725-2952	14	34	5950-00-762-6600	18	8
5915-00-725-2954	14	36	5950-00-762-6601	18	9
5915-00-725-2955	14	32	5955-00-762-7575	20	7
5915-00-725-2956	14	33	5905-00-764-4058	4	24
5915-00-725-2957	14	39	5905-00-764-4884	22	15
5915-00-725-2959	14	40	5950-00-765-4737	4	19
5915-00-725-2969	14	43	5905-00-766-8364	25	37
5970-00-725-2984	5	4	5305-00-770-2533	29	2
5950-00-725-3051	22	29	5961-00-773-7926	22	12
5305-00-725-4191	27	9	5905-00-775-0626	11	28
5915-00-725-6522	14	41	5905-00-775-0790	25	34
6210-00-725-6530	26	25	5910-00-777-4651	14	21
5821-00-726-0425	3	18	5905-00-780-2506	24	20
5821-00-726-0426	14	7	5905-00-780-7883	23	29
5821-00-726-2816	14	9	5910-00-781-1154	24	9
5821-00-726-2818	4	3	5905-00-781-9160	24	17
5905-00-726-4413	14	68	5905-00-781-9160	25	22
5905-00-726-4413	21	30	5910-00-782-1996	10	97
5999-00-726-4805	10	17	5950-00-782-7242	12	37
4140-00-726-9656	10	76	5940-00-782-8942	11	24
5915-00-727-2601	14	38	5930-00-784-4206	13	20
5325-00-727-5899	15	4	5310-00-785-2129	10	26
5325-00-727-5900	25	51	5310-00-785-2129	13	11
5905-00-727-8001	14	71	5310-00-785-2129	28	30
5905-00-727-8001	21	40	5930-00-792-2491	3	50
5905-00-727-8001	23	28	5930-00-792-2551	13	12
5950-00-727-9228	16	11	5905-00-800-3481	9	33
5950-00-727-9228	17	10	5905-00-800-8063	14	56
5310-00-728-2434	4	33	5905-00-801-2377	24	14
5310-00-728-2434	6	2	5905-00-801-6998	24	29
5310-00-728-2434	6	33	5905-00-801-8272	9	26
5310-00-728-2434	30	8	5905-00-801-8272	14	74
5355-00-728-6448	26	21	5910-00-805-3618	22	6
5961-00-729-5499	23	7	5905-00-805-9713	24	25
5915-00-731-8211	22	10	5905-00-805-9714	14	58
5325-00-732-3651	3	12	5305-00-805-9748	3	49
5325-00-732-3651	5	5	5305-00-805-9748	13	5
5945-00-733-3404	4	45	5905-00-807-4954	14	80
5945-00-733-3407	4	42	5905-00-807-4954	16	16
5950-00-734-3934	14	47	5905-00-807-4954	21	20
5950-00-734-3934	18	10	5905-00-807-4954	24	21
5950-00-735-1803	22	30	5905-00-807-6269	22	24
5950-00-735-1803	25	48	5905-00-807-6269	25	28
5950-00-735-1804	24	37	5905-00-808-6136	19	15
3020-00-736-5792	28	33	5961-00-808-6241	25	20
5821-00-736-5855	28	15	5910-00-809-4701	8	2

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5910-00-809-4701	23	2	5905-00-847-2116	23	19
5905-00-809-8685	23	43	5940-00-847-3138	4	37
5905-00-810-1008	23	21	5940-00-847-3138	5	2
5315-00-811-1265	30	16	5940-00-847-3138	10	69
5930-00-811-8250	28	58	5940-00-847-3138	12	19
5930-00-811-8251	28	65	5905-00-847-5053	23	25
5905-00-812-2483	23	30	5961-00-849-4186	8	6
5310-00-812-4292	12	16	5950-00-852-1326	12	35
5365-00-816-4239	27	54	5905-00-852-2590	23	37
5365-00-816-4239	28	47	5961-00-852-5170	25	10
5320-00-817-0728	3	16	5961-00-852-5171	22	11
5320-00-817-0728	5	6	5905-00-854-8117	23	22
5905-00-817-7971	9	32	6145-00-855-4467	14	90
5905-00-817-7971	12	26	6145-00-855-4467	14	97
5905-00-817-7971	25	40	5910-00-858-4859	9	11
5970-00-818-3486	3	41	5935-00-867-0972	25	50
5970-00-818-3486	4	36	5310-00-875-5555	2	7
5970-00-818-3486	5	14	5310-00-875-5555	15	24
5320-00-820-9346	2	3	5905-00-878-4666	28	37
5320-00-820-9346	15	26	5961-00-879-3091	25	13
5945-00-821-2978	4	48	5310-00-880-5976	28	16
5320-00-821-4992	9	42	5821-00-890-0442	28	56
5320-00-821-4992	14	87	5821-00-890-0443	28	62
5320-00-821-4992	21	53	5821-00-890-0444	28	9
5935-00-823-0487	4	1	5910-00-890-8996	9	5
5935-00-823-0487	7	1	5910-00-890-8996	12	6
5955-00-823-9998	16	26	5910-00-890-8996	16	4
5955-00-823-9999	16	25	5905-00-894-4086	23	34
5955-00-824-0047	16	23	5865-00-896-1838	5	19
5955-00-824-0091	16	24	5910-00-899-4190	25	2
5955-00-824-0113	18	21	5910-00-901-2820	24	5
5955-00-824-0171	19	17	5950-00-902-3253	14	104
5955-00-824-0172	17	25	5905-00-902-4522	11	2
5955-00-824-0175	17	18	5961-00-902-7971	23	11
5955-00-824-0177	17	19	5940-00-904-4150	9	46
5955-00-824-0178	17	26	5940-00-904-4150	11	11
5955-00-824-0179	17	20	5970-00-904-6251	28	61
5955-00-824-0180	17	24	5970-00-905-9220	28	10
5955-00-824-0181	17	21	5910-00-908-0286	8	4
5955-00-824-0184	17	28	5305-00-908-2829	3	26
6210-00-824-5595	26	6	5305-00-908-2829	4	26
5961-00-824-9946	9	19	5355-00-913-9601	26	16
5961-00-824-9946	17	11	5910-00-915-8497	10	80
5961-00-824-9946	18	11	5910-00-915-8628	12	48
5961-00-824-9946	21	15	5340-00-916-5067	4	39
5905-00-825-5592	24	23	5950-00-921-5893	23	48
5905-00-831-6134	22	20	5305-00-922-8778	28	6
5910-00-832-5145	11	9	5905-00-923-2910	3	36
5910-00-832-5145	11	19	5961-00-923-7299	3	40
5910-00-832-5719	18	3	5961-00-923-7299	5	12
5910-00-832-5720	21	5	5905-00-926-8504	23	18
5910-00-832-6125	17	4	5905-00-926-8504	23	27
5910-00-832-6125	20	23	5905-00-926-8504	23	36
5930-00-832-6461	28	1	5905-00-926-8504	23	47
6210-00-832-7216	26	24	5905-00-926-8505	23	33
5935-00-832-7995	12	5	5905-00-926-8506	23	31
5910-00-832-8285	9	4	5310-00-928-2690	4	6
5910-00-832-8285	11	26	5310-00-928-2690	10	72
5910-00-832-8285	12	27	5310-00-928-2690	11	12
5910-00-832-8285	16	7	5310-00-928-2690	13	27
5910-00-832-8285	18	2	5310-00-928-2690	21	46
5910-00-832-8285	21	7	5310-00-928-2690	29	11
6210-00-832-9039	28	45	5340-00-933-4763	6	13
5905-00-833-8357	23	24	5340-00-933-4763	15	21
5910-00-834-8493	21	8	5310-00-933-8118	3	4
5940-00-834-9660	3	54	5310-00-933-8118	4	4
5935-00-835-0508	30	7	5310-00-933-8118	5	10
5905-00-835-1631	14	79	5310-00-933-8118	6	27
5905-00-835-1632	24	31	5310-00-933-8118	6	32
5905-00-835-1635	14	66	5310-00-933-8118	10	3
5905-00-835-1635	25	31	5310-00-933-8118	10	7
5905-00-840-7607	23	16	5310-00-933-8118	10	59
5305-00-840-9313	27	2	5310-00-933-8118	12	4
5305-00-840-9313	27	45	5310-00-933-8118	12	21
5905-00-842-6861	23	38	5310-00-933-8118	29	5
5961-00-842-9864	11	27	5910-00-934-2861	14	27
5905-00-844-0818	23	23	5365-00-935-8945	27	14
5905-00-844-1423	23	17	5365-00-935-8945	27	56
6625-00-844-5430	3	46	5365-00-935-8945	28	44
5961-00-847-1900	25	15	5821-00-936-0924	1	3

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-937-7356	25	38	5305-00-958-2918	15	27
5905-00-937-7960	8	15	5360-00-958-8757	15	5
5905-00-937-8556	22	22	5360-00-958-8757	25	52
5905-00-937-8560	8	19	5305-00-959-2727	26	17
5905-00-937-8859	24	33	5910-00-964-1346	14	15
5905-00-937-8860	25	41	5910-00-964-1346	21	3
5915-00-939-2073	14	35	5325-00-966-9555	30	18
5961-00-939-4216	14	52	5330-00-971-7983	26	26
5961-00-939-4217	14	53	5905-00-975-1296	25	35
5961-00-939-4217	16	12	5340-00-975-1440	4	35
5961-00-939-4217	19	8	5961-00-985-9073	4	51
5961-00-939-4217	20	12	5961-00-985-9073	23	12
5945-00-940-0547	4	46	6645-00-988-4427	6	28
5905-00-940-0737	23	41	5961-00-989-9465	23	6
5905-00-940-0738	23	42	5935-00-989-9466	9	34
5910-00-940-7392	14	22	5935-00-989-9466	21	42
5910-00-941-8072	16	8	5935-00-989-9467	15	8
5910-00-941-8072	17	7	5910-00-989-9515	10	70
5821-00-944-3432	12	1	5961-00-989-9528	12	33
5821-00-944-3437	26	12	5950-00-990-5570	12	28
5961-00-944-3627	14	92	5305-00-993-9189	4	47
5961-00-944-3627	16	27	5935-00-995-1394	4	2
5961-00-944-3627	17	38	5955-00-998-4576	18	37
5961-00-944-3627	19	22	5955-00-998-4577	18	30
5961-00-944-3627	20	6	5955-00-998-4578	18	35
5950-00-945-3443	14	50	5955-00-998-4579	18	31
5910-00-945-9869	17	8	5955-00-998-4580	18	38
5955-00-946-9301	17	29	5955-00-998-4581	18	32
5930-00-947-7378	28	38	5955-00-998-4582	18	36
5826-00-948-8397	4	12	5955-00-998-4583	18	33
5826-00-948-8398	4	13	5955-00-998-4584	18	39
5910-00-948-8998	11	23	5955-00-998-4585	18	34
5910-00-950-2368	24	8	5955-00-998-4586	18	27
5935-00-951-5033	30	1	5955-00-998-4587	18	20
5910-00-952-6432	16	6	5955-00-998-4588	18	25
5910-00-952-6432	19	4	5955-00-998-4589	18	28
5910-00-954-5508	14	12	5955-00-998-4590	18	22
5910-00-957-6961	14	26	5955-00-998-4591	18	26
5910-00-957-6961	22	5	5955-00-998-4592	18	23
5910-00-957-9909	25	3	5955-00-998-4593	18	29
5305-00-958-2918	19	5	5955-00-998-4594	18	24
	6	3	5955-00-998-4595	19	18

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
AA101-8	70417	13	47	CR-67/U-60. 45MC	81349	18	26
AB6	53705	2	6	CR-67/U-60. 95MC	81349	18	23
AB6	53705	15	25	CR-67/U-61. 45MC	81349	18	29
AN381-1-8	88044	30	19	CR-67/U-61. 95MC	81349	18	24
AN505C4R4	88044	29	2	CR-69/U-19. 80MC	81349	17	28
AN507C632	88044	2	4	CR-69/U-20. 10MC	81349	17	36
AN960C10L	88044	5	3	CR-69/U-20. 20MC	81349	17	30
AN960C10L	88044	30	15	CR-69/U-20. 30MC	81349	17	34
AN960C6	88044	10	51	CR-69/U-20. 40MC	81349	17	31
A14929	70674	4	19	CR-69/U-20. 50MC	81349	17	37
BR7SX45007-26VDC	09026	4	48	CR-69/U-20. 60MC	81349	17	32
BR7X300D7-26VDC	09026	4	49				
BR7Y380B7A21	09026	4	45				
BR7Z800B7A20	09026	4	42	C42S122J	16299	25	35
BSF28B1000	96905	10	97	C42S241J	16299	25	34
BWHR36P0R5PCT	75042	8	15	C5-301J	16299	25	39
C-7197/ARC-134	80058	1	2	DA853-074	71590	10	70
CR-67/U-52. 45MC	81349	18	37	DD241	71590	12	7
CR-67/U-52. 95MC	81349	18	30				
CR-67/U-53. 45MC	81349	18	35	DM10C040D0100W4CR	72136	9	11
CR-67/U-53. 95MC	81349	18	31	DM10C050KP100W4CR	72136	12	
CR-67/U-54. 45MC	81349	18	38	DM10C060D0100W1CR	72136	18	4
CR-67/U-54. 95MC	81349	18	32	DM10C100J0100W1CR	72136	18	6
CR-67/U-55. 45MC	81349	18	36				
CR-67/U-55. 95MC	81349	18	33	DM10C101J0100W4CR	72136	14	29
CR-67/U-56. 45MC	81349	18	39	DM10C101J0100W4CR	72136	17	5
CR-67/U-56. 95MC	81349	18	34	DM10C180J0100W4CR	72136	14	25
CR-67/U-57. 45MC	81349	18	27	DM10C240J0100W1CR	72136	18	3
CR-67/U-57. 95MC	81349	18	20	DM10C270K0100W1CR	72136	12	29
CR-67/U-58. 45MC	81349	18	25	DM10C300J0100W4CR	72136	14	27
CR-67/U-58. 95MC	81349	18	21	DM10C301J0100W4CR	72136	17	
CR-67/U-59. 45MC	81349	18	28	DM10C330G04100W1CR	72136	16	8
CR-67/U-59. 95MC	81349	18	22	DM10C330G0100W1CR	72136	17	7

PART NUMBER	FIG. NO.	ITEM NO.	PART NUMBER	FIG. NO.	ITEM NO.
FSCM				FSCM	
DM10C510G0100WV1CR	72136	17	8 MI C17-71	81349	14 95
			MI C17-71	81349	14 102
DM10C560JP100WV4CR	72136	14	16 MI LW16878TYPEE20BLACK	81349	14 101
			MI LW16878TYPEE22WHI TEBLACKGREEN	81349	14 90
DM100360G0100WV1CR	72136	16	9 MI LW16878TYPEE22WHI TEBLACKORANGE	81349	14 97
DM100360J0100WV1CR	72136	12	25 MM1-1MASL4990	38315	3 46
DM100390G0100WV1CR	72136	20	15 MP5173	06776	9 34
DM100391J0100WV1CR	72136	19	5 MP5173	06776	21 42
DM10E300G0100WV1CR	72136	19	3 MP5174	06776	15 8
DM10E320J0100WV1CR	72136	18	5 MS122031	96906	10 83
DM10E750K0100WV4CR	72136	12	32 MS15795-803	96906	3 11
DM10E820J0100WV4CR	72136	12	32 MS15795-803	96906	4 16
DM10E820J0100WV4CR	72136	14	28 MS15795-803	96906	10 2
DM10F121J0100WV4CR	72136	14	23 MS15795-803	96906	10 8
DM10F181J0100WV4CR	72136	14	20 MS15795-803	96906	10 23
DM10F221J0100WV1CR	72136	17	3 MS15795-803	96906	10 27
DM10F241G0100WV4CR	72136	14	12 MS15795-803	96906	10 77
			MS15795-803	96906	12 24
			MS15795-803	96906	28 2
DM10F271J0100WV1CR	72136	16	3 MS15795-805	96906	3 63
DM10F331J0100WV4CR	72136	14	19 MS15795-805	96906	10 58
DM10F910J0100WV4CR	72136	12	32 MS15795-805	96906	13 7
			MS15795-806	96906	28 16
DM15C100JP100WV4CR	72136	11	9 MS16535-1	96906	9 42
DM15C101G	84171	9	5 MS16535-53	96906	3 16
DM15C101G	84171	12	6 MS16535-53	96906	5 6
DM15C101G	84171	16	4 MS17321-2	96906	6 28
DM15C180J0300WV4CR	72136	11	19 MS19060-17	96906	27 8
DM15C3R3D0300WV4CR	72136	11	12 MS20392-1C15	96906	30 16
DM15D102JP100WV4CR	72136	14	22 MS24693-C2	96906	4 47
DM15E390J0300WV4CR	72136	12	44 MS24693C24	96906	6 14
			MS24693C26	96906	6 3
DM15F471J0300WV4CR	72136	14	18 MS24693C26	96906	15 27
DM15F561J0100WV1CR	72136	16	6 MS24693C27	96906	6 1
DM15F561J0100WV1CR	72136	19	4 MS24693C3	96906	3 13
DM15F561J0100WV4CR	72136	14	21 MS24693C3	96906	4 23
DM15F751J0100WV1CR	72136	17	4 MS24693C3	96906	6 12
DM15F751J0100WV1CR	72136	20	23 MS24693C3	96906	30 9
DM19F152K0100WV4CR	72136	24	9 MS24693C4	96906	30 23
DM19F502J0100WV1CR	72136	21	5 MS24693C5	96906	30 25
DPX2-20745-8	71468	30	26 MS24693C50	96906	30 21
DPX2F40C1PF40C1P34B0003	71468	5	9 MS24693C8	96906	3 26
DPX2F40C1SF40C1S33B0003	71468	30	1 MS24693C8	96906	4 26
DPX2J44877	71468	30	1 MS25010A	96906	26 6
FHS440-5	46384	6	8 MS351053-127	96906	26 22
FHS440-5	46384	6	19 MS35190-217	96906	13 29
FHS440-5	46384	10	91 MS35191-201	96906	26 17
FHS440-5	46384	12	12 MS35214-15	96906	26 15
FHS440-6	46384	3	22 MS35233-2	96906	20 14
FP101M	01121	25	38 MS35275-203	96906	28 6
			MS35333-69	96906	27 6
FP402U	01121	22	22 MS35333-69	96906	27 49
FP501M	01121	24	17 MS35333-69	96906	3 38
FP501M	01121	25	22 NS35333-70	96906	4 15
FP501U	01121	22	15 MS35333-70	96906	5 17
FP502M	01121	24	20 MS35333-70	96906	6 34
FTSM1	98291	11	24 MS35333-70	96906	28 51
FTSM1L2	98291	9	37 MS35333-70	96906	29 9
FTSM1L2	98291	11	1 MS35333-70	96906	20 1
FT1000SL	98291	11	5 MS35337-77	96906	15 13
GA2-2PFPPORM5PCT	78488	9	8 MS35337-78	96906	26 10
GA2G032F501BA	01121	28	37 MS35337-78	96906	28 55
GA2PFPPORM5PCT	78488	9	7 MS35337-78	96906	11 12
GP1-047X312-12	73957	27	21 MS35338-134	96906	13 27
GP1-047X312-12	73957	27	42 MS35338-134	96906	
GP5093X500-12	73957	15	12		
GP5-093X500-12	73957	15	18		
HP3N	09922	3	9		
HP4N	09922	3	61		
HP6N	09922	4	35		
JB25J1	15801	23	47		
JK33	80058	3	53		
J5572-243	76005	30	12		
K27P35	05397	8	4		
LB019	07388	24	35		
LB020	07388	24	36		
LC032C2MW	84830	15	5		
LC032C2MW	84830	25	52		
LN6	03961	2	7		
LN6	53705	15	24		

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
				M3-746-1	13934	22	4
				NAS1635-06-36	80205	10	61
				NAS671C10	80205	12	16
				NS503-19-1	06776	16	18
				NS503-19-1	06776	17	17
				NS503-19-1	06776	18	19
				NS503-19-1	06776	19	16
				NS503-19-1	06776	20	18
MS3557-15	96906	28	31	NS503-19-1	06776	21	43
MS35650-104	96906	5	20	NS503-19-1	06776	22	31
MS51053-112	96906	3	49	NS503-19-1	06776	23	49
MS51053-112	96906	13	5	NS503-19-1	06776	24	38
				NS503-19-1	06776	25	49
MS51053-127	96906	26	20	NS503-8	06776	25	50
MS51053-127	96906	28	14	PC3-1-2	72794	26	4
MS51957-1	96906	21	45	PF3-1-2-38	72294	26	2
MS51957-1	96906	28	53	PS256-9	06776	16	28
MS51957-1	96906	29	10	PS256-9	06776	17	41
				PS256-9	06776	18	43
				PS256-9	06776	19	21
				PS256-9	06776	20	26
				PS3-1-2	72794	26	3
				PT02A20-39PY	77820	29	6
				PW2-2R0J	11502	25	41
MS51957-13	96906	3	7	RC07GF100J	81349	9	32
MS51957-13	96906	4	31	RC07GF100J	81349	12	26
MS51957-13	96906	10	60	RC07GF100J	81349	25	40
MS51957-13	96906	15	14	RC07GF101J	81349	9	31
MS51957-14	96906	3	19	RC07GF101J	81349	14	61
MS51957-14	96906	6	36	RC07GF101J	81349	18	13
MS51957-14	96906	10	19	RC07GF101J	81349	22	28
MS51957-14	96906	11	1	RC07GF101J	81349	23	44
MS51957-14	96906	26	11	RC07GF101J	81349	25	26
MS51957-14	96906	29	7	RC07GF102J	81349	8	24
MS51957-14	96906	30	2	RC07GF102J	81349	9	22
MS51957-15	96906	3	10	RC07GF102J	81349	18	14
MS51957-15	96906	5	11	RC07GF103J	81349	14	67
MS51957-15	96906	6	5	RC07GF103J	81349	18	15
MS51957-15	96906	8	27	RC07GF103J	81349	21	36
MS51957-15	96906	10	6	RC07GF103J	81349	22	17
MS51957-15	96906	10	21	RC07GF103J	81349	23	15
MS51957-15	96906	10	29	RC07GF103J	81349	25	24
MS51957-15	96906	28	3	RC07GF104J	81349	4	40
MS51957-15	96906	29	8	RC07GF104J	81349	8	16
MS51957-16	96906	10	78	RC07GF104J	81349	22	23
MS51957-17	96906	3	37	RC07GF104J	81349	25	25
MS51957-17	96906	4	14	RC07GF105J	81349	21	41
MS51957-17	96906	5	15	RC07GF112J	81349	14	56
MS51957-18	96906	3	59	RC07GF122J	81349	14	62
MS51957-18	96906	5	16	RC07GF123J	81349	14	68
MS51957-18	96906	13	10	RC07GF123J	81349	21	30
MS51957-18	96906	26	11	RC07GF131J	81349	22	24
MS51957-2	65597	10	96	RC07GF131J	81349	25	28
MS51957-2	96906	10	73	RC07GF133J	81349	23	26
MS51957-2	96906	11	13	RC07GF152J	81349	14	73
MS51957-2	96906	13	26	RC07GF152J	81349	16	17
MS51957-21	96906	10	4	RC07GF152J	81349	17	16
MS51957-22	96906	10	39	RC07GF152J	81349	18	17
MS51957-27	96906	6	22	RC07GF152J	81349	19	12
MS51957-28	96906	30	4	RC07GF152J	81349	21	24
MS51957-3	96906	4	10	RC07GF152J	81349	22	26
MS51957-3	96906	14	81	RC07GF152J	81349	25	29
MS51957-30	96906	10	53	RC07GF153J	81349	14	63
MS51957-31	96906	3	62	RC07GF153J	81349	16	14
MS51957-31	96906	4	34	RC07GF153J	81349	17	13
MS51957-7	96906	27	9	RC076F153J	81349	19	11
MT-3791A/ARC-134	80058	1	3	RC07GF153J	81349	20	24
MT3791BARC134	80058	1	3	RC07GF153J	81349	21	39
M3-485	13934	12	46	RC07GF153J	81349	25	42
M3-485	13934	14	14	RC07GF155J	81349	9	33
M3-492-10	13934	23	3	RC07GF161J	81349	24	23
M3-492-8	13934	14	13	RC07GF163J	81349	14	64
M3-492-8	13934	21	6	RC07GF182J	81349	18	16
M3-660-12	13934	21	4	RC07GF182J	81349	21	22
M3-660-15	13934	9	10	RC07GF182J	81349	24	19
M3-746-1	13934	9	9	RC07GF183J	81349	8	11
M3-746-1	13934	16	5	RC07GF200J	81349	14	79
M3-746-1	13934	17	2	RC07GF201J	81349	14	72
M3-746-1	13934	19	2	RC076F201J	81349	18	18
M3-746-1	13934	20	22	RC07GF202J	81349	9	25

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RC07GF202J	81349	14	59	RC07GF751J	81349	16	16
RC07GF202J	81349	17	15	RC07GF751J	81349	21	20
RC07GF202J	81349	21	26	RC07GF751J	81349	26	21
RC07GF203J	81349	21	33	RC07GF752J	81349	21	27
RC07GF203J	81349	23	14	RC07GF752J	81349	25	47
RC07GF203J	81349	25	46	RC07GF754J	81349	21	41
RC07GF221J	81349	21	34	RC07GF820J	81349	21	38
RC07GF222J	81349	22	27	RC07GF821J	81349	9	29
RC07GF222J	81349	24	26	RC07GF821J	81349	21	25
RC07GF222J	81349	25	30	RC07GF821J	81349	24	22
RC07GF223J	81349	8	11	RC07GF822J	81349	22	20
RC07GF240J	81349	24	31	RC07GF823J	81349	16	15
RC07GF241J	81349	22	16	RC07GF823J	81349	17	14
RC07GF242J	81349	14	77	RC07GF823J	81349	19	13
RC07GF242J	81349	19	10	RC07GF823J	81349	20	27
RC07GF243J	81349	24	27	RC07GF824J	81349	21	41
RC07GF272J	81349	9	23	RC07GF914J	81349	21	41
RC07GF272J	81349	14	65	RC20GF102J	81349	25	32
RC07GF272J	81349	16	13	RC20GF105J	81349	8	23
RC07GF272J	81349	17	12	RC20GF122J	81349	25	43
RC07GF272J	81349	19	14	RC20GF132J	81349	25	36
RC07GF272J	81349	20	20	RC20GF182J	81349	22	25
RC07GF272J	81349	23	39	RC20GF182J	81349	25	27
RC07GF272J	81349	24	18	RC20GF202J	81349	23	40
RC07GF273J	81349	14	76	RC20GF332J	81349	25	45
RC07GF301J	81349	24	30	RC20GF510J	81349	4	32
RC07GF302J	81349	9	30	RC20GF911J	81349	24	32
RC07GF302J	81349	14	69	RC32GF100J	81349	8	22
RC07GF302J	81349	18	12	RC32GF102J	81349	8	17
RC07GF302J	81349	21	23	RC32GF102J	81349	23	13
RC07GF302J	81349	23	45	RC32GF151J	81349	24	15
RC07GF304J	81349	22	21	RC32GF162J	81349	25	33
RC07GF331J	81349	8	14	RC32GF181J	81349	8	12
RC07GF332J	81349	8	21				
RC07GF332J	81349	21	35	RC32GF221J	81349	8	12
RC07GF332J	81349	24	34				
RC07GF334J	81349	25	23	RC32GF3R3J	81349	8	20
RC07GF361J	81349	19	15				
RC07GF362J	81349	14	58	RC42GF470J	81349	3	3
RC07GF391J	81349	14	57	RG58A/U	80058	7	2
RC07GF391J	81349	21	21	RL07S303G	81349	11	2
RC07GF392J	81349	8	25	RL07S511G	81349	11	28
RC07GF392J	81349	9	21	RL20S361J	81349	25	37
RC07GF392J	81349	14	55	RN60C1103F	81349	23	21
RC07GF392J	81349	22	19	RN60C1473F	81349	23	37
RC07GF392J	81349	24	28	RN60C1502F	81349	23	30
RC07GF393J	81349	21	28	RN60C1623F	81349	23	43
RC07GF431J	81349	24	25	RN60C1982F	81349	23	31
RC07GF471J	81349	9	28	RN60C2152F	81349	23	23
RC07GF471J	81349	14	75	RN60C2292F	81349	23	29
RC07GF472J	81349	14	70	RN60C2492F	81349	23	32
RC07GF472J	81349	19	9	RN60C2613F	81349	23	38
RC07GF472J	81349	21	29	RN60C3122F	81349	23	33
RC07GF473J	81349	8	11	RN60C3792F	81349	23	18
RC07GF474J	81349	21	41	RN60C4021F	81349	23	16
RC07GF510J	81349	9	27	RN60C4422F	81349	23	34
RC07GF511J	81349	9	26	RN60C5111F	81349	23	20
RC07GF511J	81349	14	74	RN60C5562F	81349	23	27
RC07GF512J	81349	14	78	RN60C5972F	81349	23	35
RC07GF512J	81349	21	32	RN60C6192F	81349	23	22
RC07GF512J	81349	22	18	RN60C7151F	81349	23	19
RC07GF514J	81349	21	41	RN60C7500F	81349	23	17
RC07GF561J	81349	9	24	RN60C7871F	81349	23	24
RC07GF561J	81349	21	31	RN60C8061F	81349	23	25
RC07GF562J	81349	25	44	RN60C9202F	81349	23	36
RC07GF564J	81349	21	41	RT-857/ARC-134	80058	1	1
RC07GF620J	81349	14	66	R3553-078CADMI UMPLEATEDCHROMATE	12014	2	5
RC07GF620J	81349	25	31	R3700-3-16CADMI UMPLEATED	12014	11	4
RC07GF621J	81349	24	29	R3700-3-16CADMI UMPLEATED	12014	14	100
RC07GF622J	81349	24	24	R3700-3-32	12014	14	87
RC076F624J	81349	21	41	R3700-3-32	12014	21	53
RC07GF681J	81349	14	71	R3715-9-64CANDMI UMPLEATED	12014	12	40
RC07GF681J	81349	21	40	R37159-64CADNI UMPLEATED	12014	4	38
RC07GF681J	81349	23	28	R3800-125	12014	2	3
RC07GF683J	81349	23	46	R3801-109	12014	15	26
RC07GF684J	81349	21	41	R3801-109	12014	15	22
RC07GF750J	81349	24	14	SC1A	37942	3	52
RC07GF751J	81349	14	80	SG3440	03877	23	6
				STSM1	98291	11	20

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
ST1000SL	98291	3	54	10854-1	65597	26	9
TL-40D55A	06961	14	37	10856-1	65597	10	62
TR101	14953	9	41	10857-1	65597	10	32
T1-2-5R1P0RM5PCT	12463	26	33	1103A	17870	28	38
UG1094U	80058	11	15	117366-1	13103	4	50
UG88EU	80058	4	1	117367-1	65597	3	18
UG88EU	80058	7	1	117383-1	65597	3	34
UG88GU	80058	30	7	117384-1	65597	4	30
VCJ2309	73899	9	6	117385-2	65597	4	27
VC23GY	73899	10	74	117404-1	65597	27	31
X783A	71590	10	25	117405-1	65597	27	18
052-0500MDP	00287	13	16	117416-1	65597	14	2
052-0625MDP	00287	4	17	117417-1	65597	14	3
065946-0001	65597	10	95	117418-1	65597	14	4
072576-0001	65597	28	56	117419-1	65597	14	5
072576-0002	65597	28	62	117420-1	65597	20	8
078221-0001	65597	29	16	117421-1	65597	14	7
080930-0000	65597	9	44	117422-1	65597	14	8
082534-0001	65597	30	14	117423-1	65597	14	9
082534-0002	65597	30	20	117424-1	65597	4	9
088418-0001	65597	30	10	117425-1	65597	4	11
089904-0001	65597	10	93	117427-1	65597	10	87
089904-0001	65597	10	92	117429-1	65597	14	6
092640-0001	65597	30	3	117434-1	65597	13	42
092640-0002	65597	30	3	117435-1	65597	13	31
1N252	80131	24	12	117436-1	65597	13	37
1N3032B	80131	25	10	117437-1	65597	13	45
1N3686A	81349	8	6	117438-1	65597	13	4
1N3712	81349	22	8	117440-1	65597	10	50
1N4370	80131	25	11	117443-1	65597	28	24
				117447-1	65597	27	1
				117450-1	65597	10	1
				117451-1	65597	10	31
1N627	81349	8	7	117453-1	65597	10	52
1N627	81349	9	12	117459-1	65597	14	10
1N627	81349	21	10	117460-1	65597	10	30
1N627	81349	22	7	117502-1	65597	3	20
				117554-1	65597	12	1
				117662-1	65597	27	44
1N748	80131	25	16	117666-1	65597	28	1
1N749A	80131	25	15	117670-1	65597	26	24
1N816	80131	24	11	118042-0001	65597	27	26
1N816	80131	25	8	118044-0001	65597	27	32
1N816	80131	21	11	118173-0001	65597	13	14
1N816	80131	22	9	12163-2	65597	4	3
1N816	80131	22	9	124-311-104	74970	12	5
1N914	81349	11	27	1288-245	04665	30	18
100022-0200	65597	3	47	13548	07388	4	18
100916-1	65597	11	3	13600	07388	22	29
101001-0400	65597	27	5	13621	07388	24	37
101001-0400	65597	27	48				
101730-0400	65597	13	8				
103605-0400	65597	13	30	137D476X0050F0	56289	3	55
104808-11	65597	21	52	137D476X0050F0	56289	14	30
104808-12	65597	22	35	13802	07388	23	48
104808-14	65597	25	55	150D105X9035A2	56289	22	3
104808-32	65597	22	34	150D105X9035A2	56289	24	6
104808-32	65597	24	41	150D105X9050A2	56289	8	3
104808-33	65597	24	43	150D225X0035B2	56289	21	9
104808-34	65597	24	42	150D226X0015B2	56289	24	4
104808-35	65597	24	47	150D226X0015B2	56289	25	4
104808-35	65597	25	58	150D226X0035R2	56289	24	2
104839-0002	65597	30	11	150D276X0010B2	56289	24	7
104842-0001	65597	3	29	150D276X9010B2	56289	22	6
104843-0001	65597	6	37	150D276X9020R2	56289	24	5
104843-0002	65597	10	94				
10837-1	65597	27	40	150D335X0015A0	56289	24	3
10838-1	65597	27	23	150D335X0075B2	56289	23	4
10841-1	65597	27	20	150D479X0010A2	56289	24	8
10842-1	65597	27	39	150D476X0035S2	56289	21	8
18045-1	65597	28	42				
10846-1	65597	28	32	150D685X9035B2	56289	8	2
10847-1	65597	28	26	150D685X9035B2	56289	23	2
10848-1	65597	28	27	1537-709	99800	14	50
10849-1	65597	28	28	1537-713	99800	10	67
10850-1	65597	28	25	1537-713	99800	12	8
	65597	28	23	1537-713	99800	14	49
	65597	3	50	1537-714	99800	9	15
	65597	13	12	1537-714	99800	12	47

PART NUMBER	FIG. ITEM			PART NUMBER	FSCM	FIG. NO.	ITEM NO.
	FSCM	NO.	NO.				
1537-714	99800	14	44	2104-06-00	78189	6	10
1537-718	99800	14	47	2106300	83298	3	41
1537-718	99800	18	10	2106300	83298	4	36
1537-725	99800	14	48	2106300	83298	5	14
1537-730	99800	14	51	22NKM62	72962	28	68
1537-730	99800	19	7	228569-1	65597	4	2
1537-740	99800	16	11	247295-6001	65597	16	20
1537-740	99800	17	10	247295-6002	65597	16	19
1537-744	99800	14	46	247295-6003	65597	16	21
1537-744	99800	21	13	247295-6004	65597	19	18
1537-744	99800	23	9	247295-6005	65597	19	17
1537-756	99800	21	14	247295-6006	65597	16	22
16-4041	04426	13	20	247295-6007	65597	17	25
17389-1	65597	10	75	247295-6008	65597	17	18
17483-1	65597	12	48	247295-6009	65597	17	23
1813-2AVI ATI ONRED	97539	28	45	247295-6010	65597	17	19
19A95	25140	10	76	247295-6011	65597	17	26
1947-1	71279	28	50	247295-6012	65597	17	20
2-110C147-7	83259	26	26	247295-6013	65597	17	24
2N1132	80131	25	19	247295-6014	65597	17	21
2N1132	80131	21	18	247295-6015	65597	17	27
2N1132	80131	22	14	247295-6016	65597	17	22
2N1143	81349	22	12	247295-7001	65597	17	35
2N1195	81349	9	19	247295-7003	65597	17	33
2N1195	81349	17	11	247295-7004	65597	17	29
2N1195	81349	18	11	247298-4001	65597	20	7
2N1552	81349	8	10	247299-3001	65597	16	26
2N1560	81349	3	39	247299-3002	65597	16	25
2N1711	80131	22	11	247299-3003	65597	16	23
2N2156	81349	5	18	247299-3004	65597	16	24
2N2218	81349	21	17	248R53M6405	96733	4	20
2N2398	80131	14	54	2522-04-00	78189	6	35
2N2567	80131	25	21	2565-02-00	78189	10	71
2N2586	80131	23	11	266015-0004	65597	30	24
2N2876	80131	12	31	266093-0001	65597	30	24
2N3053	80131	23	12	247158-1	65597	6	24
2N3053	81349	4	51	267391-1	65597	3	6
2N3055	81349	5	13	267392-23	65597	6	30
2N3118	80131	9	20	267393-23	65597	29	12
2N3283	80131	14	52	270167-2	65597	2	11
2N3323	80131	14	53	270167-2	65597	15	28
2N3323	80131	16	12	270223-5	65597	15	19
2N3323	81349	19	8	270223-6	65597	15	23
2N3323	81349	20	12	270224-1	65597	14	94
2N338	80131	22	13	270224-1	65597	20	13
2N338	80131	25	17	270225-1	65597	25	61
2N3961	81349	12	33	270247-1	65597	26	8
2N398A	80131	25	20	270255-1	65597	27	12
2N69	81349	21	16	270262-1	65597	6	16
2N697	80131	23	10	270263-1	65597	10	79
2N697	80131	24	13	270264-1	65597	13	41
2N697	80131	25	18	270265-1	65597	10	28
2TA51FS22	44655	4	24	270266-1	65597	10	33
2040-1	71279	9	46	270266-2	65597	10	13
2040-1	71279	11	11	270278-1	65597	10	56
2040-2	71279	12	23	270280-1	65597	13	13
2040-2	71279	21	51	270281-1	65597	10	46
2040-2	71279	24	46	270282-1	65597	28	34
2042-2	71279	16	30	270283-1	65597	28	21
2042-2	71279	19	23	270288-1	65597	3	42
2042-2	71279	20	16	270288-2	65597	28	66
2042-2	71279	22	32	270288-3	65597	28	63
2042-2	71279	23	50	270288-4	65597	28	57
2042-2	71279	24	40	270288-5	65597	28	59
2042-2	71279	25	53	270302-1	65597	3	61
2042-3	71279	17	40	270306-1	65597	3	25
2042-3	71279	18	42	270307-1	65597	12	3
2043-1	71279	9	45	270448-0001	65597	12	10
2043-1	71279	11	25	276178-0300	65597	12	45
2043-3	71279	8	26	276178-0300	65597	3	63
2101-10-00	78189	12	34	276191-0300	65597	14	82
2104-04-00	78189	4	37	276244-1	65597	3	45
2104-04-00	78189	5	2	276244-1	65597	4	7
2104-04-00	78189	10	69	276319-1	65597	13	22
2104-04-00	78189	12	19	276327-1	65597	3	24
2104-04-00	78189	12	19	276332-1	65597	10	9

SECTION IV

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

TM11-5821-277-34P

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
276343-1	65597	27	29	302705-1	65597	10	40
276343-1	65597	27	35	302705-2	65597	10	68
276344-1	65597	26	27	302710-1	65597	28	20
276373-0001	65597	27	14	302711-1	65597	27	2
276373-0001	65597	27	56	302711-1	65597	27	45
276373-0001	65597	28	44	302718-1	65597	28	5
28207-2	65597	10	38	302720-1	65597	27	11
28222-1	65597	10	11	302720-1	65597	27	52
28225-1	65597	29	17	302720-1	65597	28	13
2829-75-2	98159	3	32	30588-1	65597	16	31
2829-75-2	98159	4	8	30588-1	65597	17	42
284403-2	65597	2	1	30588-1	65597	18	40
284483-2	65597	28	22	30588-1	65597	19	19
284485-1	65597	28	40	30588-1	65597	20	21
284494-1	65597	28	67	30588-1	65597	22	36
284504-1	65597	6	40	30588-1	65597	23	52
284504-2	65597	6	38	30588-1	65597	24	44
284505-2	65597	16	29	30588-1	65597	25	59
284505-3	65597	16	1	30588-4	65597	24	45
284506-2	65597	17	39	30588-4	65597	25	57
284506-3	65597	17	1	327AS15	71744	26	28
284507-2	65597	18	41	327AS15	71744	28	4
284507-3	65597	18	1	341-098	79963	28	49
284508-2	65597	19	20	34992-720LR	82104	28	58
284508-3	65597	19	1	34993-720LR	82104	28	65
284509-2	65597	20	25	34994-720LR	82104	28	64
284509-3	65597	20	19	34995-720LR	82104	28	60
284510-2	65597	21	48	352-9552-260	13499	16	27
284510-3	65597	21	1	352-9552-260	13499	17	38
284511-2	65597	22	33	352-9552-260	13499	19	22
284511-3	65597	22	1	352-9552-260	13499	20	6
284512-2	65597	23	51	38179-1	65597	22	10
284512-3	65597	23	1	38952-13	65597	14	45
284513-2	65597	24	39	38962-1	65597	18	8
284513-3	65597	24	1	38963-1	65597	18	9
284514-2	65597	25	56	38964-1	65597	12	37
284514-3	65597	25	1	38967-1	65597	10	44
284516-2	65597	6	4	38967-2	65597	10	37
284517-1	65597	10	12	38967-3	65597	10	36
284517-1	65597	10	35	38967-4	65597	10	34
284518-1	65597	6	11	38968-1	65597	10	41
284520-1	65597	13	18	38968-2	65597	10	42
284521-1	65597	13	35	38968-3	65597	10	43
284522-1	65597	13	33	38969-2	65597	9	13
284523-1	65597	13	2	38969-3	65597	9	14
284525-1	65597	27	7	38969-4	65597	9	17
234526-1	65597	27	50	38970-2	65597	9	16
284529-1	65597	10	57	38970-3	65597	9	18
284529-2	65597	10	55	39063-1	65597	12	35
284530-1	65597	10	47	39064-1	65597	12	28
284530-2	65597	10	45	40196-1	65597	22	30
284666-1	65597	12	11	40196-1	65597	25	48
284666-2	65597	12	9	41A346	25140	13	24
284786-1	65597	29	4	42247-1	65597	10	63
284787-2	65597	29	13	42247-2	65597	10	65
284788-1	65597	26	12	42247-3	65597	10	64
284789-1	65597	26	5	42248-1	65597	10	16
284790-1	65597	26	13	42248-2	65597	10	15
284792-2	65597	6	18	42248-3	65597	10	14
284792-3	65597	6	17	42248-4	65597	10	66
284852-2	65597	28	48	42249-1	65597	11	22
285416-0002	65597	2	1	42249-2	65597	11	21
287N1	91984	10	80	42250-1	65597	11	18
288628-0001	65597	2	10	42250-2	65597	11	17
288629-0001	65597	2	9	42251-1	65597	11	8
288630-0001	65597	2	8	42251-2	65597	11	6
288631-0001	65597	2	2	42252-1	65597	10	22
294422-3-270	76530	15	4	432710-1	65597	3	60
294422-8-780	76530	25	51	432711-1	65597	4	29
294424	16530	15	3	432712-1	65597	14	103
294424	76530	25	60	432713-1	65597	14	96
294632	76530	3	15	432714-1	65597	3	57
294632	76530	5	7	44267-1	65597	14	41
294632	76530	6	39	44268-2	65597	14	38
294665	76530	5	19	44270-1	65597	14	42
295111-8A	76530	3	35	44271-2	65597	14	35
30-02GZ	82768	4	46	44272-1	65597	14	34
302019-1	65597	27	17	44273-1	65597	14	36
302019-1	65597	27	58	44275-1	65597	14	32
302022-1	65597	13	19	44276-1	65597	14	33

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
44277-1	65597	14	39	68-1660-40	72962	12	2
44277-2	65597	14	40	68-1660-40	72962	12	20
44278-1	65597	14	43	68-1660-40	72962	13	3
46122-1	65597	4	44	68-1660-40	72962	14	91
46122-1	65597	14	31	68NM107-62	72962	4	33
46122-1	65597	16	10	68NM107-62	72962	8	2
46122-1	65597	17	9	68NM107-62	72962	8	33
46122-1	65597	18	7	68NM107-62	72962	30	8
46122-1	65597	19	6				
46122-1	65597	21	12				
46122-1	65597	23	8	68129-10	65597	5	12
46122-1	65597	25	12	68129-11	65597	5	4
46197-1	65597	25	13	68129010	65597	3	40
46231-1	65597	8	8	69M3405AA	96733	4	22
46232-1	65597	23	7	70-5-2	49956	3	51
48595-1	65597	21	15	7011	65726	3	8
50SL209-255	12615	8	28	71580-1	65597	28	36
50SL210-256	12615	8	29	71587-1	65597	28	41
50SL299-315	12615	3	2	71590-1	65597	28	19
50SL299-315	12615	10	82	71591-1	65597	13	36
50SL299-315	12615	12	43	71593-1	65597	13	9
50SL299-315	12615	15	7	71595-1	65597	27	53
50SL540-499	12615	3	1	72514-1	65597	28	39
50SL540-499	12615	21	56	72515-1	65597	28	33
50SL542-499	12615	3	43	72520-2	65597	28	9
50SL542-499	12615	12	39	72521-1	65597	28	15
50994-1	65597	23	42	72527-1	65597	27	22
5100-12	79136	13	23	72530-1	65597	27	15
5133-12MD	79136	27	54	72531-1	65597	13	46
5133-12MD	79136	28	47	72532-1	65597	13	43
5220	76493	3	56	72533-1	65597	13	48
5451D	70998	30	6	72534-1	65597	13	34
56-590-65-4A	02114	14	104	72535-1	65597	13	38
6009-18CT	91506	6	13	72536-1	65597	13	44
6009-18CT	91506	15	21	72537-1	65597	13	6
601PE1040-5W2	84411	14	15	72538-1	65597	27	16
601PE1040-08W2	84411	21	3	72539-1	65597	27	57
601PE1530-5STYLE2	84411	25	5	72540-1	65597	27	24
601PE3330R5W4	84411	25	2	72541-1	65597	27	41
601PE6839-5STYLE4	84411	14	26	72543-1	65597	27	51
601PE6839-55STYLE4	84411	22	5	72544-1	65597	27	38
601PE6839-55STYLE4	84411	25	3	72545-1	65597	28	35
60641-1	65597	6	20	73180-1	65597	13	40
60695-1	65597	26	1	73181-1	65597	13	17
60812-1	65597	6	25	74352-1	65597	13	32
60812-2	65597	6	23	75-120	79963	28	18
60825-1	65597	26	19	75599-2	65597	29	36
60825-2	65597	26	16	75630-1	65597	27	19
60827-1	65597	26	23	75631-1	65597	27	33
60827-2	65597	26	21	75632-1	65597	27	43
60828-1	65597	26	18	75639-1	65597	27	27
60829-1	65597	28	7	75641-1	65597	13	39
60830-3	65597	28	8	75644-1	65597	10	49
60830-4	65597	28	11	75645-1	65597	28	29
60830-5	65597	28	12	75646-1	65597	28	10
60833-1	65597	15	11	76102	65597	10	26
60833-1	65597	15	17	76102	65597	13	11
60834-2	65597	15	10	76102	65597	28	30
60835-1	65597	15	9	77117-18NWHTTE	13103	14	92
60835-2	65597	15	15	77695-1	65597	6	41
60876-1	65597	30	17	77881-1	65597	4	39
60935-2	65597	15	16	77882-2	65597	4	12
61237-1	65597	27	4	77883-1	65597	4	13
61238-1	65597	27	47	77917-1	65597	27	10
61239-1	65597	27	3	77934-1	65597	29	14
61239-1	65597	27	46	77935-1	65597	27	25
62410-1	65597	13	15	77936-1	65597	27	37
65755-1	65597	3	30	77937-1	65597	28	43
65755-1	65597	14	89	77941-1	65597	3	14
65755-1	65597	20	4	77941-1	65597	5	8
65755-2	65597	14	83	77941-2	65597	3	12
65755-3	65597	14	88	77941-2	65597	5	5
65776-1	65597	26	14	78070-3	65597	6	29
68-1660-26	72962	13	25	78071-1	65597	27	55
68-1660-40	72962	3	17				
68-1660-40	72962	3	27				
68-1660-40	72962	4	25	80050-2	87034	26	25
68-1660-40	72962	5	1	801-010W5R102K	72982	9	4
68-1660-40	72962	6	6	801-010W5R102K	72962	12	26
68-1660-40	72962	10	24	801-010W5R102K	72982	12	27

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
801-010W5R102K	72982	16	7	882-3R33PORM5PCT	44655	3	36
801-010W5P102K	72982	18	2	89620-1	65597	21	54
801-010W5R102K	72982	21	7	89670-1	65597	15	1
805Y5T202M	72982	14	17	89676-1	65597	14	86
805Y5T202M	72982	20	17	89677-1	65597	14	85
80926-1	65597	15	6	89677-2	65597	14	11
80926-2	65597	14	1	89678-2	65597	20	11
80927-1	71279	8	30	89678-3	65597	20	9
80927-2	65597	8	1	89679-1	65597	20	3
80928-1	65597	6	7	89679-2	65597	20	2
80928-2	65597	6	9	89680-1	65597	9	40
80929-1	65597	4	41	89681-1	65597	9	39
80929-2	65597	4	28	89682-1	65597	21	55
80930-1	65597	9	2	89683-1	65597	21	47
80930-2	65597	9	1	89683-2	65597	21	2
80931-1	65597	10	89	89685-1	65597	11	14
80931-2	65597	10	88	89687-2	65597	11	16
80935-1	65597	12	14	89696-1	65597	29	15
80935-2	65597	12	13	89700-1	65597	12	22
8121	86684	10	5	89702-1	65597	14	99
81545	65597	30	22	89703-1	65597	14	98
81572	65597	30	13	89704-2	65597	3	28
82316-1	65597	27	13	89711-1	65597	14	84
82326-1	65597	27	28	89800-1	65597	29	18
82327-1	65597	27	30	89800-2	65597	29	1
82328-1	65597	27	36	92349-1	65597	9	43
82330-1	65597	27	34	92350-1	65597	10	90
82333-1	65597	13	21	92350-1	65597	21	44
82334-1	65597	12	41	92351-2	65597	11	29
82335-1	65597	28	54	92354-1	65597	12	38
82335-1	65597	29	3	94575-1	65597	10	20
82349-1	65597	3	23	94575-2	65597	10	17
82349-2	65597	3	21	94576-1	65597	10	18
882-3-1000PORM5PCT	44655	8	18	94579-1	65597	10	85
882-3-1000PORM5PCT	44655	10	81	94590-1	65597	3	58
882-3-5R6PORM5PCT	44655	8	19	94591-1	65597	10	10
882-3-560PORM5PCT	44655	23	41				

LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG. NO.	ITEM NO.	STOCK NUMBER	FIG. NO.	ITEM NO.
5915-00-052-8412	15	2	5961-00-686-8578	22	13
5915-00-052-8412	20	10	5961-00-686-8578	25	37
5305-00-054-6655	4	34	5305-00-719-5329	10	48
5910-00-064-4704	17	5	5310-00-728-2414	13	22
5305-00-066-7326	3	4	5961-00-772-7706	3	44
5305-00-066-7326	6	26	5961-00-772-7706	4	43
5305-00-066-7326	6	31	5961-00-772-7706	8	9
5305-00-066-7326	10	84	5961-00-772-7706	25	14
5305-00-066-7326	11	10	5905-00-824-3057	21	19
5305-00-066-7326	28	17	5961-00-836-6667	21	11
5910-00-067-4411	24	10	5961-00-836-6667	22	9
5910-00-078-2023	12	15	5961-00-836-6667	25	8
5910-00-078-2023	25	6	5961-00-836-6667	24	11
5940-00-082-4833	21	49	5961-00-855-1551	21	18
5940-00-082-4869	12	42	5961-00-855-1551	22	14
5940-00-082-4869	15	20	5961-00-855-1551	25	19
5940-00-082-4869	21	50	5310-00-857-5548	3	33
5940-00-082-4869	25	54	5310-00-857-5548	4	21
5961-00-087-6047	23	5	3040-00-880-0497	27	53
5961-00-087-6047	25	9	5910-00-893-0196	17	5
5910-00-089-7504	12	30	5940-00-901-1405	9	38
5961-00-104-9899	3	39	5310-00-928-2690	28	52
5905-00-110-7622	14	60	5310-00-929-6395	6	21
5905-00-110-7622	21	37	5310-00-929-6395	10	54
5910-00-113-5689	22	2	5310-00-929-6395	13	1
5905-00-246-9399	8	13	5310-00-933-8119	12	18
5905-00-247-8722	24	16	5305-00-933-8120	9	35
5905-00-247-8732	8	12	5305-00-933-8120	10	86
5310-00-274-8321	28	68	5305-00-933-8120	12	17
5910-00-400-4991	8	5	5310-00-982-4999	26	7
5910-00-400-4991	25	7	5310-00-982-4999	30	5
5905-00-443-7032	10	81			
6145-00-542-6092	7	2			

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CM04CD100D03	81349	12	30	MS35338-135	96906	10	59
CM04FD111G03	81349	17	5	MS35338-135	96906	12	4
CM04FD241G03	81349	12	15	MS35338-135	96906	12	21
CM04FD241G03	81349	25	6	MS35338-135	96906	29	5
CM04FD910G03	81349	17	5	MS35338-136	96906	6	21
FP102U	01121	21	19	MS35338-136	96906	10	54
JAN1N4384	81349	3	44	MS35338-136	96906	13	1
JAN1N4384	81349	4	43	MS35338-137	96906	12	18
JAN1N4384	81349	8	9	MS35338-138	96906	9	35
JAN1N4384	81349	25	14	MS35338-138	96906	10	86
MS21044C04	96906	26	7	MS35338-138	96906	12	17
MS21044C04	96906	30	5	MS51957-3	96906	4	5
MS21044D04	96906	3	33	MS51963-20	96906	10	48
MS21044D04	96906	4	21	M39003-01-2347	81349	24	10
MS24693C24	96906	3	4	M39003-01-3015	81349	22	2
MS24693C24	96906	6	26	M39006-09-6546	81349	8	5
MS24693C24	96906	6	31	M39006-09-6546	81349	25	7
MS24693C24	96906	10	84	RCR07G682JS	81349	14	60
MS24693C24	96906	11	10	RCR07G682JS	81349	21	37
MS24693C24	96906	28	17	RCR32G202JS	81349	8	13
MS35338-134	96906	4	6	RCR32G271JS	81349	24	16
MS35338-134	96906	10	72	RCR32G471JS	81349	8	12
MS35338-134	96906	21	46	SE089B01	81349	9	38
MS35338-134	96906	28	52	SE11XC01	81349	21	49
MS35338-134	96906	29	11	SE12XC01	81349	12	42
MS35338-135	96906	3	5	SE12XC01	81349	15	20
MS35338-135	96906	4	4	SE12XC01	81349	21	50
MS35338-135	96906	5	10	SE12XC01	81349	25	54
MS35338-135	96906	6	27	023311-0001	72982	15	2
MS35338-135	96906	6	32	023311-0001	72982	20	10
MS35338-135	96906	10	3	1N645	80131	23	5
MS35338-135	96906	10	7	1N645	80131	25	9

ADDITIONAL LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG. NO.	ITEM NO.
5821-00-072-6108	1	1
5821-00-905-9935	1	1
5910-00-954-5508	9	3
5910-00-954-5508	14	24
5910-01-010-7561	16	2

ADDITIONAL LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CM05E510G0DR	81349	16	2
CM05FD241G03	81349	9	3
CM05FD241G03	81349	14	24

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703

DATE 10 July 1975

PUBLICATION NUMBER				DATE	TITLE
TM 11-5840-340-20P				23 Jan 78	Radar Set AN/PRC-76
BE EXACT...PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:	
PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.		
33		19		For item 2, change the NSN to read: 5835-00-134-9186. <u>Reason:</u> Accuracy.	
44				Identify the cover on the junction box (item no. 5). <u>Reason:</u> It is a separate item and is not called out on figure 19.	
45				Add the cover of the junction box as an item in the listing for figure 19? <u>Reason:</u> Same as above.	

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I. M. DeSpiritof 999-1776

SIGN HERE:

SSG I. M. DeSpiritof

DA FORM 2028-2 1 AUG 74

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "END," MAKE
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

**THEN. . .JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!**

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

TM 11-5821-277-34P

DATE

24 NOV 78

TITLE

Radio Sets AN/ARC-134,
AN/ARC-134A, AN/ARC-134B

BE EXACT . . . PIN-POINT WHERE IT IS

**IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:**

PAGE NO.	PARA- GRAPH	FIGURE NO.	TABLE NO.
-------------	----------------	---------------	--------------

TEAR ALL OVER AGAIN

TYPED NAME, GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$200

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

**THEN . . . JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!**

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

TM 11-5821-277-34P

DATE

24 NOV 78

TITLE

Radio Sets AN/ARC-134,
AN/ARC-134A, AN/ARC-134B

BE EXACT...PIN-POINT WHERE IT IS.

**IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:**

TEAR ALONG DOTTED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?



THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

				FROM: (YOUR UNIT'S COMPLETE ADDRESS)	
				DATE	
PUBLICATION NUMBER				DATE	TITLE
TM 11-5821-277-34P				24 NOV 78	Radio Sets AN/ARC-134, AN/ARC-134A, AN/ARC-134B
BE EXACT...PIN-POINT WHERE IT IS IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:					
PAGE NO.	PARA- GRAPH	FIGURE NO.	TABLE NO.		
TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER				SIGN HERE:	

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$200

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-814



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

**THEN. . .JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!**

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

TM 11-5821-277-34P

DATE

24 NOV 78

TITLE

Radio Sets AN/ARC-134,
AN/ARC-134A, AN/ARC-134B

BE EXACT PIN-POINT WHERE IT IS

**IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:**

TEAR ALONG DOTTED LINE

				<h1>SOMETHING WRONG WITH THIS MANUAL?</h1>		
<p>THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!</p>				<p>FROM: (YOUR UNIT'S COMPLETE ADDRESS)</p>		
				DATE		
<p>PUBLICATION NUMBER TM 11-5821-277-34P</p>				<p>DATE 24 NOV 78</p>	<p>TITLE Radio Sets AN/ARC-134, AN/ARC-134A, AN/ARC-134B</p>	
<p>BE EXACT... PIN-POINT WHERE IT IS</p>						
<p>IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:</p>						
PAGE NO.	PARA- GRAPH	FIGURE NO.	TABLE NO.			
<p>TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER</p>				<p>SIGN HERE:</p>		

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$200

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DDC-314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-ME-MQ
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

By Order of the Secretary of the Army:

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Official:

J. C. PENNINGTON
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-36, Section I, direct and general support avionics literature requirements for AN/ARC-134.

PI N: 035505-000

This fine document...

Was brought to you by me:



Liberated Manuals -- free army and government manuals

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals

- Sincerely
Igor Chudov
<http://igor.chudov.com/>
- [Chicago Machinery Movers](http://chicagomachinerymovers.com)