

TECHNICAL MANUAL

GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS

(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)

FOR

RECORDER-REPRODUCER SET, SOUND AN/UNH-10

(NSN 5835-00-082-3842)

TECHNICAL MANUAL



No. 11-5874-200- 40P

HEADQUARTERS

DEPARTMENT OF THE ARMY

WASHINGTON, DC, 14 October, 1977

GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS

(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)

FOR

RECORDER-REPRODUCER SET, SOUND AN/UNH-10

(NSN 5835-00-082-3842)

Current as of 20 June 1977

REPORTING OF ERRORS

You can Improve this manual by recommending improvements using DA Form 2028-2 (Test) located in the back of the manual. Simply tear out the self-addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 (Test) in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Electronics Command, ATTN: DRSEL-MA-Q, Fort Monmouth, NJ 07703.

In either case a reply will be furnished direct to you.

*This manual together with TM 11-5874-200-20P, supersedes TM 11-5874-200-25P, 28 July 1966.

Table of Contents

		Page	Figure	Illus
SECTION	I. Introduction	1		
	II. Repair parts list	5		
GROUP	00 Recorder-Reproducer Set, Sound AN/UNH-10	5		1-13
	01 Battery Charger P/N 12515.....	37		14
	02 Headset H-224/UNH-10.....	39		15
	03 Microphone M-119/UNH-10.....	41		16
SECTION	III. Special tools list (Not applicable)			
	IV. National stock number and part number index.....	42		

SECTION I. INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of general support maintenance of the AN/UNH-10. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. *Section II. Repair Parts List.* A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. *Section III. Special Tools List.* Not applicable.

c. *Section IV. National Stock Number and Part Number Index.* A list, in National item identification number (NIIN) sequence, of all National stock numbers(NSN) appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. *Illustration.* This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. *Source, Maintenance, and Recoverability (SMR) Codes.*

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

<i>Code</i>	<i>Definition</i>
PA -	Item procured and stocked for anticipated or known usage.
XD -	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance Code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth (2) Maintenance Codes columns of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

<i>Code</i>	<i>Application/Explanation</i>
C -	Crew or operator maintenance performed within organizational maintenance.
O -	Support item is removed, replaced, used at the organizational level.
H -	Support item is removed, replaced, used at the general support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
H-	The lowest maintenance level capable of complete repair of the support item is the general support level.
Z-	Nonreparable. No repair is authorized.
(3)	Recoverability code. Recoverability codes are assigned to support items to indicate the-disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows::

<i>Recoverability codes</i>	<i>Definition</i>
Z-	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
H-	Reparable item. When uneconomically repairable, condemn and dispose at the general support level.

D - Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level. (1)

c. *National Stock Number.* Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. *Part Number.* Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. *Federal Supply Code for Manufacturer (FSCM)* The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. *Description.* Indicates the Federal item name and, if required, a minimum description to identify the item.

g. *Unit of Measure (U/M).* Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. *Quantity Incorporated in Unit.* Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

4. Special Information

The following publications pertain to the AN/UNH-10 and its components:

TM 11-5874-200-12, Recorder-Reproducer Set, Sound AN/UNH-10

TM 11-5874-200-20P, Recorder-Reproducer Set, Sound AN/UNH-10

TM 11-5874-200-45, Recorder-Reproducer Set, Sound AN/UNH-10

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This ~~First~~ Using the table of contents, illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4.)

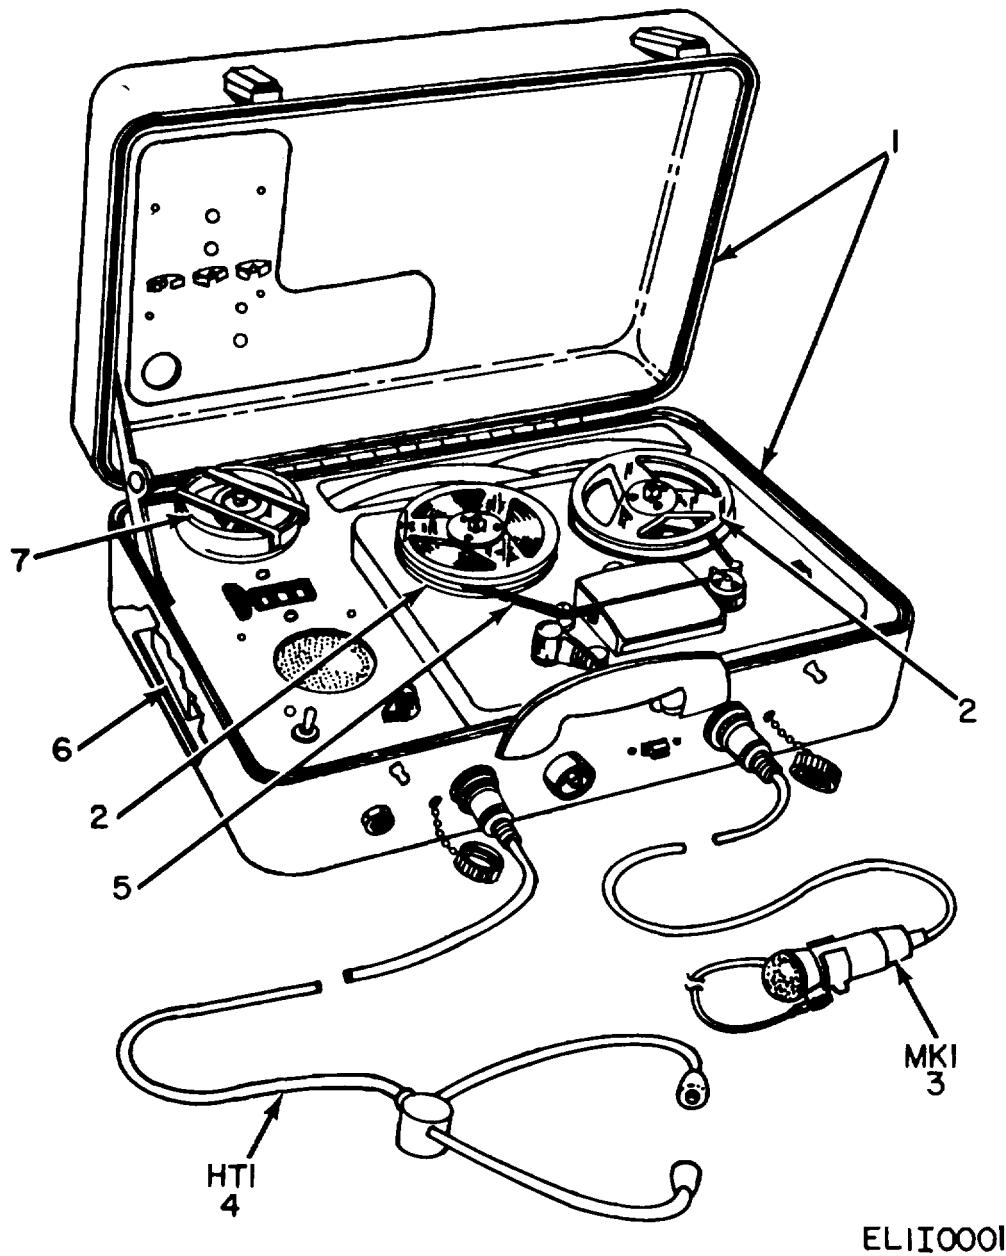


Figure 1. Recorder Reproducer Set, Sound AN/UNH-10.

(1) ILLUSTRATION		(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE					U/M	
I	1	PAHHD	5835-00-13-5645	12505	9171	GROUP 00 RECORDER REPRODUCER SET, SOUND AN/UNH-10 CASE,RECORDER,PRODUCER,SOUND	EA	1
1	2	PACZZ	5835-00-461-9984	RB1-4-5	94961	REEL,SOUND RECORDING TAPE	EA	2
I	3	PAOHH	5965-00-082-3843	M19UNH10	80058	MICROPHONE,DYNAMIC	EA	1
I	4	PAOHH	5965-00-013-7990	H-224/UNH-10	80058	HEADSET,ELECTRICAL	EA	1
I	5	PACZZ	5835-00-419-0575	200-1-4-I200	94161	TAPE,SOUND RECORDING	RL	1
I	6	XDHHIH		12515	89178	CHARGER,BATTERY	EA	1
I1	7	PACZZ	5835-00-909-7421	U1310CC15	78723	CARTRIDGE,LOOP	EA	1


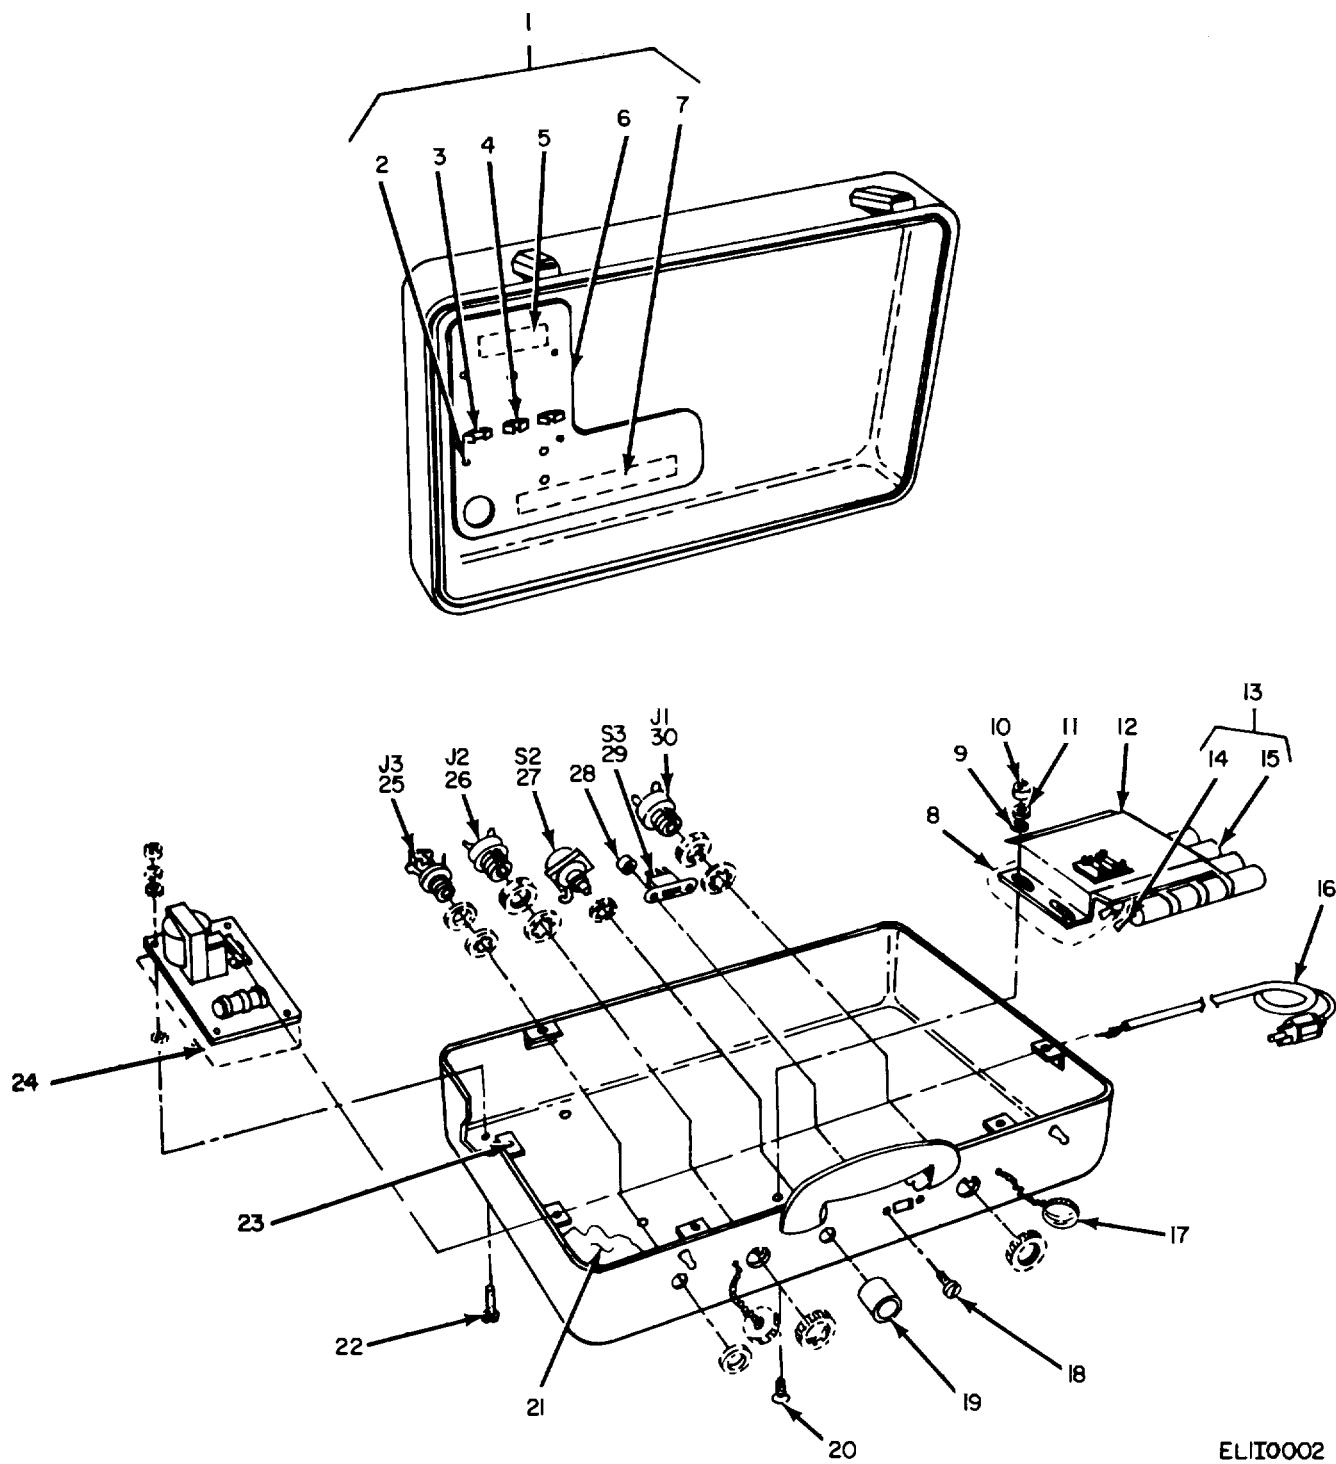


Figure 2. Recorder Reproducer Set, Sound AN/UNH-10, Case Assembly

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	
2	1	XDHHH	5999-00-329-4434	C14247	89178	PANEL ASSEMBLY,EQUIPMENT STORAGE	EA	1
2	2	XDHZZ		1530B	88245	SPACER,STANDOFF	EA	4
2	3	XDHZZ		TH19	37942	CLIP,RETAINING	EA	2
2	4	XDHZZ		TH23	37942	CLIP,RETAINING	EA	1
2	5	XDHZZ		A14245-1	89178	BRACKET,CABLE STORAGE	EA	1
2	6	XDHZZ		A14245	89178	BRACKET,CABLE STCRAGE	EA	1
2	7	XDHZZ		A14246	8918	BRACKET,CABLE STORAGE	EA	1
2	8	XDHZZ		A10198	8918I	INSULATION SHEET,ELECTRICAL	EA	1
2	9	XDHZL	5310-00-209-0788	MS35335-30	96906	WASHER,LOCK	EA	8
2	10	XDHZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	8
2	11	XDHZZ	MS15795-205	96906	WASHER,FLAT	EA	8	
2	12	XDHHH	12512	89178	COVER ASSEMBLY,BATTERY	EA	1	
2	13	XDHHH	12511	89178	BATTERY ASSEMBLY	EA	1	
2	14	XDHZZ	5940-00-050-2308	MS35431-3	96906	TERMINAL,LUG	EA	2
2	15	PAHZZ	6140-00-921-3670	BB412U	81349	BATTERY,NICKEL CADIUM	EA	8
2	16	PAHZZ	6150-00-834-6804	174085	70903	CABLE ASSEMBLY	EA	1
2	17	XDHZZ	91CC3	02660	COVER,ELECTRICAL	EA	2	
2	18	XDHZZ	MS35223-12	96906	SCREW,MACHINE	EA	2	
2	19	XDHZZ	12510	89116	GUARD,SWITCH	EA	1	
2	20	XDHZZ	5305-00-207-0763	MS35223-28	96906	SCREW,MACHINE	EA	4
Z	21	XDHHH	12518	19178	PANEL ASSEMBLY,MAIN	EA	1	
2	22	XDHZZ	5305-00-543-2192	MS35223-41	96906	SCREW,MACHINE	EA	4
2	23	XDHZZ	5S5-17	71286	STUD,TURNLOCK FASTENER	EA	6	
2	24	XDHZZ	A9167	89178	INSULATION SHEET,ELECTRICAL	EA	1	
2	25	PAHZZ	5935-00-608-0518	L12A	82389	JACK,TELEPHONE	EA	1
2	26	PAFZZ	5935-00-642-3330	91PC4F	02660	CONNECTOR,RECEPTACLE,ELECTRICALE	EA	1
2	27	PAHZZ	5930-00-268-0344	575	755821	SWTCH,PUSH	EA	1
2	28	XDHZZ	MS35649-42	96906,	NUT,PLAIN,HEXAGON	EA	2	
2	29	PAHZZ	5930-00-245-9642	SW724	79727	SWITCH,SLIDE	EA	1
2	30	PAHZZ	5935-00-257-93411	91PC3F	02660'	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1

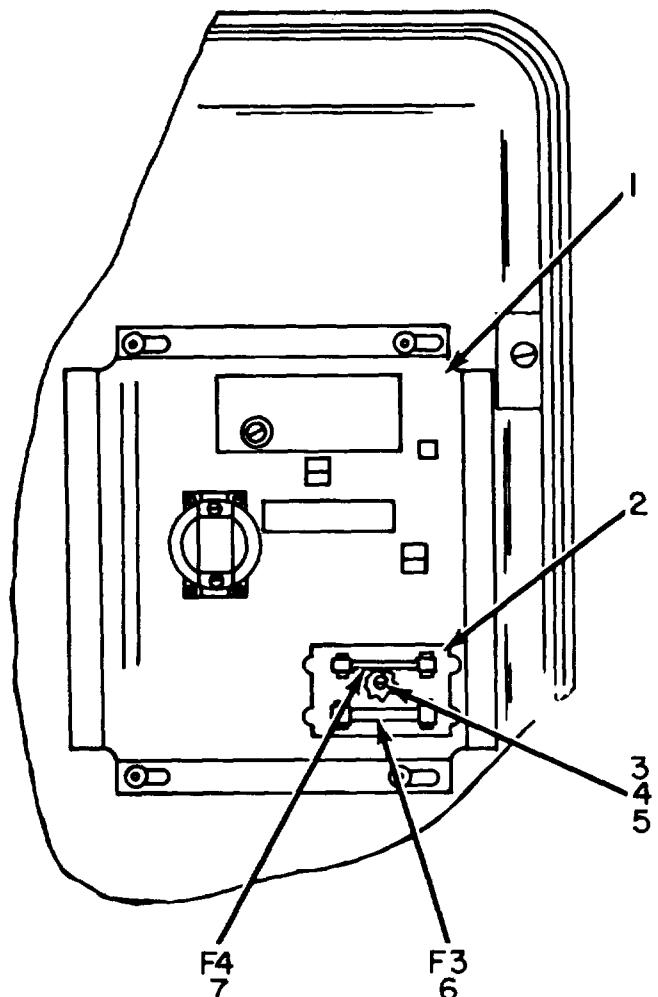


EL1I0003

Figure 3. Recorder Reproducer Set, Sound AN/UNH-10, Cover Assembly.

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	QTY INC IN UNIT
3	1	XDHZZ	5920-00-221-5673	12514	81718	COVER,BATTERY	EA	1
3	2	PAHZZ	5310-00-934-9747	357002	79s15	FUSEHOLDER	EA	1
3	3	XDHZZ	5305-00-207-0763	MH35649-262	96906	NUT,PLAIN,HEXAGON	EA	2
3	4	XDHZZ	5310-00-209-0788	MS35223-28	96906	SCREW,MACHINE	EA	2
3	5	XDHZZ	5920-00-184-2050	N3533F30	16906	WASHER,LOCK	EA	2
3	6	PACZZ	5920-00-710-8434	3136-25	75915	FUSE,CARTRIDGE	EA	1
3	7	PACZZ		312-500	75915	FUSE,CARTRIDGE	EA	1

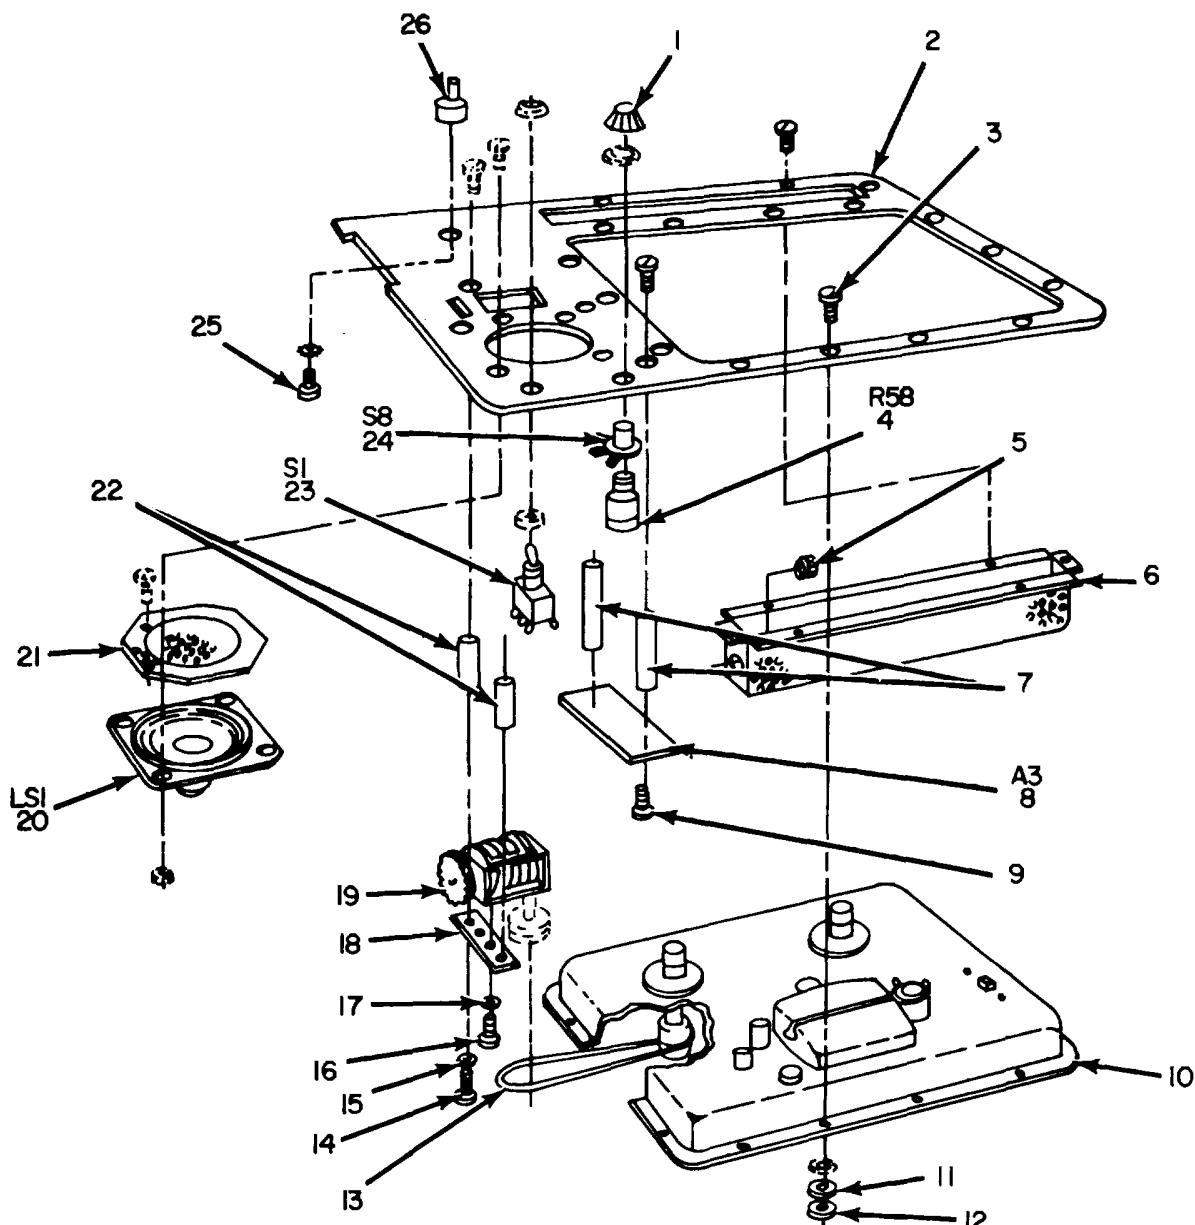


ELI10004

Figure 4. Recorder Reproducer Set, Sound AN/UNH-10, Panel Assembly, Main.

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	
4	1	XDCZZ		2246C	83330	KNOB	EA	I
4	2	XDHZZ		12519	89178	PANEL,MAIN	EA	1
4	3	XDHZZ		NS35239-35	96906	SCREW,MACHINE	EA	16
4	4	XDHZZ		12526	89178	RESISTOR,VARIABLE,COMPOSITION	EA	I
4	5	XDHZZ		2137	83330	BUSHING,ELECTRICAL CONDUCTOR	EA	1
4	6	XDHZZ		121ZI	89178	WELL STORAGE	EA	1
4	7	XDHZZ		12524-1	89178	SPACER	EA	2
4	8	XDHHH		12527	89178	AMPLIFIER.AUDIO FREQUENCY	EA	1
4	9	XDHZZ		251-C-6--32-5	89178	SCREW,MACHINE	EA	4
4	10	XDHHH		12530	89178	TRANSPORT,MAGNETIC TAPE	EA	1
4	11	XDHZZ	S310-00-209-0788	NS35335-30	96906	WASHER,LOCK	EA	8
4	12	XDHZZ	5310-00-934-9747	HS35649-262	96906	NUT,PLAIN,HEXAGON	EA	12
4	13	PACZZ	3030-00-477-8311	S6L151	77308	BELT,ROUND,COUNTER DRIVE	EA	I
4	14	XDHZZ		KS35223-27	96906	SCREW,MACHINE	EA	2
4	15	XDHZZ	5310-00-209-0768	MS35335-30	96906	WASHER,LOCK	EA	2
4	16	XDHZZ		NS35223-42	96906	SCREW,MACHINE	EA	2
4	17	XDHZZ	5310-00-56-7693	NS35335-31	96906	WASHER,LOCK	EA	2
4	18	XDHZZ		A14138	89178	BRACKET,COUNTER MOUNTING	EA	I
4	19	PAHZZ	6680-00-909-5248	3Y68805	18911	COUNTER,ROTATING	EA	1
4	20	XDHZZ		35C1267	07109	LOUDSPEAKER,PERMANENT MAGNET	EA	I
4	21	XDHZZ		12525	89178	SHIELD,LOUDSPEAKER	EA	1
4	22	XDHZZ		12524-4	89178	SPACER,SLEEVE	EA	2
4	23	PAHZZ	5930-00-258-4311	8360K7	271931	SWITCH,TOGGLE	EA	1
4	24	XDHZZ		KRI	71590	SWITCH,ROTARY	EA	1
4	25	XDHZZ		MS35223-68	96906	SCREW,MACHINE	EA	1
4	26	XDHZZ		"15142	89178	SPINDLE,WHEEL MOUNTING	EA	I

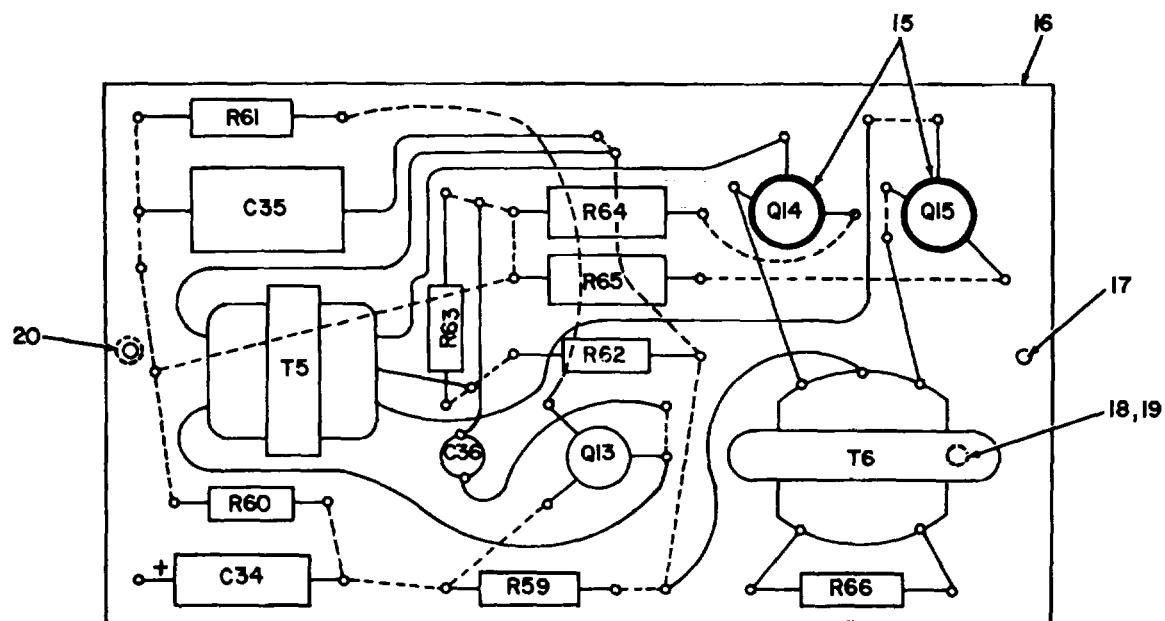


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C34	1	R59	6	R65	11
C35	2	R60	7	R66	12
C36	3	R61	8	T5	13
Q13	4	R62	9	T6	14
Q14	5	R63	10		
Q15	5	R64	11		

ELII0005

Figure 5. Recorder Reproducer Set., Sound AN/UNH-10, Amplifier, Audio Frequency.


(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	
5	1	PAHZZ	5910-00-719-9920	SMT-1025	74140	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
5	2	PAHZZ	5910-00-780-7838	SMT-100015	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
5	3	PAHZZ	5910-00-668-1685	DD102	71590	CAPACITOR,FIXED,CERAMIC	EA	1
5	4	XDHZZ		2N5232A	03508	TRANSISTOR	EA	1
5	5	PAHZZ	5961-00-985-9073	2N3053	01295	TRANSISTOR	EA	2
5	6	PAHZZ	5905-00-190-8879	RC20GFI8SK	81349	RESISTOR,FIXED,COMPOSITION	EA	1
5	7	PAHZZ	5905-00-171-2009	RC20GF222K	8L349	RESISTOR,FIXED,COMPOSITION	EA	1
5	8	PAHZZ	5905-00-171-2005	RC20GF471K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
5	9	PAHZZ	5905-00-104-8330	RC20GF333K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
5	10	PAHZZ	5905-00-185-6966	RC20GF271K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
5	11	PAHZZ	5905-00-327-9673	RC2GF022K	81349	RESISTOR,FIXED,COMPOSITION	EA	2
5	12	PAHZZ	5905-00-111-4734	RC20GF470K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
5	13	XDHZZ		X7176	95118	TRANSFORMER,AUDIO	EA	1
5	14	XDHZZ		X7177	95118	TRANSFORMER,AUDIO	EA	1
5	15	PAHZZ	S835-00-909-5366	A-12774	89178	HEAT SINK,ELECTRICAL COMPONENT	EA	2
5	16	XDHZZ		13686	89178	PRINTED WIRING BOARD	EA	1
5	17	XDHZZ		MS352Z3-27	96906	SCREW,MACHINE	EA	2
5	18	XDHZZ		MS35223-12	96906	SCREW,MACHINE	EA	2
5	19	XDHZZ		MS35649-42	96906	NUT,PLAIN,HEXAGON	EA	2
5	20	XDHZZ		12524-1	89178	SPACER,SLEEVE	EA	2

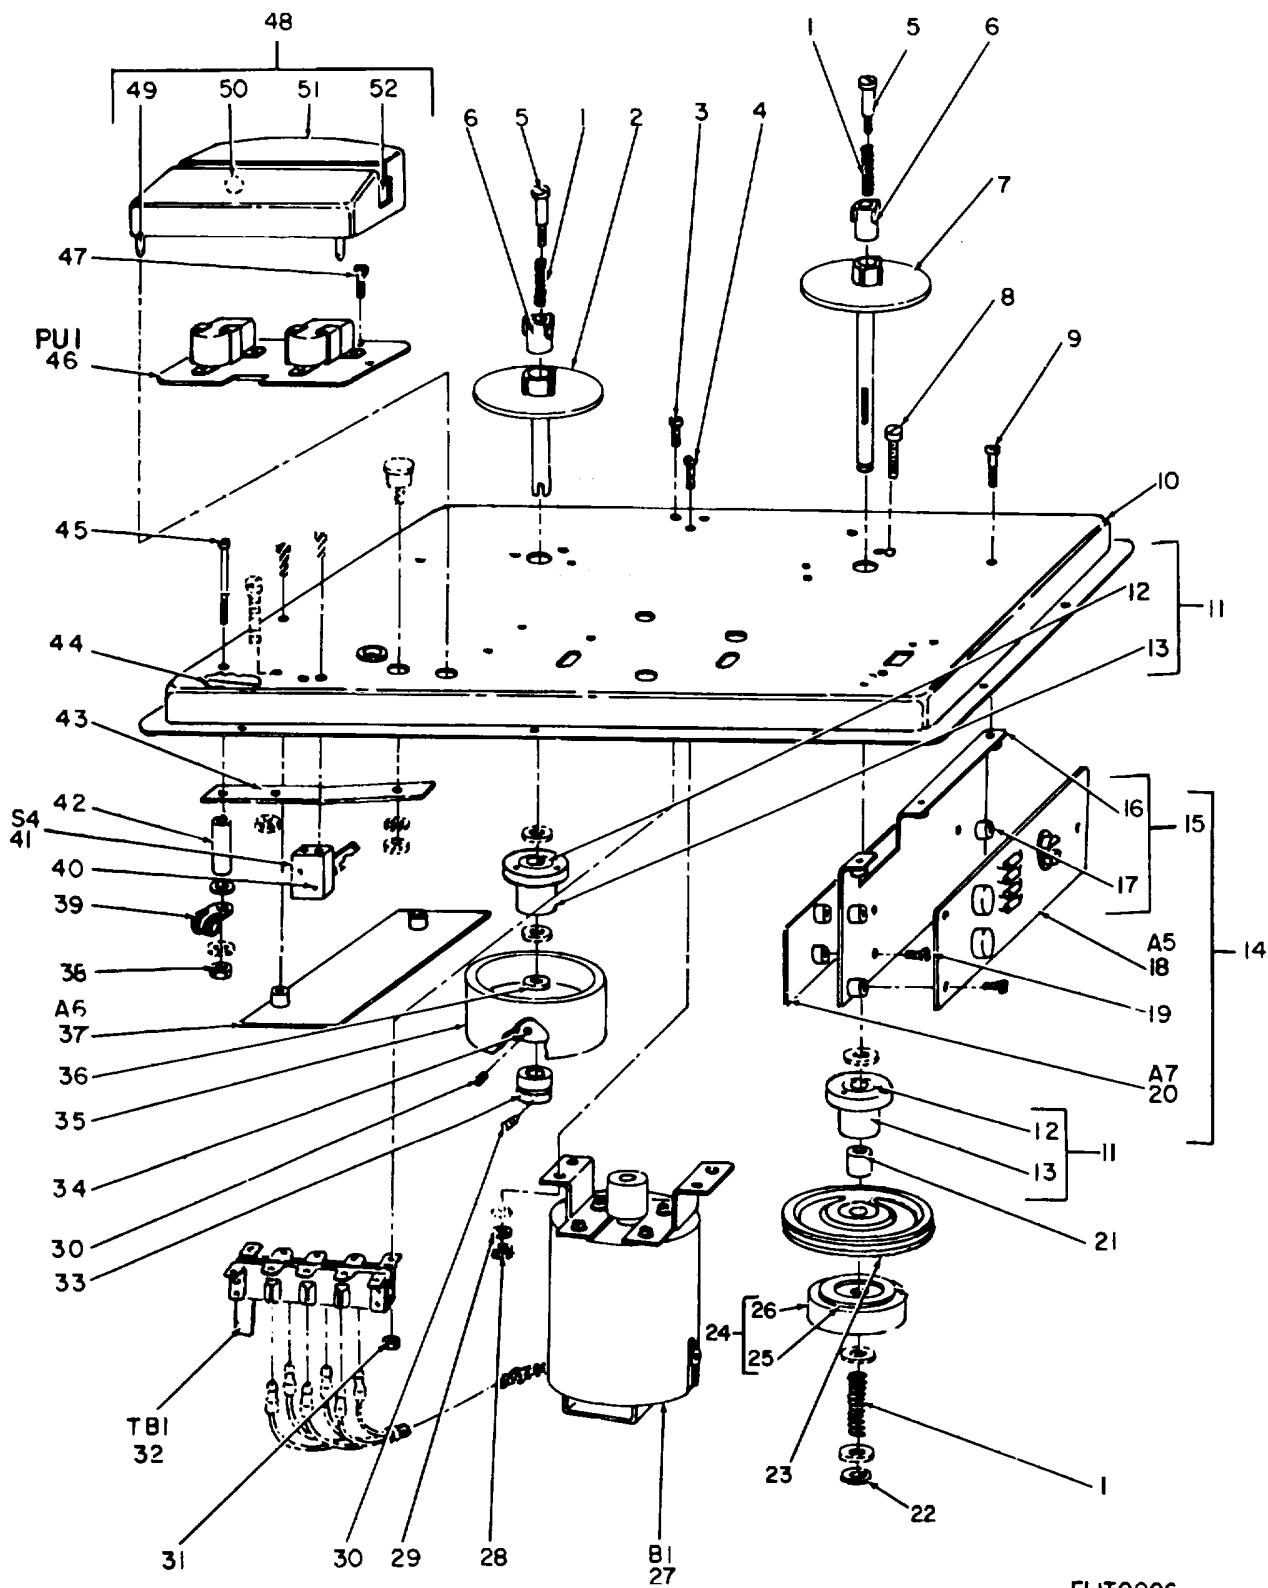

ELLI0006

EXPLODED VIEW, CALLOUTS 1-52

Figure 6. Recorder Reproducer Set, Sound AN/UNH-10, Transport, Magnetic Tape (Sheet 1 of 3).

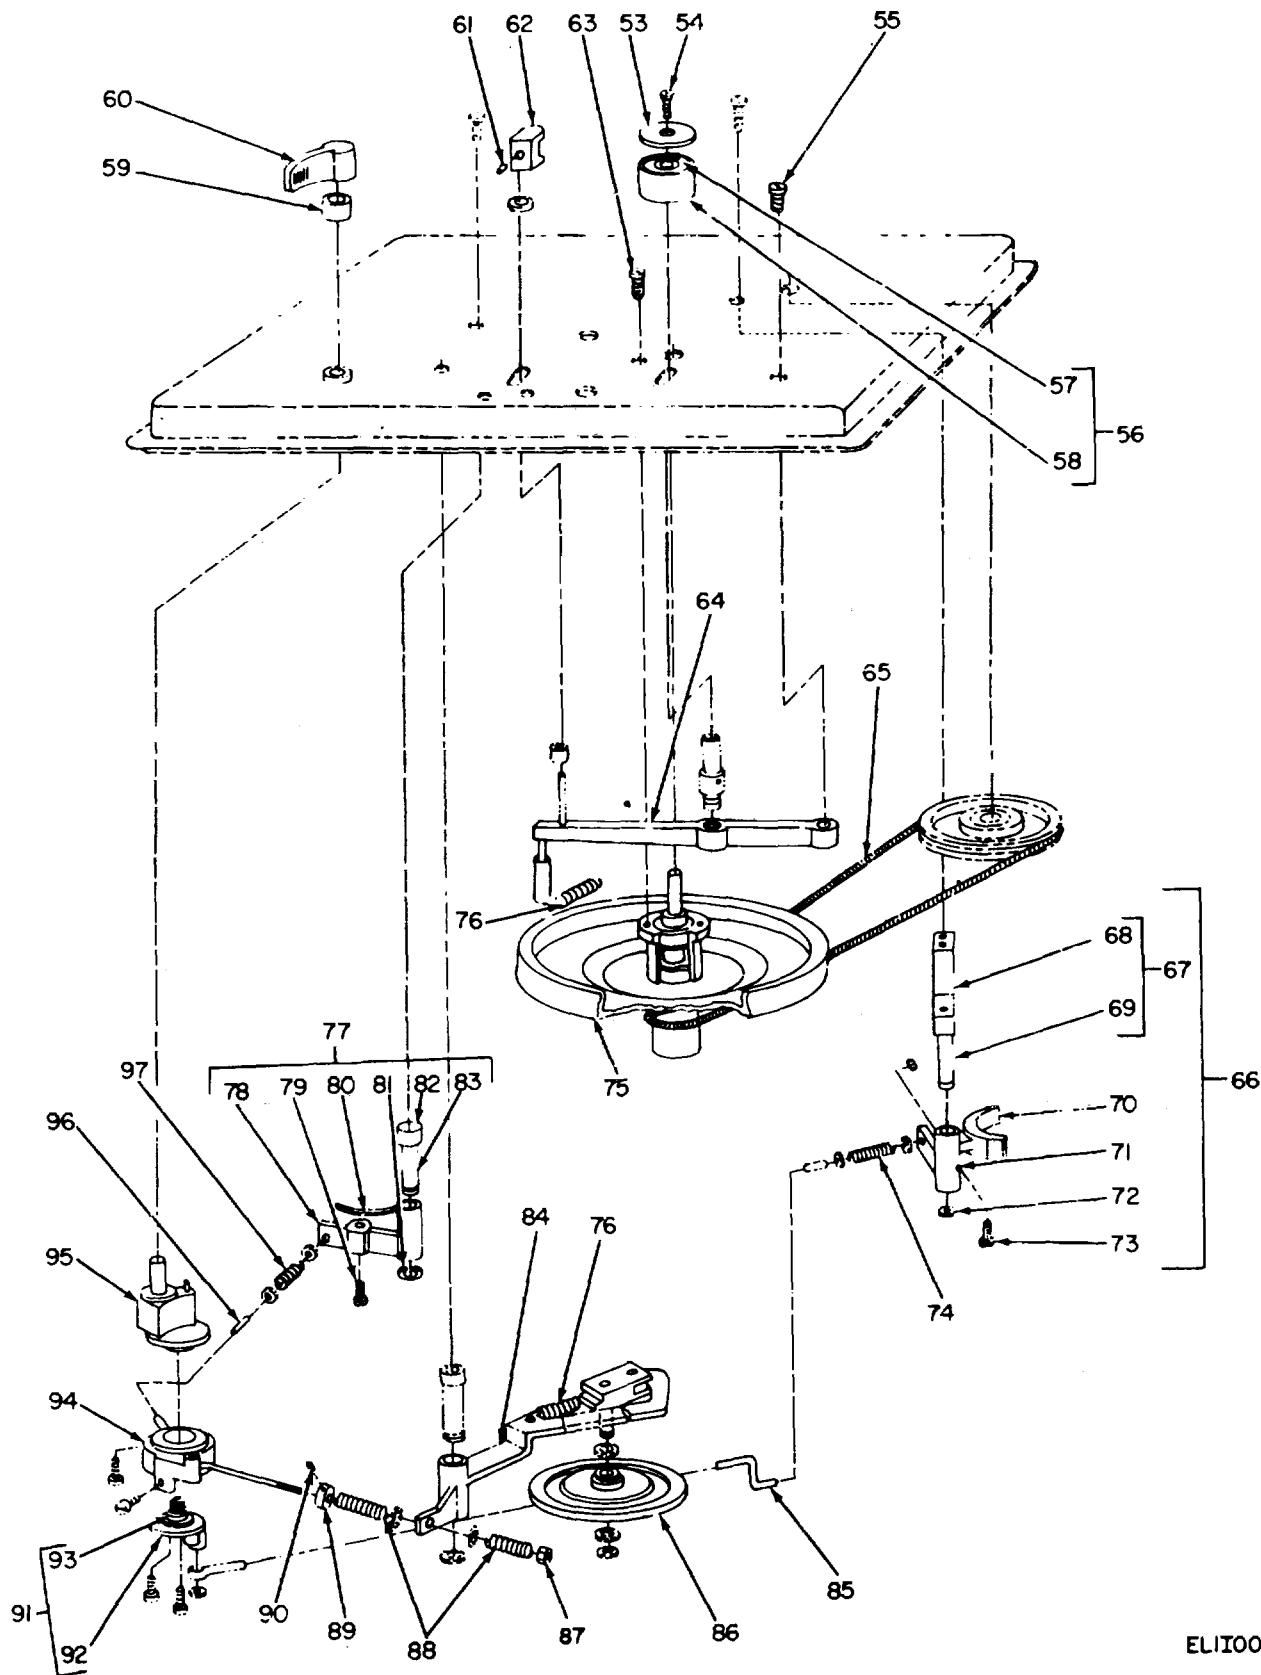

ELI10007

Figure 6. Recorder Reproducer Set, Sound AN/UNH-10, Transport, Magnetic Tape
(Sheet 2 of 3)

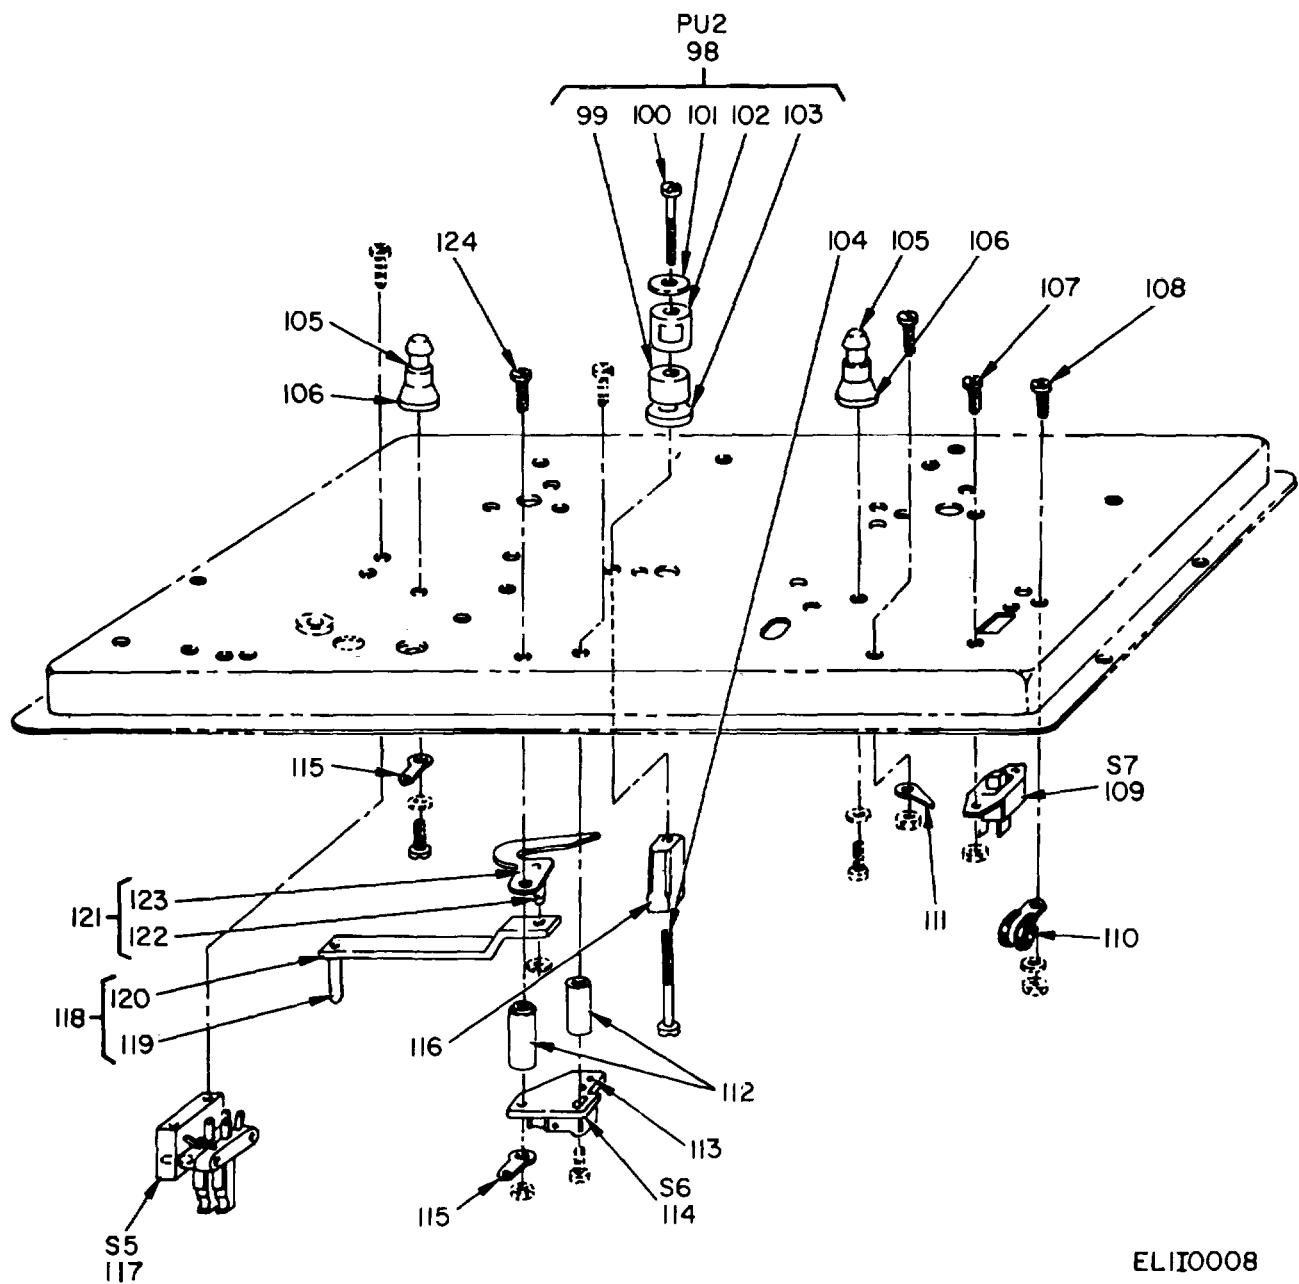


Figure 6. Recorder Reproducer Set, Sound AN//UNH-10, Transport, Magnetic Tape
(Sheet 3 of 3).

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	
6	1	XDHZZ		12560	89178	SPRING ,HELICAL,COMPRESSION	EA	3
6	2	PAHZZ	5835-00-909-5363	12556-1	89178	TURNTABLE ASSEMBLY	EA	1
6	3	XDHZZ		251-8-8-6-32-5	89117	SCREW,MACHINE	,EA	4
6	4	XDHZZ		251854405	89178	SCREW,MACHINE	EA	6
6	5	XDHZZ		12561	89171	SCREW,SHOULDER	EA	2
6	6	PAHZZ	5835-00-909-53T6	12559	89178	LOCK,REEL	EA	2
6	7	PAHZZ	5835-CO-909-7417	12556-2	89178	TURNTABLE ASSEMBLY	EA	1
6	8	XDHZZ	530-00-55-48089	MS35223-14	96906	SCREW,MACHINE	EA	9
6	9	XDHZZ		251C5-6-2-5	891t8	SCREW,MACHINE	EA	6
6	10	XDHZZ		12531	89178	PANEL,TAPE TRANSPORT	EA	1
6	11	PANHH	5835-00-909-5375	12562	89178	BEARING,HOUSING,TAKEUP-FEED	EA	2
6	12	XDHZZ		12562-1	89178	HOUSING	EA	2
6	13	XDHZZ	5365-00-687-3379	NS16625-1062	96906	RING,RETAINING	EA	2
6	14	XDHHH		12532	89178	AMPLIFIER,TAPE TRANSPORT	EA	1
6	15	XDPHH		89576	89178	BRACKET,BOARD	EA	1
6	16	XDHZZ		89576-1	89178	BRACKET	EA	1
6	17	XDHZZ		15308	88245	SPACER,SLEEVE	EA	9
6	18	XDHHH		12534	89178	AMPLIFIER,PLAY	EA	1
6	19	XDHZZ		HS35223-27	96906	SCREW,MACHINE	EA	9
6	20	XOHHH		12538	89178	AMPLIFIER,CONTROL	EA	1
6	21	XDHZZ		12563	89178	SPACER,SLEEVE	EA	2
6	22	XDHZZ	5365-00-687-3379	M516625-1062	96906	RING,RETAINING	EA	1
6	23	PAHZZ	5835-00-909-5374	12564	89178	PULLEY ASSEMBLY,TAKEUP	EA	1
6	24	XOHH		12565	89178	DISK ASSEMBLY DRIVE	EA	1
6	25	XDHZI		12566	89178	DISK,DRIVE	EA	1
6	26	XDHZZ		12567	89118	LINER,DRIVE	EA	1
6	27	PAHHH	6105-00-999-2654	12633	89178	MOTOR,DIRECT CURRENT	EA	1
6	28	XDHZZ		MS20365-440	96906	NUT,PLAIN,HEXAGON	EA	4
6	29	XDHZZ	5310-00-95D-1310	MS1579S-204	96906	WASHER,FLAT	EA	8
6	30	XDHZZ		MS51025-28	96906	SETSCREW	EA	2
6	31	XDHZZ	5310-00-934-9747	MH35649-26?	96906	NUT,PLAIN,HEXAGON	EA	6
6	32	XDHZZ	5940-00-171-0156	S1406	07233	TERMINAL BOARD	EA	1
6	33	PAHZZ	3020-00-150-7182	13806	89178	PULLEY,COUNTER DRIVE	EA	1
6	34	PAHZZ	5365-00-598-1362	5555-18	79136	RING,RETAINING	EA	3
6	35	PAHZZ	5835-C0-909-5367	12636	09178	PULLEY,FEED	EA	1
6	36	PAHZZ	5365-00-598-8635	555S-12	79136	RING,RETAINING	EA	4
6	37	XDHHH		12536	89178	AMPLIFIER,RECORD	EA	1
6	38	XDHZZ		MS35649-42	9906	NUT,PLAIN,HEXAGON	EA	10
6	39	XDHZZ		728	11002	CLAMP,LOOP	EA	1
6	40	XDHZZ	5315-00-276-5165	MS35671-8	969061	PIN,GROOVED.,HEADLESS	EA	2

SECTION II

TM 11-5874-200-40P


(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	
6	41	PAHZZ	5835-00-909-5365	12612	89178	SWITCH ASSEMBLY,RECORD.....	EA	
6	42	XDHZZ		12524-3	89178	SPACER	EA	
6	43	PAHZZ	5835-00-90F5356	12609	89178	SPRING,ASSEMBLY,INTERLOCK	EA	
6	44	XDHZZ		12575	89178	INSULATOR,PLATE	EA	1
6	45	XDHZZ		MS35223-22	96906	SCREW,NACHINE	EA	1
6	46	PAHZZ	5835-00-909-5361	12618	89178	HEAD,ASSEMBLY,PLAY AND RECORD	EA	1
6	47	XDHZZ		119-45	11983	SCREW,MACHINE	EA	4
6	48	XDHHH		12634	89178	COVER ASSEMBLY,HEAD	EA	1
6	49	XDHZZ		12634-2	89178	PIN,DOWEL,HEADLESS	EA	4
6	50	XDHZZ		P116-499-5	78553	STUD,RETAINER	EA	3
6	51	XDHZZ		12635	89178	COVER,HEADO	EA	1
6	52	XDHZZ		12634-1	89178	BAR,PRESSURE	EA	1
6	53	XDHZZ		A14683	89178	CAP,BEARIING PINCHWHEEL	EA	1
6	54	XDHZZ		NS35209-25	96906	SCREW,MACHINE	EA	1
6	55	XDHZZ		MS35223-42	46906	SCREW,NACHINE	EA	1
6	56	P6AHH	5835-00-909-5371	12624	89178	PINCHWHEEL ASSEMBLY	EA	1
6	57	XDHZZ		12626	89118	CORE,PINCHWHEEL	EA	1
6	58	XDHZZ		12625-I	89178	TIRE,SOLID RUBBER	EA	1
6	59	XDHZZ		12589	89178	SPACER	EA	
6	60	PACZZ	355-00-667-8972	22348	72653	KNOB	EA	
6	61	XDHZZ		MS51025-8	96906	SETSCREW	EA	
6	62	PAHZZ	535-00-909-8088	12628	89178	BAR,TAPE PRESSURE	EA	
6	63	XDHZZ		251B5-440-5	89178	SCREW,MACHINE	EA	3
6	64	PAHHH	535-00-19-3121	12545	89178	ARM ASSEN8LY,PINCHWHEEL	EA	1
6	65	PACZZ	3030-00-455-1614	568-235	77308	BELT ,ROUND,TAKEUP DRIVE	EA	1
6	66	XDHHH		12550	89178	BRAKE ASSEPBLY,TAKEUP	EA	1
6	67	XDHHH		12554	89178	BASE ASSEMBLY,TAKEUP BRAKE	EA	1
6	68	XDHZZ		1255	89178	BASE	EA	1
6	69	XDHZZ		1255-1	89178	PIN.DOWEL	EA	1
6	70	PAHZZ	5835-00-911-6330	12552	89178	SHOE ASSENBLY,TAKEUP BRAKE	EA	1
6	71	XDHZZ		12551	89178	ARM,BRAKE	EA	1
6	72	PAHZZ	5365-00-598-1362	5555-18	79136	RING,RETAINING	EA	1
6	73	XDHZZ		NS35223-2	96906	SCREW	EA	1
6	74	XDHZZ		12631	89178	SPRING,HELICAL,CCMPRESSION	EA	1
6	75	XDFHH		12540	89181	FLYWHEEL ASSEMHLY	EA	1
6	76	XDHZZ		12548	89178	SPRING,HELICAL,EXTENS/ON	EA	2
6	77	XDHHH		12570	89178	BRAKE ASSEHBLY,SUPPLY	EA	1
6	78	XDHZZ		12551	89178	ARM,BRAKE	EA	
6	79	XDHZZ		MS35223-27	96906	SCREW,MACHINE	EA	
6	80	PAHZZ	5835-00-909-5373	12572	89178	SHOE ASSEHBLY,SUPPLY BRAKE	EA	

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	
6	81	PAHZZ	5365-00-598-1362	5555-18	79136	RING,RETAINING		EA 1
6	82	XDHZZ		12575	89178	INSULATOR		EA 1
6	83	XDHZZ		12574	89178	STUD,SUPPLY BRAKE		EA 1
6	84	PAHHH	5835-00-909-5352	1295	89118	ARM ASSEMBLY,INTERMEDIATE		EA 1
6	85	PAHZZ	5835-00-909-5369	12630	89178	ROD,TAKEUP BRAKE		EA 1
6	86	PAHZZ	5935-00-909-5354	12601	89178	PULLEY ASSEMBLY, INTERMEDIATE		EA 1
6	87	XDHZZ	5310-00-012-0622	NS35649-82	96906	NUT,PLAIN,HEXAGON		EA 1
6	88	PAHZZ	5360-00-904-8137	12605	89178	SPRING,HELICAL COMPRESSION		EA 2
6	89	XDHZZ		SCI2	71041	COLLAR,CONTROL SPIDER ROD		EA 1
6	90	XDHZZ		NS51025-8	96906	SETSCREW		EA 1
6	91	XDHHH		12585	89178	DETENT.CONTROL SPIDER		EA 1
6	92	XDHZZ		12585-1	89178	DETENT		EA 1
6	93	XDHZZ		12586	89118	SPRING,HELICAL.COMPRESSION		EA 1
6	94	PAHZZ	5835-00-909-5360	12578	89178	SPIDER,CONTROL ASSEMBLY		EA 1
6	95	PAHZZ	5835-00-909-5358	12581	89178	CAN ASSENBLY.CONTROL SPIDER		EA 1
6	96	XDHZZ		17571	89178	ROO,FEEDBRAKE		EA 1
6	97	XDHZZ	5360-00-951-6318	12569	89178	SPRING,HELICAL,COMPRESSION		EA 1
6	98	PAHHH	5835-00-419-3120D	9573	891OL	ERASE HEAD ASSEMBLY		EA 1
6	99	XDHZZ		A6843	89178	SPACER,HEAD,ERAS		EA 1
6	100	XDHZZ		MS35223-20	96906	SCREW,MACHINE		EA 1
6	101	XDHZZ		A6844	89178	CAP,ERASE HEAD		EA 1
6	102	XDHZZ		S4A507	74919	HEAD,ERASE		EA 1
6	103	XDHZZ		A6845	89178	SPACER,SLEEVE		EA 1
6	104	XDHZZ		S35223-35	96906	SCREIW,MACHINE		EA 1
6	105	PAHZZ	5835-00-247-5I92	173-13	11983	GUIDE.TAPE		EA 2
6	106	XDHZZ		12632	89178	SPACER.TAPE GUIDE		EA 2
6	107	XDHZZ		21A4-4-40-5	89178	SCREW,MACHIIE		EA 2
6	108	XDHZZ		251C5-6-32-S	89178	SCREI.MACHINE		EA 1
6	109	PAHZZ	5930-00-245-9642	SW724	79727	SWITCH,SLIDE		EA 1
6	110	XDHZZ		725	11002j	CLAMP,LOOP		EA 3
6	111	XDHZZ		518	07233	TERMINAL		EA 1
6	112	XDHZZ		125Z4- 2	89178	SPACER		EA 2
6	113	XDHZZ		NS35671-10	96906	PIN,GROOVED,HEADLESS		EA 4
6	114	PAHZZ	5835-00-909-5357	2606	89178	SWITCH ASSEMBLY,PLAY		EA 1
6	115	XDHZZ	5940-00-050-2308	MS35431-3	96906	TERMINAL,LUG		EA 2
6	116	XDHZZ		814227	89178	BAR.,LOADING		EA 1
6	117	PAHZZ	5835-00-909-5362	12615	89178	SWITCH ASSEMBLY,REWIND		EA 1
6	118	XDHHH		12590	89178;	ROD ASSEMBLY,CONNECTING		EA 1
6	119	XDHZZ		MS1655628	96906	PIN.DOWEL		EA 1
6	120	XDHZZ		12591	891781	ROD.CONECTING		EA 1

SECTION II**TM 11-5874-200-40P**

(1) ILLUSTRATION		(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
6	121	XDHHH		12592	89178	ARM ASSEMBLY,TAPE PRESSURE	EA	1
6	122	XDHZZ		12592-1	89178	PIN,DDOEL	EA	1
6	123	XDHZZ		12593	89178	ARM,TAPE PRESSURE	EA	1
6	124	XDHZZ		MS35223-35	96906	SCREW,MACHINE	EA	1

20/(21 BLANK)

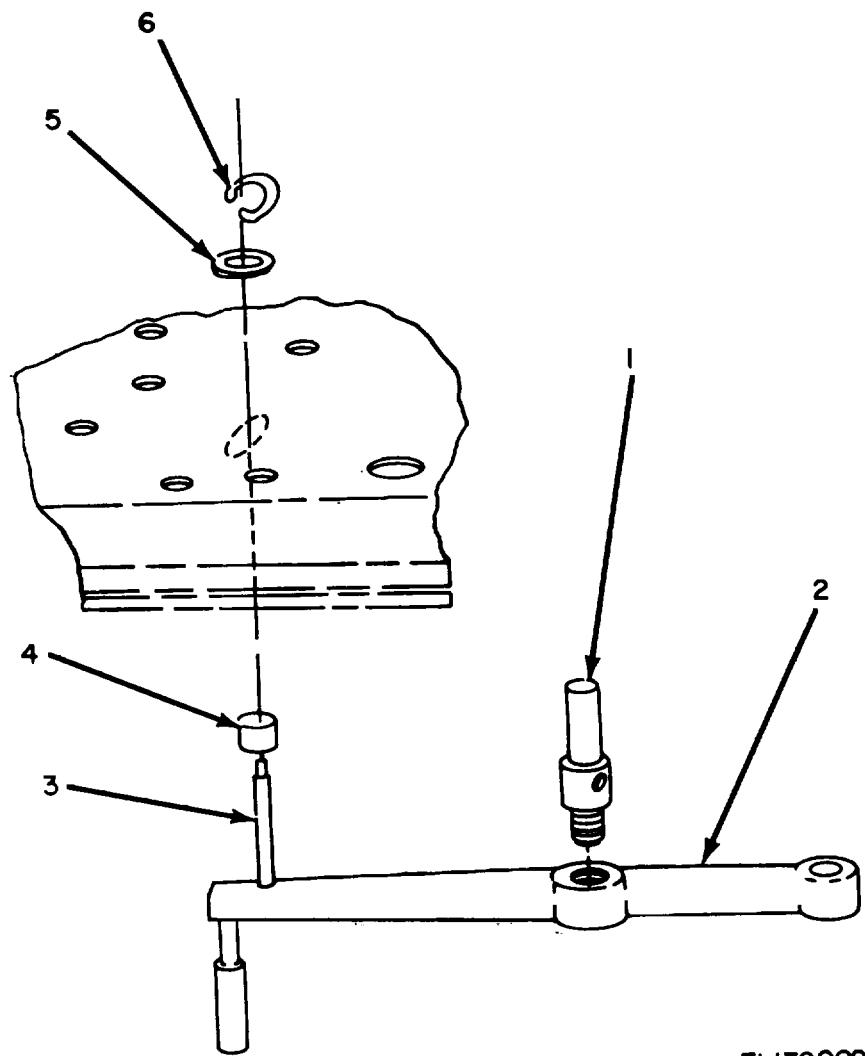

EL110009

Figure 7. Recorder Reproducer Set, Sound AN/UNH-10, Arm Assembly, Pinchwheel.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	QTY INC IN UNIT
7	1	XDHZZ		12541	89178	STUD.,PINCHWHEEL ARM	EA	1
7	2	XDHZZ		12546	89178	ARM,PINCHWHEEL.....	EA	1
7	3	XDHZZ	5315-00-828-5486	MS3567I-16	96906	PIN,GROOVED,HEADLESS	EA	1
7	4	XDHZZ		12629	89178	ROLLER,ACTUATOR.....	EA	1
7	5	XDHZZ		MS15795-205	96906	WASHER,FLAT	EA	1
7	6	PAHZZ	5365000-720-8064	Sa16624-1025	96906	RING,RETAINING	EA	1

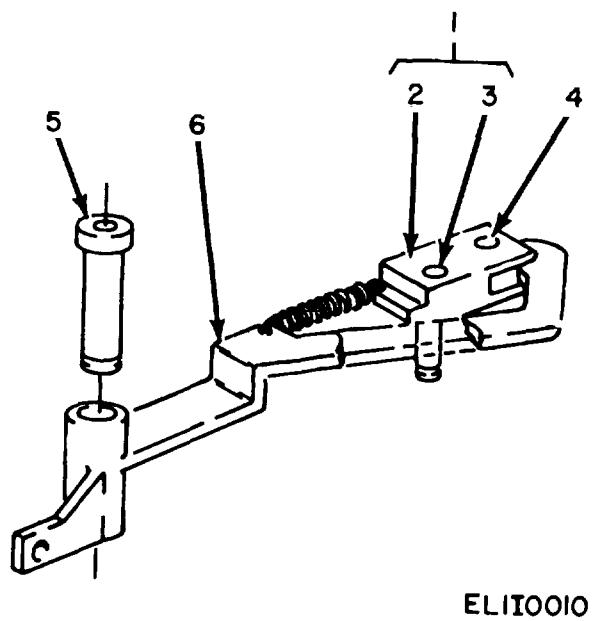


Figure 8. Recorder Reproducer Set, Sound AN/UNH-10, Arm Assembly, Intermediate.

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	QTY INC IN UNIT
8	1	XDHHH		12599	89178	HINGE ASSEMBLY,INTERMEDIATE	EA	1
8	2	XDHZZ		12600	89178	HINGE, INTERMEDIATE ARM	EA	1
8	3	XDHZZ	MS16556-43		96906	PIN,DOWEL	EA	1
8	4	XDHZZ		12597	89178	PIN,DOWEL	EA	1
8	5	XDHZZ		12603	89174	STUD,INTERMEDIATE ARM	EA	1
8	6	XDHZZ		12596	89178	ARM,INTERMEDIATE	EA	1


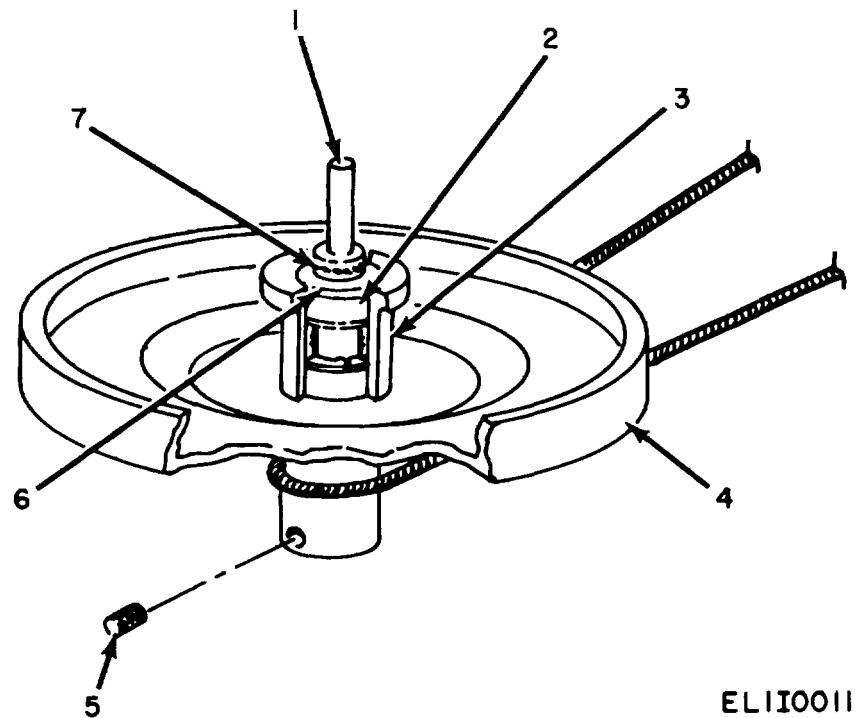


Figure 9. Recorder Reproducer Set, Sound AN/UNH-10, Flywheel Assembly.

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	QTY INC IN UNIT
9	1	PAHZZ	5835-00-909-7418	12543	89178	SHAFT,FLYWHEEL	EA	1
9	2	IDHZZ		R4ZZ1NB08	20316	BEARING,BALL.....	EA	2
9	3	XDHZZ		A4406	8917i8	BEARING HOUSING ASSEMBLY,FLYWHEEL	EA	1
9	4	XDHZZ		A4409	89178	FLYWEEL.....	EA	1
9	5	XDHZZ		MS51025-39	96906	SETSCREW	EA	1
9	6	XDHZZ		12544	89178	SEAL,PLAIN.....	EA	1
9	7	XDHZZ	5365-00 -617-3379	MS1625-10I2	96906	RING, RETAINING	EA	2

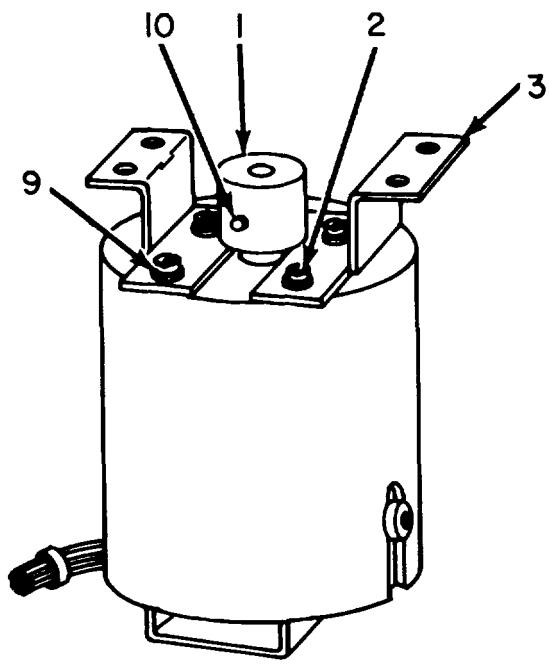

SIDE VIEW



BOTTOM VIEW
EL110012

Figure 10. Recorder Reproducer Set, Sound AN/UNH, Motor, Direct Current

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	QTY INC IN UNIT
10	1	XDHZZ	5305-00-984-4983	A4417	89178	PULLEY, MOTOR.....	EA	1
10	2	XDHZZ		MS35230-35	96906	SCREW, MACHINE.....	EA	4
10	3	XDHZZ		A4418	89178	PLATE, MOTOR MOUNTING.....	EA	1
10	4	XDHZZ		MS18064-2	96906	SETSCREW	EA	2
10	5	XDHZZ		A6949	89178	COVER, REGULATOR.....	EA	1
10	6	XDHZZ		MS35206-226	96906	SCREW, MACHINE.....	EA	2
10	7	XDHZZ		B6662	87178	REGULATOR ASSEMBLY	EA	1
10	8	XDHZZ		MS35223-12	96906	SCREW, MACHINE.....	EA	2
10	9	XDHZZ		87	72953	GROMMET	EA	4
10	10	XDHZZ		MS18064-6	96906	SETSCREW	EA	1

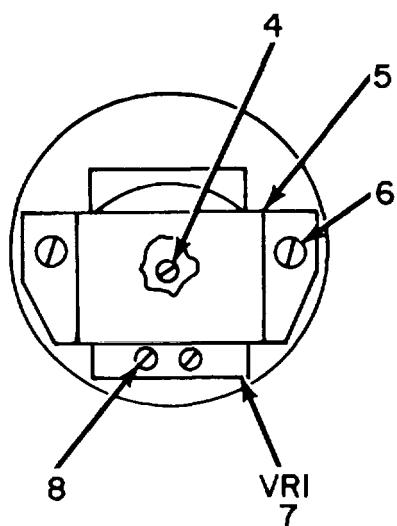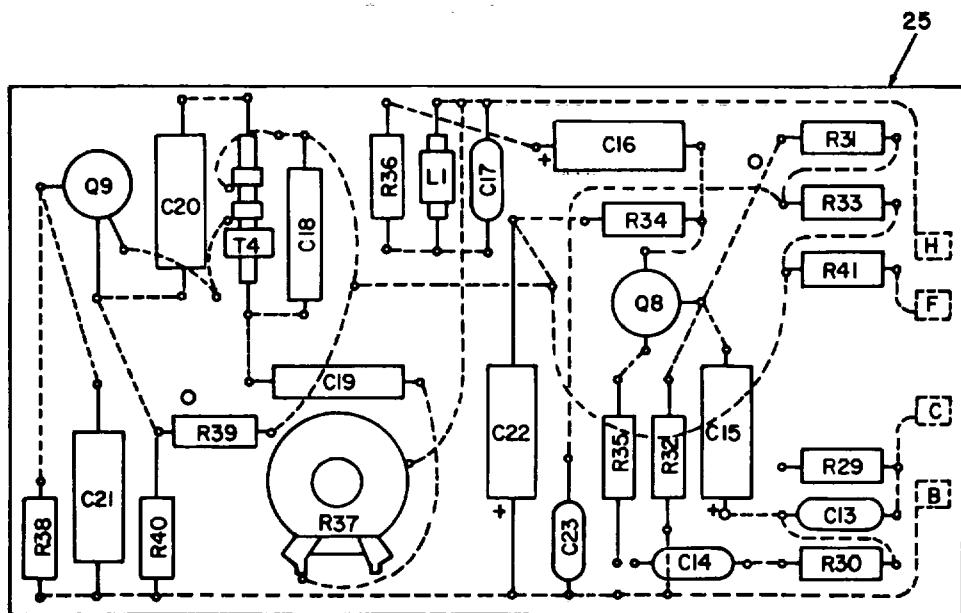

REF. DES.	ITEM NO.						
C13	1	C20	8	R29	13	R36	19
C14	2	C21	8	R30	14	R37	20
C15	3	C22	9	R31	15	R38	18
C16	4	C23	10	R32	14	R39	21
C17	5	L1	11	R33	16	R40	22
C18	6	Q8	12	R34	17	R41	23
C19	7	Q9	12	R35	18	T4	24


ELI10013

Figure 11. Recorder Reproducer Set, Sound AN/UNH-10, Amplifier, Record.

SECTION II

TM11-5874-200-40P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY IN UNIT	
11	1	XDHZZ		PVC62	90201	CAPACITOR,FIXED,MYLAR	EA	1
11	2	XDHZZ		UK474	71590	CAPACITOR,FIXED,CERAMIC	EA	1
11	3	XDHZZ		SHT-225	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
11	4	XDHZZ		SMT-825	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
11	5	XDHZZ		10TSD15	56289	CAPACITOR,FIXED.,CERAMIC	EA	1
11	6	PAHZZ	5910-00-023-1614	CM20FD182G03	81349	CAPACITOR,FIXED,MICA	EA	1
11	7	XDHZZ		DM19-511	72136	CAPACITOR,FIXED,MICA	EA	1
11	8	PAHZZ	5910-00-802-9423	P8292ZN9	06656	CAPACITOR,FIXED,PAPER	EA	2
11	9	PAHZZ	5910-00-058-5862	SMT-10012	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
i1	10	PAHZZ	5910-00-577-1138	DD103	71590	CAPACITOR,FIXED,CERAMIC	EA	1
11	11	XDHZZ		70F683A1	76493	REACTOR	EA	1
11	12	PAHZZ	5961-00-902-7477	2N508	03508	TRANSISTOR	EA	2
11	13	PAHZZ	5905-00-106-1282	RC20GF223K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
11	14	PAHZZ	5905-00-110-0196	RC20GF102K	81349	IESISTOR,FIXED,COMPOSITION	EA	2
11	15	PAHZZ	5905-00-190-8876	RC20GFI53K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
11	16	PAHZZ	5905-00-190-8884	RC20GF123K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
11	17	PAHZZ	5905-00-171-2009	RC20GF222K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
11	18	PAHZZ	5905-00-111-4734	RC20GF470K	81349	RESISTOR,FIXED,CCOPOSITION	EA	2
11	19	PAHZZ	5905-00-245-0023	RC20GF682K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
11	20	XDHZZ		U201NX9817	71450	RESISTOR,VARIABLE,COMPOSITION	EA	1
11	21	PAHZZ	5905-00-141-1116	RC20GF562K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
11	22	PAHZZ	5905-00-185-6966	RC206F2TIK	81349	RESISTED,FIXED,COMPOSITION	EA	1
11	23	PAHZZ	5905-00-186-3008	RC20GF101K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
11	24	XDHZZ		2814	71493	TRANSFORMER,AUDIO FREQUENCY	EA	1
11	25	XDHZZ		A12536	89178	PRINTED WIRING BOARD	EA	1

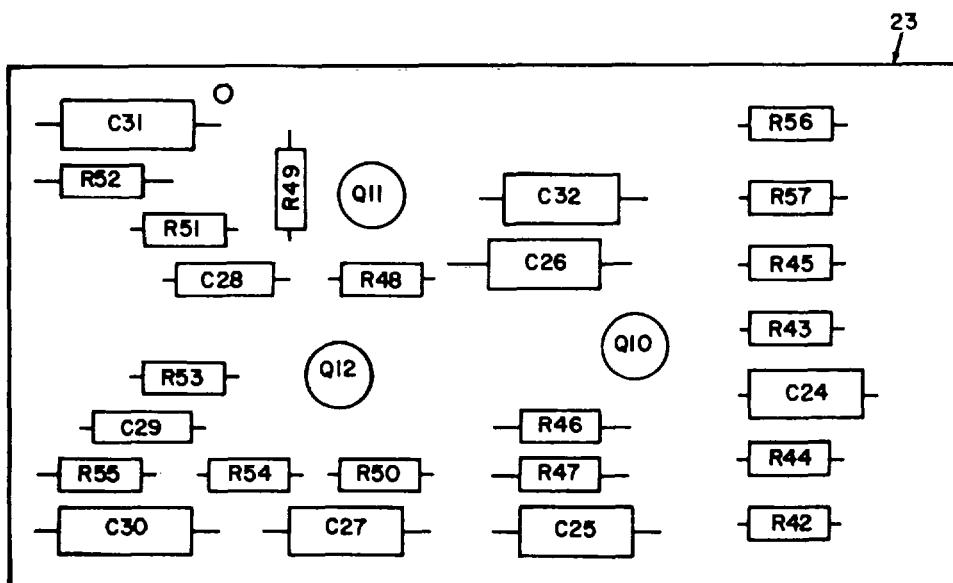


REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.	REF. DES.	ITEM NO.
C24	1	C31	6	R44	10	R51	17
C25	2	C32	4	R45	11	R52	18
C26	3	Q10	7	R46	12	R53	19
C27	4	Q11	7	R47	13	R54	8
C28	5	Q12	7	R48	14	R55	20
C29	5	R42	8	R49	15	R56	21
C30	6	R43	9	R50	16	R57	22

ELII0015

Figure 12. Recorder Reproducer Set, Sound AN/UNH-10, Amplifier, Play.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		U/M	
12	1	PAHZZ	5910-00-719-9920	SMT1025	74840	CAPACITOR,FIXED,ELECTRLLYTIC	EA	1
12	2	XDHZZ		SMT1003	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
12	3	PAHZZ	5910-00-845-9307	P8292ZN9	00656	CAPACITOR,FIXED,PAPER	EA	1
12	4	PAHZZ	5910-00-058-5862	SMT10012	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	2
12	5	PAHZZ	5910-00-088-9193	SMT2525	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	2
12	6	PAHZZ	5910-00-926-0081	SMT20025	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	2
12	7	PAHZZ	5961-00-902-7477	2N508	03508	TRANSISTOR	EA	3
12	8	PAHZZ	5905-00-279-3833	RC20GF100K	81349	RESISTOR,FIXED,COMPOSITION RS4 IS A SELECT	EA	2
	8	PAHZZ	5905-00-126-6691	RC20GF150K	81349	RESISTOR,FIXEO,COMPOSITION SELECT	EA	1
12	8	PAHZZ	5905-00-279-1752	RC20GF120K	81349	RESISTOR,FIXED,COMPOSITION SELECT	EA	11
12	8	XDHZZ		RC20GF180K	81349	RESISTOR,FIXED,COMPOSITION SELECT	EA	1
12	8	PAHZZ	5905-00-25?-????	RC20GF220K	81349	RESISTOR,FIXED,COMPOSITION SELECT	EA	1
12	8	PAHZZ	5905-00-251-7757	RC20GF210K	81349	RESISTOR,FIXED,COMPOSITION SELECT	EA	1
12	8	PAHZZ	5905-00-279-2621	RC20GF33???	81349	RESISTOR,FIXED,COMPOSITION SELECT	EA	1
12	9	PAHZZ	5905-00-???-3???	RC20GF473?	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	10	PAHZZ	5905-00-???-6451	RC20GF472K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	11	PAHZZ	5905-00-1105-518	RC20GF103K	81349	RESISTOR,FIXED,CCOMPSSION	EA	1
12	12	PAHZZ	5905-00-186-3008	RC20GF101K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	13	PAHZZ	5905-00-110-0196	RC20GF102K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	14	PAHZZ	????-00-??5-6502	RC20GF332K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	15	PAHZZ	5905-00-???-?130	RC20GF????	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	16	PAHZZ	5905-00-171-2009	RC20GF222?	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	17	PAHZZ	5905-00-190-8882	RC20GF393K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
11	18	PAHZZ	5905-00-190-8879	RC20GFI83K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	19	PAHZZ	5905-00-279-1761	RC20GF621J	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	20	PAHZZ	5905-00-256-04??	RC20GF221K	81349	RESISTOR,FIXED,COMPOSITION	FA	1
12	21	PAHZZ	5905-00-279-1169	RC20GF121K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	22	PAHZ	5905-00-195-5514	RC20GFI52K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
12	73	KDHZZ		A12534	89178	PRINTED WIRING BOARD	EA	1

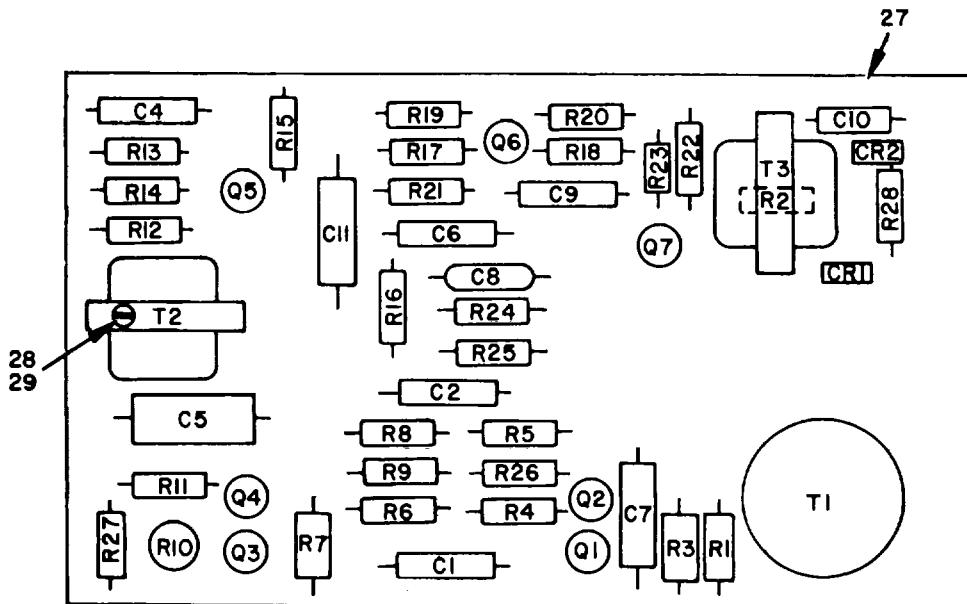

REF. DES.	ITEM NO.								
C1	1	CRI	7	R2	11	R12	17	R22	21
C2	1	CR2	7	R3	12	R13	13	R23	22
C4	2	Q1	8	R4	10	R14	18	R24	23
C5	3	Q2	8	R5	10	R15	11	R25	12
C6	1	Q3	8	R6	10	R16	12	R26	19
C7	4	Q4	8	R7	13	R17	17	R27	12
C8	5	Q5	9	R8	14	R18	13	R28	12
C9	6	Q6	9	R9	10	R19	19	T1	24
C10	6	Q7	8	R10	15	R20	20	T2	25
CII	1	R1	10	RII	16	R21	12	T3	26


EL110014

Figure 13. Recorder Reproducer Set, Sound AN/UNH-10, Amplifier, Control
34

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	QTY IN U/M	QTY INC IN UNIT
13	1	PAHZZ	5910-00-805-5264	SMT225	74840	CAPACITOR.FIXED,ELECTROLYTIC	EA	4
13	2	XDHZZ		SMT1003	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
13	3	PAHZZ	5910-00-926-0081	SMT20025	74840	CAPACITOR,FIXED,ELECTROLYTIC	EA	1
13	4	PAHZZ	5910-00-088-9193	SMT2525	74840	CAPACITOR.FXED,ELECTROLYTIC	EA	1
13	5	PAHZZ	5910-00-577-1138	DD0103	71590	CAPACIOR,FIXED,CERAMIC	EA	1
13	6	XDHZZ	5910-00-719-9920	SMT1025	74840	CAPACITOR.FIXED, ELECTROLYTIC	EA	2
13	7	PAHZZ	5961-00-921-3781	1N4001	04713	SENICONDUCTOR DEVICE,DIODE	EA	2
13	8	PAHZZ	5961-00-577-3022	2N220	81349	TRANSISTOR	EA	5
13	9	PAHZZ	5961-00-902-7477	2N508	03508	TRANSISTOR	EA	2
13	10	PAHZZ	5905-00-185-8518	RC20GF103K	81349	RESISTOR,FIXED,.COMPOSITION	EA	5
13	11	PAHZZ	5905-00-186-3008	RC20GF101K	81349	RESISTOR,FIXED,COMPOSITION	EA	2
13	12	PAHZZ	5905-00-110-0196	RC20GF102K	81349	RESIST0R,FIXED,COMPOSITION	EA	6
13	13	PAHZZ	5905-00-185-6157	RC20GF392K	81349	RESISTOR,FIXED,COMPOSITION	EA	3
13	14	PAHZZ	5905-00-190-8884	RC20GF123K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
13	15	XDHZZ		U201R751B	71450	RES] STOR.VARIABLE.COMPOSITION	EA	1
13	16	PAHZZ	5905-00-942-9326	RC20GF561K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
13	17	PAHZZ	5905-00-195-6451	RC20GF472K	81349	RESISTOR.FIXED.COMPOSITION	EA	2
13	18	PAHZZ	5905-00-106-1282	RC20GF223K	81349	RESISTOR,FIXED.COMPOSITION	EA	1
13	19	PAHZZ	5905-00-295-3410	RC20GF473K	81349	RESISTOR,FIXED.COMPOSITION	EA	2
13	20	PAHZZ	5905-00-279-1869	RC20GF121K	81349	RESIST0R,FIXED,COMPOSITION	EA	1
13	21	PAHZZ	5905-00-190-8865	RC20GF274J	81349	RESISTOR,FIXED,COMPOSITION	EA	1
13	22	PAHZZ	5905-00-075-0458	41DZ	83186	RESISTCR, THERMAL	EA	1
13	23	PAHZZ	5905-00-114-5441	RC20GF563K	81349	RESISTOR,FIXED,COMPOSITION	EA	1
13	24	XDHZZ		12508	14351	TRANSFCRMER,AUDIO,FREQUENCY	EA	1
13	25	XDHZZ		X7132-3	95118	TRANSFORMER.AUDIO FREQUENCY	EA	1
13	26	XDHZZ		X7133-1	95118	TRANSFORNER.AUDIO FREQUENCV	EA	1
13	27	XDHZZ		A4955	89118	PRINTED WIRING BOARD	EA	1
13	28	XDHZZ		MS35649-42	96906	NUT,PLAIN,HEXAGON	EA	2
13	29	XDHZZ		MS3522312	96906	SCREW,MACHINE	EA	2

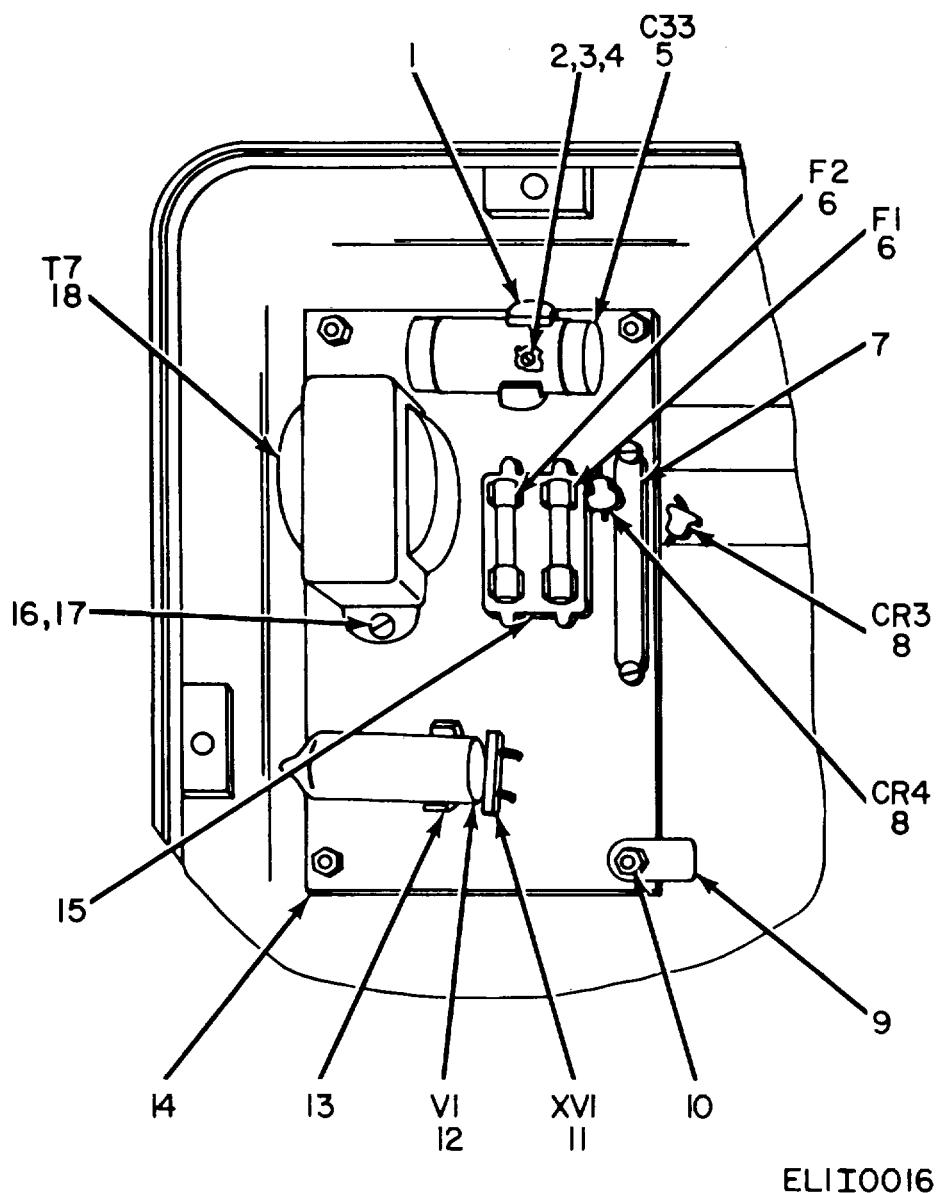

EL1I0016

Figure 14. Battery Charger P/N

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION		(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE					U/M	
						GROUP 01 BATTERY CHARGER P/N 12515		
14	1	XDHZZ		30010-6	89171	CLIP	EA	11
14	2	XDHZZ	5305-00-984-4983	MS35206-226	96906	SCREW,MACHINE	EA	1
14	3	XDHZZ	5310-00-209-0788	MS35335-30	96906	WASHER,FLAT	EA	6
14	4	XDHZZ	5310-00-934-9747	MS35649-262	96906	NUT,PLAIN,HEXAGON	EA	7
14	5	PAHZZ	5910-00-079-0761	BR500-50	89023	CAPACITOR, FIXED,PAPER	EA	1
14	6	XDHZZ		312-750	58854	FUSE,CARTRIDGE	EA	2
14	1	XDHZZ	5940-00-192-6653	2007	71785	TERMINAL,BOARD	EA	1
14	8	PAHZZ	5961-00-814-4251	1N1692	81483	SEMICONDUCTOR DEVICE,DIODE	EA	2
14	9	XDHZZ		N014	11074	CLAMP,LOOP	EA	1
14	10	XDHZZ		MS5223-26	96906	SCREW,MACHINE	EA	1
14	11	XDHZZ		210-6400	13029	SOCKET,BALLAST	EA	1
14	12	PAHZZ	5905-00-910-5720	12517-1	89178	RESISTOR, CURRENT REGULATOR	EA	1
14	13	XDHZZ		30010-4	21966	STRAP, RETAINING	EA	2
14	14	XDHZZ		A14143	89117	CHASSIS, ELECTRICAL EQUIPMENT	EA	1
+ 14	I5	PAHZZ	5920-00-221-5673	357002	75915	FUSE, HOLDER	EA	1
14	16	XDHZZ	5310-00-983-8483	MS27183-5	96906	WASHER, FLAT	EA	2
14	17	XDHZZ	5310-00-597693	MS35335-31	96906	WASHER, LOCK	EA	2
14	18	XDHZZ		815120	89178	TRANSFORMER, POWER STEPDOWN	EA	1

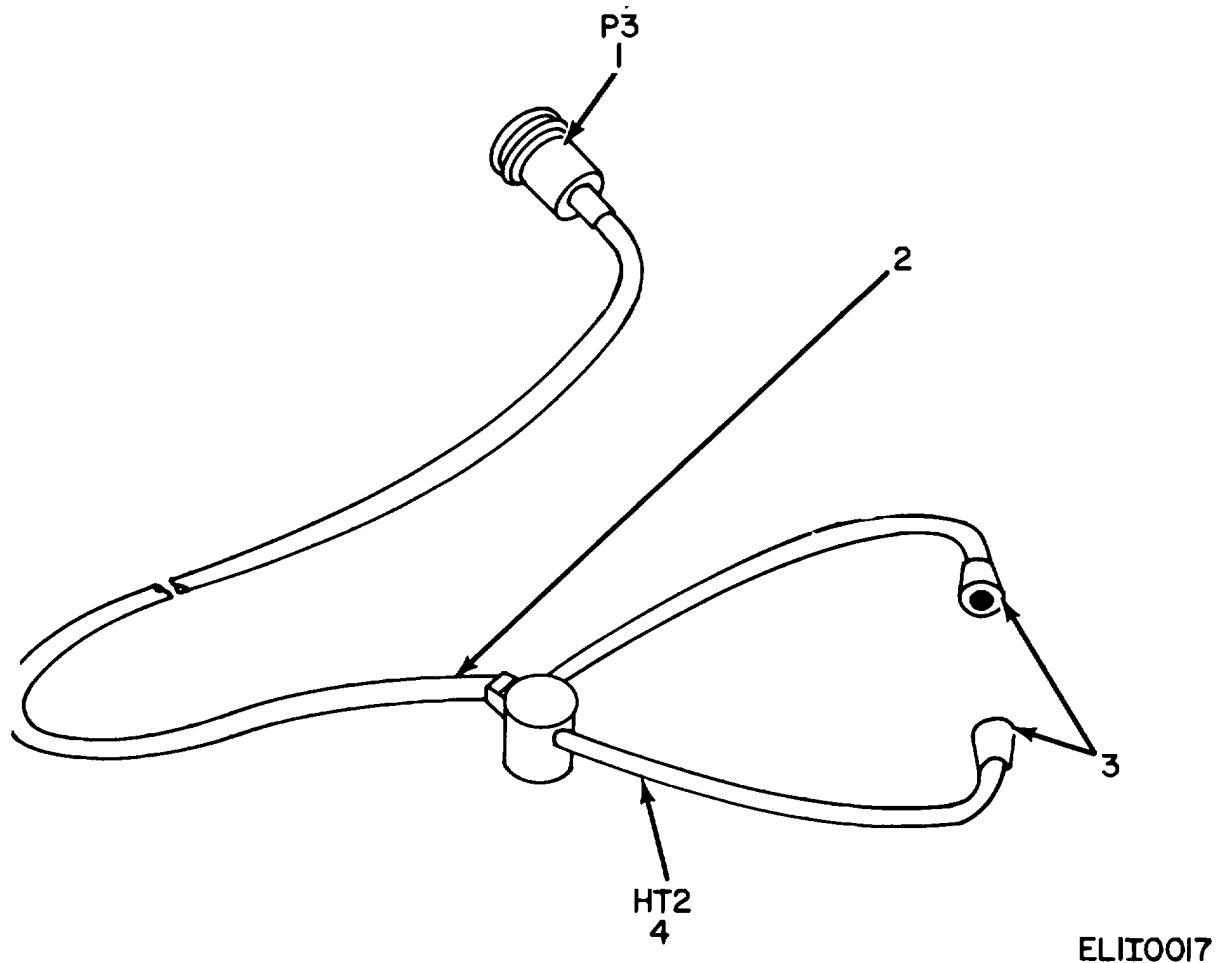


Figure 15. Headset H-224/UNH-10.

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION		(2)	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7)	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE					U/M	
5	1	PAHZZ	5935-00-257-9016	91MC4M 9241-22 AMT2 18110-5	02660 22711 59446 22711	GROUP 02 HEADSET H-224/UNH-10 CONNECTOR,PLUG,ELECTRICAL CORD ELECTRICAL TIP,EAR HEADSET,ELECTRICAL	EA	1
15	2	XDHZZ					EA	1
15	3	XDHZZ					EA	2
15	4	XDHZZ					EA	1

SECTION II

TM 11-5874-200-40P

(1) ILLUSTRATION (a) FIG NO.		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION USABLE ON CODE	(7) U/M	(8) QTY INC IN UNIT
16	t 16	PAHZZ XDH4ZZ	5935-00-222-0012	91MC3M A5803	02660 74384	GROUP 03 MICROPHONE H-119/UNH-10 CONNECTOR,PLUG,ELECTRICAL MICROPHONE	EA EA	1 1

SECTION IV

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

TM 11-5874-20-40P

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF
INDEX

STOCK NUMBER	FIG. NO.	ITEM NO.	STOCK NUMBER	FIG. NO.	ITEM NO.
5310-00-012-0622	6	87	5905-00-279-1761	12	19
5940-00-050-2308	2	14	5905-00-279-1869	12	21
5940-00-050-2308	6	115	5905-00-279-1869	13	20
5910-00-058-5862	11	9	5905-00-279-2621	12	8
5910-00-058-5862	12	4	5905-00-279-3833	12	8
5905-00-075-0458	13	22	5905-00-295-3410	12	9
5910-00-079-0761	14	5	5905-00-295-3410	13	19
5965-00-082-3843	1	3	5905-00-327-9673	5	11
5910-00-088-9193	12	5	5999-00-329-4434	2	4
5910-00-088-9193	13	4	5835-00-419-3120	6	98
5905-00-104-8330	5	9	5835-00-419-3121	6	64
5905-00-106-1282	11	13	5835-00-461-9984	1	2
5905-00-106-1282	13	18	5305-00-543-2192	2	22
5905-00-110-0196	11	14	5305-00-558-4889	6	8
5905-00-110-0196	12	13	5910-00-577-1138	11	10
5905-00-110-0196	13	12	5910-00-577-1138	13	5
5905-00-111-4734	5	12	5961-00-577-3022	13	8
5905-00-111-4734	11	18	5310-00-596-7693	4	17
5905-00-114-5441	13	23	5310-00-596-7693	14	17
5905-00-126-6691	12	8	5365-00-598-1362	6	34
5835-00-138-5645	1	1	5365-00-598-1362	6	72
5905-00-141-1116	11	21	5365-00-598-1362	6	81
5905-00-141-1130	12	15	5365-00-598-8635	6	36
3020-00-150-7182	6	33	5935-00-608-0518	2	25
5940-00-171-0156	6	32	5935-00-642-3330	2	265
5905-00-171-2005	5	8	5365-00-687-3379	6	13
5905-00-171-2009	5	7	5365-00-687-3379	6	22
5905-00-171-2009	11	17	5365-00-687-3379	9	7
5905-00-171-2009	12	16	5920-00-710-8434	3	7
5920-00-184-2050	3	6	5365-00-720-8064	7	6
5905-00-185-6575	13	13	5910-00-780-7838	5	2
5905-00-185-6966	5	10	5910-00-802-9423	11	8
5905-00-185-6966	11	22	5910-00-805-5264	11	3
5905-00-185-8518	12	11	5910-00-805-5264	13	1
5905-00-185-8518	13	10	6150-00-834-6804	2	16
5905-00-186-3008	11	23	5910-00-845-9307	12	3
5905-00-186-3008	12	12	5961-00-902-7477	11	12
5905-00-186-3008	13	11	5961-00-902-7477	12	7
5905-00-190-8876	11	15	5961-00-902-7477	13	9
5905-00-190-8879	5	6	6680-00-909-5248	4	19
5905-00-190-8879	12	18	5835-00-909-5352	6	84
5905-00-190-8882	12	17	5835-00-909-5354	6	86
5905-00-190-8884	11	16	5835-00-909-5356	6	43
5905-00-190-8884	13	14	5835-00-909-5357	6	114
5940-00-192-6653	14	7	5835-00-909-5358	6	95
5905-00-195-5514	12	22	5835-00-909-5361	6	46
5905-00-195-6451	12	10	5835-00-909-5362	6	117
5905-00-195-6451	13	17	5835-00-909-5363	6	2
5905-00-195-6502	12	14	5835-00-909-5365	6	41
5305-00-207-0763	2	20	5835-00-909-5367	6	35
5305-00-207-0763	3	4	5835-00-909-5369	6	85
5310-00-209-0788	2	9	5835-00-909-5371	6	56
5310-00-209-0788	3	5	5835-00-909-5373	6	80
5310-00-209-0788	4	11	5835-00-909-5374	6	23
5310-00-209-0788	4	15	5835-00-909-5375	6	11
5310-00-209-0788	14	3	5835-00-909-5376	6	6
5920-00-221-5673	3	2	5835-00-909-7417	6	7
5920-00-221-5673	14	15	5835-00-909-7418	9	1
5935-00-222-0812	16	1	5835-00-909-8088	6	62
5905-00-245-0023	11	19	5835-00-911-6330	6	70
5835-00-247-5192	6	105	5961-00-921-3781	13	7
5905-00-251-7757	12	8	5910-00-926-0081	12	6
5905-00-252-2995	12	8	5910-00-926-0081	13	3
5905-00-256-0409	12	20	5305-00-926-5595	10	10
5935-00-257-9016	15	1	5905-00-942-9326	13	16
5935-00-257-9341	2	30	5310-00-950-1310	6	29
5930-00-258-4317	4	23	5360-00-951-6318	6	97
5930-00-268-0344	2	27	5310-00-983-8483	14	16
5315-00-276-5165	6	40	5961-00-985-9073	5	5
5905-00-279-1752	12	8	6105-00-999-2654	6	27

SECTION IV.

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

TM 11-5874-200-40P

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
AMT2	59446	15	3	MS35335-31	96906	4	17
A10198	89178	2	8	MS35335-31	96906	14	17
A12534	89178	12	23	MS35431-3	96906	2	14
A12536	89178	11	25	MS35431-3	96906	6	115
A14138	89178	4	18	MS35649-262	96906	1	10
A14143	89178	14	14	MS35649-262	96906	3	3
A14245	89178	2	6	MS35649-262	96906	4	12
A14245-1	89178	2	5	MS35649-262	96906	6	31
A14246	89178	2	7	MS35649-262	96906	14	4
A14683	89178	6	53	MS35649-42	96906	2	28
A15142	89178	4	26	MS35649-42	96906	5	19
A4406	89178	9	3	MS35649-42	96906	6	38
A4409	89178	9	4	MS35649-42	96906	13	28
A4417	89178	10	1	MS35649-82	96906	6	87
A4418	89178	10	3	MS35671-10	96906	6	113
A4955	89178	13	27	MS35671-16	96906	7	3
A5803	74384	16	2	MS35671-8	96906	6	40
A6843	89178	6	99	MS51025-28	96906	6	30
A6844	89178	6	101	MS51025-39	96906	9	5
A6845	89178	6	103	MS51025-8	96906	6	61
A6949	89178	10	5	MS51025-8	96906	6	90
A9167	89178	2	24	MS5223-26	96906	14	10
BB412U	81349	2	15	M119UNH10	80058	1	3
BR500-50	89023	14	5	N014	81074	14	9
B14227	89178	6	116	PVC624	90201	11	1
B15120	89178	14	18	P116-499-5	78553	6	50
B6662	87178	10	7	P8292ZN9	00656	12	3
B9576-1	89178	6	16	P8292ZN9	06656	11	8
C14247	89178	2	1	RB1-4-5	94961	1	2
DD102	71590	5	3	RC20GF022K	81349	5	11
DD00103	71590	11	10	RC20GF100K	81349	12	8
D0103	71590	13	5	RC20GF101K	81349	11	23
DM19-511	72136	11	7	RC20GF100K	81349	12	12
				RC20GF101K	81349	13	11
D9573	891786		98	RC20GF102K	81349	11	14
KR1	715904		24	RC20GF102K	81349	12	13
L12ZA	82389	2	25	RC20GF102K	81349	13	12
MS15795-204	96906	6	29	RC20GF103K	81349	13	10
MS15795-205	96906	2	11	RC20GF103K	81349	12	11
I15795-205	96906	7	5	RC20GF120K	81349	12	8
MS16556-28	96906	6	119	RC20GF121K	81349	12	21
MS16556-43	96906	8	3	RC20GF121K	81349	13	20
MS16624-1025	96906	7	6	RC20GF123K	81349	11	16
MS16625-1062	96906	6	13	RC20GF123K	81349	13	14
MS16625-1062	96906	6	22	RC20GF150K	81349	12	8
MS16625-1062	96906	9	7	RC20GF152K	81349	12	22
MS18064-2	96906	10	4	RC20GF153K	81349	11	15
MS18064-6	96906	10	10	RC20GF180K	81349	12	8
MS20365-440	96906	6	28	RC20GF183K	81349	5	6
MS27183-5	96906	14	16	RC20GF183K	81349	12	18
MS35209-25	96906	6	54	RC20GF220K	81349	12	8
MS35223-12	96906	2	18	RC20GF221K	81349	12	20
MS35223-12	96906	5	18	RC20GF222K	81349	5	7
MS35223-12	96906	10	8	RC20GF222K	81349	11	17
MS35223-12	96906	13	29	RC20GF222K	81349	12	16
MS35223-14	96906	6	8	RC20GF223K	81349	11	13
MS35223-20	96906	6	100	RC20GF223K	81349	13	18
MS35223-22	96906	6	45	RC20GF270K	81349	12	8
MS35223-27	96906	4	14	RC20GF271K	81349	5	10
MS35223-27	96906	5	17	RC20GF271K	81349	11	22
MS35223-27	96906	6	19	RC20GF272K	81349	12	15
MS35223-27	96906	6	73	RC20GF330K	81349	12	8
MS35223-27	96906	6	79	RC20GF332K	81349	12	14
MS35223-28	96906	2	20	RC206F333K	81349	5	9
MS35223-28	96906	3	4	RC20GF392K	81349	13	13
MS35223-35	96906	6	104	RC200F393K	81349	12	17
MS35223-35	96906	6	124	RC20GF470K	81349	5	12
MS35223-41	96906	2	22	RC20GF470K	81349	11	18
MS35223-42	96906	4	16	RC20GF471K	81349	5	8
MS35223-42	96906	6	55	RC20GF472K	81349	12	10
MS35223-68	96906	4	25	RC20GF472K	81349	13	17
MS35238-35	96906	10	2	RC20GF473K	81349	12	9
MS35239-35	96906	4	3	RC20GF473K	81349	13	19
MS35335-30	96906	2	9	RC20GF561K	81349	13	16
MS35335-30	96906	3	5	RC20GF562K	81349	11	21
MS35335-30	96906	4	11	RC20GF563K	81349	13	23
MS35335-30	96906	4	15	RC20GF621J	81349	12	19
MS35335-30	96906	14	3				

SECTION IV.

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

TM 11-5874-200-40P

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RC20GF682K	81349	11	19	12561	89178	6	5
R4ZZIN808	20316	9	2	12562	89178	6	11
SC12	71041	6	89	12562-1	89178	6	12
SMT100015	74840	5	2	12563	89178	6	21
SMT10012	74840	11	9	12564	89178	6	23
SMT0012	74840	12	4	12565	89178	6	24
SMT1003	74840	12	2	12566	89178	6	25
SMT1003	74840	13	2	12567	89178	6	26
SMT1025	74840	5	1	12569	89178	6	97
SHT1025	74840	12	1	12570	89178	6	77
SMT1025	74849	13	6	12571	89178	6	96
SHT20025	74840	12	6	12572	89178	6	80
SMT20025	74840	13	3	12574	89178	6	83
SM225	74840	11	3	12575	89178	6	44
SMT225	74840	13	1	12575	89178	6	82
SMT2525	74840	12	5				
SMT2525	74840	13	4	12581	89178	6	95
SHT825	74840	11	4	12585	89178	6	91
SW724	79727	2	29	12585-1	89178	6	92
SW724	79727	6	109	12586	89178	6	93
S1406	07233	6	32	12589	89178	6	59
548A507	74919	6	102	12590	89178	6	118
TH19	37942	2	3	12591	89178	6	-120
TH23	37942	2	4	12592	89178	6	121
UK474	71590	11	2	12592-1	89178	6	122
U130CC15S	78723	1	7	12593	89178	6	123
U201NX9817	71450	11	20	12595	89178	6	84
U201RT518	71450	13	15	12596	89178	8	6
X7132-3	95118	13	25	12597	89178	8	4
X7133-1	95118	13	26	12599	89178	8	1
X7176	95118	5	13	12600	89178	8	2
X7177	95118	5	14	12601	89178	6	86
IN1692	81483	14	8	12603	89178	8	5
1N4001	04713	13	7	12605	89178	6	88
10TSD15	56289	11	5	12606	89178	6	114
119-45	11983	6	47	12609	89178	6	43
				12612	89178	6	41
12505	89178	1	1	12615	89178	6	117
12508	14351	13	24	12618	89178	6	46
12510	89178	2	19	12624	89178	6	56
12511	89178	2		1312625-1	89178	6	58
12512	89178	2	12	12626	89178	6	57
12514	89178	3	1	12628	89178	6	62
12515	89178	1	6	12629	89178	7	4
412517-1	89178	14	12	12630	89178	6	85
12518	89178	2	21	12631	89178	6	14
12519	89178	4	2	12632	89178	6	106
12521	89178	4	6	12633	89178	6	27
12524-1	89178	4	7	12634	89178	6	48
12524-1	69178	5	20	12634-1	89178	6	52
12524-2	89178	6	112	12634-2	89178	6	49
12524-3	89178	6	42	12635	89178	6	51
12524-4	89178	4	22	12636	89178	6	35
12525	89178	4	21	13686	89178	5	16
12526	89178	4	4	13806	89178	6	33
12527	89178	4	8	15308	88245	2	2
12530	89178	4	10	15308	88245	6	17
12531.	89178	6	10	173-13	11983	6	105
12532	89178	14	17	4085	70903	2	16
12534	89178	6	18	18110-5	22711	15	4
12536	89178	6	37	2NZ20	81349	13	8
12538	89178	6	20	2N508	03508	11	12
12540	89178	6	75	2N508	03508	12	7
12543	89178	9	1	2N508	03508	13	9
12544	89178	9	6	2N5232A	03508	5	4
12545	89178	6	64	200-1-4-1200	94161	1	5
12546	89178	7	2	2007	71185	14	7
12547	89178	7	1	210-6400	13029	14	11
12548	89178	6	76	2137	83330	4	5
12550	89178	6	66	22348	72653	6	60
12551	89178	6	71	2246C	83330	4	1
12551	89178	6	78	251-B-6-32-5	89178	6	3
12552	89178	6	70	251-C-6-6-32-5	89178	4	9
12554	89178	6	67	251A-40-45	89178	6	107
12554-1	89178	6	69	25185-440-5	89178	6	63
12555	89178	6	68	251854405	89178	6	4
12556-1	89178	6	2	251C5-6-32-5	89178	6	9
12556-2	89178	6	7	251C5-6-32-5	89178	6	108
12559	89178	6	6	2814	76493	11	24
12560	89178	6	1	3Y88805	18911	4	19

SECTION IV.	NATIONAL STOCK NUMBER AND PART NUMBER INDEX					TM 11-5874-100-40P		
	PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
30010-4	21966	14	13	568-157	77308	4	13	
30010-6	89178	14	1	568-235	77308	6	65	
312-500	75915	3	7	575	75582	2	27	
312-750	58854	14	6	70F683A1	76493	11	11	
3136-25	75915	3	6	725	71002	6	110	
35C1267	07109	4	20	728	71002	6	39	
357002	75915	3	2	8360K7	27193	4	23	
357002	75915	14	15	87	72953	10	9	
41DZ	83186	13	22	89576	89178	6	15	
555-17	71286	2	23	91CC3	02660	2	17	
518	07233	6	111	91MC3M	02660	16	1	
5555-12	79136	6	36	91HC4M	02660	15	1	
5555-18	79136	6	34	91PC3F	02660	2	30	
5555-18	79136	6	72	91PC4F	02660	2	26	
5555-18	79136	6	81	9241-22	22711	15	2	

LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG. NO.	ITEM NO.	FIG. NO.	ITEM. NO.	
5965-00-013-7990	1	5	5315-00-828-5486	7	3
5905-00-190-8865	13	21	5360-00-904-8137	6	88
5930-00-245-9642	2	29	5835-00-909-5360	6	94
5930-00-245-9642	6	109	5835-00-909-5366	5	15
5835-00-419-0575	1	5	5335-00-909-7421	1	7
3030-00-455-1614	6	65	5905-00-910-5720	14	12
5835-00-461-9984	1	2	6140-00-921-3670	2	15
3030-00-477-8311	4	13	5310-00-934-9747	2	10
5355-00-667-8972	6	60	5310-00-934-9747	3	3
5910-00-668-1685	5	3	5310-00-934-9747	4	12
5910-00-719-9920	5	1	5310-00-934-9747	6	31
5910-00-719-9920	12	1	5310-00-934-9747	14	4
5910-00-719-9920	13	6	5305-00-984-4983	10	6
5961-00-814-4251	14	8	5305-00-984-4983	14	2

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	FIG. NO.
A12774	81349	5	15
H-224/UNH-10	80058	1	4
MS35206-226	96906	10	6
MS35206-226	96906	14	2
RCO7GF274J	81349	13	21
12578	89178	6	94
2N3053	01295	5	5

<u>ADDITIONAL LATEST NATIONAL STOCK NUMBER ASSIGNMENT</u>			<u>ADDITIONAL LATEST PART NUMBER ASSIGNMENT</u>				
STOCK NUMBER	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.	
5910-00-02;3- 6	11	6	CO20FDI82G03		81349	11	6

By Order of the Secretary of the Army:

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Official:

J.C. PENNINGTON
Brigadier General, United States Army
The Adjutant General

Distribution:

To be distributed in accordance with DA Form 12-51, Direct and General Support maintenance requirements for AN/UNH-10.

* U. S. GOVERNMENT PRINTING OFFICE : 1936 O - 406-421 (51039)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?



THEN... JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, CAREFULLY TEAR IT
OUT, FOLD IT AND DROP IT
IN THE MAIL!

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

TM 11-5825-270-10

PUBLICATION DATE

23 Jul 81

PUBLICATION TITLE

Radio Frequency R-2176/FRN

TEAR ALONG PERFORATED LINE

BE EXACT... PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE
NO.

PARA-
GRAPH

FIGURE
NO.

TABLE
NO.

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS
• ARE OBSOLETE.

P.S.-IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR
RECOMMENDATION MAKE A CARBON COPY OF THIS
AND GIVE IT TO YOUR HEADQUARTERS.

PIN : 033626-00

This fine document...

Was brought to you by me:



Liberated Manuals -- free army and government manuals

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals

- Sincerely
Igor Chudov
<http://igor.chudov.com/>
- [Chicago Machinery Movers](http://chicagomachinerymovers.com)