

TM 11-5895-687-34P-1

TECHNICAL MANUAL

DIRECT SUPPORT AND GENERAL MAINTENANCE REPAIR PARTS AND
SPECIAL TOOLS LISTS (INCLUDING DEPOT MAINTENANCE REPAIR
PARTS AND SPECIAL TOOLS)
FOR

INTERROGATOR SET AN/TPX-50 (NSN 5895-00-782-5296)

HEADQUARTERS, DEPARTMENT OF THE ARMY
JULY 1977

TECHNICAL MANUAL

No.11-5896-687-34P-1

HEADQUARTERS
 DEPARTMENT OF THE ARMY
WASHINGTON, DC, 21 July 1977

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE

REPAIR PARTS AND SPECIAL TOOLS LISTS

(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)

FOR

INTERROGATOR SET AN/TPX-50 (NSN 5895-00-782-5296)

Current as of 22 April 1977

REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 (Test) located in the back of the manual. Simply tear out the self-addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 (Test) in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander US Army Electronics Command, ATTN: DRSEL-MA-Q, Fort Monmouth, New Jersey 07703.

In either case, a reply will be furnished direct to you.

Table of Contents

	Page	ILLUS	Figure
SECTION I. INTRODUCTION -----	1		
II. Repair parts list -----	5		
Group 00 Interrogator Set AN/TPX-50 -----	5		
Cable Assembly, Special Purpose, Electrical CX-10876/U (7ft 8in) -----	5	1	
Cable Assembly, Special Purpose, Electrical, Branched CX-10878/TPX-50 -----	7	2	
Programmer Kit MK-1161-TPX-50 -----	9	3	
01 Interrogator Set Group OX-8/TPX-50 -----	11	4	
Cabinet, Interrogator Set Group CY-6442/TPX-50 -----	17	5	
Control Panel Assembly -----	23	6	
0101 Signal Processor CP-936/TPX-50 (See TM 11-5895-687-34P-2 for parts)			
0102 Synchroniser, Electrical SN-421/TPX-50 (See TM 11-5895-687-34P-3 for parts)			
0103 Receiver-Transmitter, Radio RT-903/TPX-50 (See TM 11-5895-687-34P-4 for parts)			
02 Control, Interrogator Set C-7651/TPX-50 -----	25	7	
0201 Circuit card assembly lamp driver -----	29	8	
0202 Circuit card assembly remote error indicator -----	31	9	
SECTION III. Special tools list (Not applicable)			
IV. National stock number and part number index -----	32		

*This manual supersedes TM 11-5895-687-35P-1, 2 March 1972.

SECTION I

INTRODUCTION

1. Scope

This manual lists repair parts required for performance of direct support, general support, and depot maintenance of the AN/TPX-50.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. *Section II. Repair Parts List.* A list of repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending numerical sequence, with the parts in each group listed in figure and item number sequence.

b. *Section III. Special Tools List.* Not applicable.

c. *Section IV. National Stock Number and Part Number Index.* A list, in ascending numerical sequence, of all National stock numbers appearing in the listings, followed by a list, in alphanumeric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

The following provides an explanation of columns found in the tabular listings:

a. *Illustration.* This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. *Source, Maintenance, and Recoverability Codes (SMR).*

(1) *Source code.* Source codes are assigned to support items to indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

<i>Code</i>	<i>Definition</i>
PA	Item procured and stocked for anticipated or known usage.
PB-	Item procured and stocked for insurance purpose because essentiality dictates that a minimum quantity be available in the supply systems.
PD	Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues or outfitting. Not subject to automatic replenishment.
XA	Item is not procured or stocked because the requirement for the item will result in the replacement of the next higher assembly.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA, XD, and aircraft support items as restricted by AR 70042.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

<i>Code</i>	<i>Application/Explanation</i>
O	Support item is removed, replaced, used at the organizational level.
F	Support item is removed, replaced, used at the direct support level.
D	Support items that are removed, replaced, used at depot, mobile depot, specialized repair activity only.

NOTE

Codes "I" and "F" will be Considered the same by direct support units.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
F—	The lowest maintenance level capable of complete repair of the support item is the direct support level.
D—	The lowest maintenance level capable of complete repair of the support item is the depot level, performed by depot.
Z—	Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

<i>Recoverability codes</i>	<i>Definition</i>
Z —	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 8.
F—	Reparable item. When uneconomically repar- able, condemn and dispose at the direct sup- port level.
D—	Reparable item. When beyond lower level re- pair capability, return to depot. Condemna- tion and disposal not authorized below depot level.
L—	Reparable item. Repair, condemnation, and disposal not authorized below depot/spe- cialized repair activity level.

c. *National Stock Number.* Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. *Part Number.* Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have

a different part number than the part being replaced.

e. *Federal Supply Code for Manufacturer (FSCM).* The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. *Description.* Indicates the Federal item name and, if required, a minimum description to identify the item.

g. *Unit of Measure (U/M).* Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned

h. *Quantity Incorporated in Unit.* Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that no specific quantity is applicable (e.g., shims, spacers, etc.).

4. Special Information

a. Bulk materials required to manufacture items are listed in the Bulk Material Group of TM 11-5896-687-34P-4.

b. The following publications pertain to the AN/TPX-50 and its components:

TM 11-6896-687-12, Interrogator Set AN/TPX-50.

TM 11-5896-687-35-1, Interrogator Set AN/TPX-50.

TM 11-5896-687-35-2, Interrogator Set AN/TPX-50 (Signal Processor CP-936/TPX-50).

TM 11-5895-687-35-3, Interrogator Set AN/TPX-50 (Electrical Synchronizer SN-421/TPX-50) .

TM 11-5895-687-35-4, Interrogator Set AN/TPX-50 (Receiver-Transmitter, Radio RT-903/TPX-50).

TM 11-5895-687-20P, Interrogator Set AN/TPX-50.

TM 11-5895-687-34P-2, Signal Processor CP-936/TPX-50.

TM 11-5895-687-34P-3, Synchronizer, Electrical SN-421/TPX-50.

TM 11-5895-687-34P-4, Receiver-Transmitter, Radio RT-903/TPX-50.

c. National stock numbers (NSN's) that are missing from P source-coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to: Commander, US Army Electronics Command, ATTN: DRSEL-MM, Fort Monmouth, NJ 07703 for the part required to support your equipment.

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group or subgroup within which the repair part belongs. This is necessary since illustrations are prepared for functional groups or subgroups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the repair part.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.


(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in ascending NSN sequence, followed by a list of part numbers in ascending alphabetic sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4)

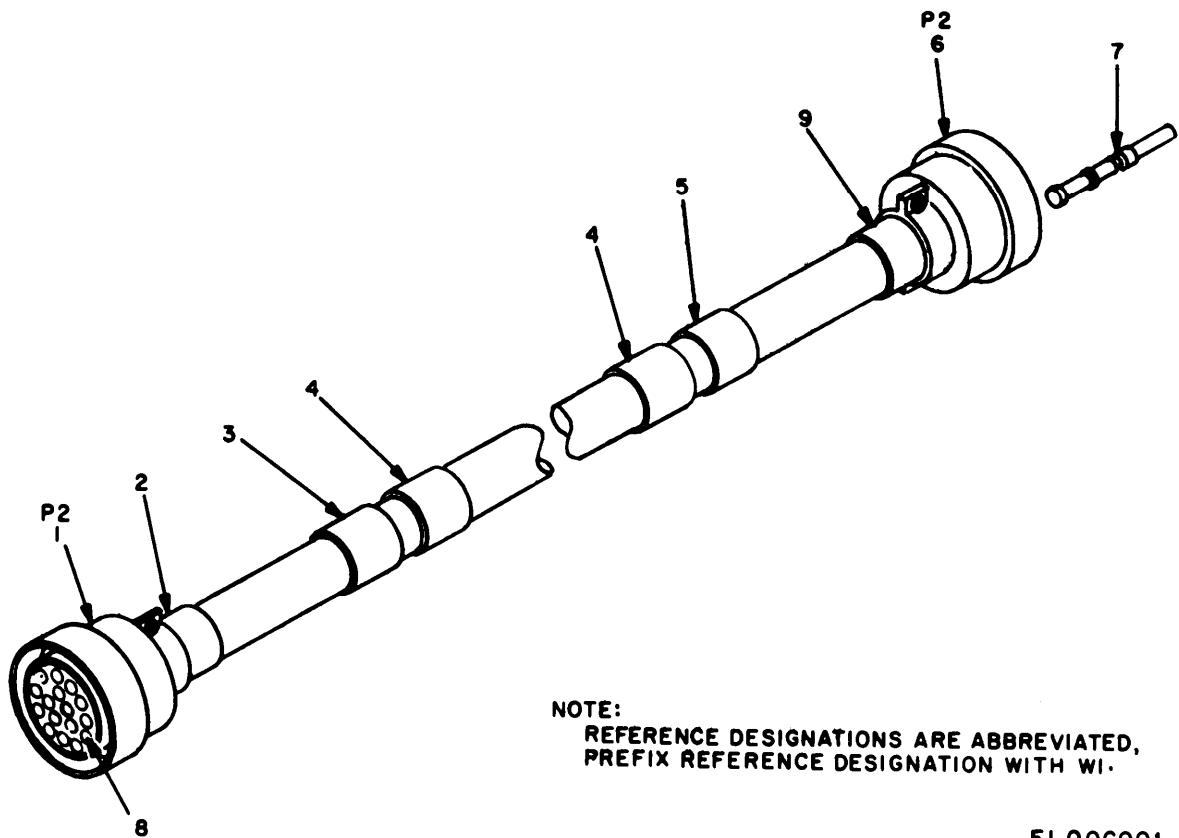

NOTE:

**REFERENCE DESIGNATIONS ARE ABBREVIATED,
PREFIX REFERENCE DESIGNATION WITH WI.**

ELOOC001

Figure 1. Cable Assembly, Special Purpose, Electrical CX-10876/U.

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT U/M
GROUP 00 INTERROGATOR SET AN/TPX-50								
1		PAODZ	5995-00-136-4980	SMB679388	80063	CABLE ASSEMBLY,SPECIAL PURPOSE,ELECTRICAL CX-1087670	EA	1
1	1	PAFZZ	5935-00-765-6006	MS3126E22-55S	96906	CONNECTOR,PLUG,ELECTRICAL	EA	1
1	2	PAOZZ	5970-00-828-3451	202A163-3	06090	CAP,PROTECTIVE,DUST AND MOISTURE SEAL	EA	1
1	3	XDDZZ		SMC679706-2	80063	TAG,MARKER	EA	1
1	4	XDDZZ		SMB679708-20	80063	TAG,MARKER	EA	2
1	5	XDDZZ		SMC679706-1	80063	TAG,MARKER	EA	1
1	6	PAFZZ	5935-00-728-7793	MS3126E22-55P	96906	CONNECTOR,PLUG,ELECTRICAL	EA	1
1	7	PAFZZ	5999-00-226-4703	MS3192A20A	96906	CONTACT,ELECTRICAL	EA	55
1	8	PAFZZ		MS3193A20A	96906	CONTACT,ELECTRICAL	EA	55
1	9	PAOZZ	5970-00-904-2491	222A174-3	06090	CAP,PROTECTIVE,DUST AND MOISTURE SEAL	EA	1

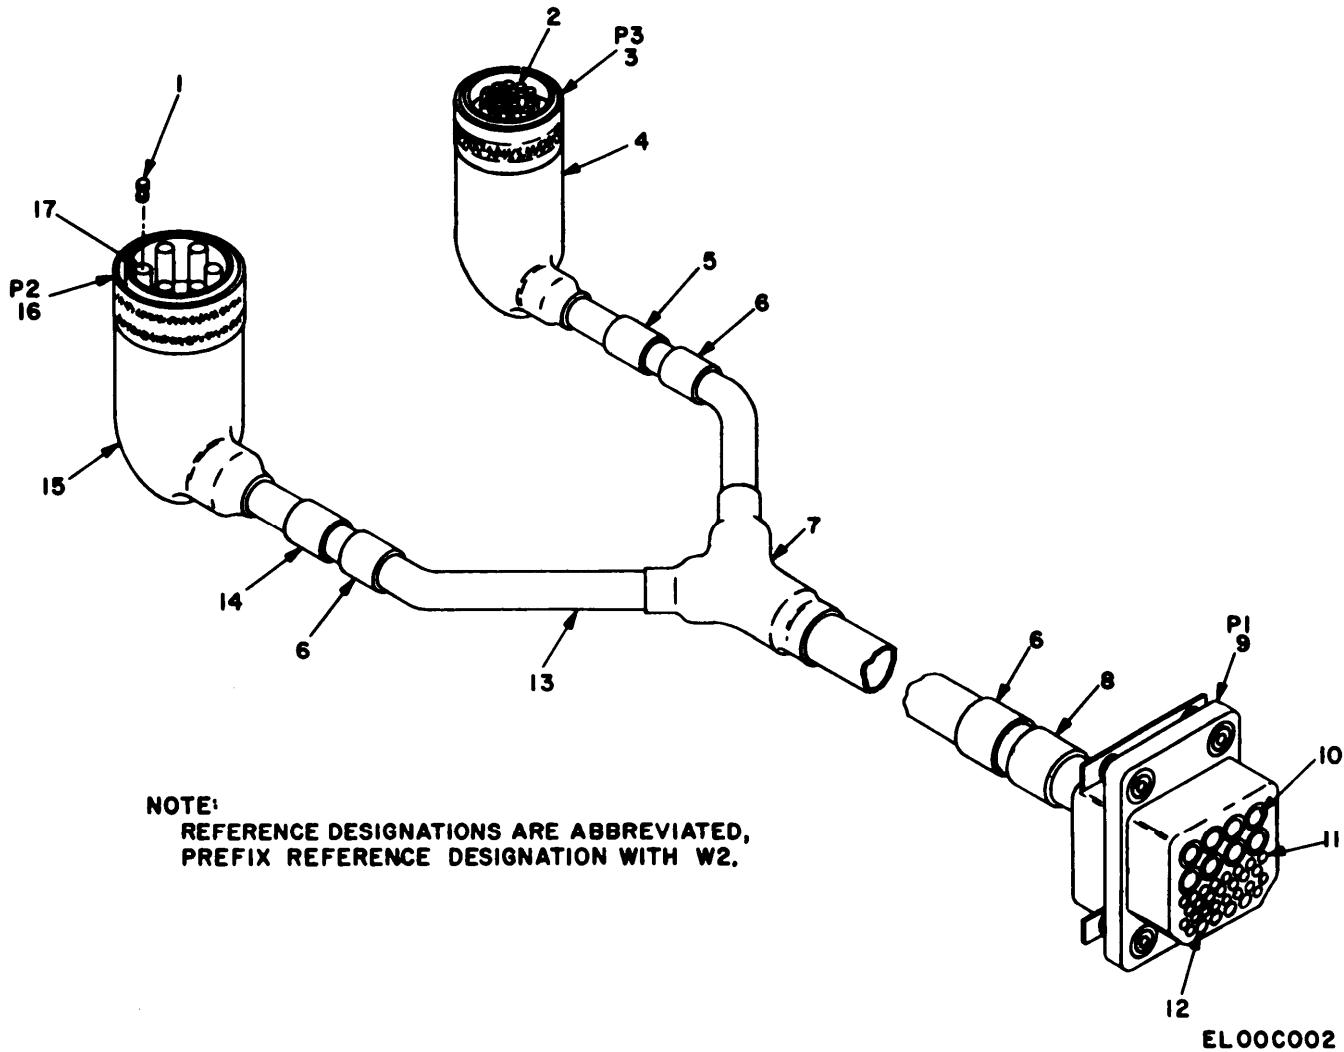


Figure 2. Cable Assembly, Special Purpose, Electrical, Branched CX-10878/TPX-50.

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
						FSCM	U/M	
2		PACDD		5995-00-132-3321	SMC679298	80063	CABLE ASSEMBLY CX-10878/TPX-50	EA 1
2	1	PAFFZ		5935-00-565-9497	MS25251-8	96906	CONNECTOR,PLUG,ELECTRICAL	EA 1
2	2	PAFZZ		5999-00-226-4703	MS3192A20A	96906	CONTACT,ELECTRICAL	EA 19
2	3	PAFZZ		5935-00-988-4350	MS3126E14-19P	96906	CONNECTOR,PLUG,ELECTRICAL	EA 1
2	4	PAFZZ		5970-00-944-8562	222A142-3	06090	CAP,PROTECTIVE,DUST AND MOISTURE SEAL	EA 1
2	5	XDDZZ			SMC679706-3	80063	TAG,MARKER	EA 1
2	6	XDDZZ			SMB679708-17	80063	TAG,MARKER	EA 3
2	7	PAFZZ		5970-00-992-3470	382A023-3	06090	SLEEVING,PLASTIC,ELECTRICAL	EA 1
2	8	XDDZZ			SMC679706-1	80063	TAG,MARKER	EA 1
2	9	PAFZZ		5935-00-021-9576	94-621	02660	CONNECTOR,PLUG,ELECTRICAL	EA 1
2	10	PAFZZ		5999-00-193-4971	94-658-8	02660	CONTACT,ELECTRICAL	EA 6
2	11	PAFZZ		5935-00-134-5273	94-671-01	02660	CONTACT,ELECTRICAL	EA 25
2	12	PAFZZ		5999-00-256-9365	94-672-01	02660	CONTACT,ELECTRICAL	EA 4
2	13	PAFZZ			UG180BU	80058	CABLE,RADIO FREQUENCY	FT 36
2	14	XDDZZ			SMC679706-2	80063	TAG,MARKER	EA 1
2	15	PAFZZ		5970-00-904-2491	222A174-3	06090	CAP,PROTECTIVE,DUST AND MOISTURE SEAL	EA 1
2	16	PAFFZ			PT06SE22-78P	77820	CONNECTOR,PLUG,ELECTRICAL	EA 1
2	17	PAFZZ		5999-00-958-1839	21-33012-24	77820	CONTACT,ELECTRICAL	EA 6

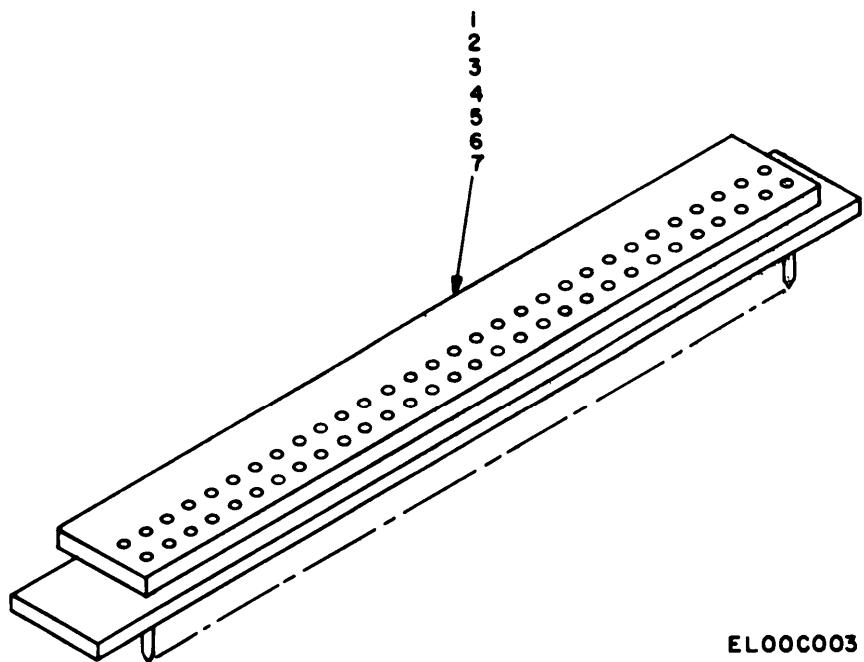


Figure 3. Programmer Kit MK-1161/TPX-50.

SECTION II							TM11-5895-687-34P-1			
(1) ILLUSTRATION (A) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5)	(6) DESCRIPTION		(7) USABLE ON CODE	(8) QTY INC IN UNIT		
					FSCM		U/M			
3	1	PDOFF	5895-00-133-1193	SMB679374	80063	MK-1161/TPX-50, PROGRAMMER KIT	EA	1		
3	2	PAOZZ	5895-00-410-2423	SMC680134	80063	PROGRAM CONNECTOR	EA	1		
3	3	PAOZZ	5895-00-410-2425	SMB679374	80063	PROGRAM CONNECTOR	EA	1		
3	4	PAOZZ	5895-00-410-2421	SMC680136	80063	PROGRAM CONNECTOR	EA	1		
3	5	PAOZZ	5895-00-410-2420	SMC680137	80063	PROGRAM CONNECTOR	EA	1		
3	6	PAOZZ	5895-00-410-2419	SMC680138	80063	PROGRAM CONNECTOR	EA	1		
3	7	PAOZZ	5895-00-410-2422	SMC680135	80063	PROGRAM CONNECTOR	EA	1		

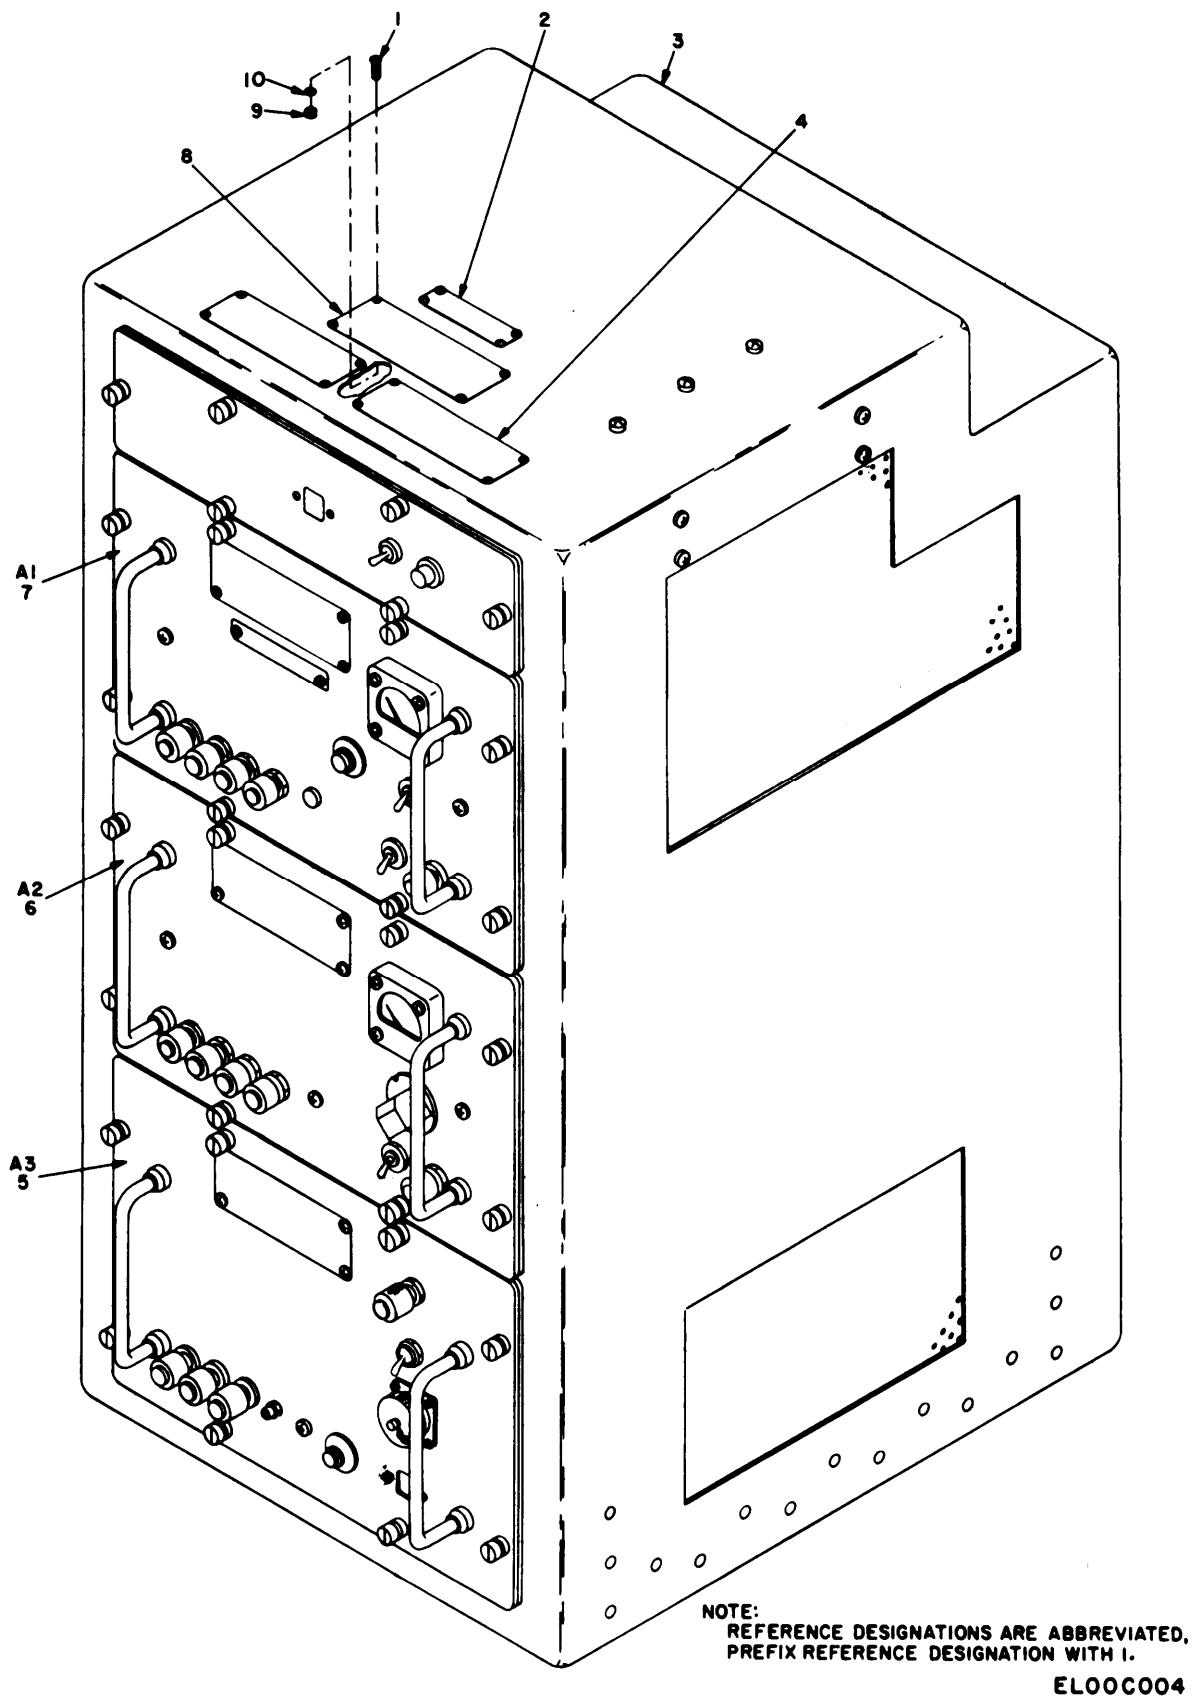


Figure 4. Interrogator Set Group OX-8-TPX50.

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT U/M
GROUP: 01 INTERROGATOR SET GROUP OX-8/TPX-50								
INTERROGATOR SET GROUP OX-8/TPX-50								
4		PDOODD	5895-00-130-5817	SME679363	80063	SCREW, MACHINE	EA	1
4	1	XDDZZ		NAS1635-04-5P	80205	PLATE, DESIGNATION	EA	10
4	2	XDDZZ		SMC679711-1	80063	CABINET, INTERROGATOR SET GROUP CY-6442/TPX-50	EA	1
4	3	PDOODD	5895-00-129-6066	SME679362	80063	RECEIVER-TRANSMITTER, RADIO RT-903/TPX-50	EA	1
4	4	XDDZZ		SMD679705-7	80063	SYNCHRONIZER, ELECTRICAL SN-421/TPX-50	EA	1
4	5	PDOODD	5895-00-130-5815	SMD679393	80063	SIGNAL PROCESSOR CP-936/TPX-50	EA	1
4	6	PDOODD	5895-00-130-5814	SME679364	80063	PLATE, IDENTIFICATION	EA	1
4	7	PDOODD	5895-00-135-9106	SME679365	80063	NUT, PLAIN, HEXAGON	EA	8
4	8	XDDZZ		SMD679705-6	80063	WASHER, LOCK	EA	8
4	9	XDDZZ		MS16210-2	96906			
4	10	XDDZZ	5310-00-933-8118	MS35338-135	96906			

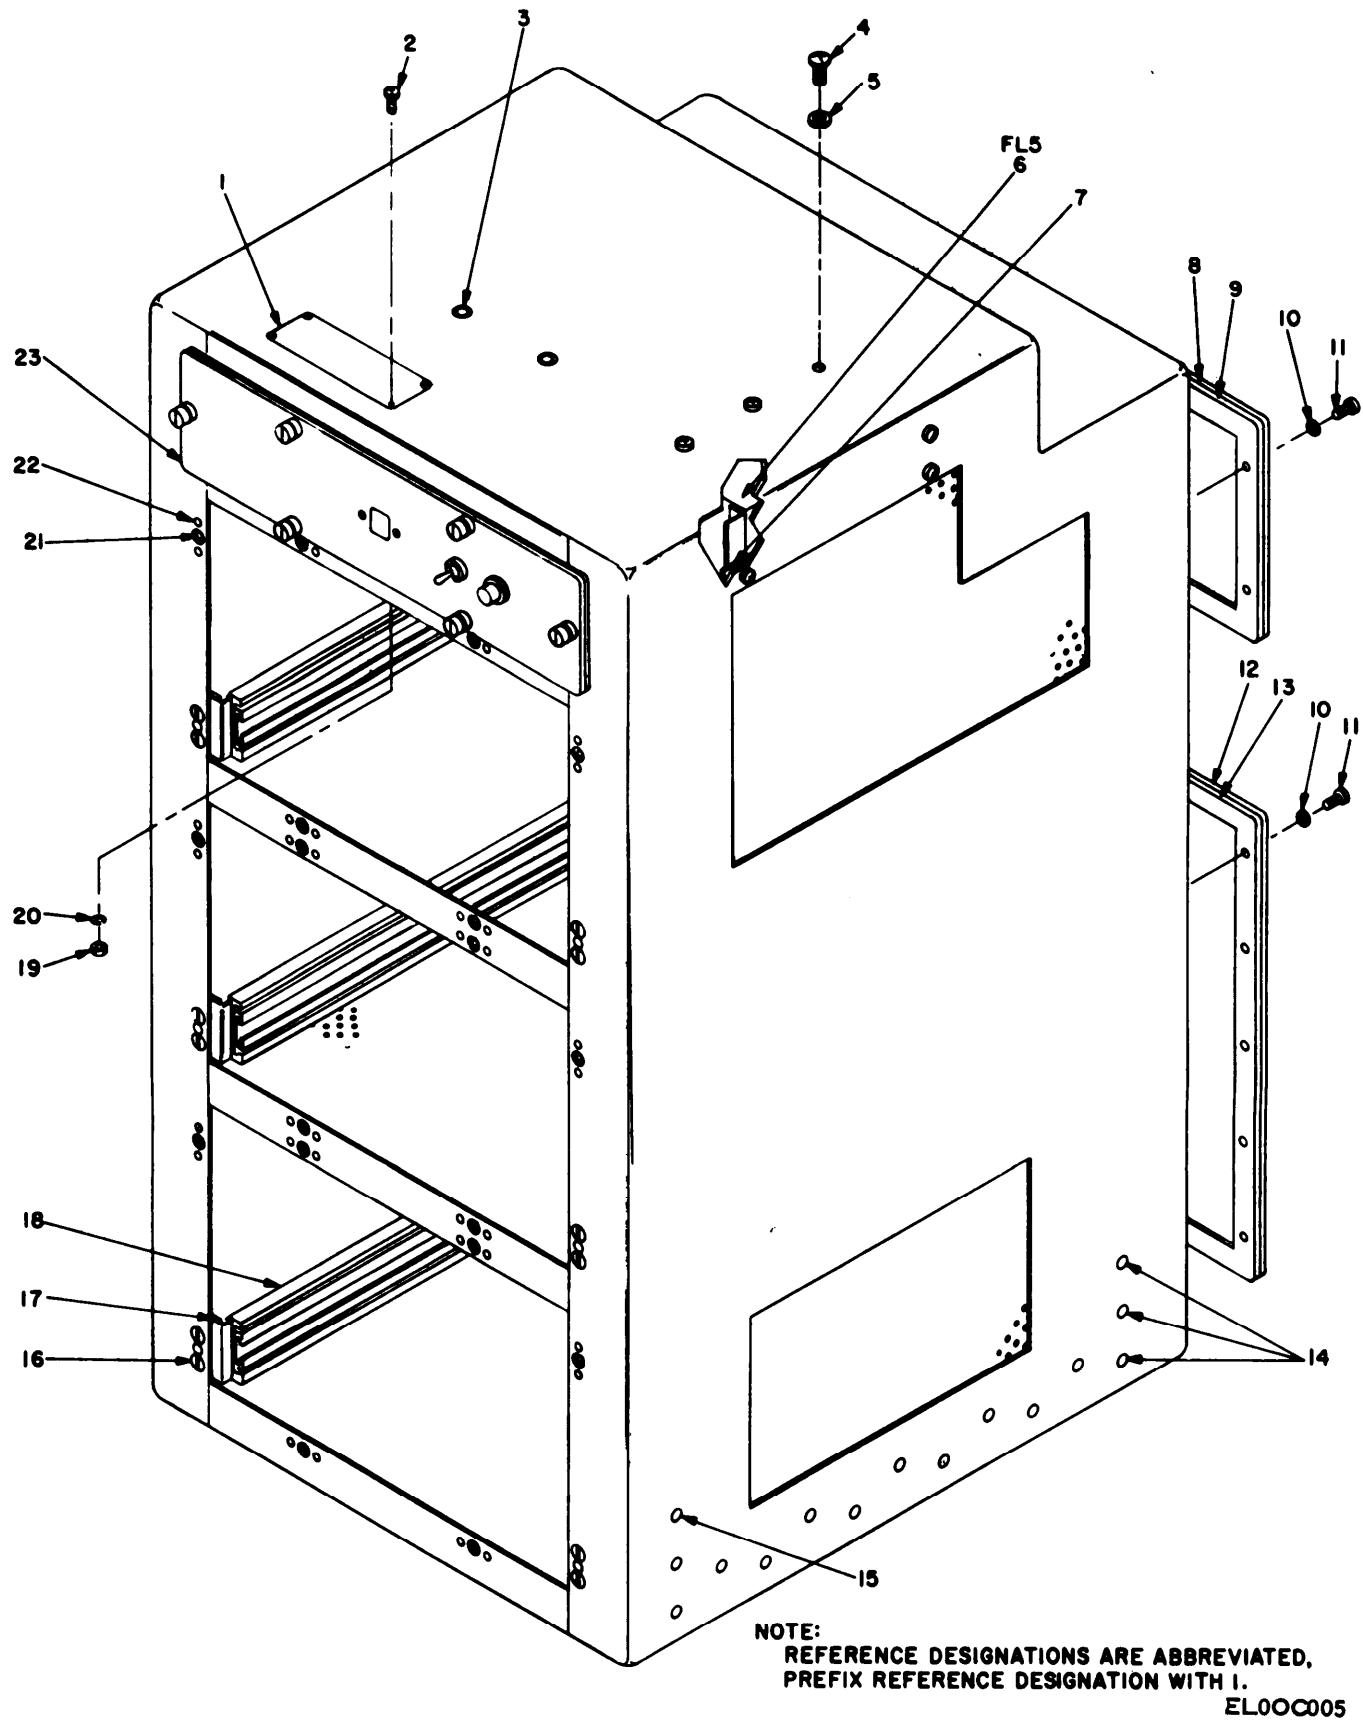


Figure 5. Cabinet, Interrogator Set Group CY-6442/TPX-50 (sheet 1 of 4).

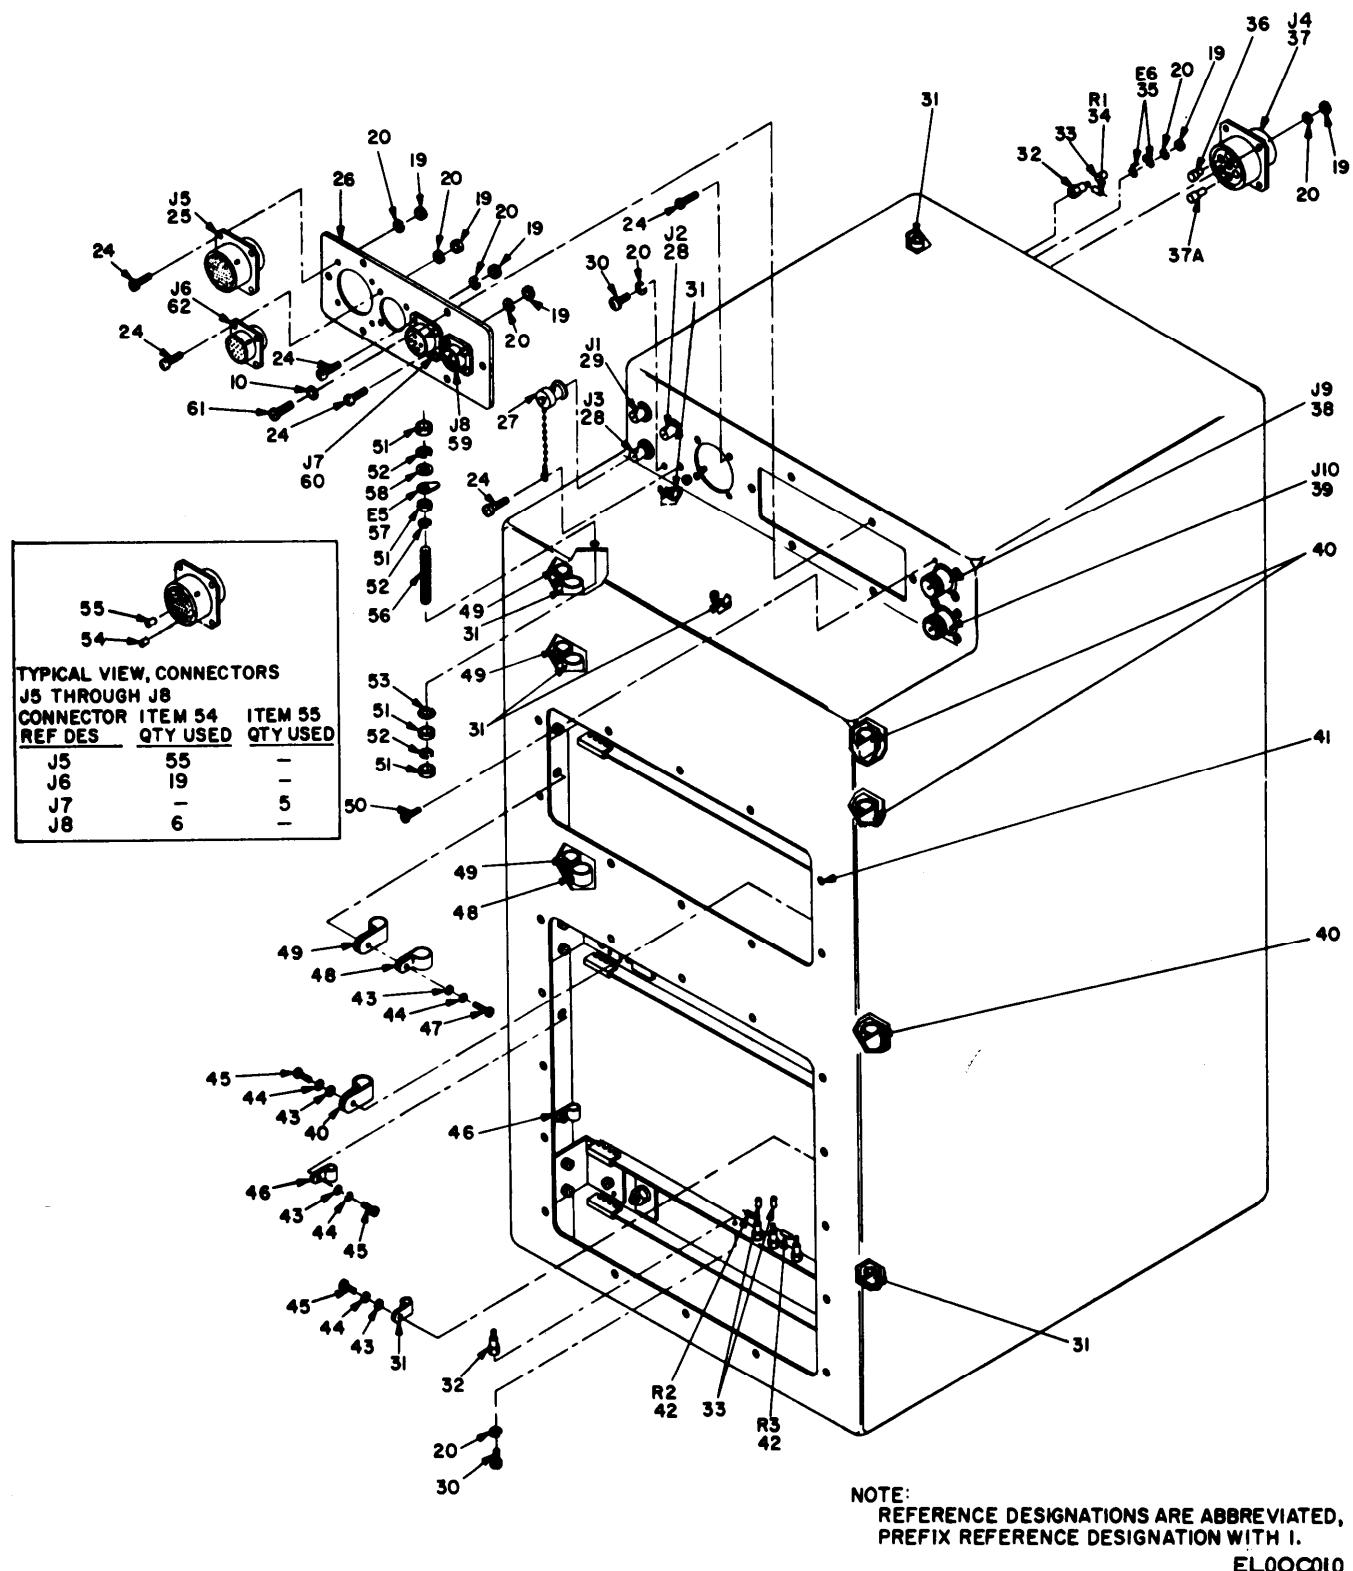


Figure 5. Cabinet, Interrogator Set Group CY-6442/TPX-50 (sheet 2 of 4).


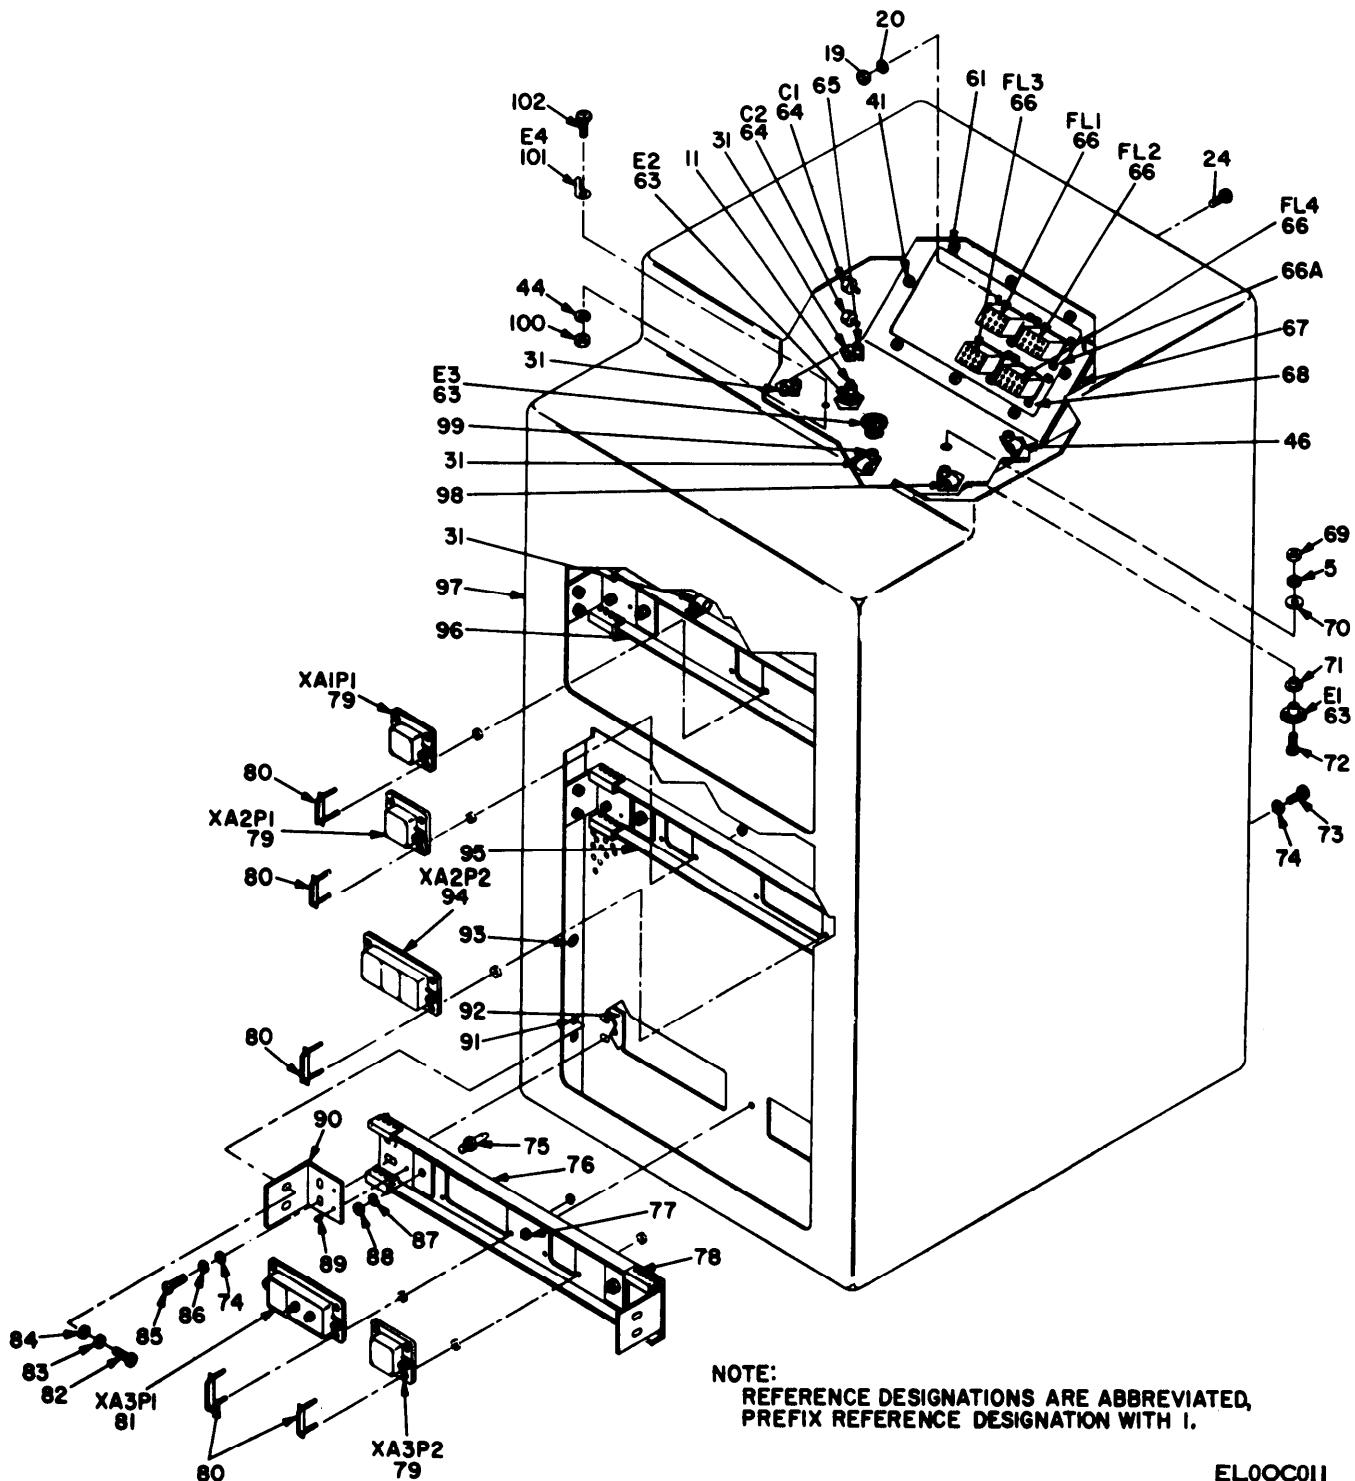


Figure 5. Cabinet, Interrogator Set Group CY-6442/TPX-50 (sheet 3 of 4).

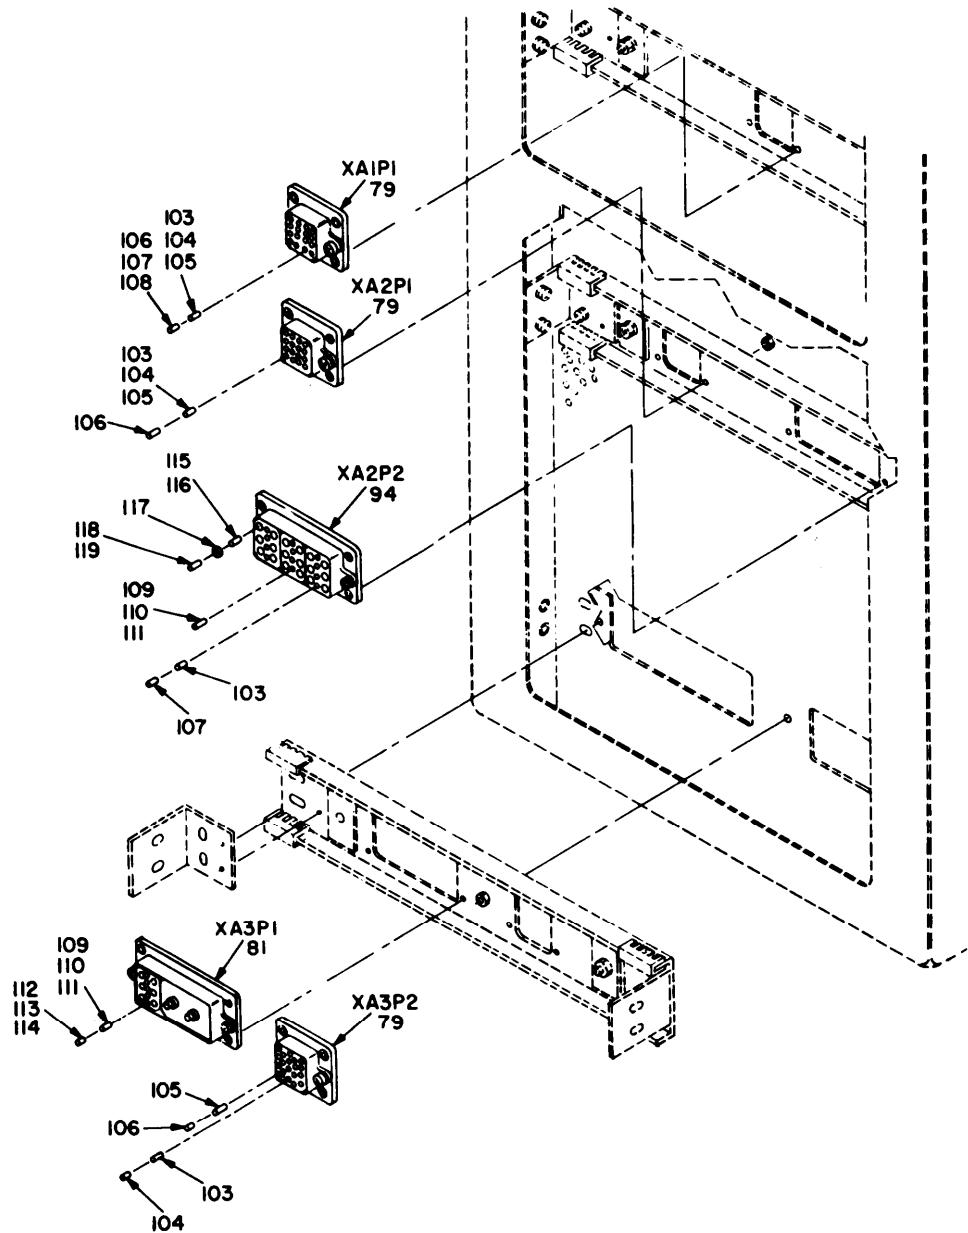

CONNECTOR REF DES	ITEM I03 QTY USED	ITEM I04 QTY USED	ITEM I05 QTY USED	ITEM I06 QTY USED	ITEM I07 QTY USED	ITEM I08 QTY USED
XAIPI	14	1	2	2	9	2
XA2PI	2	—	2	2	—	—
XA2P2	32	—	—	—	9	—
XA3P2	5	1	2	2	—	—

CONNECTOR REF DES	ITEM I09 QTY USED	ITEM I10 QTY USED	ITEM I11 QTY USED	ITEM I12 QTY USED	ITEM I13 QTY USED	ITEM I14 QTY USED	ITEM I15 QTY USED	ITEM I16 QTY USED	ITEM I17 QTY USED
XA2P2	6	6	6	—	—	—	5	1	6
XA3PI	4	4	4	2	2	2	—	—	—

CONNECTOR REF DES	ITEM I18 QTY USED	ITEM I19 QTY USED
XA2P2	5	1

EL00C012


Figure 5. Cabinet, Interrogator Set Group CY-6442/TPX-50 (sheet 4 of 4).

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
						FSCM	U/M	
5	1	XDOZZ		SMD679705-2	80063	PLATE, IDENTIFICATION	EA	1
5	2	PAFZZ		NAS1635-04-5P	80205	SCREW, MACHINE	EA	4
5	3	PAFZZ	5310-00-053-1366	LKS440-2	46384	NUT, SELF-LOCKING, CLINCH	EA	2
5	4	PAFZZ	5305-00-054-6670	MS51957-45	96906	SCREW, MACHINE	EA	7
5	5	PAFZZ	5310-00-880-5978	MS15795-807	96906	WASHER, FLAT	EA	9
5	6	PAFZZ	5915-00-443-3985	RF3366B	13619	FILTER, RADIO FREQUENCY INTERFERENCE	EA	1
5	7	XDFZZ		SMB680359	80063	SPACER, PLATE	EA	1
5	8	XDFFF	5340-00-489-8428	SMD679425	80063	COVER ASSEMBLY, REAR ACCESS	EA	1
5	9	PAFZZ	5999-00-436-9027	13980	07700	SHIELDING GASKET, ELECTRONIC	FT	3
5	10	PAFZZ	5310-00-850-1611	MS15795-808	96906	WASHER, FLAT	EA	32
5	11	PAFZZ	5305-00-059-3660	MS51958-64	96906	SCREW, MACHINE	EA	27
5	12	XDFFF	5340-00-489-8430	SMD679426	80063	COVER ASSEMBLY, REAR ACCESS	EA	1
5	13	PAFZZ	5999-00-436-9027	13980	07700	SHIELDING GASKET, ELECTRONIC	FT	4
5	14	XAFZZ		MS20470AD2-4	96906	RIVET, SOLID	EA	8
5	15	PAFZZ	5320-00-117-6952	MS20426AD4-7	96906	RIVET, SOLID	EA	24
5	16	PAFZZ	5305-00-068-5287	MS24693C49	96906	SCREW, MACHINE	EA	12
5	17	PAFZL	5895-00-437-2407	SMB679679-1	8006	NUT, SPACER, PLATE	EA	6
5	18	PAFDZ	5895-00-437-2405	35711	83508	SLIDE SECTION, DRAWER, EXTENSION	PR	3
5	19	PAFZZ		MS16210-2	96906	NUT, PLAIN, HEXAGON	EA	49
5	20	PAFZZ	5310-00-933-8118	MS35338-135	96906	WASHER, LOCK	EA	55
5	21	PAFZZ		P5400-3	15653	NUT, SELF-LOCKING, PLATE	EA	24
5	22	PAFZZ	5320-00-117-6939	MS20426AD3-5	96906	RIVET, SOLID	EA	48
5	23	PAFFL	5895-00-410-9957	SMC679368	80063	CONTROL PANEL ASSEMBLY	EA	1
5	24	PAFZZ	5305-00-054-5649	MS51957-15	96906	SCREW, MACHINE	EA	45
5	25	PAFZZ	5935-00-765-6392	MS3120E22-55S	96906	CONNECTOR, RECEPTACLE, ELECTRICAL	EA	1
5	26	PAFZL	5895-00-410-2418	SMC679694	80063	PLATE, CONNECTOR MOUNTING	EA	1
5	27	XDFZZ		CW123AU	81349	COVER, ELECTRICAL CONNECTOR	EA	1
5	28	PAFZZ	5935-00-913-3648	02583800-75	94375	CONNECTOR, RECEPTACLE, ELECTRICAL	EA	2
5	29	PAFZZ	5935-00-443-4011	025B3602-75	94375	CONNECTOR, RECEPTACLE, ELECTRICAL	EA	1
5	30	PAFZZ	5305-00-054-5647	MS51957-13	96906	SCREW, MACHINE	EA	6
5	31	XDFZZ	5340-00-975-1440	HP6N	09922	CLAMP, LOOP	EA	11
5	32	PAFZZ	5940-00-926-8121	SE206D01	81349	TERMINAL, STUD	EA	6

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
						FSCM	U/M	
5	33	PAFZZ		D133	08795	FERRULE,RADIO FREQUENCY CABLE,GROUNDING	EA	3
5	34	PAFZZ		RCR20G910JR	81349	RESISTOR,FIXED,COMPOSITION	EA	1
5	35	PAFZZ		147-4-032BRASSHT	79963	TERMINAL,LUG	EA	2
5	36	PAFZZ	5999-00-955-4138	21-33011-24	77820	CONTACT,ELECTRICAL	EA	1
5	37	PAFFF	5935-00-710-6177	PT02SE22-78S	77820	CONNECTOR BODY,RECEPTACLE,ELECTRICAL	EA	1
5	37A	PAFZZ	5999-00-955-4138	21-33011-24	77820	CONTACT,ELECTRICAL	EA	5
5	38	PAFZZ	5935-00-443-4018	100N3002A20	94375	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
5	39	PAFZZ	5935-00-443-4014	100N3000A20	94375	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
5	40	XDFZZ	5340-00-003-6667	HP8N	09922	CLAMP,LOOP	EA	4
5	41	PAFZZ	5310-00-879-0696	LKS032-2	46384	NUT,SELF-LOCKING,CLINCH	EA	41
5	42	PAFZZ		RCR20G102JR	81349	RESISTOR,FIXED,COMOSITION	EA	2
5	43	PAFZZ	5310-00-722-5998	MS15795-805	96906	WASHER,FLAT	EA	21
5	44	PAFZZ	5310-00-929-6395	MS35338-136	96906	WASHER,LOCK	EA	19
5	45	PAFZZ	5305-00-054-6654	MS51957-30	96906	SCREW,MACHINE	EA	14
5	46	XDFZZ	5340-00-003-9207	HP4N	09922	CLAMP,LOOP	EA	3
5	47	PAFZZ	5305-00-054-6655	MS51957-31	96906	SCREW,MACHINE	EA	7
5	48	XDFZZ	5340-00-337-8642	HP9N	09922	CLAMP,LOOP	EA	2
5	49	XDFZZ		TA723SS7	84971	CLAMP,LOOP	EA	4
5	50	PAFZZ		SMA680035-28	8006	SCREW,MACHINE	EA	8
5	51	PAFZZ	5310-00-905-1691	MS51972-1	96906	NUT,PLAIN,HEXAGON	EA	4
5	52	PAFZZ	5310-00-933-8121	MS35338-139	96906	WASHER,LOCK	EA	3
5	53	PAFZZ		MS16213-61	96906	WASHER,LOCK	EA	1
5	54	PAFZZ		MS3193A20A	96906	CONTACT,ELECTRICAL	EA	80
5	55	PAFZZ	5999-00-901-3237	MS3192-16A	96906	CONTACT,ELECTRICAL	EA	5
5	56	PAFZZ	5307-00-177-7548	NAS1454C4-0200	80205	TERMINAL,STUD	EA	1
5	57	PAFZZ	5940-00-113-8184	MS25036-150	96906	TERMINAL,LUG	EA	1
5	58	PAFZZ	5310-00-582-5677	MS15795-810	96906	WASHER,FLAT	EA	2
5	59	PAFZZ	5935-00-765-8593	MS3120E10-6S	96906	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
5	60	PAFZZ	5935-00-914-0174	MS3120E14-5P	96906	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
5	61	PAFZZ	5305-00-059-3659	MS51958-63	96906	SCREW,MACHINE	EA	14
5	62	PAFZZ	5935-00-880-7894	MS3120E14-195	96906	CONNECTOR,RECPTACLE,ELECTRICAL	EA	1

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
					FSCM		U/M	
5	63	PAFZZ	5940-00-839-0828	SE26XP01	81349	TERMINAL, STUD	EA	3
5	64	PAFZZ		2960-000	72982	CAPACITOR, FIXED, CERAMIC DIELECTRIC	EA	2
5	65	PAFZZ	5310-00-982-6813	MS21044C06	96906	NUT, SELF-LOCKING, HEXAGON	EA	3
5	66	PAFZZ		1212-502	72982	FILTER, RADIO FREQUENCY INTERFERENCE	EA	4
5	66A	XDFFF	5895-00-410-2417	SMD679446	80063	PLATE ASSEMBLY, FILTER MOUNTING	EA	1
5	67	PAFZZ	5999-00-436-9027	13980	07700	SHIELDING GASKET, ELECTRONIC	FT	2
5	68	XDFZZ	5895-00-437-7273	SMD679446-1	80063	COVER, PLATE ASSEMBLY	EA	1
5	69	PAFZZ	5310-00-982-6814	MS21044C08	96906	NUT, SELF-LOCKING, HEXAGON	EA	2
5	70	PAFZZ		SMA679942-5	80063	INSULATOR, WASHER	EA	2
5	71	PAFZZ		SMB679658-1	80063	INSULATOR, BUSHING	EA	2
5	72	PAFZZ	5305-00-054-6673	MS51957-48	96906	SCREW, MACHINE	EA	2
5	73	PAFZZ	5305-00-054-6670	MS51957-45	96906	SCREW, MACHINE	EA	1
5	74	PAFZZ	5310-00-880-5978	MS15795-807	96906	WASHER, FLAT	EA	13
5	75	PAFZZ		SMB679787	80063	PIN, SHOULDER, HEADLESS	EA	6
5	76	PAFZZ	5935-00-411-8380	SMD680142	80063	BRACKET ASSEMBLY, CONNECTOR	EA	1
5	77	XAFZZ		LKS832-2	46384	NUT, SELF-LOCKING, CLINCH	EA	1
5	78	XDFZZ	5325-00-926-1394	MS21266-3N	96906	GROMMET, PLASTIC	EA	1
5	79	PAFZZ	5935-00-782-6134	SMC680113	80063	CONNECTOR ASSEMBLY, ELECTRICAL	EA	3
5	80	PAFZZ	5360-00-134-3216	202300-3	00779	SPRING ASSEMBLY	EA	5
5	81	PAFZZ	5935-00-201-8855	SMA679389	80063	CONNECTOR ASSEMBLY, ELECTRICAL	EA	1
5	82	PAFZZ	5305-00-059-3661	MS51958-65	96906	SCREW, MACHINE	EA	12
5	83	PAFZZ	5310-00-933-8120	MS35338-138	96906	WASHER, LOCK	EA	12
5	84	PAFZZ	5310-00-850-1611	MS15795-808	96906	WASHER, FLAT	EA	12
5	85	PAFZZ	5305-00-054-6672	MS51957-47	96906	SCREW, MACHINE	EA	12
5	86	PAFZZ	5310-00-933-8119	MS35338-137	96906	WASHER, LOCK	EA	12
5	87	PAFZZ	5310-00-933-8121	MS35338-139	96906	WASHER, LOCK	EA	6
5	88	PAFZZ		MS16210-6	96906	NUT, PLAIN, HEXAGON	EA	6
5	89	PAFZZ		MS39086-125	96906	PIN, SPRING	EA	24
5	90	XDFZZ		SMB679695	80063	SUPPORT, CONNECTOR MOUNTING BRACKET	EA	6
5	91	PAFZZ		S10K116	03481	NUT, PLAIN, CLINCH	EA	12

SECTION II							TM11-5895-687-34P-1		
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	USABLE	ON CODE	(7) (8) QTY INC IN UNIT	
					FSCM		U/M		
5	92	PAFZD	5895-00-437-2406	SMB679679-2	80063 NUT, SPACER, PLATE		EA	6	
5	93	PAFZZ		S6K106	03481 NUT, PLAIN, CLINCH		EA	13	
5	94	PAFZZ	5935-00-411-3688	SMC680114	80063 CONNECTOR ASSEMBLY, ELECTRICAL		EA	1	
5	95	PAFZZ	5935-00-411-8371	SMD680141	80063 BRACKET ASSEMBLY, CONNECTOR		EA	1	
5	96	PAFZZ	5935-00-411-8381	SMD679423	80063 BRACKET ASSEMBLY, CONNECTOR		EA	1	
5	97	PAFFL	5895-00-410-9951	SME679447	80063 CABINET ASSEMBLY		EA	1	
5	98	XDFZZ	5340-00-007-6040	HP5N	09922 CLAMP, LOOP		EA	1	
5	99	PAFZZ	5310-00-819-9188	LKS632-2	46384 NUT, SELF-LOCKING, CLINCH		EA	5	
5	100	PAFZZ		MS16210-3	96906 NUT, PLAIN, HEXAGON		EA	1	
5	101	PAFZZ		147-6-032BRASSHT	79963 TERMINAL, LUG		EA	1	
5	102	PAFZZ	5305-00-054-6652	MS51957-28	96906 SCREW, MACHINE		EA	1	
5	103	PAFZZ	5935-00-909-8565	66104-1	00779 CONTACT, ELECTRICAL		EA	53	
5	104	PAFZZ	5935-00-909-8565	66104-1	00779 CONTACT, ELECTRICAL		EA	3	
5	105	PAFZZ	5999-00-918-4046	66100-1	00779 CONTACT, ELECTRICAL		EA	6	
5	106	XDFZZ		327137	00779 FERRULE, RADIO FREQUENCY CABLE, GROUNDING		EA	6	
5	107	PAFZZ	5940-00-993-5216	2-323930-2	00779 FERRULE, RADIO FREQUENCY CABLE, GROUNDING		EA	18	
5	108	PAFZZ	5935-00-909-8565	66104-1	00779 CONTACT, ELECTRICAL		EA	2	
5	109	PAFZZ	5999-00-989-6819	201144-1	00779 CONTACT, ELECTRICAL		EA	10	
5	110	PAFZZ	5820-00-986-7389	201142-2	00779 SPRING, RETENTION		EA	10	
5	111	PAFZZ	5940-00-989-8407	328666	00779 FERRULE, ELECTRICAL CONDUCTOR		EA	10	
5	112	PAFZZ	5999-00-989-6819	201144-1	00779 CONTACT, ELECTRICAL		EA	2	
5	113	PAFZZ	5820-00-986-7389	201142-2	00779 SPRING, RETENTION		EA	2	
5	114	PAFZZ	5940-00-989-8407	328666	00779 FERRULE, ELECTRICAL CONDUCTOR		EA	2	
5	115	PAFZZ	5999-00-299-0901	201146-2	00779 CONTACT, ELECTRICAL		EA	5	
5	116	PAFZZ	5999-00-989-6819	201144-1	00779 CONTACT, ELECTRICAL		EA	1	
5	117	PAFZZ	5820-00-986-7389	201142-2	00779 SPRING, RETENTION		EA	6	
5	118	PAFZZ	5940-00-897-5195	328664	00779 FERRULE, ELECTRICAL CONDUCTOR		EA	5	
5	119	PAFZZ	5940-00-989-8407	328666	00779 FERRULE, ELECTRICAL CONDUCTOR		EA	1	

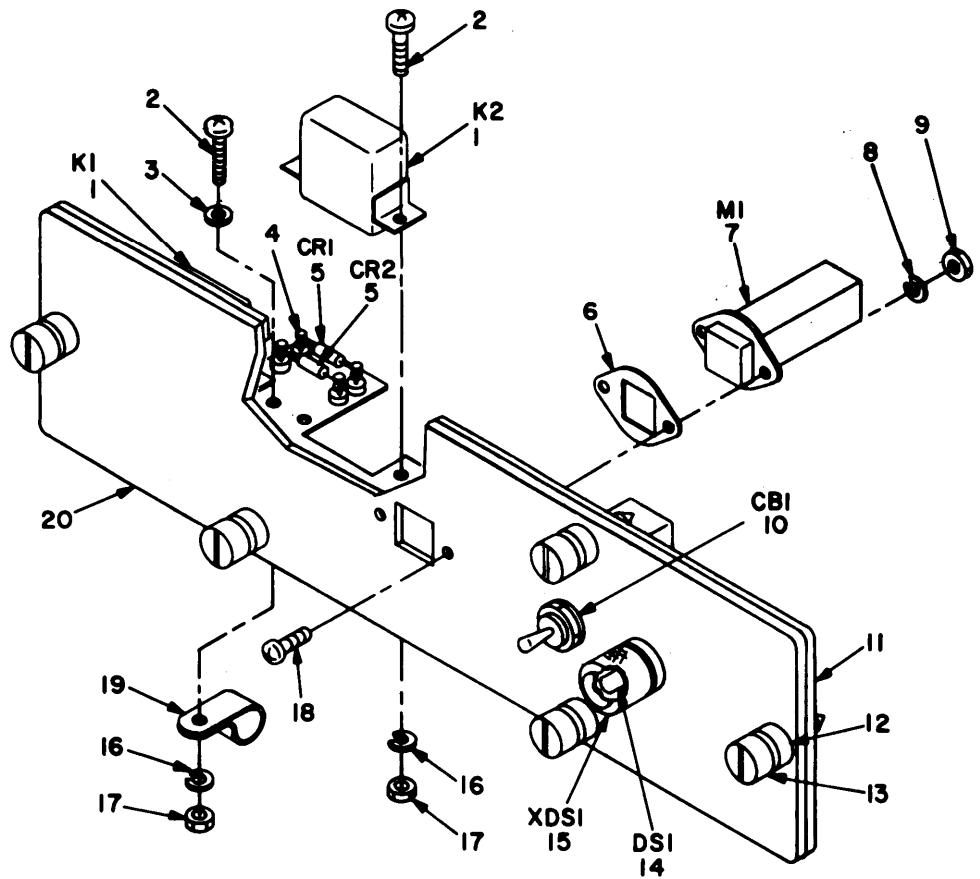

NOTE:

**REFERENCE DESIGNATIONS ARE ABBREVIATED,
PREFIX REFERENCE DESIGNATION WITH I.**

ELOOC006

Figure 6. Control, panel assembly.

SECTION II (1) ILLUSTRATION (A) FIG NO		(2)		(3)		(4)		(5)		TM11-5895-687-34P-1 (6) DESCRIPTION		(7)		(8) QTY INC IN UNIT	
	ITEM NO	SMR CODE		NATIONAL STOCK NUMBER		PART NUMBER		FSCM			USABLE ON	CODE	U/M		
6	1	PAFZZ	5945-00-226-5241	MS27401-1		96906	RELAY, HYBRID				EA		2		
6	2	PAFZZ	5305-00-054-6653	MS51957-29		96906	SCREW, MACHINE				EA		3		
6	3	PAFZZ	5310-00-722-5998	MS15795-805		96906	WASHER, FLAT				EA		1		
6	4	PAFZZ	5940-00-957-2683	SE079B02		81349	TERMINAL, STUD				EA		4		
6	5	PAFZZ	5961-00-842-9864	JAN1N914		81349	SEMICONDUCTOR DEVICE, DIODE				EA		2		
6	6	PAFZZ	5999-00-437-6492	SMB679635		80063	SHIELDING GASKET, ELECTRONIC				EA		1		
6	7	PAFZZ	KT19703G4A19754			82227	METER, TIME TOTALIZING				EA		1		
6	8	PAFZZ	5310-00-933-8118	MS35338-135		96906	WASHER, LOCK				EA		2		
6	9	PAFZZ		MS16210-2		96906	NUT, PLAIN, HEXAGON				EA		2		
6	10	PAFZZ	5925-00-411-5217	API-76-5		81541	CIRCUIT BREAKER				EA		1		
6	11	PAFZZ	5999-00-436-9027	13980		07700	SHIELDING GASKET, ELECTRONIC				FT		3		
6	12	PAFZZ	5340-00-134-3224	SMA679719		80063	NUT, PLAIN, ROUND				EA		6		
6	13	PAFZZ	5305-00-989-4859	6141SS1032-7		06540	SCREW, EXTERNALLY RELIVED BODY				EA		6		
6	14	PAOZZ	6240-00-763-7744	CM387		71744	LAMP, INCANDESCENT				EA		1		
6	15	PAFZZ	6210-00-553-0878	MS25041-1		96906	LIGHT, INDICATOR				EA		1		
6	16	PAFZZ	5310-00-929-6395	MS35338-136		96906	WASHER, LOCK				EA		3		
6	17	PAFZZ		MS16210-3		96906	NUT, PLAIN, HEXAGON				EA		3		
6	18	PAFZZ		NAS1635-04-7P		80205	SCREW, MACHINE				EA		2		
6	19	PAFZZ	5340-00-975-1440	HP6N		09922	CLAMP, LOOP				EA		1		
6	20	XDFDD	5895-00-410-2415	SMD679427		80063	PANEL, CONTROL				EA		1		


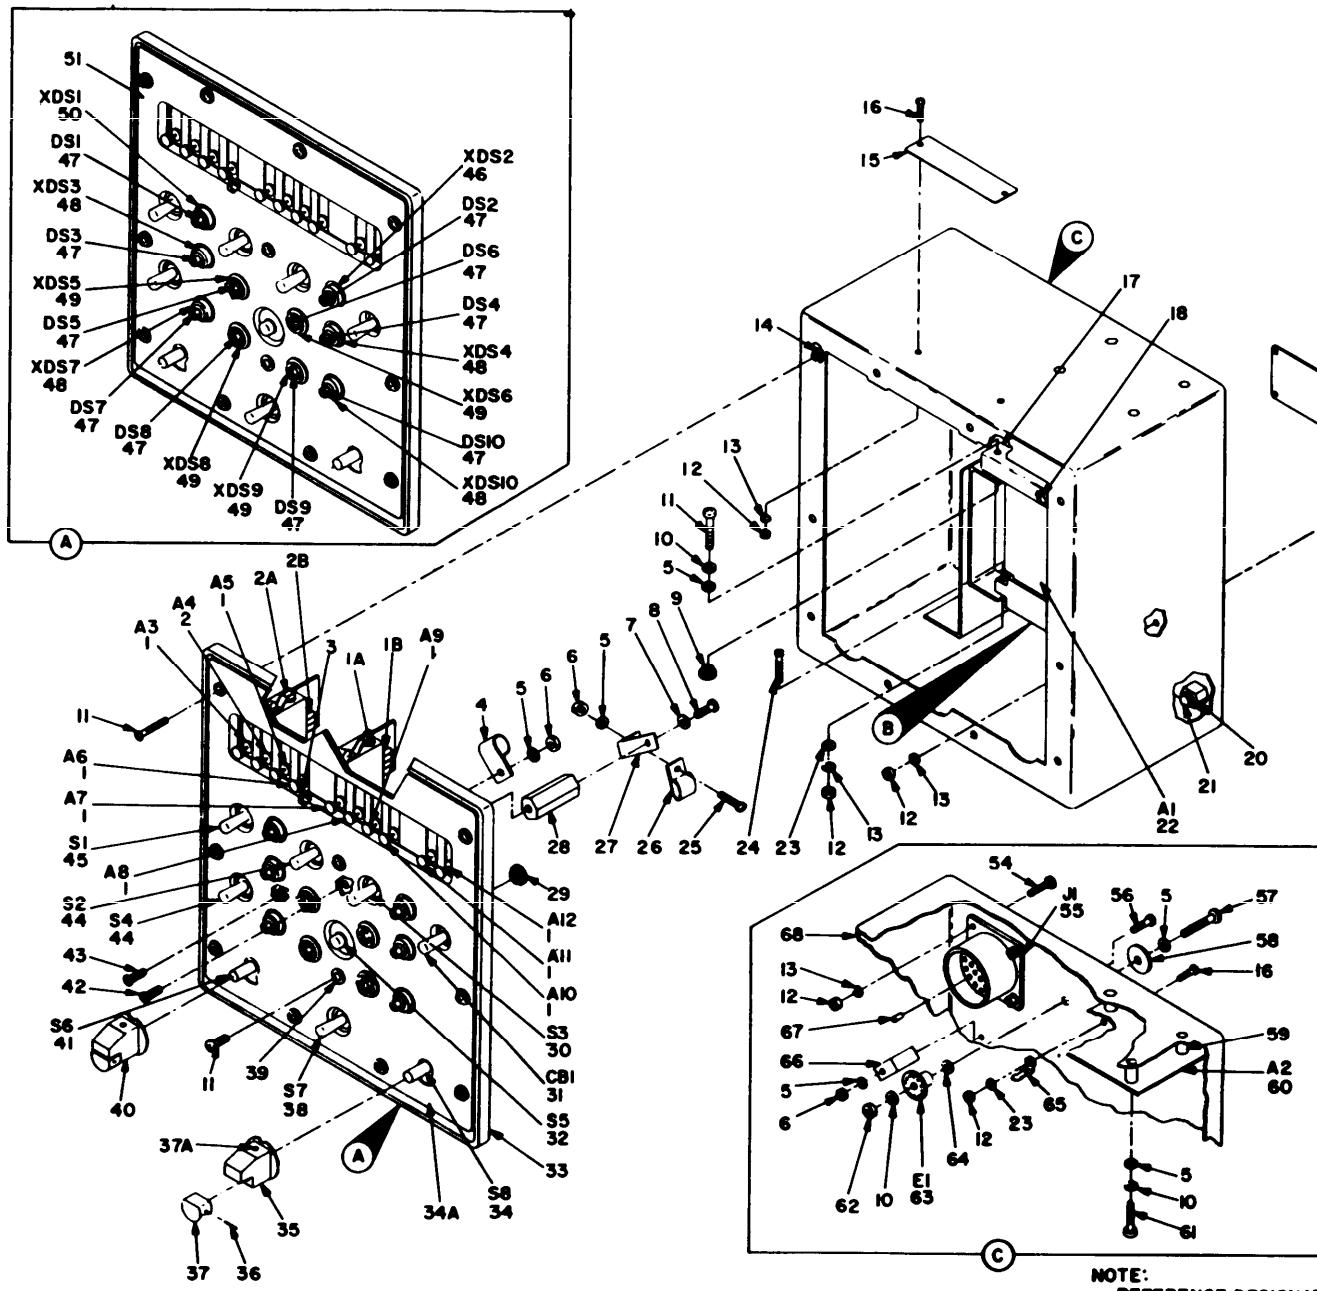


Figure 7. Control, Interrogator Set C-7651/TPX-50.

(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
SECTION II ILLUSTRATION (A)							
7	P0ODD	5895-00-130-5816	SME679366	80063	GROUP: 02 CONTROL,INTERROGATOR SET C-7651/TPX-50 CONTROL,INTERROGATOR SET C-7651/TPX-50	EA	1
7	1	PAFFZ	5930-00-443-3949	12H51	07126 SWITCH,PUSH	EA	9
7	1A	PAOZZ	6240-00-143-6558	MS3338-6839	96906 LAMP,INCANDESCENT	EA	1
7	18	PAFZZ	5961-00-938-1135	JAN1N4148	81349 SEMICONDUCTOR DEVICE,DIODE	EA	3
7	2	PAFPZ	5930-00-443-3951	12H52	07126 SWITCH,PUSH	EA	1
7	2A	PAOZZ	6240-00-143-6558	MS3338-6839	96906 LAMP,INCANDESCENT	EA	1
7	28	PAFZZ	5961-00-938-1135	JAN1N4148	81349 SEMICONDUCTOR DEVICE,DIODE	EA	2
7	3	XDFZZ	5305-00-764-2966	MS51959-2	96906 SCREW,MACHINE	EA	20
7	4	XDFZZ		HP7N	09922 CLAMP,LOOP	EA	1
7	5	PAFZZ	5310-00-531-9514	AN960C6	88044 WASHER,FLAT	EA	10
7	6	XDFZZ	5310-00-982-6813	MS21044C06	96906 NUT,SELF-LOCKING,HEXAGON	EA	3
7	7	PAFZZ	5310-00-933-8119	MS35338-137	96906 WASHER,LOCK	EA	1
7	8	XDFZZ	5305-00-054-6668	MS51957-43	96906 SCREW,MACHINE	EA	1
7	9	XDDZZ	5310-00-725-4719	CLS632-2	46384 NUT,SELF-LOCKING,CLINCH	EA	2
7	10	PAFZZ	5310-00-929-6395	MS35338-136	96906 WASHER,LOCK	EA	7
7	11	XDFZZ	5305-00-054-6655	MS51957-31	96906 SCREW,MACHINE	EA	14
7	12	XDFZZ		MS16210-2	96906 NUT,PLAIN,HEXAGON	EA	13
7	13	PAFZZ	5310-00-933-8118	MS35338-135	96906 WASHER,LOCK	EA	13
7	14	XDDZZ	5310-00-819-9188	LKS632-2	46384 NUT,SELF-LOCKING,CLINCH	EA	10
7	15	XDDZZ		SMC679711-2	80063 PLATE,DESIGNATION	EA	1
7	16	XDFZZ	5305-00-054-5648	MS51957-14	96906 SCREW,MACHINE	EA	7
7	17	XDFFF		SMC679297	80063 CLAMP,ASSEMBLY,RETAINING	EA	1
7	18	PAFZZ	5895-00-433-2381	SMC679297-2	80063 RUBBER STRIP	EA	1
7	19	XDDZZ		SMD679705-5	80063 PLATE,IDENTIFICATION	EA	1
7	20	XDFZZ		MS51972-3	96906 NUT,PLAIN,HEXAGON	EA	2
7	21	XDDZZ		SMB679784	80063 BOLT,EXTERNALLY RELIEVED BODY	EA	2
7	22	PADDL	5895-00-410-9960	SMD679361	80063 CIRCUIT CARD ASSEMBLY (LAMP DRIVER)	EA	1
7	23	PAFZZ	5310-00-782-1349	AN960C4	88044 WASHER,FLAT	EA	2
7	24	XDFZZ	5305-00-054-5652	MS51957-18	96906 SCREW,MACHINE	EA	2
7	25	XDFZZ	5305-00-054-6652	MS51957-28	96906 SCREW,MACHINE	EA	1
7	26	XDFZZ	5340-00-337-8642	HP9N	09922 CLAMP,LOOP	EA	1
7	27	XDDZZ		SMB679489	80063 BRACKET,ANGLE	EA	1
7	28	XDFZZ		SMB679783-18	80063 SPACER,SLEEVE	EA	1
7	29	XDFZZ	5310-00-819-9188	LKS632-2	46384 NUT,SELF-LOCKING,CLINCH	EA	2
7	30	PAFZZ	5930-00-945-1834	MS90311-211	96906 SWITCH,TOGGLE	EA	1
7	31	PAFZZ	5925-00-411-5216	AP1-76-1	81541 CIRCUIT BREAKER	EA	1
7	32	PAFZZ	5930-00-892-9479	MS27903-1	96906 SWITCH,PUSH	EA	1
7	33	PBFFF	5895-00-410-2414	SMD679432	80063 PANEL ASSEMBLY,FRONT	EA	1

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
					FSCM		U/M	
7	34	PAFZZ	5930-00-443-3991	SMC679803	80063	SWITCH,ROTARY	EA	1
7	34A	PAFFF	5895-00-410-2416	SMD679433	80063	PANEL ASSEMBLY,EDGE-LIGHTED	EA	1
7	35	XAFZZ		SMB679271	80063	KNOB	EA	1
7	36	XAFZZ		MS35678-3	96906	PIN,GROOVED,HEADLESS	EA	1
7	37	XAFZZ		SMA679775	80063	KNOB	EA	1
7	37A	XAFZZ		MS51017-34	96906	SETScrew	EA	1
7	38	PAFZZ	5930-00-088-8762	MS90310-281	96906	SWITCH,TOGGLE	EA	1
7	39	XDFZZ		MS25381-1	96906	GROMMET,METALLIC	EA	12
7	40	PAOZZ		SMB679270	80063	KNOB ASSEMBLY,SELECTOR	EA	2
7	41	PAFZZ	5930-00-443-3992	SMC679804	80063	SWITCH,ROTARY	EA	1
7	42	XDFZZ	5305-00-889-2991	MS24693C4B	96906	SCREW,MACHINE	EA	1
7	43	XDFZZ	5305-00-066-7328	MS24693C27	96906	SCREW,MACHINE	EA	1
7	44	PAFZZ	5930-00-914-6458	MS90310-231	96906	SWITCH,TOGGLE	EA	2
7	45	PAFZZ	5930-00-931-0516	MS90310-271	96906	SWITCH,TOGGLE	EA	1
7	46	PAFZZ		109-8430-0115-20 1	72619	LIGHT,INDICATOR	EA	1
7	47	PAOZZ	6240-00-763-7744	CM387	71744	LAMP, INCANDESCENT	EA	10
7	48	PAFZZ	6210-00-965-1491	MS25010C11B	96906	LIGHT,PANEL	EA	4
7	49	PAFZZ		109-8430-0111-20 1	72619	LIGHT,INDICATOR	EA	4
7	50	PAFZZ	6210-00-145-1392	109-8430-0112-20 1	72619	LIGHT,INDICATOR	EA	1
7	51	XDFZZ	5895-00-437-2408	SMD679433-1	80063	PANEL,EDGE-LIGHTED	EA	1
7	52	PAFZZ	5935-00-905-7595	SMA679547	80063	CONNECTOR BODY,RECEPTACLE,ELECTRICAL	EA	1
7	53	PAFZZ	5999-00-946-7716	SMA679544	80063	CONTACT,ELECTRICAL	EA	34
7	54	XDFZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE	EA	4
7	55	PAFZZ	5935-00-728-7825	MS3120E22-55P	96906	CONNECTOR,RECEPTACLE,ELECTRICAL	EA	1
7	36	XDFZZ	5305-00-054-6653	MS51957-29	96906	SCREW,MACHINE	EA	1
7	57	XDFZZ	5305-00-054-6656	MS51957-32	96906	SCREW,MACHINE	EA	1
7	58	XDFZZ		SMB679658-1	80063	INSULATOR,BUSHING	EA	1
7	59	XDDZZ	5340-00-953-0670	BS0S632-16	46384	SPACER,SLEEVE	EA	4
7	60	PAFDL		SMD680383	80063	CIRCUIT CARD ASSEMBLY (REMOTE ERROR INDICATOR	EA	1
7	61	XDFZZ	5305-00-054-6651	MS51957-27	96906	SCREW,MACHINE	EA	4
7	62	XDFZZ		MS16210-3	96906	NUT,PLAIN,HEXAGON	EA	1
7	63	XDFZZ	5940-00-839-0828	SE26XP01	81349	TERMINAL, STUD	EA	1
7	64	XDFZZ		SMA679942-5	80063	INSULATOR,WASHER	EA	1
7	65	XDFZZ		147-4-032BRASSHT	79963	TERMINAL,LUG	EA	1
7	66	XDFZZ	5340-00-003-6667	HP8N	09922	CLAMP,LOOP	EA	1
7	67	PAFZZ	5999-00-226-4703	MS3192A20A	96906	CONTACT,ELECTRICAL	EA	55
7	68	XDDDD	5895-00-437-2387	SMD679431	80063	CHASSIS,ELECTRICAL EQUIPMENT	EA	1

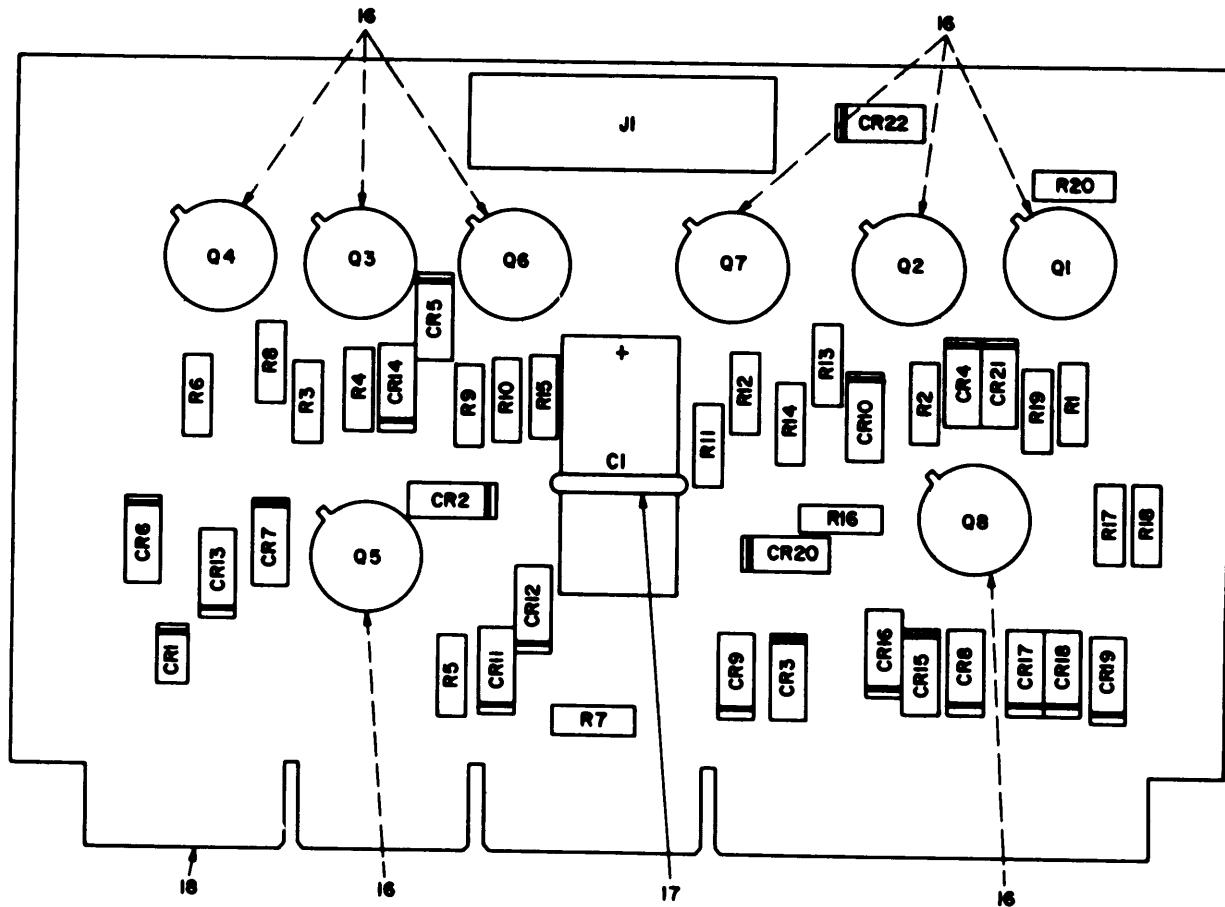


NOTE:
REFERENCE DESIGNATIONS ARE ABBREVIATED,
PREFIX REFERENCE DESIGNATION WITH ZAI.

REF DES	ITEM NO.								
C1	1	CR9	3	CR18	3	Q4	6	R5	8
CR1	2	CR10	3	CR19	3	Q5	5	R6	9
CR2	3	CR11	3	CR20	3	Q6	6	R7	10
CR3	3	CR12	3	CR21	3	Q7	6	R8	11
CR4	3	CR13	3	CR22	3	Q8	5	R9	8
CR5	3	CR14	3	J1	4	R1	7	R10	9
CR6	3	CR15	3	Q1	5	R2	8	R11	8
CR7	3	CR16	3	Q2	5	R3	8	R12	9
CR8	3	CR17	3	Q3	6	R4	9	R20	15

ELOOCO08

Figure 8. Circuit card assembly lamp driver.

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT U/M
GROUP: 0201 CIRCUIT CARD ASSEMBLY LAMP DRIVER								
8	1	PADZZ		CL65BN430MP3	81349	CAPACITOR, FIXED, ELECTROLYTIC	EA	1
8	2	PADZZ	5961-00-059-2904	JAN1N3613	81349	SEMICONDUCTOR DEVICE, DIODE	EA	1
8	3	PADZZ	5961-00-087-6047	JAN1N645	81349	SEMICONDUCTOR DEVICE, DIODE	EA	21
8	4	PADZZ	5895-00-782-5837	85928-2	00779	CONNECTOR, RECEPTACLE, ELECTRICAL	EA	1
8	5	PADZZ	5961-00-014-6458	JAN2N3498	81349	TRANSISTOR	EA	4
8	6	PADZZ	5961-00-086-0612	JAN2N3634	81349	TRANSISTOR	EA	4
8	7	PADZZ	5905-00-110-7622	RCR07G682JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	8	PADZZ	5905-00-114-0711	RCR07G472JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	5
8	9	PADZZ	5905-00-110-7620	RCR07G102JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	4
8	10	PADZZ	5905-00-141-0717	RCR07G473JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	11	PADZZ	5905-00-116-8556	RCR07G223JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	5
8	12	PADZZ	5905-00-106-3666	RCR07G103JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	13	PADZZ	5905-00-119-3505	RCR07G683JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	14	PADZZ	5905-00-118-4559	RCR07G333JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	15	PADZZ	5905-00-106-1278	RCR07G123JJS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
8	16	PADZZ	5961-00-976-9592	A10020	07047	MOUNTING PAD, ELECTRICAL-ELECTRONIC COMPONENT	EA	8
8	17	XDDZZ		2829-75-2	98159	STRAP, TIEDOWN, ELECTRICAL COMPONENTS	EA	1
8	18	XDDZZ		SMD679861	80063	PRINTED WIRING BOARD	EA	1

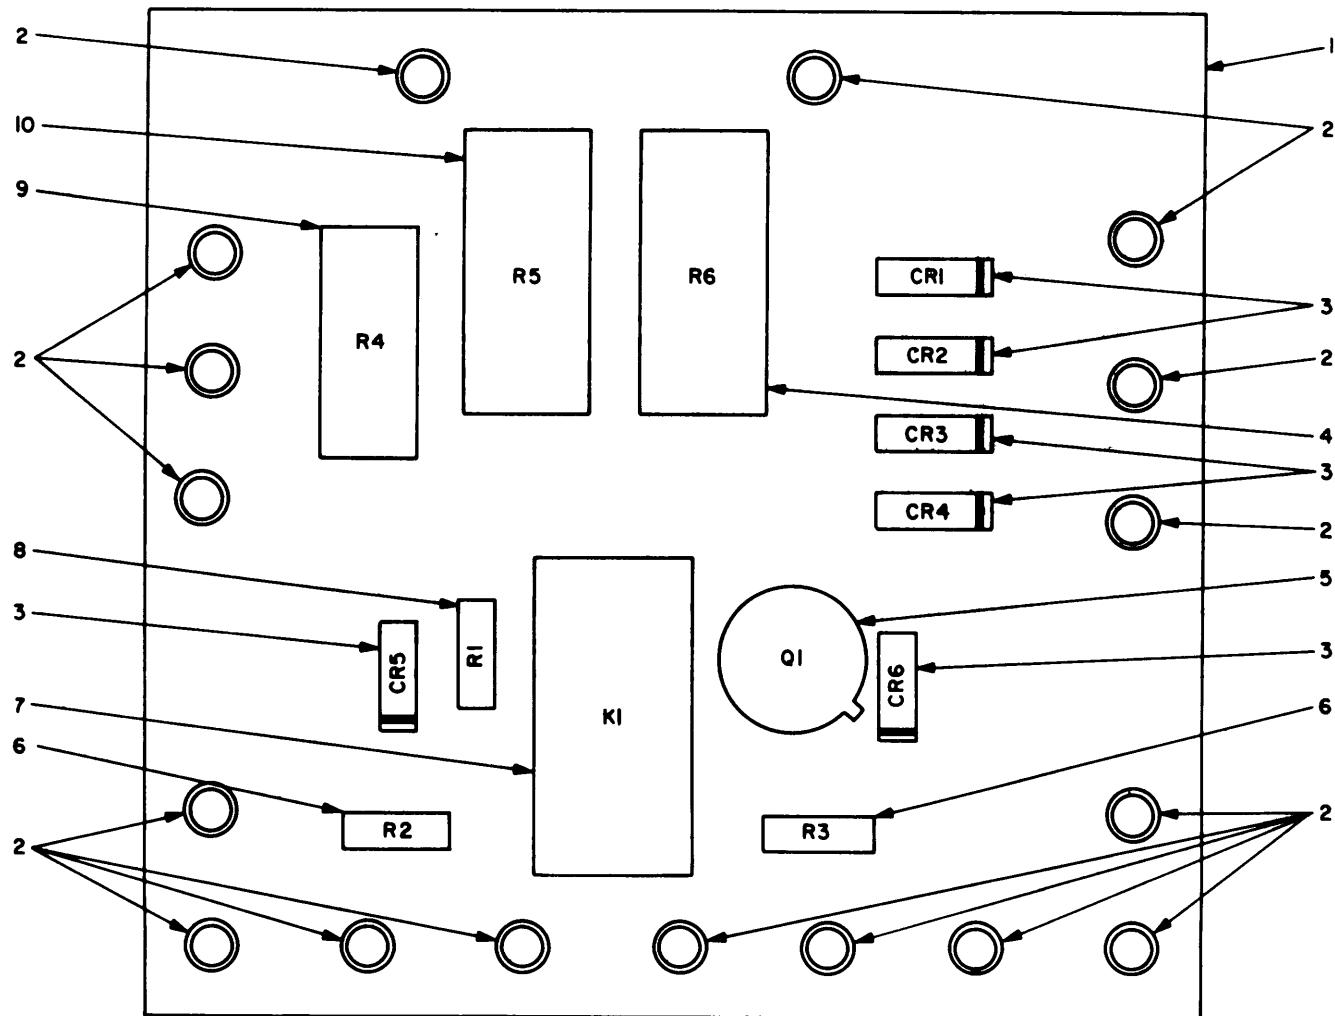

NOTE:
REFERENCE DESIGNATIONS ARE ABBREVIATED,
PREFIX REFERENCE DESIGNATION WITH 2A2.

ELOOC009

Figure 9. Circuit card assembly remote error indicator.

SECTION II (1) ILLUSTRATION (A) FIG NO		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT U/M
GROUP: 0202 CIRCUIT CARD ASSEMBLY REMOTE ERROR INDICATOR								
9	1	XADZZ		SMD680384	80063	PRINTED WIRING BOARD	EA	1
9	2	XDDZZ		2034-2-05	71279	TERMINAL, STUD	EA	17
9	3	PADZZ	5961-00-842-9864	JAN1N914	81349	SEMICONDUCTOR DEVICE, DIODE	EA	6
9	4	PADZZ	5905-00-828-4045	RL42S270J	81349	RESISTOR, FIXED, FILM	EA	1
9	5	PADZZ	5961-00-014-6458	JAN2N3498	81349	TRANSISTOR	EA	1
9	6	PADZZ	5905-00-110-0388	RCR07G104JS	81349	RESISTOR, FIXED, COMPOSITION	EA	2
9	7	PADZZ	5945-00-904-8319	M5757-9-003	81349	RELAY, ARMATURE	EA	1
9	8	PADZZ	5905-00-110-7622	RCR07G682JS	81349	RESISTOR, FIXED, COMPOSITION	EA	1
9	9	PADZZ	5905-00-982-3324	RW69V561	81349	RESISTOR, FIXED, WIRE WOUND	EA	1
9	10	PADZZ	5905-00-080-5224	RL42S330J	81349	RESISTOR, FIXED, FILM	EA	1

STOCK NUMBER	FIGURE NO	NATIONAL STOCK NUMBER AND PART NUMBER INDEX		FIGURE NO	ITEM NO
		ITEM NO	STOCK NUMBER		
5340-00-003-6667	5	40	5895-00-410-2417	5	66A
5340-00-003-6667	7	66	5895-00-410-2418	5	26
5340-00-003-9207	5	46	5895-00-410-2419	3	6
5340-00-007-6040	5	98	5895-00-410-2420	3	5
5961-00-014-6458	8	5	5895-00-410-2421	3	4
5961-00-014-6458	9	5	5895-00-410-2422	3	7
5935-00-021-9576	2	9	5895-00-410-2423	3	2
5310-00-053-1366	5	3	5895-00-410-2425	3	3
5305-00-054-5647	5	30	5895-00-410-9951	5	97
5305-00-054-5648	7	16	5895-00-410-9957	5	23
5305-00-054-5649	5	24	5895-00-410-9960	7	22
5305-00-054-5649	7	54	5935-00-411-3688	5	94
5305-00-054-5652	7	24	5925-00-411-5216	7	31
5305-00-054-6651	7	61	5925-00-411-5217	6	10
5305-00-054-6652	5	102	5935-00-411-8371	5	95
5305-00-054-6652	7	25	5935-00-411-8380	5	76
5305-00-054-6653	6	2	5935-00-411-8381	5	96
5305-00-054-6653	7	56	5895-00-433-2381	7	18
5305-00-054-6654	5	45	5999-00-436-9027	5	9
5305-00-054-6655	5	47	5999-00-436-9027	5	13
5305-00-054-6655	7	11	5999-00-436-9027	5	67
5305-00-054-6656	7	57	5999-00-436-9027	6	11
5305-00-054-6668	7	8	5895-00-437-2387	7	68
5305-00-054-6670	5	4	5895-00-437-2405	5	18
5305-00-054-6670	5	73	5895-00-437-2406	5	92
5305-00-054-6672	5	85	5895-00-437-2407	5	17
5305-00-054-6673	5	72	5895-00-437-2408	7	51
5961-00-059-2904	8	2	5999-00-437-6492	6	6
5305-00-059-3659	5	61	5895-00-437-7273	5	68
5305-00-059-3660	5	11	5930-00-443-3949	7	1
5305-00-059-3661	5	82	5930-00-443-3951	7	2
5305-00-066-7328	7	43	5915-00-443-3985	5	6
5305-00-068-5287	5	16	5930-00-443-3991	7	34
5905-00-080-5224	9	10	5930-00-443-3992	7	41
5961-00-086-0612	8	6	5935-00-443-4011	5	29
5961-00-087-6047	8	3	5935-00-443-4014	5	39
5930-00-088-8762	7	38	5935-00-443-4018	5	38
5905-00-106-1278	8	15	5340-00-489-8428	5	8
5905-00-106-3666	8	12	5340-00-489-8430	5	12
5905-00-110-0388	9	6	5310-00-531-9514	7	5
5905-00-110-7620	8	9	6210-00-553-0879	6	15
5905-00-110-7622	8	7	5935-00-565-9497	2	1
5905-00-110-7622	9	8	5310-00-582-5677	5	58
5940-00-113-8184	5	57	5935-00-710-6177	5	37
5905-00-114-0711	8	8	5310-00-722-5998	5	43
5905-00-116-8556	8	11	5310-00-722-5998	6	3
5320-00-117-6939	5	22	5310-00-725-4719	7	9
5320-00-117-6952	5	15	5935-00-728-7793	1	6
5905-00-118-4559	8	14	5935-00-728-7825	7	55
5905-00-119-3505	8	13	6240-00-763-7744	6	14
5895-00-129-6066	4	3	6240-00-763-7744	7	47
5895-00-130-5814	4	6	5305-00-764-2966	7	3
5895-00-130-5815	4	5	5935-00-765-6006	1	1
5895-00-130-5816	7		5935-00-765-6392	5	25
5895-00-130-5817	4		5935-00-765-8593	5	59
5995-00-132-3321	2		5310-00-782-1349	7	23
5895-00-133-1193	3	1	5895-00-782-5837	8	4
5360-00-134-3216	5	80	5935-00-782-6134	5	79
5340-00-134-3224	6	12	5310-00-819-9188	5	99
5935-00-134-5273	2	11	5310-00-819-9188	7	14
5895-00-135-9106	4	7	5310-00-819-9188	7	29
5995-00-136-4980	1		5970-00-828-3451	1	2
5905-00-141-0717	8	10	5905-00-828-4045	9	4
6240-00-143-6558	7	1A	5940-00-839-0828	5	63
6240-00-143-6558	7	2A	5940-00-839-0828	7	63
6210-00-145-1392	7	50	5961-00-842-9864	6	5
5307-00-177-7548	5	56	5961-00-842-9864	9	3
5999-00-193-4971	2	10	5310-00-850-1611	5	10
5935-00-201-8855	5	81		5	84
5999-00-226-4703	1	7	5310-00-879-0696	5	41
5999-00-226-4703	2	2	5310-00-880-5978	5	5
5999-00-226-4703	7	67	5310-00-880-5978	5	74
5945-00-226-5241	6	1	5935-00-880-7894	5	62
5999-00-256-9365	2	12	5305-00-889-2991	7	42
5999-00-299-0901	5	115	5930-00-892-9479	7	32
5340-00-337-8642	5	48	5940-00-897-5195	5	118
5340-00-337-8642	7	26	5999-00-901-3237	5	55
5895-00-410-2414	7	33	5970-00-904-2491	1	9
5895-00-410-2415	6	20	5970-00-904-2491	2	15
5895-00-410-2416	7	34A	5945-00-904-8319	9	7

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	FIGURE NO	ITEM NO	STOCK NUMBER	FIGURE NO	ITEM NO
5310-00-905-1691	5	51	5999-00-946-7716	7	53
5935-00-905-7595	7	52	5340-00-953-0670	7	59
5935-00-909-8565	5	103	5999-00-955-4138	5	36
5935-00-909-8565	5	104	5999-00-955-4138	5	37A
5935-00-909-8565	5	108	5940-00-957-2683	6	4
5935-00-913-3648	5	28	5999-00-958-1839	2	17
5935-00-914-0174	5	60	6210-00-965-1491	7	48
5930-00-914-6458	7	44	5340-00-975-1440	5	31
5999-00-918-4046	5	105	5340-00-975-1440	6	19
5325-00-926-1394	5	78	5961-00-976-9592	8	16
5940-00-926-8121	5	32	5905-00-982-3324	9	9
5310-00-929-6395	5	44	5310-00-982-6813	5	65
5310-00-929-6395	6	16	5310-00-982-6813	7	6
5310-00-929-6395	7	10	5310-00-982-6814	5	69
5930-00-931-0516	7	45	5820-00-986-7389	5	110
5310-00-933-8118	4	10	5820-00-986-7389	5	113
5310-00-933-8118	5	20	5820-00-986-7389	5	117
5310-00-933-8118	6	8	5939-00-988-4350	2	3
5310-00-933-8118	7	13	5305-00-989-4859	6	13
5310-00-933-8119	5	86	5999-00-989-6819	5	109
5310-00-933-8119	7	7	5999-00-989-6819	5	112
5310-00-933-8120	5	83	5999-00-989-6819	5	116
5310-00-933-8121	5	52	5940-00-989-8407	5	111
5310-00-933-8121	5	87	5940-00-989-8407	5	114
5961-00-938-1135	7	18	5940-00-989-8407	5	119
5961-00-938-1135	7	2B	5970-00-992-3470	2	7
5970-00-944-8562	2	4	5940-00-993-5216	5	107
5930-00-945-1834	7	30			
PART NUMBER	FIG. NO.	ITEM NO.	PART NUMBER	FIG. NO.	ITEM NO.
AN960C4	88044	7	23	MS16210-2	96906
AN960C6	88044	7	5	MS16210-2	96906
AP1-76-1	81541	7	31	MS16210-3	96906
AP1-76-5	81541	6	10	MS16210-3	96906
A10020	07047	8	16	MS16210-3	96906
BS05632-16	46384	7	59	MS16210-6	96906
CLSS32-2	46384	7	9	MS16213-61	96906
CL65BN430MP3	81349	8	1	MS20426AD3-5	96906
CM387	71744	6	14	MS20426AD4-7	96906
CM387	71744	7	47	MS20470AD2-4	96906
CW123AU	81349	5	27	MS21044C06	96906
D133	08795	5	33	MS21044C06	96906
F5400-3	15653	5	21	MS21044C08	96906
HP4N	09922	5	46	MS21266-3N	96906
HP5N	09922	5	98	MS24693C27	96906
HP6N	09922	5	31	MS24693C48	96906
HP6N	09922	6	19	MS24693C49	96906
HP7N	09922	7	4	MS25010C11B	96906
HP8N	09922	5	40	MS25036-150	96906
HP8N	09922	7	66	MS25041-1	96906
HP9N	09922	5	48	MS25251-8	96906
HP9N	09922	7	26	MS25381-1	96906
JAN1N3613	81349	8	2	MS27401-1	96906
JAN1N4148	81349	7	1B	MS27903-1	96906
JAN1N4148	81349	7	2B	MS3120E10-6S	96906
JAN1N645	81349	8	3	MS3120E14-19S	96906
JAN1N914	81349	6	5	MS3120E14-5P	96906
JAN1N914	81349	9	3	MS3120E22-55P	96906
JAN2N3498	81349	8	5	MS3120E22-55S	96906
JAN2N3498	81349	9	5	MS3126E14-19P	96906
JAN2N3634	81349	8	6	MS3126E22-55P	96906
KT19703G4A19754	82227	6	7	MS3126E22-55S	96906
LKS032-2	46384	5	41	MS3192-16A	96906
LKS440-2	46384	5	3	MS3192A20A	96906
LKS632-2	46384	5	99	MS3192A20A	96906
LKS632-2	46384	7	14	MS3192A20A	96906
LKS632-2	46384	7	29	MS3193A20A	96906
LKS832-2	46384	5	77	MS3193A20A	96906
MS15795-805	96906	5	43	MS3338-6839	96906
MS15795-805	96906	6	3	MS3338-6839	96906
MS15795-807	96906	5	5	MS35338-135	96906
MS15795-807	96906	5	74	MS35338-135	96906
MS15795-808	96906	5	10	MS35338-135	96906
MS15795-808	96906	5	84	MS35338-135	96906
MS15795-810	96906	5	58	MS35338-136	96906
MS16210-2	96906	4	9	MS35338-136	96906
MS16210-2	96906	5	19	MS35338-136	96906

PART NUMBER	FSCM	FIG. NO	ITEM NO	PART NUMBER	FSCM	FIG. NO	ITEM NO
MS35338-137	96906	5	86	SMB679658-1	80063	5	71
MS35338-137	96906	7	7	SMB679658-1	80063	7	58
MS35338-138	96906	5	83	SMB679679-1	80063	5	17
MS35338-139	96906	5	52	SMB679679-2	80063	5	92
MS35338-139	96906	5	87	SMB679695	80063	5	90
MS35678-3	96906	7	36	SMB679708-17	80063	2	6
MS39086-125	96906	5	89	SMB679708-20	80063	1	4
MS51017-34	96906	7	37A	SMB679783-18	80063	7	28
MS51957-13	96906	5	30	SMB679784	80063	7	21
MS51957-14	96906	7	16	SMB679787	80063	5	75
MS51957-15	96906	5	24	SMB680359	80063	5	7
MS51957-15	96906	7	54	SMC679297	80063	7	17
MS51957-18	96906	7	24	SMC679297-2	80063	7	18
MS51957-27	96906	7	61	SMC679298	80063	2	
MS51957-28	96906	5	102	SMC679368	80063	5	23
MS51957-28	96906	7	25	SMC679694	80063	5	26
MS51957-29	96906	6	2	SMC679706-1	80063	1	5
MS51957-29	96906	7	56	SMC679706-1	80063	2	8
MS51957-30	96906	5	45	SMC679706-2	80063	1	3
MS51957-31	96906	5	47	SMC679706-2	80063	2	14
MS51957-31	96906	7	11	SMC679706-3	80063	2	5
MS51957-32	96906	7	57	SMC679711-1	80063	4	2
MS51957-43	96906	7	8	SMC679711-2	80063	7	15
MS51957-45	96906	5	4	SMC679803	80063	7	34
MS51957-45	96906	5	73	SMC679804	80063	7	41
MS51957-47	96906	5	85	SMC680113	80063	5	79
MS51957-48	96906	5	72	SMC680114	80063	5	94
MS51958-63	96906	5	61	SMC680134	80063	3	2
MS51958-64	96906	5	11	SMC680135	80063	3	7
MS51958-65	96906	5	82	SMC680136	80063	3	4
MS51959-2	96906	7	3	SMC680137	80063	3	5
MS51972-1	96906	5	51	SMC680138	80063	3	6
MS51972-3	96906	7	20	SMD679361	80063	7	22
MS90310-231	96906	7	44	SMD679393	80063	4	5
MS90310-271	96906	7	45	SMD679423	80063	5	96
MS90310-281	96906	7	38	SMD679425	80063	5	8
MS90311-211	96906	7	30	SMD679426	80063	5	12
M5757-9-003	81349	9	7	SMD679427	80063	6	20
NAS1454C4-0200	80205	5	56	SMD679431	80063	7	68
NAS1635-04-5P	80205	4	1	SMD679432	80063	7	33
NAS1635-04-5P	80205	5	2	SMD679433	80063	7	34A
NAS1635-04-7P	80205	6	18	SMD679433-1	80063	7	51
PT02SE00-78S	77820	5	37	SMD679446	80063	5	66A
PT06SE22-78P	77820	2	16	SMD679446-1	80063	5	68
RCR07G102JS	81349	8	9	SMD679705-2	80063	5	1
RCR07G103JS	81349	8	12	SMD679705-5	80063	7	19
RCR07G104JS	81349	9	6	SMD679705-6	80063	4	8
RCR07G123JS	81349	8	15	SMD679705-7	80063	4	4
RCR07G223JS	81349	8	11	SMD679861	80063	8	18
RCR07G333JS	81349	8	14	SMD680141	80063	5	95
RCR07G472JS	81349	8	8	SMD680142	80063	5	76
RCR07G473JS	81349	8	10	SMD680383	80063	7	60
RCR07G682JS	81349	8	7	SMD680384	80063	9	1
RCR07G682JS	81349	9	8	SME679362	80063	4	3
RCR07G683JS	81349	8	13	SME679363	80063	4	
RCR20G102JR	81349	5	42	SME679364	80063	4	6
RCR20G910JR	81349	5	34	SME679365	80063	4	7
RF3366B	13619	5	6	SME679366	80063	7	
RL42S270J	81349	9	4	SME679447	80063	5	97
RL42S330J	81349	9	10	S10K116	03481	5	91
RW69V561	81349	9	9	S6K106	03481	5	93
SE079802	81349	6	4	TA723SS7	84971	5	49
SE206D01	81349	5	32	UG180BU	80058	2	13
SE26XF01	81349	5	63	025B3602-75	94375	5	29
SE26XF01	81349	7	63	025B3800-75	94375	5	28
SMA679389	80063	5	81	100N3000A20	94375	5	39
SMA679544	80063	7	53	100N3002A20	94375	5	38
SMA679547	80063	7	52	109-8430-0111-201	72619	7	49
SMA679719	80063	6	12	109-8430-0112-201	72619	7	50
SMA679775	80063	7	37	109-8430-0115-201	72619	7	46
SMA679942-5	80063	5	70	12H51	07126	7	1
SMA679942-5	80063	7	64	12H52	07126	7	2
SMA680035-28	80063	5	50	1212-502	72982	5	66
SMB679270	80063	7	40	13980	07700	5	9
SMB679271	80063	7	35	13980	07700	5	13
SMB679374	80063	3	1	13980	07700	5	67
SMB679374	80063	3	3	13980	07700	6	11
SMB679388	80063	1		147-4-032BRASSHT	79963	5	35
SMB679489	80063	7	27	147-4-032BRASSHT	79963	7	65
SMB679635	80063	6	6	147-6-032BRASSHT	79963	5	101

NATIONAL STOCK NUMBER AND PART NUMBER INDEX		FIG. NO.	ITEM NO	PART NUMBER	FSCM	FIG. NO.	ITEM NO
PART NUMBER	FSCM						
2-323930-2	00779	5	107	2960-000	72982	5	64
201142-2	00779	5	110	327137	00779	5	106
201142-2	00779	5	113	328664	00779	5	118
201142-2	00779	5	117	328666	00779	5	111
201144-1	00779	5	109	328666	00779	5	114
201144-1	00779	5	112	328666	00779	5	119
201144-1	00779	5	116	35711	83508	5	18
201146-2	00779	5	115	382A023-3	06090	2	7
202A163-3	06090	1	2	6141SS1032-7	06540	6	13
202300-3	00779	5	80	66100-1	00779	5	105
2034-2-05	71279	9	2	66104-1	00779	5	103
21-33011-24	77820	5	36	66104-1	00779	5	104
21-33011-24	77820	5	37A	66104-1	00779	5	108
21-33012-24	77820	2	17	85928-2	00779	8	4
222A142-3	06090	2	4	94-621	02660	2	9
222A174-3	06090	1	9	94-658-8	02660	2	10
222A174-3	06090	2	15	94-671-01	02660	2	11
2829-75-2	98159	8	17	94-672-01	02660	2	12

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703

DATE 10 July 1975

PUBLICATION NUMBER	DATE	TITLE
TM 11-5840-340-12	23 Jan 74	Radar Set AN/PS-76

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG DOTTED LINE.

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.	REASON
2-25	2-28			Recommend that the installation antenna alignment procedure be changed throughout to specify a 2° IFF antenna lag rather than 1°.
3-10	3-3	3-1		Item 5, Function column. Change "2 db" to "3db."
5-6	5-8			REASON: The adjustment procedure for the TRANS POWER FAULT indicator calls for a 3 db (500 watts) adjustment to light the TRANS POWER FAULT indicator.
		F03		Add new step f.1 to read, "Replace cover plate removed in step e.1, above."
				REASON: To replace the cover plate.
				Zone C 3. On J1-2, change "+24 VDC to "+5 VDC."
				REASON: This is the output line of the 5 VDC power supply. + 24 VDC is the input voltage.

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I. M. DeSpirito 999-1776

SIGN HERE:

DA FORM 2028-2 (TEST) 1 AUG 74 P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

HISA 1686-75

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

DATE

TITLE

BE EXACT...PIN-POINT WHERE IT IS

**IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:**

PAGE

PAR

TABLE

AN

FEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 2028-2 (TEST) P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$500

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

FOLD BACK

REVERSE OF DA FORM 2020-2 (TEST)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

DATE

TITLE

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE NO.

PARA-
GRAPH

FIGURE NO.

TABLE NO.

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 2028-2 (TEST) 1 AUG 74

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$500

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
800-914



Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

DATE

TITLE

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 2028-2 (TEST) 1 AUG 74

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$500

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

FOLD BACK

REVERSE OF DA FORM 2020-2 (TEST)

By Order of the Secretary of the Army:

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Official :

PAUL T. SMITH
Major General, United States Army
The Adjutant General

DISTRIBUTION :

To be distributed in accordance with DA Form 12-32, Direct and General Support maintenance requirements for Chaparral and Hawk Missile Systems.

*U. S. GOVERNMENT PRINTING OFFICE : 1991 - 281-486 (42455)

PIN: 032656-000

This fine document...

Was brought to you by me:



Liberated Manuals -- free army and government manuals

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals

- Sincerely
Igor Chudov
<http://igor.chudov.com/>
- [Chicago Machinery Movers](http://chicagomachinerymovers.com)