TECHNICAL MANUAL

OPERATOR'S, UNIT AND DIRECT SUPPORT MAINTENANCE MANUAL (INCLUDING REPAIR PARTS AND SPECIAL TOOLS LIST) FOR

KOEHLER CLOSED CUP FLASH TESTER

This technical manual is an authentication of the manufacturer's commercial literature and does not conform with the format and the content requirements normally associated with Army technical manuals. This technical manual does, however, contain all essential information required to operate and maintain the equipment.

Approved for public release; distribution is unlimited.

HEADQUARTERS, DEPARTMENT OF THE ARMY 28 SEPTEMBER 1990

This technical manual is an authentication of the manufacturer's commercial literature and does not conform with the format and the content requirements normally associated with Army technical manuals. This technical manual does, however, contain all essential information required to operate and maintain the equipment.

Approved for public release; distribution is unlimited.

SUPPLEMENTARY INTRODUCTORY MATERIAL

1–1. Maintenance Forms and Records.

Department of the Army forms and procedures used for equipment maintenance will be those described by DA Pam 738–750, The Army Maintenance Management System.

1–2. Reporting Errors and Recommending Improvements.

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letters, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028–2 located in the back of this manual, directly to: Commander, U.S. Army Troop Support Command, ATTN: AMSTR–MCTS, 4300 Goodfellow Blvd., St. Louis, MO 63120–1798. A reply will be furnished to you.

1–3. Destruction of Army Material to Prevent Enemy Use.

Refer to TM 750-244-3 for instructions covering the destruction of Army Material to prevent enemy use.

1-4. Administrative Storage of Equipment.

a. Placement of equipment in administrative storage should be for short periods of time when a shortage of maintenance effort exists. Items should be in mission readiness within 24 hours or within the time factors as determined by the directing authority. During the storage period appropriate maintenance records will be kept.

b. Before placing equipment in administrative storage, current preventive maintenance checks and services should be completed. Shortcomings and deficiencies should be corrected, and all modification work orders (MWO'S) should be applied.

c. Storage site selection. Inside storage is preferred for items selected for administrative storage. If inside storage is not available, trucks, vans, conex containers and other containers may be used.



PRODUCT: Flash Point by Tag Closed Tester

Tag Closed Cup Flash Tester

- Conforms to ASTM D56, FTM 791-1101 and related specifications
- Gas, electrical or alcohol heating
- Flash points below 200°F (93°C)

Determines flash points of liquid products, except cutback asphalts, having flash points below 200°F (93°C). (For viscous products, products tending to form a surface film during testing and materials which contain suspended solids, use the Pensky Martens flash tester. For cutback asphalts use the Tag Open Cup tester).

Features stepless variable heat control with reference dial for convenient, accurate repeat setting of temperature rate of rise per specifications. Also available with gas or alcohol burner instead of electric heater. Precision machined cover mechanism simultaneously opens slide shutter and applies test flame to sample at the turn of a knob. Includes liquid bath with constant level overflow, brass test cup, plated brass thermometer ferrules and test flame reference bead. Bath and cover mechanism are constructed of plated brass. Heater is enclosed in a cast aluminum base assembly.

SPECIFICATIONS

Conforms to the specifications of: ASTM D56, FTM 791-1101, IP 304

DIMENSIONS 1 x w x h*, in. (cm)

5 X 5 X 16 (13 X 13 X 41) *with thermometers inserted

SHIPPING INFORMATION

Net Weight: 7 lbs (3.2 kg) Shipping Weight: 8 lbs (3.6 kg) Dimensions: 12 x 10 x 11" (31 x 25 x 28 cm)

ORDERING INFORMATION


Includes heater unit with electric heater or gas or alcohol burner. Order thermometers separately.

Catalog

No. Description

K14600	Tag Closed Cup Flash Tester,
	Electrically Heated
	115V 50/60 Hz
K14670	Tag Closed Cup Flash Tester,
	Electrically Heated
	220-240V 50/60 Hz
K14690	Tag Closed Cup Flash Tester,
	Gas Heated
K14680	Tag Closed Cup Flash Tester,

Alcohol Heated

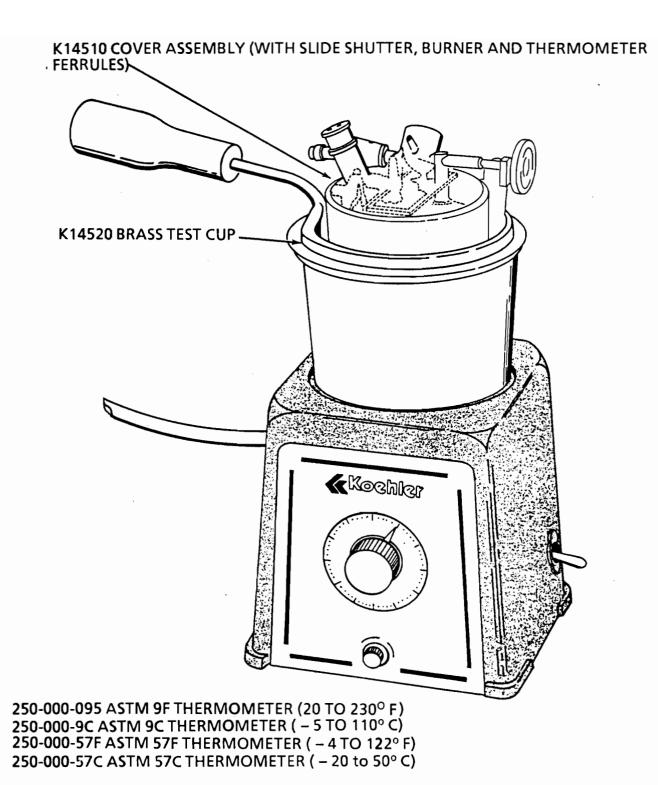

KOEHLER K14600 TAG CLOSED CUP FLASH TESTER, ELECTRICALLY HEATED, 115 V 50/60 HZ

Accessories and Replacement Parts

- K14510 Cover Assembly Includes slide shutter, burner and thermometer ferrules
- K14520 Brass Test Cup With heat resistant handle
- K14550 Carrying Case Wood construction
- 250-000-09F ASTM 9F Thermometer Range: 20 to 230°F
- 250-000-09C ASTM 9C Thermometer Range: -5 to +110°C
- 250-000-57F ASTM 57F Thermometer Range: -4 to +122°F
- 250-000-57C ASTM 57C Thermometer Range: -20 to +50°C

APPENDIX A

REFERENCES

A-1. **Scope.** This appendix contains all forms, pamphlets and technical manuals referenced in both the Air mobile and Semitrailer mounted Laboratories.

A-2. Forms.

Recommended Changes to Publications	DA For	m 2028
D	DA Form	2028–2
Quality Deficiency Report		SF 368
Equipment Inspection and Maintenance Work Sheet	DA For	m 2404
Hand Receipts	DA For	m 2062

A-3. Field Manuals.

Petroleum Testing Facilities:	
Laboratories and Kits	FM10–72
Inspecting and Testing Petroleum Products	FM10–70
ASTM Test Method Supplement to	FM 10-92C1/C2

A-4. Technical Manuals.

Atlas-Copco CompressorTM 10-4310-392-13&P Alcor Jet Fuel Thermal Oxidation Tester Operating
and Maintenance Manual
Bacharach Gas Alarm and Calibration Data
Brother Portable Typewriter TM 10–7430–218–13&P
Chemtrix Field Ph Meter TM 10-6630-237-13&P
Elkay Manufacturing 30 GPH Cooler
Emcee Micro–Separometer TM 10-6640-222-13&P
Foxboro Pressure Recording Gauge
Gammon Aqua Glo Water Detector
Gammon Mini Monitor Fuel Sampling Kit TM 10-6630-230-13&P
Jelrus Burn–Out Furnace
Koehler Cleveland Open Tester TM 10-6630-236-13&P
Koehler Cloud and Pour Point Chamber TM 10-6630-238-13&P
Koehler Copper Strip Corrosion Bomb Bath
Koehler Distillation Apparatus
Koehler Dropping Point Apparatus
Koehler Electric Pensky–Martins Tester TM 10-6630-231-13&P
Koehler Foaming Characteristics Determination Apparatus
Koehler Kinematic Viscosity Bath TM 10-6630-239-13&P
Koehler Tag Closed Cup Flash Tester TM 10-6630-235-13&P
Lab-Line Explosion Proof Refrigerator
Lily Freezer
Millipore OM 39 Filter Holder
Millipore Vacuum Pump
Ohaus Harvard Trip Balance
Precision Gas-Oil Distillation Test Equipment
Precision General Purpose Water Bath
· · · · · · · · · · · · · · · · · · ·

Precision High Temperature Bronze Block Gum Bath	. TM	10-6630-234-13&P
Precision General Purpose Ovens		
Precision Heater Instruction Manual and Parts List	. TM	10-6640-223-13&P
Precision Oxidation Stability Bath	ТМ	10-6640-232-13&P
Precision Pensky–Martens Flash Testers	ТМ	10-6630-231-13&P
Precision Reid Vapor Pressure Bath	ТΜ	10-6640-226-13&P
Precision Slo-Speed Stirrer	ТΜ	10-6640-224-13&P
Precision Universal Centrifuge	ТМ	10-6640-230-13&P
Precision Universal Penetrometer	ТМ	10-6640-228-13&P
Sargent–Welch Vacuum Pump	ТΜ	10-4310-391-13&P
Sartorious Analytical Balance	ТΜ	10-6670-277-13&P
Scotsman Cuber	ТΜ	10-6640-227-13&P
Soltec VOM–Multimeter	ТМ	10-6625-3127-13&P
Teel Self–Priming Centrifugal Pump	ТМ	10-6640-217–13&P
Teel Submersible Pump	ТМ	10-4320-320-13&P
Texas Instrument TI-5030II Calculator	TM 1	0-7420-210-13&P
A-5. Pamphlets.		
The Army Maintenance Management System (TAMMS)		DA Pam 738–750
A-6. Miscellaneous Publications.		
The Army Integrated Publishing and Printing Program		AR 25–30
Laboratory, Airmobile, Aviation Fuel		MIL-L-52733A(ME)
Apparatus, Instruments, Chemicals, Furniture, and Supplies for Industrial,		
Clinical, College and Government Laboratories Fisher Scie	ntific	Laboratories Catalog
Petroleum–Petrochemical Testing Equipment	Precisi	ion Scientific Catalog

APPENDIX B

MAINTENANCE ALLOCATION CHART

Section I. INTRODUCTION

B-1. General.

a. This section provides a general explanation of all maintenance and repair functions authorized at various maintenance categories.

b. The Maintenance Allocation Chart (MAC) in Section II designates overall authority and responsibility for the performance of maintenance functions on the identified end item or component. The application of the maintenance functions to the end item or component will be consistent with the capacities and capabilities of the designated maintenance categories.

c. Section III lists the tools and test equipment (both special tools and common tool sets) required for each maintenance function as referenced from Section II.

d. Section IV contains supplemental instructions and explanatory notes for a particular maintenance function.

B-2. Maintenance Functions. Maintenance functions will be limited to and defined as follows:

a. <u>Inspect.</u> To determine the serviceability of an item by comparing its physical, mechanical, and/or electrical characteristics with established standards through examination (e.g., by sight, sound, or feel).

b. <u>Test.</u> To verify serviceability by measuring the mechanical, pneumatic, hydraulic, or electrical characteristics of an item and comparing those characteristics with prescribed standards.

c. <u>Service.</u> Operations required periodically to keep an item in proper operating condition, i.e., to clean (includes decontaminate, when required), to preserve, to drain, to paint, or to replenish fuel, lubricants, chemical fluids, or gases.

d. <u>Adjust.</u> To maintain or regulate, within prescribed limits, by bringing into proper or exact position, or by setting the operating characteristics to specified parameters.

e. <u>Align.</u> To adjust specified variable elements of an item to bring about optimum or desired performance.

f. <u>Calibrate</u>. To determine and cause corrections to be made or to be adjusted on instruments or test, measuring, and diagnostic equipments used in precision measurement. Consists of comparisons of two instruments, one of which is a certified standard of knob accuracy, to detect and adjust any discrepancy in the accuracy of the instrument being compared.

g. <u>Remove/Install.</u> To remove and install the same item when required to perform service or other maintenance functions. Install may be the act of emplacing, seating, or fixing into position a spare, repair part, or module (component or assembly) in a manner to allow the proper functioning of an equipment or system.

h. <u>Replace.</u> To remove an unserviceable item and install a serviceable counterpart in its place. "Replace" is authorized by the MAC and is shown as the third position code of the SMR code. *i.* <u>Repair.</u> The application of maintenance services, ¹ including fault location/troubleshooting,² removal/installation, and disassembly/assembly procedures,³ and maintenance actions,⁴ to identify troubles and restore serviceability to an item by correcting specific damage, fault, malfunction, or failure in a part, subassembly, module (component or assembly), end item, or system.

j. <u>Overhaul.</u> That maintenance effort (service/action) prescribed to restore an item to a completely serviceable/operational condition as required by maintenance standards in appropriate technical publications (i.e, DMWR). Overhaul is normally the highest degree of maintenance performed by the Army. Overhaul does not normally return an item to like–new condition.

k. <u>Rebuild.</u> Consists of those services/actions necessary for the restoration of unserviceable equipment to a like-new condition in accordance with original manufacturing standards. Rebuild is the highest degree of materiel maintenance applied to Army equipment. The rebuild operation includes the act of returning to zero those age measurements (hours/miles, etc.) considered in classifying Army equipment/components.

B-3. Explanation Of Columns In The MAC, Section II.

a. <u>Column 1. Group Number</u>. Column 1 lists functional group code numbers, the purpose of which is to identify maintenance significant components, assemblies, subassemblies, and modules with the next higher assembly. End item group number shall be "00."

b. <u>Column 2. Component/Assembly.</u> Column 2 contains the names of components, assemblies, subassemblies, and modules for which maintenance is authorized.

c. <u>Column 3. Maintenance Function</u>. Column 3 lists the functions to be performed on the item listed in column 2. (For a detailed explanation of these functions, see paragraph B - 2.)

d. <u>Column 4. Maintenance Category</u>. Column 4 specifies, by the listing of a work time figure in the appropriate subcolumn(s), the category of maintenance authorized to perform the function listed in column 3. This figure represents the active time required to perform that maintenance function at the indicated category of maintenance. If the number or complexity of the tasks within the listed maintenance function vary at different maintenance categories, appropriate work time figures will be shown for each category. The work time figure represents the average time required to restore an item (assembly, subassembly, component, module, end item, or system) to a serviceable condition under typical field operating conditions. This time includes preparation time (including any necessary disassembly/ assembly time), troubleshooting/fault location time, and quality assurance/quality control time in addition to the time required to perform the specific tasks identified for the maintenance functions authorized in the maintenance allocation chart. The symbol designations for the various maintenance categories are as follows:

¹Services - inspect, test, service, adjust, align, calibrate, and/or replace.

² Fault locate/troubleshoot - the process of investigating and detecting the cause of equipment malfunctioning; the act of isolating a fault within a system or unit under test (UUT).

³ Disassemble/assemble - encompasses the step-by-step taking apart (or breakdown) of a spare/functional group coded item to the level of its least componency identified as maintenance significant (i. e., assigned an SMR code) for the category of maintenance under consideration,

⁴Actions - welding, grinding, riveting, straightening, facing, remachining, and/or resurfacing.

С	Operator/Crew
0	Unit Maintenance
F	Direct Support Maintenance
Н	General Support Maintenance
D	Depot Maintenance

e. <u>Column 5. Tools and Equipment</u>. Column 5 specifies, by code, those common tool sets (not individual tools) and special tools, TMDE, and support equipment required to perform the designated function.

f. <u>Column 6.</u> <u>Remarks</u>. This column shall, when applicable, contain a letter code, in alphabetic order, which shall be keyed to the remarks contained in section IV.

B-4. Explanation Of Columns In Tool And Test Equipment Requirements, Section III.

a. <u>Column 1. Reference Code</u>. The tool and test equipment reference code correlates with a code used in the MAC, section II, column 5.

b. <u>Column 2. Maintenance Category.</u> The lowest category of maintenance authorized to use the tool or test equipment.

- c. <u>Column 3. Nomenclature</u>. Name or identification of the tool or test equipment.
- d. <u>Column 4. National Stock Number</u>. The National stock number of the tool or test equipment.
- e. Column 5. Tool Number. The manufacturer's part number.

B-5. Explanation Of Columns In Remarks, Section IV.

a. <u>Column I. Reference Code</u>. The code recorded in column 6, Section II.

b. <u>Column 2. Remarks</u>. This column lists information pertinent to the maintenance function being performed as indicated in the MAC, section II.

(1) GROUP NUMBER	(2) COMPONENT/ ASSEMBLY	(3) MAINTENANCE FUNCTION		MAINT NIT O	(4 ENAN DS F	CE L	EVEL DEPOT D	(5) TOOLS AND EQUIPMENT	(6) REMARKS
01	TESTER FLASH POINT CLOSED, TAG	INSPECT REPLACE REPAIR	0.3	0.3 1.5	1.0			1, 2	A

Section II. MAINTENANCE ALLOCATION CHART

TM10-6630-235-13&P SECTION III. TOOL AND TEST EQUIPMENT REQUIREMENTS FOR MAINTENANCE ALLOCATION CHART

(1) TOOL/TEST	(2)	(3)	(4)	(5)
EQUIP. REF CODE	MAINTENANCE CATEGORY	NOMENCLATURE	NSN	TOOL NUMBER
1	Ο, F	TOOL KIT, GENERAL AUTOMOTIVE	5180-00-177-7033	(50980) SC 5180-90- CL-N26
2	0,F	MULTIMETER,0-500V	6625-00-691-2453	
SECTION IV. H	REMARKS			
REFERENCE CODE	REMARKS			

A REPAIR LIMITED TO REPLACEMENT OF PARTS.

APPENDIX C

COMPONENTS OF END ITEM AND BASIC ISSUE ITEMS LISTS

Section I. INTRODUCTION

C-1. Scope.

This appendix lists components of end item and basic issue items for the Flash Point Closed Tester to help you inventory items required for safe and efficient operation.

C-2. General.

The Components of End Item and Basic Issue Items Lists are divided into the following sections:

a. <u>Section II. Components of End Item.</u> This listing is for informational purposes only, and is not authority to requisition replacements. These items are part of the end item, but are removed and separately packaged for transportation or shipment. As part of the end item, these items must be with the end item whenever it is issued or transferred between property accounts. Illustrations are furnished to assist you in identifying the items.

b. <u>Section III. Basic Issue Item</u>s. These are the minimum essential items required to place the Flash Point Closed Tester in operation, to operate it, and to perform emergency repairs. Although shipped separately packaged, BII must be with the shelter during operation and whenever it is transferred between property accounts. The illustrations will assist you with hard-to-identify items. This manual is your authority to request/requisition replacement BII, based on TOE/MTOE authorization of the end item.

C-3. Explanation of Columns.

The following provides an explanation of columns found in the tabular listings:

a. <u>Column (1) - Illustration Number (Illus Number)</u>. This column indicates the number of the illustration in which the item is shown.

b. <u>Column (2) - National Stock Number</u>. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

c. <u>Column (3)</u> - <u>Description</u>. Indicates the Federal item name and, if required, a minimum description to identify and locate the item. The last line for each item indicates the CAGEC (in parentheses) followed by the part number.

d. <u>Column (4) - Unit of Measure (U/M)</u>. Indicates the measure used in performing the actual operational/maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr).

e. <u>Column (5) - Quantity required (QTY RQR</u>). Indicates the quantity of the item authorized to be used with/on the equipment.

TM 10-6630-235-13&P

SECTION II. COMPONENTS OF END ITEM

(1)	(2) NATIONAL STOCK	(3) DESCRIPTION	USABLE	(4)	(5)
ILLUS	NUMBER	CAGEC AND PART NUMBER	ON CODE	U/M	QTY
		THERMOMETER RANG: 20 TO 230 [°] F (23035) 250-000-09F		EA	1
		THERMOMETER RANGE: -5 TO 110 [°] C (23035) 250-000-09C		EA	1
		THERMOMETER RANGE: -4 TO 122 [°] F (23035) 250-000-57F		EA	1
		THERMOMETER RANGE: -20 TO +50 °C (23035) 250-000-57C		EA	1
		SECTION III. BASIC ISSUE ITEMS			
		NOT APPLICABLE			

APPENDIX D ADDITIONAL AUTHORIZATION LIST

NOT APPLICABLE

APPENDIX E

EXPENDABLE/DURABLE SUPPLIES AND MATERIALS LIST

NOT APPLICABLE

By Order of the Secretary of the Army:

CARL E. VUONO General, United States Army Chief of Staff

Official:

THOMAS F. SIKORA

Brigadier General, United States Army The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12–21A, Operator, Unit and Direct Support Maintenance requirements for Laboratory, Petroleum, MTD

✿ U.S. GOVERNMENT PRINTING OFFICE: 1990 554-123/20057

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS SOMETHING WRONG WITH THIS PUBLICATION? FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS) PFC JOHN DOE THEN. . JOT DOWN THE DOPE ABOUT IT ON THIS COA, 34 ENGINEER BN FORM, CAREFULLY TEAR IT RONARDWOOD, MD. 63108 FL OUT, FOLD IT AND DROP IT IN THE MAIL! DATE SENT PUBLICATION NUMBER PUBLICATION DATE PUBLICATION TITLE TM 10-6630-235-13&P 28 SEPT 1990 KOEHLER CLOSED CUP FLASH TESTER BE EXACT. PIN-POINT WHERE IT IS IN THIS SPACE TELL WHAT IS WRONG FIGURE TABLE NO AND WHAT SHOULD BE DONE ABOUT IT: PAGE PARA-GRAPH NO NO In line 6 g paragraph 2-10 the 6 2-1 a manual states t le engine J. The ensine on . 4 Culu only manual , nae the ALONG PERFORATED LINI linder o. ut 16 and dig 4-3 81 et. In k ntino a TEAR , 4 - 3, item 16 is called n - Please Correc one on the other gasket 20 Ŀ 125 allug NSA on to I gri lass N PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUM SIGN HERE MRER YNL HOL JOHN DOE, PFC (268) 317.7111 JOHN DOE DA 1 JUL 79 2028-2 PREVIOUS EDITIONS P S .-- IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR ARE OBSOLETE. RECOMMENDATION MAKE A CARBON COPY OF THIS DRSTS-M Overprint 1, 1 Nov 80 AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG PERFORATED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

	Something	WRONG WITH THIS PUBLICATIO
	FROM	
	JOT DOWN THE BOUT IT ON THIS	
	CAREFULLY TEAR IT	
IN THE		SENT
PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 10-6630-235-13&P	28 SEPT 1990	KOEHLER CLOSED CUP FLASH TEST
BE EXACT. PIN-POINT WHERE IT IS	IN THIS SPACE TELL WHAT I	S WRONG
PAGE PARA- FIGURE TABLE NO GRAPH NO NO	AND WHAT SHOULD BE DON	E ABOUT IT:
	}	
PRINTED NAME, GRADE OR TITLE, AND TEL	PHONE NUMBER SIGN HI	RE:
PRINTED NAME, GRADE ON THEE, AND TEE		

i

i

TEAR ALONG PERFORATED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

ļ

TEAR ALONG PERFORATED LINE



FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

7	C.VVII 9				Someth		WRONG WITH THIS PUBLICATI	ON?
$\langle \langle \rangle$					WN THE ON THIS		(PRINT YOUR UNIT'S COMPLETE ADDRESS)	
Z			FORM, C.	AREFUL	LY TEAR IT ND DROP IT			
			IN THE			DATE	BENT	
UBLICA		BER			PUBLICATION D	ATE	PUBLICATION TITLE	
TM	06630	-235-13	&Р		28 SEPT 1	990	KOEHLER CLOSED CUP FLASH TE	STER
BE EXAC		OINT WHE			S SPACE TELL V			
NO	PARA- GRAPH	FIGURE NO	TABLE NO		HAI SHOULD B	E DON	E ABOUT 11:	
								· .
PRINTED	NAME. GRAD	DE OR TITLE	AND TELEP	HONE NUN	IBER	SIGN H	RE	

TEAR ALONG PERFORATED LINE



FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

		IG WRONG WITH THIS PUBLICATION?
DOPE AL FORM, C	JOT DOWN THE BOUT IT ON THIS AREFULLY TEAR IT	IOM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)
IN THE	MAIL	TESENT
UBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 10-6630-235-13&P	28 SEPT 1990	KOEHLER CLOSED CUP FLASH TESTER
BE EXACT. PIN-POINT WHERE IT IS	IN THIS SPACE TELL WHA AND WHAT SHOULD BE D	T IS WRONG
		· · ·
	HONE NUMBER SIGN	P SIF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR

TEAR ALONG PERFORATED LINE

i

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

		Somethin	B WRONG WITH THIS PUBLICATION?	
	THEN. JOT E DOPE ABOUT FORM, CAREFU OUT, FOLD IT	DOWN THE IT ON THIS	M: (PRINT YOUR UNIT'S COMPLETE ADDRESS)	
	IN THE MAIL'		ESENT	
PUBLICATION NUMBER		PUBLICATION DATE	PUBLICATION TITLE	
TM 10-6630-235-1	3&P	28 SEPT 1990	KOEHLER CLOSED CUP FLASH TESTE	
BE EXACT. PIN-POINT W PAGE PARA- FIGUR NO GRAPH NO		HIS SPACE TELL WHAT WHAT SHOULD BE DO	IS WRONG NE ABOUT IT:	
PRINTED NAME. GRADE OR TIT	LE. AND TELEPHONE N	JMBER SIGN I	HERE:	

REVERSE OF DA FORM 2028-2 REVERSE OF DRSTS-M OVERPRINT 2, 1 NOV 80 TEAR ALONG PERFORATED LINE FILL IN YOUR UNIT'S ADDRESS FOLD BACK DEPARTMENT OF THE ARMY OFFICIAL BUSINESS COMMANDER U.S. ARMY TROOP SUPPORT COMMAND ATTN: AMSTR-MCTS 4300 GOODFELLOW BOULEVARD ST. LOUIS, MO 63120-1798

The Metric System and Equivalents

Linear Measure

1 centimeter = 10 millimeters = .39 inch 1 decimeter = 10 centimeters = 3.94 inches 1 meter = 10 decimeters = 39.37 inches 1 dekameter = 10 meters = 32.8 feet 1 hectometer = 10 dekameters = 328.08 feet 1 kilometer = 10 hectometers = 3,280.8 feet

Weights

1 centigram = 10 milligrams = .15 grain 1 decigram = 10 centigrams = 1.54 grains 1 gram = 10 decigram = .035 ounce 1 dekagram = 10 grams = .35 ounce 1 hectogram = 10 dekagrams = 3.52 ounces 1 kilogram = 10 hectograms = 2.2 pounds 1 quintal = 100 kilograms = 220.46 pounds 1 metric ton = 10 quintals = 1.1 short tons

Liquid Measure

1 centiliter = 10 milliters = .34 fl. ounce 1 deciliter = 10 centiliters = 3.38 fl. ounces 1 liter = 10 deciliters = 33.81 fl. ounces 1 dekaliter = 10 liters = 2.64 gallons 1 hectoliter = 10 dekaliters = 26.42 gallons 1 kiloliter = 10 hectoliters = 264.18 gallons

Square Measure

1 sq. centimeter = 100 sq. millimeters = .155 sq. inch 1 sq. decimeter = 100 sq. centimeters = 15.5 sq. inches 1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. feet 1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. feet 1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 acres 1 sq. kilometer = 100 sq. hectometers = .386 sq. mile -

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = .06 cu. inch 1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. inches 1 cu. meter = 1000 cu. decimeters = 35.31 cu. feet

To change	Το	Multiply by	To change	To	Multiply by
inches	centimeters	2.540	ounce-inches	newton-meters	.007062
feet	meters	.305	centimeters	inches	.394
yards	meters	.914	meters	feet	3.280
miles	kilometers	1.609	meters	yards	1.094
square inches	square centimeters	6.451	kilometers	miles	.621
square feet	square meters	.0 9 3	square centimeters	square inches	.155
squ a re yards	square meters	.836	square meters	square feet	10.764
square miles	square kilometers	2.590	square meters	square yards	1.196
acres	square hectometers	.405	square kilometers	square miles	.386
cubic feet	cubic meters	.028	square hectometers	acres	2.471
cubic yards	cubic meters	.765	cubic meters	cubic feet	35.315
fluid ounces	milliliters	29 ,573	cubic meters	cubic yards	1.308
pints	liters	.473	milliliters	fluid ounces	.034
quarts	liters	.946	liters	pints	2.113
gallons	liters	3.785	liters	quarts	1.057
ounces	grams	28.349	liters	gallons	.264
pounds	kilograms	.454	grams	ounces	.035
short tons	metric tons	.907	kilograms	pounds	2.205
pound-feet	newton-meters	1.356	metric tons	short tons	1.102
pound-inches	newton-meters	.11296			

Approximate Conversion Factors

Temperature (Exact)

°F	Fahrenheit	5/9 (after	Celsius	°C
	temperature	subtracting 32)	temperature	

PIN: 046067-000

This fine document...

Was brought to you by me:



Liberated Manuals -- free army and government manuals

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap "watermarks" and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=<u>http://www.liberatedmanuals.com/</u>>Free Military and Government Manuals

Sincerely
Igor Chudov
<u>http://igor.chudov.com/</u>
Chicago Machinery Movers