TECHNICAL MANUAL

OPERATOR'S, UNIT AND
DIRECT SUPPORT MAINTENANCE MANUAL
(INCLUDING REPAIR PARTS AND SPECIAL TOOLS LIST)
FOR
KOEHLER COPPER STRIP
CORROSION BOMB BATH

This technical manual is an authentication of the manufacturer's commercial literature and does not conform with the format and the content requirements normally associated with Army technical manuals. This technical manual does, however, contain all essential information required to operate and maintain the equipment.

Approved for public release; distribution is unlimited.

HEADQUARTERS, DEPARTMENT OF THE ARMY 28 SEPTEMBER 1990

This technical manual is an authentication of the manufacturer's commercial literature and does not conform with the format and the content requirements normally associated with Army technical manuals. This technical manual does, however, contain all essential information required to operate and maintain the equipment.

Approved for public release; distribution is unlimited. SUPPLEMENTARY INTRODUCTORY MATERIAL

1-1. Maintenance Forms and Records.

Department of the Army forms and procedures used for equipment maintenance will be those described by DA Pam 738-750, The Army Maintenance Management System.

1-2. Reporting Errors and Recommending Improvements.

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letters, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in the back of this manual, directly to: Commander, U.S. Army Troop Support Command, ATTN: AMSTR-MCTS, 4300 Goodfellow Blvd., St. Louis, MO 63120-1798. A reply will be furnished to you.

1-3. Destruction of Army Material to Prevent Enemy Use.

Refer to TM 750-244-3 for instructions covering the destruction of Army Material to prevent enemy use.

1-4. Administrative Storage of Equipment.

- a. Placement of equipment in administrative storage should be for short periods of time when a shortage of maintenance effort exists. Items should be in mission readiness within 24 hours or within the time factors as determined by the directing authority. During the storage period appropriate maintenance records will be kept.
- b. Before placing equipment in administrative storage, current preventive maintenance checks and services should be completed. Shortcomings and deficiencies should be corrected, and all modification work orders (MWO's) should be applied.
- c. Storage site selection. Inside storage is preferred for items selected for administrative storage. If inside storage is not available, trucks, vans, conex containers and other containers may be used.



K25310, K25319, K25320, K25329

COPPER STRIP CORROSION BOMB BATH

ASTM D130

DETECTION OF COPPER CORROSION

FROM PETROLEUM PRODUCTS

BY THE COPPER STRIP TARNISH TEST

SAFETY AND HAZARD WARNING

THIS EQUIPMENT MAY INVOLVE HAZARDOUS MATERIAL AND OPERATIONS. THIS MANUAL DOES NOT PURPORT TO ADDRESS ALL OF THE SAFETY PROBLEMS ASSOCIATED WITH THE USE OF THE EQUIPMENT. IT IS THE RESPONSIBILITY OF WHOEVER USES THIS EQUIPMENT TO CONSULT AND ESTABLISH APPROPRIATE SAFETY AND HEALTH PRACTICES, AND DETERMINE THE APPLICABILITY OF REGULATORY LIMITATIONS PRIOR TO USE.

KOEHLER

K253, K253-1A, K253-2 & K253-2A

COPPER STRIP CORROSION BOMB BATH

ASTM D130

TABLE OF CONTENTS

SECTION:	
(A)	GENERAL INSTRUCTIONS:
	(1) UNPACKING INSTRUCTIONS
	(2) ASSEMBLY INSTRUCTIONS
	(3) OPERATING INSTRUCTIONS
	(4) SERVICE INSTRUCTIONS
(B)	MECHANICAL ASSEMBLY PRINT
(C)	WIRING DIAGRAM
(D)	SPARE PARTS LIST

NOTE: The K253-1 is the same as the K253-2, except the K253-2 is for 8 bombs and the (A) designation is for 230V., 50/60 Hz. operation.

SECTION A

(1) UNPACKING INSTRUCTIONS:

Remove bath from the shipping carton, and remove the cardboard attached to the bottom and top plates. Remove styrofoam from around constant water level device. Unpack the Soxhlet condenser and rubber stoppers from the separate carton and place in a safe location. Clean the packing from inside the bath, and place on a firm level table.

(2) **ASSEMBLY INSTRUCTIONS**:

- (A) Connect the line cord to a properly fused and grounded receptacle of the proper voltage, as marked on the back plate of the bath.
 - (B) Fill the bath with water through one of the port openings (see assembly drawing).
 - (C) Install the Soxhlet condenser to the bath and secure with the fitting on the tube.
- (D) Connect the constant water level device to a water line and adjust the device to maintain the water level desired.

(3) **OPERATING INSTRUCTIONS:**

- (A) Turn on the line switch and adjust to the desired temperature by turning graduated dial on the thermoregulator.
- (B) When bath has reached desired temperature and has stabilized, insert the corrosion bombs into the rack and cover with the rubber stoppers.
 - (C) Proceed with test in accordance with ASTM D130.

SECTION A

(D) When operating bath at 2120F., connect a cooling water line to one of the small tubes on the Soxhlet condenser and a drain line to the other. This will condense the steam coming from the bath and return the condensation to the bath.

(4) **SERVICE INSTRUCTIONS:**

Under normal conditions this unit requires no service. However, any service problem can often be resolved inexpensively by phone or letter.


For further information, please contact our office


at:

KOEHLER INSTRUMENT COMPANY, INC. 1595 SYCAMORE AVENUE BOHEMIA, NEW YORK 11716

TELEPHONE: (516) 589-3800

TELEX: 4973677 KOEHLER

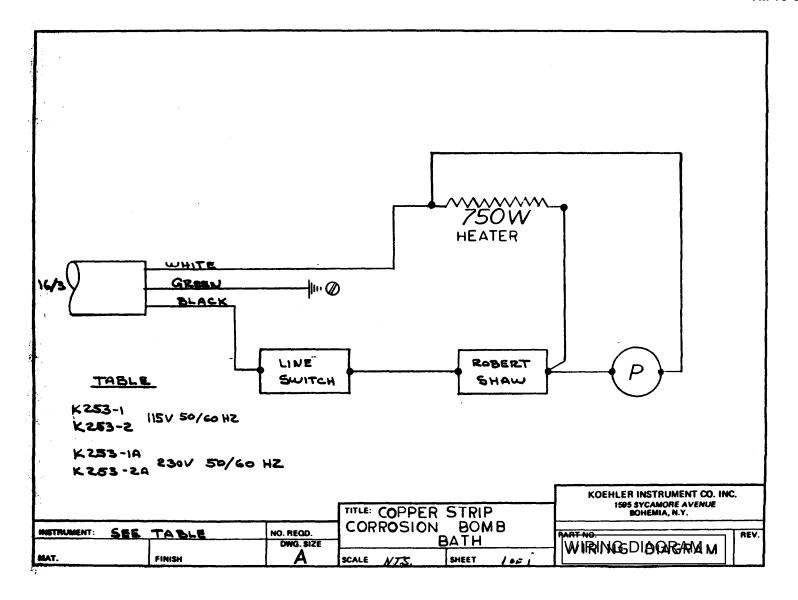

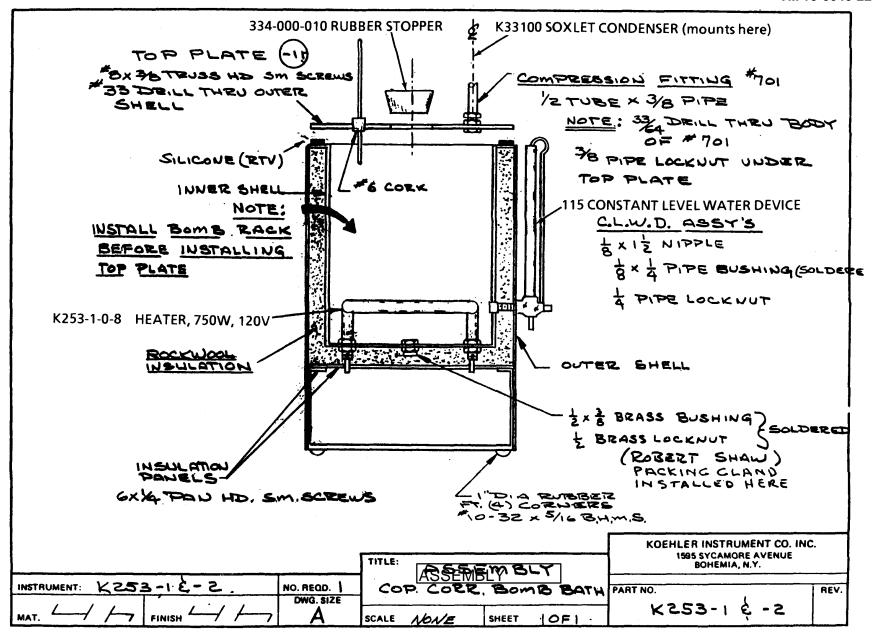

KOEHLER

K253-1, K253-1A, K253-2 & K253-2A

SPARE PARTS LIST

Part No.	<u>Description</u>	Quantity
K253-1-0-8	Heater, 750W., 120 V.)) 4 Unit	1 each
K253-1-0-8A	Heater, 750W., 230 V.)	1 each
K253-2-0-8	Heater, 750W., 120 V.)	1 each
K253-2-0-8A) 8 Unit Heater, 750W., 230 V.)	
255-200-001	Thermoregulator	1 each
045-115-001	Pilot Light, 115V.	1 each
045-230-001	Pilot Light, 230V.	1 each
050-001-001	Switch, Line	1 each
K33100	Soxhlet Condenser	1 each
025-308-OON	Condenser Fitting	1 each
115	Constant Level Water Device	1 each
334-000-010*	Rubber Stopper	4 each

^{* 8} each for K253-2 & 253-2A

APPENDIX A

REFERENCES

A-1. **Scope.** This appendix contains all forms, pamphlets and technical manuals referenced in both the Air mobile and Semitrailer mounted Laboratories.

A-2. Forms.

Recommended Changes to Publications	
Quality Deficiency Report	DA Form 2028-2
Equipment Inspection and Maintenance Work Sheet	
Hand Receipts	
Tidira (Coolpio	57(1 01111 2002
A-3. Field Manuals.	
Petroleum Testing Facilities:	
Laboratories and Kits	. FM 10-72
Inspecting and Testing Petroleum Products	
ASTM Test Method Supplement to	. FM 10-92C1/C2
A-4. Technical Manuals.	
Atlas-Copco Compressor	.TM 10-4310-392-13&P
Alcor Jet Fuel Thermal Oxidation Tester Operating	10 1010 002 100
and Maintenance Manual	. TM 10-6635-210-13&P
Bacharach Gas Alarm and Calibration Data	
Brother Portable Typewriter	. TM 10-7430-218-13&P
Chemtrix Field Ph Meter	
Elkay Manufacturing 30 GPH Cooler	TM 10-4130-240-13&P
Emcee Micro-Separometer	. TM 10-6640-222-13&P
Foxboro Pressure Recording Gauge	TM 10-6685-365-13&P
Gammon Aqua Glo Water Detector	
Gammon Mini Monitor Fuel Sampling Kit	
Jelrus Burn-Out Furnace	
Koehler Cleveland Open Tester	. IM 10-6630-236-13&P
Koehler Cloud and Pour Point Chamber	
Koehler Copper Strip Corrosion Bomb Bath	
Koehler Distillation Apparatus	TM 10 6635 311 138 P
Koehler Dropping Point ApparatusKoehler Electric Pensky-Martins Tester	TM 10 6620 221 128 D
Koehler Foaming Characteristics Determination Apparatus	TM 10 6640 229 129 D
Koehler Kinematic Viscosity Bath	
Koehler Tag Closed Cup Flash Tester	TM 10-6630-235-13&P
Lab-Line Explosion Proof Refrigerator	TM 10-6640-219-13&P
Lily Freezer	TM 10-6640-234-13&P
Millipore OM 39 Filter Holder	
Millipore Vacuum Pump	
Ohaus Harvard Trip Balance	
Precision Gas-Oil Distillation Test Equipment	
Precision General Purpose Water Bath	

Precision High Temperature Bronze Block Gum Bath	
Precision General Purpose Ovens	
Precision Heater Instruction Manual and Parts List	TM 10-6640-223-13&P
Precision Oxidation Stability Bath	TM 10-6640-232-13&P
Precision Pensky-Martens Flash Testers	TM 10-6640-231-13&P
Precision Reid Vapor Pressure Bath	TM 10-6640-226-13&P
Precision Slo-Speed Stirrer	
Precision Universal Centrifuge	
Precision Universal Penetrometer	
Sargent-Welch Vacuum Pump	TM 10-4310-391-13&P
Sartorious Analytical Balance	
Scotsman Cuber	
Soltec VOM-Multimeter	TM 10-6625-3127-13&P
Teel Self-Priming Centrifugal Pump	
Teel Submersible Pump	
Texas Instrument TI-503011 Calculator	
A-5. Pamphlets.	
The Army Maintenance Management System (TAMMS)	DA Pam 738-750
A-6. Miscellaneous Publications.	
The Army Integrated Publishing and Printing Program	AR 25-30
Laboratory, Airmobile, Aviation Fuel	
Apparatus, Instruments, Chemicals, Furniture, and Supplies for Industr	
Clinical, College and Government Laboratories	
Petroleum-Petrochemical Testing Equipment	Precision Scientific Catalog

APPENDIX B MAINTENANCE ALLOCATION CHART SECTION I. INTRODUCTION

B-1. General.

- a. This section provides a general explanation of all maintenance and repair functions authorized at various maintenance categories.
- b. The Maintenance Allocation Chart (MAC) in Section II designates overall authority and responsibility for the performance of maintenance functions on the identified end item or component. The application of the maintenance functions to the end item or component will be consistent with the capacities and capabilities of the designated maintenance categories.
- c. Section III lists the tools and test equipment (both special tools and common tool sets) required for each maintenance function as referenced from Section II.
- d. Section IV contains supplemental instructions and explanatory notes for a particular maintenance function.

B-2. Maintenance Functions. Maintenance functions will be limited to and defined as follows:

- a. <u>Inspect.</u> To determine the serviceability of an item by comparing its physical, mechanical, and/or electrical characteristics with established standards through examination (e.g., by sight, sound, or feel).
- b. <u>Test.</u> To verify serviceability by measuring the mechanical, pneumatic, hydraulic, or electrical characteristics of an item and comparing those characteristics with prescribed standards.
- c. <u>Service</u>. Operations required periodically to keep an item in proper operating condition, i.e., to clean (includes decontaminate, when required), to preserve, to drain, to paint, or to replenish fuel, lubricants, chemical fluids, or gases.
- *d.* Adjust. To maintain or regulate, within prescribed limits, by bringing into proper or exact position, or by setting the operating characteristics to specified parameters.
- e. Align. To adjust specified variable elements of an item to bring about optimum or desired performance.
- f. <u>Calibrate</u>. To determine and cause corrections to be made or to be adjusted on instruments or test, measuring, and diagnostic equipments used in precision measurement. Consists of comparisons of two instruments, one of which is a certified standard of knob accuracy, to detect and adjust any discrepancy in the accuracy of the instrument being compared.
- g. Remove/Install. To remove and install the same item when required to perform service or other maintenance functions. Install may be the act of emplacing, seating, or fixing into position a spare, repair part, or module (component or assembly) in a manner to allow the proper functioning of an equipment or system.
- h. Replace. To remove an unserviceable item and install a serviceable counterpart in its place. "Replace" is authorized by the MAC and is shown as the third position code of the SMR code.

- *i.* Repair. The application of maintenance services, ¹including fault location/troubleshooting, removal/installation, and disassembly/assembly procedures and maintenance actions to identify troubles and restore serviceability to an item by correcting specific damage, fault, malfunction, or failure in a part, subassembly, module (component or assembly), end item, or system.
- *j.* <u>Overhaul</u>. That maintenance effort (service/action) prescribed to restore an item to a completely serviceable/operational condition as required by maintenance standards in appropriate technical publications (i.e, DMWR). Overhaul is normally the highest degree of maintenance performed by the Army. Overhaul does not normally return an item to like-new condition.
- k. <u>Rebuild.</u> Consists of those services/actions necessary for the restoration of unserviceable equipment to a like-new condition in accordance with original manufacturing standards. Rebuild is the highest degree of materiel maintenance applied to Army equipment. The rebuild operation includes the act of returning to zero those age measurements (hours/miles, etc.) considered in classifying Army equipment/components.

B-3. Explanation Of Columns In The MAC, Section II.

- a. <u>Column I. Group Number</u>. Column 1 lists functional group code numbers, the purpose of which is to identify maintenance significant components, assemblies, subassemblies, and modules with the next higher assembly. End item group number shall be "00."
- b. <u>Column 2. Component/Assembly</u>. Column 2 contains the names of components, assemblies, subassemblies, and modules for which maintenance is authorized.
- c. <u>Column 3. Maintenance Function</u>. Column 3 lists the functions to be performed on the item listed in column 2. (For a detailed explanation of these functions, see paragraph B-2.)
- d. <u>Column 4. Maintenance Category</u>. Column 4 specifies, by the listing of a work time figure in the appropriate subcolumn(s), the category of maintenance authorized to perform the function listed in column 3. This figure represents the active time required to perform that maintenance function at the indicated category of maintenance. If the number or complexity of the tasks within the listed maintenance function vary at different maintenance categories, appropriate work time figures will be shown for each category. The work time figure represents the average time required to restore an item (assembly, subassembly, component, module, end item, or system) to a serviceable condition under typical field, operating conditions. This time includes preparation time (including any necessary disassembly/ assembly time), troubleshooting/fault location time, and quality assurance/quality control time in addition to the time required to perform the specific tasks identified for the maintenance functions authorized in the maintenance allocation chart. The symbol designations for the various maintenance categories are as follows:
- 1 Services inspect, test, service, adjust, align, calibrate, and/or replace.
 - 2. Fault locate/troubleshoot- the process of investigating and detecting the cause of equipment malfunctioning; the act of isolating a fault within a system or unit under test (UUT).
 - 3 Disassemble/assemble encompasses the step-by-step taking apart (or breakdown) of a spare/functional group coded item to the level of its least componency identified as maintenance significant (ie., assigned an SMR code) for the category of maintenance under consideration.
 - 4 Actions welding, grinding, riveting, straightening, facing, remachining, and/or resurfacing.

C	Operator/Crew
O	Unit Maintenance
F	Direct Support Maintenance
H	
D	

- e. <u>Column 5. Tools and Equipment</u>. Column 5 specifies, by code, those common tool sets (not individual tools) and special tools, TMDE, and support equipment required to perform the designated function.
- f. <u>Column 6. Remarks</u>. This column shall, when applicable, contain a letter code, in alphabetic order, which shall be keyed to the remarks contained in section IV.

B-4. Explanation Of Columns In Tool And Test Equipment Requirements, Section III.

- a. <u>Column I. Reference Code</u>. The tool and test equipment reference code correlates with a code used in the MAC, section II, column 5.
- b. <u>Column 2. Maintenance Category</u>. The lowest category of maintenance authorized to use the tool or test equipment.
 - c. Column 3. Nomenclature. Name or identification of the tool or test equipment.
 - d. <u>Column 4. National Stock Number</u>. The National stock number of the tool or test equipment.
 - e. Column 5. Tool Number. The manufacturer's part number.

B-5. Explanation Of Columns In Remarks, Section IV.

- a. Column I. Reference Code. The code recorded in column 6, Section II.
- b. <u>Column 2. Remarks</u>. This column lists information pertinent to the maintenance function being performed as indicated in the MAC, section II.

Section II. MAINTENANCE ALLOCATION CHART

(1) GROUP NUMBER	(2) COMPONENT/ ASSEMBLY	(3) MAINTENANCE FUNCTION	(4) MAINTENANCE LEVEL			VEL	(5) TOOLS AND EQUIPMENT	(6) REMARKS	
			U١	ΝT	DS	GS	DEPOT		
			С	0	F	Н	D		
01	CORROSION BOMB BATH	INSPECT REPLACE REPAIR	0.1	0.2 0.5	1.0			1 1,2	

SECTION III. TOOL AND TEST EQUIPMENT REQUIREMENTS FOR MAINTENANCE ALLOCATION CHART

(1) TOOL/TEST EQUIP. REF CODE	(2) MAINTENANCE CATEGORY	(3) NOMENCLATURE	(4) NSN	(5) TOOL NUMBER
1	O,F	TOOL KIT, GENERAL AUTOMOTIVE	5180-00-177-7033	(50980) SC 5180-90- SC-N26
2	O,F	MULTIMETER, 0-500V	6625-00-691-2453	

SECTION IV. REMARKS

NOT APPLICABLE

B-4

APPENDIX C COMPONENTS OF END ITEM AND BASIC ISSUE ITEMS LISTS SECTION I. INTRODUCTION

C-1. Scope.

This appendix lists components of end item and basic issue items for the Copper Strip Corrosion Bomb Bath to help you inventory items required for safe and efficient operation.

C-2. General.

The Components of End Item and Basic Issue Items Lists are divided into the following sections:

- a. <u>Section II. Components of End Item.</u> This listing is for informational purposes only, and is not authority to requisition replacements. These items are part of the end item, but are removed and separately packaged for transportation or shipment. As part of the end item, these items must be with the end item whenever it is issued or transferred between. property accounts. Illustrations are furnished to assist you in identifying the items.
- b. <u>Section III. Basic Issue Items.</u> These are the minimum essential items required to place the Copper Strip Corrosion Bomb Bath in operation, to operate it, and to perform emergency repairs. Although shipped separately packaged, Bll must be with the shelter during operation and whenever it is transferred between property accounts. The illustrations will assist you with hard-to-identify items. This manual is your authority to request/requisition replacement B I, based on TOE/MTOE authorization of the end item.

C-3. Explanation of Columns.

The following provides an explanation of columns found in the tabular listings:

- a. <u>Column (1) Illustration Number (Illus Number)</u>. This column indicates the number of the illustration in which the item is shown.
- b. <u>Column (2) National Stock Number.</u> Indicates the National stock number assigned to the item and will be used for requisitioning purposes.
- c. <u>Column (3) Description.</u> Indicates the Federal item name and, if required, a minimum description to identify and locate the item. The last line for each item indicates the CAGEC (in parentheses) followed by the part number.
- d. <u>Column (4) Unit of Measure (U/M).</u> Indicates the measure used in performing the actual operational/maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr).
- e. <u>Column (5) Quantity required (QTY RQR).</u> Indicates the quantity of the item authorized to be used with/on the equipment.

SECTION II. COMPONENTS OF END ITEM

(1) Illus	(2) National Stock Number	(3) Description CAGEC And Part Number Usable On Code	(4) U/M	(5) Qty
	6630-00-522-1893	BOMB, TEST, PETROLEUM: FOR ASTM TEST D-130; (22527) NO. 13-420-20	EA	2
	6640-00-179-2558	CORK, PETROLEUM TEST: REGULAR LG.; ASSORTMENT OF NO. 6 TO 15 CORKS, 100 PER BAG; (80740) NO. 27-000	EA	1
	6640-00-074-3339	COPPER STRIP CORROSION STANDARDS: COLOR STD. FOR GRADING CORROSION OF COPPER POST STRIPS; FOR ASTM TEST D-130; (80740) NO. 66-940-12	EA	1
	6640-00-323-8689	CORROSION TEST STRIP, COPPER 1/16 TO 1/8 IN. THK, 3 IN. LG, 1/2 IN. WIDE; FOR ASTM TEST D-130; MS36252-1	LB	1
	6640-00-061-8967	TEST TUBE: CULTURE; GENERAL PURPOSE; 55ML; 25 X 150MM; NO. 11 OR 4 CORK OR RUBBER STOPPER;12 PER BOX; NNN-T-189, TYPE 1, STYLE 1, SIZE 9	EA	1
		THERMOMETER, SELF INDICATING, LIQUID IN GLASS: MERCURY; ETCHED STEM SCALE; -20 TO +102°C RANGE; 0.10 ACCURACY RATING; 0.20 SMALLEST GRADUATION; 415 TO 425MM LG.; W/ EXPANSION CHAMBER AND RING; FOR ASTM TEST D-130; ASTM EI NO. 12C	EA	2

SECTION III. BASIC ISSUE ITEMS

NOT APPLICABLE

APPENDIX D ADDITIONAL AUTHORIZATION LIST NOT APPLICABLE

APPENDIX E

EXPENDABLE/DURABLE SUPPLIES AND MATERIALS LIST

SECTION I. INTRODUCTION

E-1. **Scope**. This listing is for informational purposes only and is not authority to requisition the listed items. These items are authorized to you by CTA 50-970, Expendable/Durable Items (except medical, class V, repair parts, and heraldic items).

E-2. Explanation of Columns.

- a. <u>Column (1) Item Number</u>. This number is assigned to the entry in the listing and is referenced in the narrative instructions to identify the material (e.g., Use cleaning compound, item 5, appendix C).
 - b. Column (2) Level. This column identifies the lowest level of maintenance that requires the listed item.
- C Operator/Crew
- O Unit Maintenance
- F Direct Support Maintenance
- H General Support Maintenance
- c. <u>Column (3)- National Stock Number.</u> This is the National stock number assigned to the item; use it to request or requisition the item.
- d. <u>Column (4) Description</u>. Indicates the Federal item name, and, if required, a description to identify the item. The last line for each item indicates the Commercial and Government Entity Code (CAGEC) in parentheses followed by the part number.
- e. <u>Column (5) Unit of Measure (U/M).</u> Indicates the measure used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., EA, IN, PR). If the unit of measure differs from the unit of issue, requisition the lowest unit of issue that will satisfy your requirements.

SECTION II. EXPENDABLE/DURABLE SUPPLIES AND MATERIALS LIST

(1)	(2)	(3)	(4)	(5)
Item	Level	National Stock	Description	U/M
Number		Number		
	С	5350-00-184-6255		EA
			CARBIDE; 140 MESH, 1 LB CAN; FOR ASTM	
			TEST D-130; MIL-A-21380, TYPE III	
	0	0540 00 004 4000	COTTON DUDIEIED DOLLED LIOD 40 IN	DO
	С	6510-00-201-4000	COTTON, PURIFIED; ROLLED; USP 12 IN. WIDE, 10 FT. LONG, 1LB PACKAGE; FOR	PG
			ASTM TEST D-130; JJJ-C-561; GRADE A,	
			CLASS 2, SIZE 4	
			OLMOO 2, OIZE 4	
	С	5350-00-721-8117	PAPER, ABRASIVE: SILICON CARBIDE;	ВХ
			9 X 11 IN. SHEETS; FOR ASTM TEST D-130;	
			P-P-101; GRIT NO. 180; CLOSED COATING;	
			WATER PROOF; PACKAGE	
	С	5350-00-240-2920	STEEL WOOL: 1LB ROLL; FF-W-1825,	PG
			TYPE I, CLASS 00 FINE	

By Order of the Secretary of the Army:

CARL E. VUONO General, United States Army Chief of Staff

Official:

THOMAS F. SIKORA

Brigadier General, United States Army The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-21A, Operator, Unit and Direct Support Maintenance requirements for Laboratory, Air Mobile, Aviation Fuel and Laboratory, Petroleum, MTD

★ U.S. GOVERNMENT PRINTING OFFICE: 1991 554-123/20084

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATION SOMETHING WERDE WITH PUBLICATION FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS) PUBLICATION NUMBER PUBLICATION DATE PUBLICATION NUMBER PUBLICATION DATE PUBLICATION TITLE BE EXACT PIN-POINT WHERE IT IS PAGE PARA PROUBLE PUBLICATION DATE PAGE PARA PROUBLE TABLE NO. TABLE NO. AND WHAT SHOULD BE DONE ABOUT IT.

DA 1 FORM 2028-2

PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER

TEAR ALONG PERFORATED LINE

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

SIGN HERE

The Metric System and Equivalents

Linear Meagun

1 centimeter = 10 millimeters = .39 inch 1 decimeter = 10 centimeters = 3.94 inches 1 meter = 10 decimeters = 39.37 inches 1 dekameter = 10 meters = 32.8 feet 1 hectometer = 10 dekameters = 328.08 feet 1 kilometer = 10 hectometers = 3,280.8 feet

Weights

1 centigram = 10 milligrams = .15 grain 1 decigram = 10 centigrams = 1.54 grains 1 gram = 10 decigram = .035 ounce 1 dekagram = 10 grams = .35 ounce 1 hectogram = 10 dekagrams = 3.52 ounces 1 kilogram = 10 hectograms = 2.2 pounds 1 quintal = 100 kilograms = 220.46 pounds 1 metric ton = 10 quintals = 1.1 short tons

Liquid Measure

1 centiliter = 10 milliters = .34 fl. ounce 1 deciliter = 10 centiliters = 3.38 fl. ounces 1 liter = 10 deciliters = 33.81 fl. ounces 1 dekaliter = 10 liters = 2.64 gallons 1 hectoliter = 10 dekaliters = 26.42 gallons 1 kiloliter = 10 hectoliters = 264.18 gallons

Square Measure

1 sq. centimeter = 100 sq. millimeters = .155 sq. inch 1 sq. decimeter = 100 sq. centimeters = 15.5 sq. inches 1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. feet 1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. feet 1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 acres 1 sq. kilometer = 100 sq. hectometers = .386 sq. mile

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = .06 cu. inch 1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. inches 1 cu. meter = 1000 cu. decimeters = 35.31 cu. feet

Approximate Conversion Factors

/ To change	To	Multiply by	To change	To	Multiply by
inches	centimeters	2.540	ounce-inches	newton-meters	.007062
feet	meters	.305	centimeters	inches	.394
yards	meters	.914	meters	feet	3.280
miles	kilometers	1.609	meters	yards	1.094
square inches	square centimeters	6.451	kilometers	miles	.621
square feet	square meters	.093	square centimeters	square inches	.155
square yards	square meters	.836	square meters	square feet	10.764
square miles	square kilometers	2.590	square meters	square yards	1.196
acres	square hectometers	.405	square kilometers	square miles	.386
cubic feet .	cubic meters	.028	square hectometers	acres	2.471
cubic yards	cubic meters	.765	cubic meters	cubic feet	3 5.315
fluid ounces	milliliters	29,573	cubic meters	cubic yards	1.308
pints	liters	.473	milliliters	fluid ounces	.034
quarts	liters	.946	liters	pints	2.113
gallons	liters	3.785	liters	quarts	1.057
ounces	grams	28.349	liters	galions	.264
pounds	kilograms	.454	grams	ounces	.035
short tons	metric tons	.907	kilograms	pounds	2.205
pound-feet	newton-meters	1.356	metric tons	short tons	1.102
pound-inches	newton-meters	.11296			

Temperature (Exact)

°F	Fahrenheit	5/9 (after	Celsius	°C
	temperature	subtracting 32)	temperature	

PIN: 046477-000

This fine document...

Was brought to you by me:



<u>Liberated Manuals -- free army and government manuals</u>

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap "watermarks" and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

Free Military and Government Manuals

- SincerelyIgor Chudovhttp://igor.chudov.com/
- Chicago Machinery Movers