

TM 11-6625-368-24P

TECHNICAL MANUAL

**ORGANIZATIONAL DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE
REPAIR PARTS AND SPECIAL TOOLS LISTS
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)
FOR
PULSE GENERATOR SETS
AN/UPM-15 (NSN 6625-00-643-5969)
AND
AN/UPM-15A (NSN 6625-00-682-2581)**

HEADQUARTERS, DEPARTMENT OF THE ARMY

AUGUST 1977

TECHNICAL MANUAL

No. 11-6625-368-24P

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, 19 August 1977

ORGANIZATIONAL, DIRECT SUPPORT, AND GENERAL SUPPORT MAINTENANCE
REPAIR PARTS AND SPECIAL TOOLS LISTS
(INCLUDING DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS)

FOR

PULSE GENERATOR SETS

AN/UPM-15 (NSN 6625-00-643-5969)

AND

AN/UPM-15A (NSN 6625-00-682-2581)

Current as of 29 April 1977

REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 (Test) located in the back of the manual. Simply tear out the self-addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Forms 2028-2 (Test) in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Electronics Command, ATTN: DRSEL-MA-Q, Fort Monmouth, New Jersey 07703.

In either case a reply will be furnished direct to you.

Table of Contents

		Page	Illus Figure
SECTION	I. Introduction	1	
	II. Repair parts list	5	
Group 00	Generators, Pulse AN/UPM-15, AN/UPM-15A	5	1-16
SECTION III.	Special tools list (Not applicable)		
	IV. National stock number and part number index	48	

*This manual supersedes TM 11-6625-368-20P, 1 August 1973 and TM 11-6625-368-34P, 31 August 1973.

SECTION I

INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organizational, direct support, and general support maintenance of the AN/UPM-15 and AN/UPM-15A. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. *Section II. Repair Parts List.* A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. *Section III. Special Tools List.* Not applicable.

c. *Section IV. National Stock Number and Part Number Index.* A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. *Illustration.* This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. *Source, Maintenance, and Recoverability (SMR) Codes.*

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows

Code	Definition
PA	-Item procured and stocked for anticipated or known usage.
XD	-A support item that is not stocked. When re-

quired, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

Code	Application/Explanation
------	-------------------------

O -Support item is removed, replaced, used at the organizational level.

H -Support item is removed, replaced, used at the general support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	Application/Explanation
------	-------------------------

H -The lowest maintenance level capable of complete repair of the support item is the general support level.

Z -Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability	Definition
----------------	------------

codes
Z -Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.

H -Reparable item. When uneconomically repairable, condemn and dispose at the general support level.

D -Reparable item. When beyond lower level repair

capability, return to depot. Condemnation and disposal not authorized below depot level.

c. *National Stock Number*. Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. *Part Number*. Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. *Federal Supply Code for Manufacturer (FSCM)*. The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. *Description*. Indicates the Federal item name and, if required, a minimum description to identify the item.

g. *Unit of Measure (U/M)*. Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. *Quantity Incorporated in Unit*. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

4. Special Information

a. Usable on codes are shown in the description column. Uncoded items are applicable to all models.

Identification of the usable on codes used in this publication are:

Code	<i>Used on</i>
A M Q	AN UPM - 15
A M R	AN/UPM - 15A

b. The following publications pertain to the AN/UPM-15 and AN/UPM-15A and its components:
 TM 11-6625-368-10, Pulse Generator Sets
 AN/UPM-15 and AN/UPM-15A
 TM 11-6625-368-24, Pulse Generator Sets
 AN/UPM-15 and AN/UPM-15A

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First*. Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second*. Find the illustration covering the functional group to which the item belongs.

(3) *Third*. Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth*. Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.


(1) *First*. Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second*. After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations

Not applicable.

(Next printed page is 4)

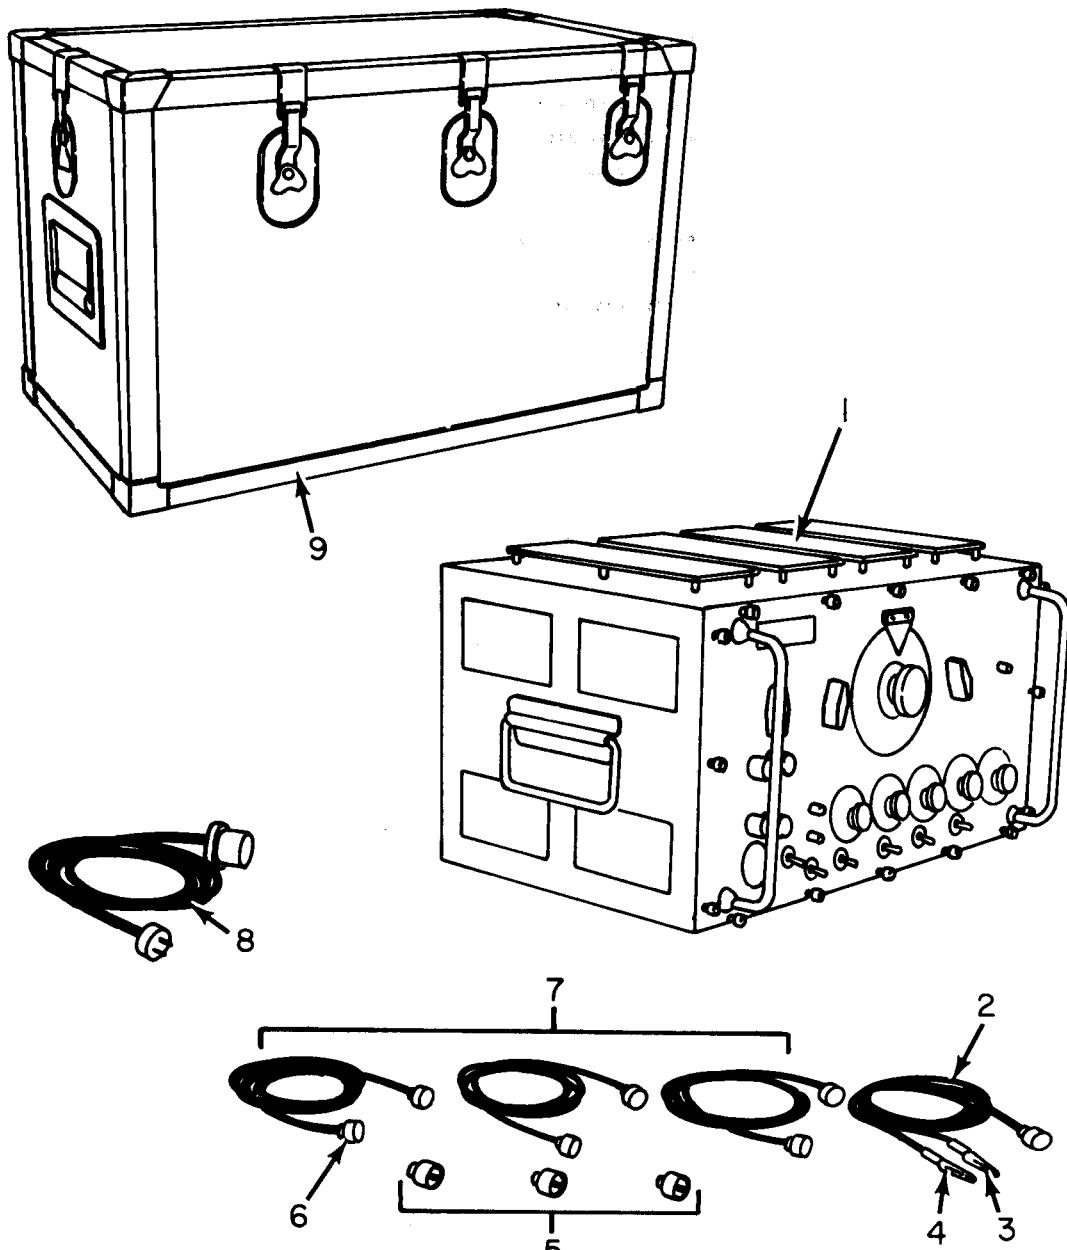

EL2ZI001

Figure 1. Generator, Pulse AN/UPM-15.

SECTION II				TM11-6625-368-24P						
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION			(7) QTY INC IN	(8) UNIT	
						USABLE ON	CODE	U/M		

AN/UPM-15A									
1	1	PAHHD	6625-00-519-7600	TS-592A/UPM-15	80058	PULSE, GENERATOR	AMQ	EA	1
1	2	PAHHH	6625-00-643-2716	CG-521/U	80058	CABLE, ASSEMBLY, RADIO FREQUENCY	AMQ	EA	1
1	3	PAHZZ	5999-00-065-1833	85	76543	CLIP, ALLIGATOR	AMQ	EA	1
1	4	PAHZZ	5999-00-501-8365	60CHSB	76545	CLIP, ALLIGATOR	AMQ	EA	1
1	5	PAOZZ	5935-00-149-3534	UG-273/U	30058	ADAPTER	AMQ	EA	3
1	6	PAHZZ	5935-00-149-4066	UG-88/U	80058	CONNECTOR, PLUG, ELECTRICAL	AMQ	EA	3
1	7	PAHZZ	5995-00-519-1342	CG-409A/U	80058	CABLE ASSEMBLY	AMQ	EA	1
1	8	PAOZZ	5995-00-577-3470	CX-337/U	80058	CABLE ASSEMBLY	AMQ	EA	1
1	9	XDHZZ		CY672U	80058	TRANSIT CASE	AMQ	EA	1


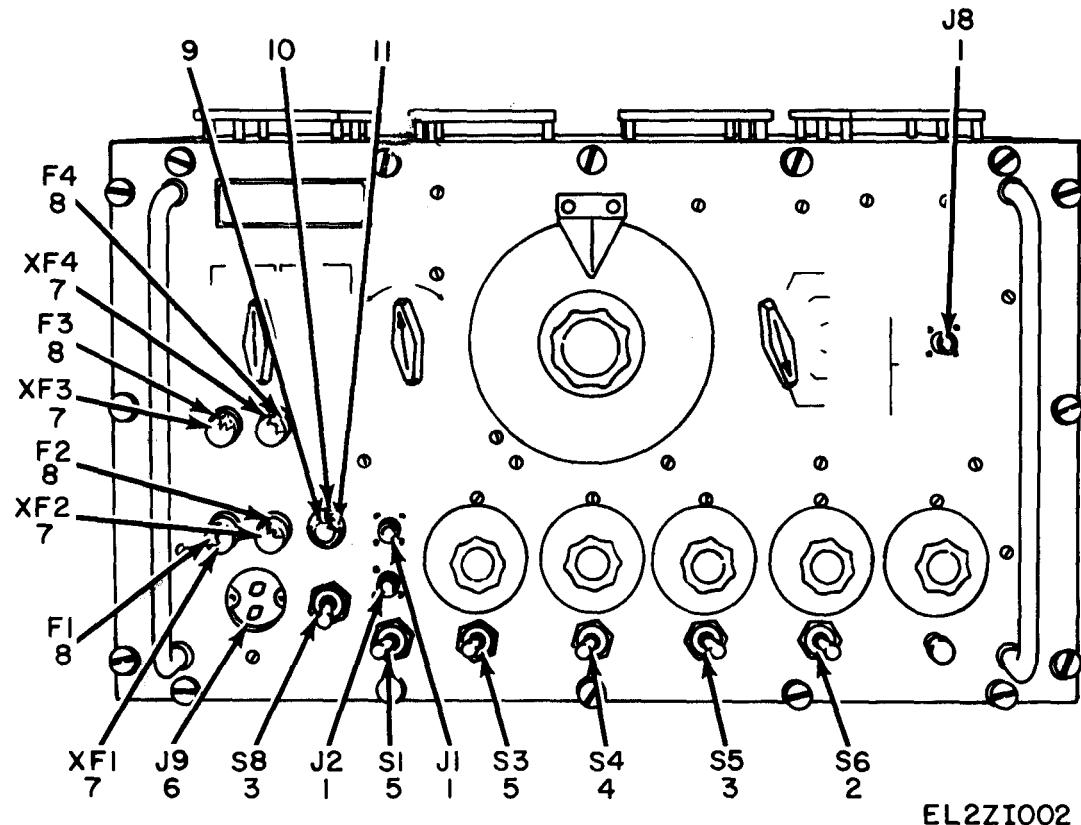


Figure 2. Generator, Pulse AN/UPM-15, Front Panel.


SECTION II ILLUSTRATION		(A) (B)		(3)	(4)	(5)	(6)	DESCRIPTION		(7)	(8)
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM			USABLE ON CODE	U/M	QTY INC IN UNIT	
2	1	PAHZZ	5935-00-201-3511	UG290AU	80058	CONNECTOR,RECEPTACLE,ELECTRICAL		AMQ	EA	3	
2	2	XDHZZ		SW1004	98179	SWITCH,TOGGLE		AMQ	EA	1	
2	3	PAHZZ	5930-00-829-3748	MS25100-22	96906	SWITCH,TOGGLE		AMQ	EA	2	
2	4	PAHZZ	5930-00-615-7896	MS25098-22	96906	SWITCH,TOGGLE		AMQ	EA	1	
2	5	PAHZZ	5930-00-655-1508	MS25100-23	96906	SWITCH,TOGGLE		AMQ	EA	2	
2	6	PAHZZ	5935-00-149-3092	4891	74545	CONNECTOR,RECEPTACLE,ELECTRICAL		AMQ	EA	1	
2	7	PAHZZ	5920-00-892-9311	HKPJE	71400	FUSEHOLDER		AMQ	EA	4	
2	8	PAOZZ	5920-00-557-2647	312004	75915	FUSE,CARTRIDGE INSTANTANEOUS		AMQ	EA	4	
2	9	PAOZZ	6210-00-188-8779	81-121	72619	LENS,INDICATOR LIGHT		AMQ	EA	1	
2	10	XDHZZ		810B	72619	LAMPHOLDER		AMQ	EA	1	
2	11	PAOZZ	6240-00-155-8706	MS15571-2	96906	LAMP		AMQ	EA	1	

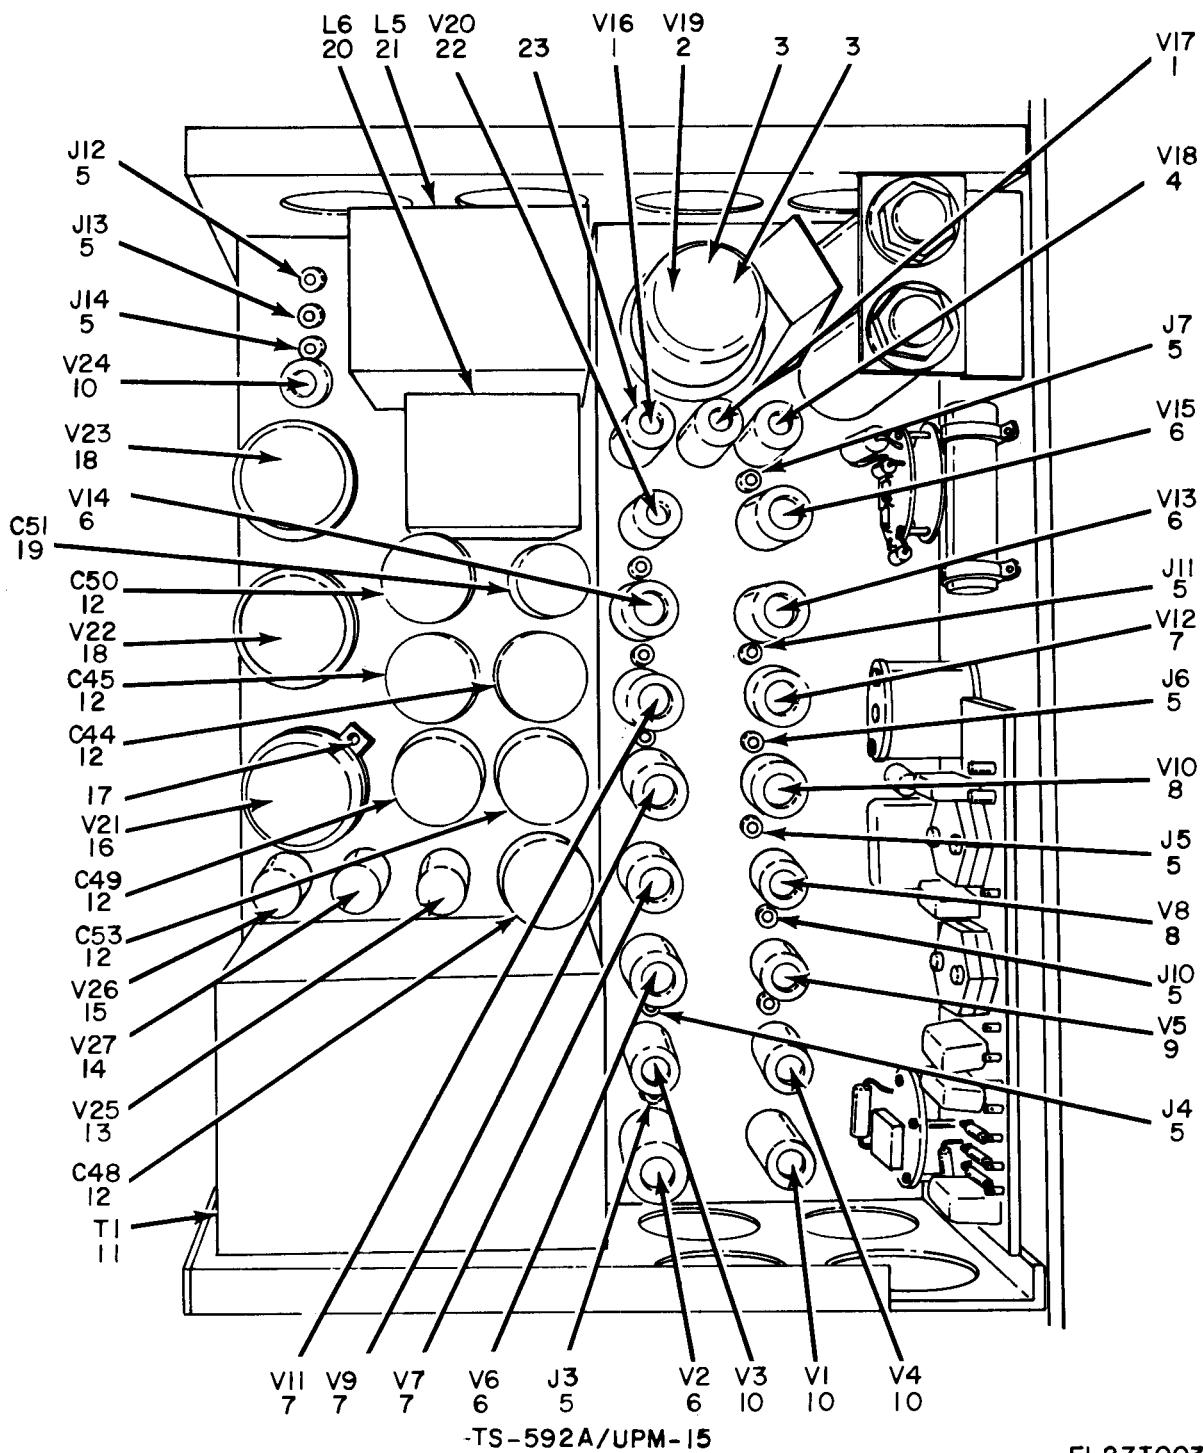

EL2ZI003

Figure 3. Generator, Pulse AN/UPM-15, Chassis, Top View.

SECTION II ILLUSTRATION (A) (B)				TM11-6625-368-24P				(7) (8) QTY INC IN UNIT	
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	U/M	
3	1	PAOZZ	5960-00-542-7004	6AH6WA	81349	ELECTRON TUBE	AMQ	EA	2
3	2	PAOZZ	5960-00-107-8147	829B	81350	ELECTRON TUBE	AMQ	EA	1
3	3	PAHZZ	5999-00-186-8944	10	72307	CLIP,ELECTRICAL	AMQ	EA	2
3	4	PAOZZ	5960-00-543-0219	6ANS	81350	ELECTRON TUBE	AMQ	EA	1
3	5	PAHZZ	5935-00-501-5488	105-603-1	74970	CONNECTOR,RECEPTACLE,ELECTRICAL	AMQ	EA	10
3	6	PAOZZ	5960-00-262-0210	5814A	81350	ELECTRON TUBE	AMQ	EA	5
3	7	PAOZZ	5960-00-262-0167	12AT7WA	81350	ELECTRON TUBE	AMQ	EA	4
3	8	PAOZZ	5960-00-237-6917	5725-6AS6W	81350	ELECTRON TUBE	AMQ	EA	2
3	9	PAOZZ	5960-00-108-0263	6D4	81350	ELECTRON TUBE	AMQ	EA	1
3	10	PAOZZ	5960-00-262-0152	6AU6WA	81350	ELECTRON TUBE	AMQ	EA	4
3	11	PAHZZ	5950-00-645-0543	165	23616	TRANSFORMER,POWER,STEP-DOWN AND STEP-UP SELECT	AMQ	EA	1
3	11	XDHZZ		234C120	15196	TRANSFORMER,POWER STEP-DOWN AND STEP-UP SELECT	AMQ	EA	1
3	12	PAHZZ	5910-00-129-9237	CP41B1FF405K1	81349	CAPACITOR,FIXED,PAPER	AMQ	EA	6
3	13	PAOZZ	5960-00-503-4880	0A2WA	81349	ELECTRON TUBE	AMQ	EA	1
3	14	PAOZZ	5960-00-624-4718	0B2WA	81350	ELECTRON TUBE	AMQ	EA	1
3	15	PAOZZ	5960-00-272-9182	6X4W	81350	ELECTRON TUBE	AMQ	EA	1
3	16	PAOZZ	5960-00-284-5823	5R4WGA	81350	ELECTRON TUBE	AMQ	EA	1
3	17	PAOZZ	5960-00-272-9225	X1817C	71279	RETAINER,ELECTRON TUBE	AMQ	EA	1
3	18	PAOZZ	5960-00-166-7674	6AS7G	81350	ELECTRON TUBE	AMQ	EA	2
3	19	XDHZZ		CF41C800K	81349	CAPACITOR,FIXED,ELECTROLYTIC SELECT	AMQ	EA	1
3	20	PAHZZ	5950-00-645-1266	167	23616	REACTOR	AMQ	EA	1
3	21	PAHZZ	5950-00-645-1099	166	23616	REACTOR	AMQ	EA	1
3	22	PAOZZ	5960-00-669-6861	6005-6AQ5W	81350	ELECTRON TUBE	AMQ	EA	1
3	23	XDOZZ		TS102U01	81350	SHIELD,ELECTRON TUBE	AMQ	EA	2

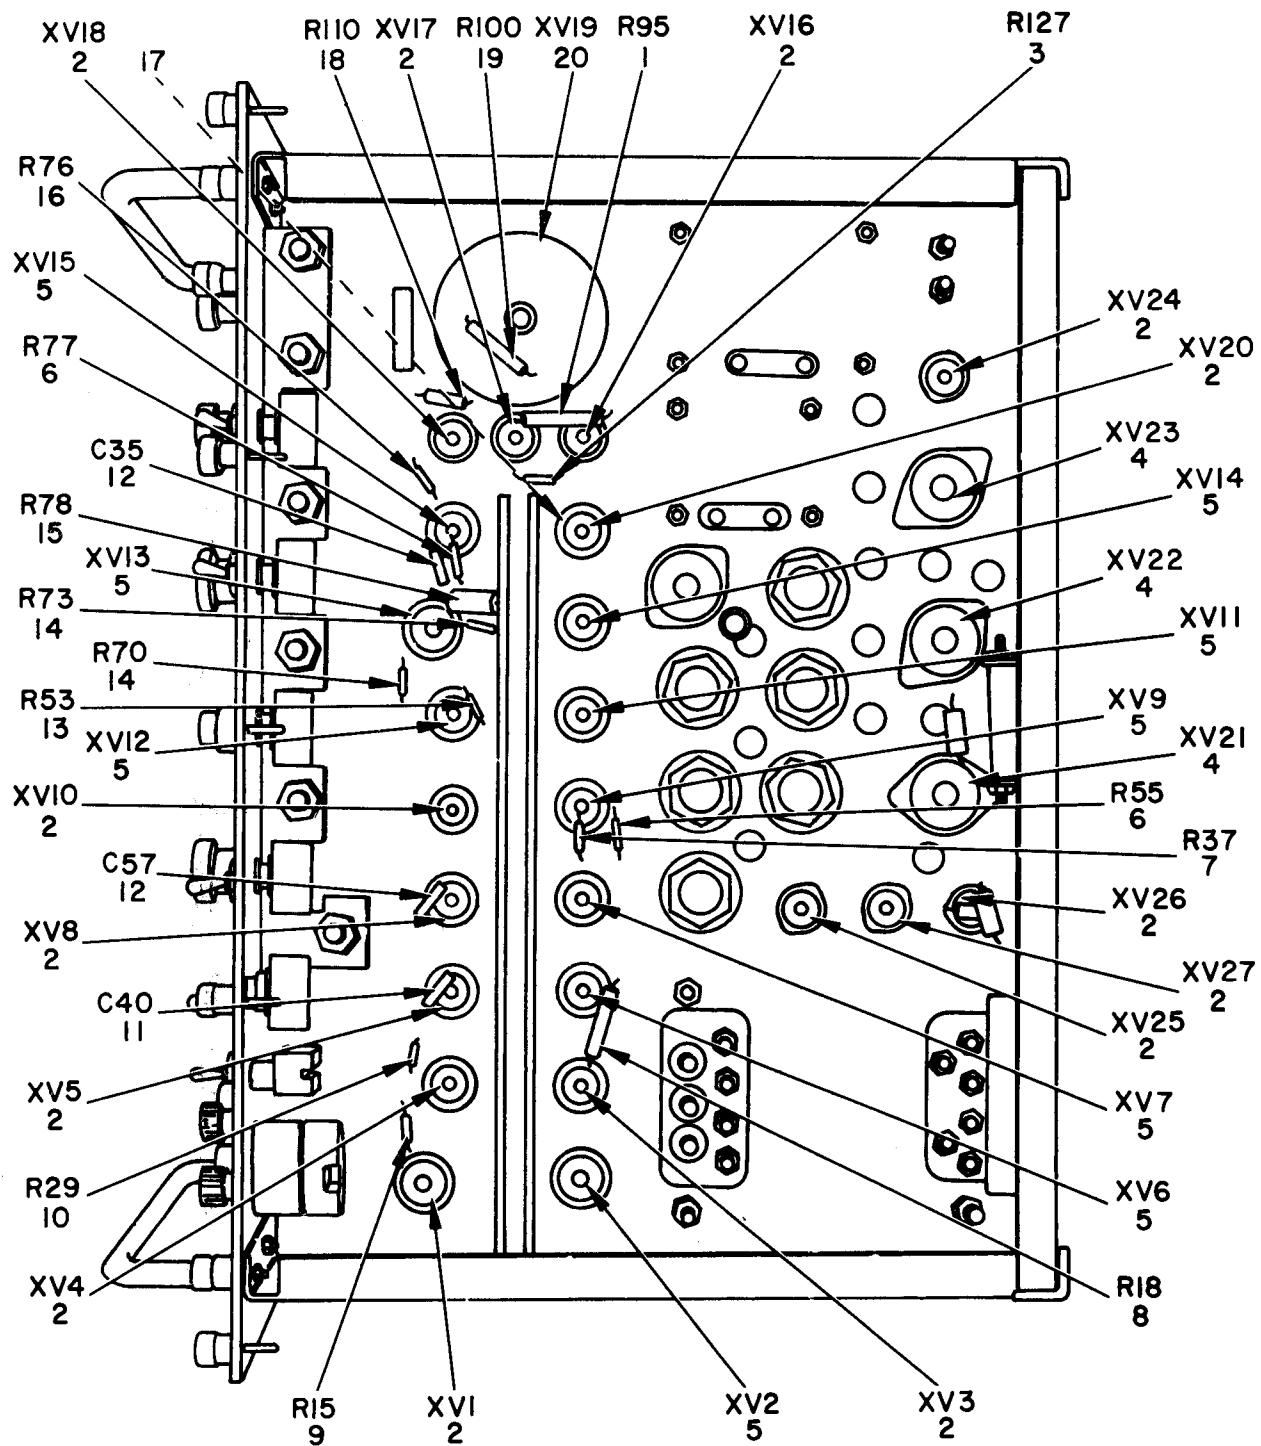


TS-592A / UPM-15

EL2ZI004

Figure 4. Generator, Pulse AN/UPM-15, Chassis,
Bottom View.


SECTION II ILLUSTRATION				TM11-6625-368-24P					
(A) FIG NO.	(B) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT		
					FSCM	U/M			
4	1	PAHZZ	5905-00-256-8352	RC42GF122J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	2	PAHZZ	5935-00-232-3758	TS102C01	81350 SOCKET, ELECTRON TUBE	AMQ	EA	14	
4	3	PAHZZ	5905-00-186-3008	RC20GF101K	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	4	PAHZZ	5935-00-063-5789	TS101P01	81350 SOCKET, ELECTRON TUBE	AMQ	EA	3	
4	5	PAHZZ	5935-00-222-9828	TS103C01	81350 SOCKET, ELECTRON TUBE	AMQ	EA	9	
4	6	PAHZZ	5905-00-195-6761	RC20GF104J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	2	
4	7	PAHZZ	5905-00-190-8887	RC20GF202J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	8	PAHZZ	5905-00-279-2675	RC42GF333J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	9	PAHZZ	5905-00-192-3981	RC20GF124J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	10	PAHZZ	5905-00-195-6806	RC20GF102J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	11	PAHZZ	5910-00-760-7919	CM15FD241G03	81349 CAPACITOR, FIXED, MICA	AMQ	EA	1	
4	12	PAHZZ	5910-00-727-4997	CM20B240J	81349 CAPACITOR, FIXED, MICA	AMQ	EA	1	
4	13	PAHZZ	5905-00-279-3506	RC20GF332J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	14	PAHZZ	5905-00-192-0667	RC20GF224J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	2	
4	15	PAHZZ	5905-00-108-6922	RC20GF151J	81349 RESISTOR, FIXED, COMPOSITION SELECT	AMQ	EA	1	
4	15	PAHZZ	5905-00-249-4190	RC42GF562J	81349 RESISTOR, FIXED, COMPOSITION SELECT	AMQ	EA	1	
4	16	PAHZZ	5905-00-249-3661	RC20GF683J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	17	XDOZZ		TS102U02	81349 SHIELD, ELECTRON TUBE	AMQ	EA	9	
4	18	XDHZZ		RC32GF224K	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	19	XDHZZ		RC42GF681K	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA	1	
4	20	XDHZZ		6A244	26916 SOCKET, ELECTRON TUBE	AMQ	EA	1	

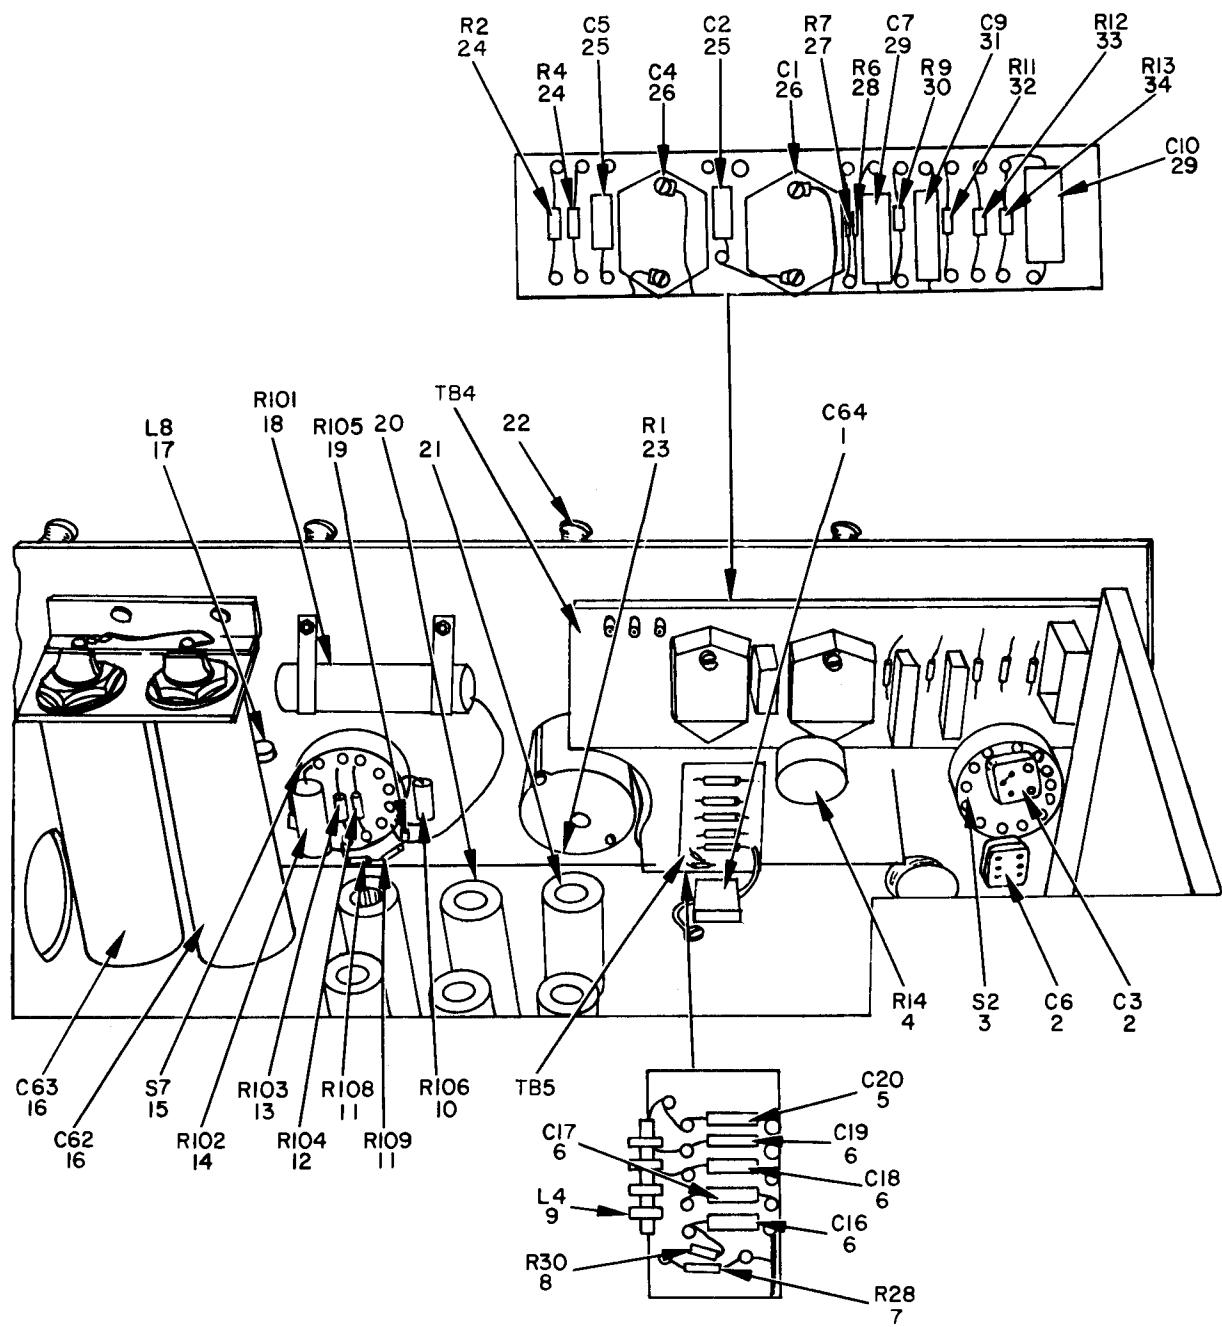

EL2ZI005

Figure 5. Generator, Pulse AN/UPM-15, Front Panel, Inside Chassis.

SECTION II		TM11-6625-368-24P						
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT	
						U/M		
5	1	PAHZZ	5910-00-823-1145	CP05A1KF223K3	81349 CAPACITOR, FIXED, PAPER	AMQ	EA 1	
5	2	PAHZZ	5910-00-101-4013	CM30E102G	81349 CAPACITOR, FIXED, MICA	AMQ	EA 2	
5	3	XDHZZ		53104DH2	76854 SWITCH, ROTARY	AMQ	EA 1	
5	4	PAHZZ	5905-00-893-9499	RV4NAYS5D504A	81349 RESISTOR, VARIABLE	AMQ	EA 1	
5	5	PAHZZ	5910-00-727-4997	CM20B240J	81349 CAPACITOR, FIXED, MICA	AMQ	EA 1	
5	6	PAHZZ	5910-00-850-0540	CM15FD510G03	81349 CAPACITOR, FIXED, MICA	AMQ	EA 4	
5	7	PAHZZ	5905-00-221-5860	RC20GF334K	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	8	PAHZZ	5905-00-195-6806	RC20GF102J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	9	PAHZZ	5950-00-518-0612	CK1005	88585 TRANSFORMER, RADIO FREQUENCY	AMQ	EA 1	
5	10	PAHZZ	5905-00-247-8738	RCR32G750JS	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	11	PAHZZ	5905-00-279-3511	RC20GF511J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 2	
5	12	PAHZZ	5905-00-279-1760	RC20GF620J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	13	PAHZZ	5905-00-279-1686	RC32GF560J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	14	XDHZZ		RW55G251	81349 RESISTOR, FIXED, WIRE WOUND	AMQ	EA 1	
5	15	XDHZZ		53105DH2	76854 SWITCH, ROTARY	AMQ	EA 1	
5	16	PAHZZ	5910-00-129-9237	CP41B1FF405K1	81349 CAPACITOR, FIXED, PAPER	AMQ	EA 2	
5	17	XDHZZ		CK1003	98179 COIL, RADIO FREQUENCY	AMQ	EA 1	
5	18	PAHZZ	5905-00-685-9939	25NIT	33954 RESISTOR, FIXED, WIRE WOUND	AMQ	EA 1	
5	19	XDHZZ		RN20X56R0F	81349 RESISTOR, FIXED, FILM	AMQ	EA 1	
5	20	PAOZZ	5960-00-729-8150	TS102U03	81350 SHIELD, ELECTRON TUBE	AMQ	EA 4	
5	21	PAOZZ	5960-00-264-3004	TS103U02	81350 SHIELD, ELECTRON TUBE	AMQ	EA 8	
5	22	PAOZZ	5305-00-515-9860	SM1035	98179 THUMBSCREW	AMQ	EA 16	
5	23	XDHZZ		L402	11707 RESISTOR, VARIABLE, LINEAR PRECISION	AMQ	EA 1	
5	24	PAHZZ	5905-00-279-2616	RC20GF153J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 2	
5	25	XDHZZ		CM35E512G	81349 CAPACITOR, FIXED, MICA	AMQ	EA 2	
5	26	XDHZZ		CM55E333G	81349 CAPACITOR, FIXED, MICA	AMQ	EA 2	
5	27	PAHZZ	5905-00-279-3506	RC20GF332J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	28	PAHZZ	5905-00-299-1971	RC20GF822J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	29	XDHZZ		CN435104M	81349 CAPACITOR, FIXED, PAPER	AMQ	EA 2	
5	30	PAHZZ	5905-00-171-1998	RC20GF333J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	31	PAHZZ	5910-00-621-8761	CN42AX503M	81349 CAPACITOR, FIXED, PAPER	AMQ	EA 1	
5	32	PAHZZ	5905-00-409-7616	RC20GF105K	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	33	PAHZZ	5905-00-279-1883	RC20GF335J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	
5	34	PAHZZ	5905-00-192-0660	RC20GF184J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1	

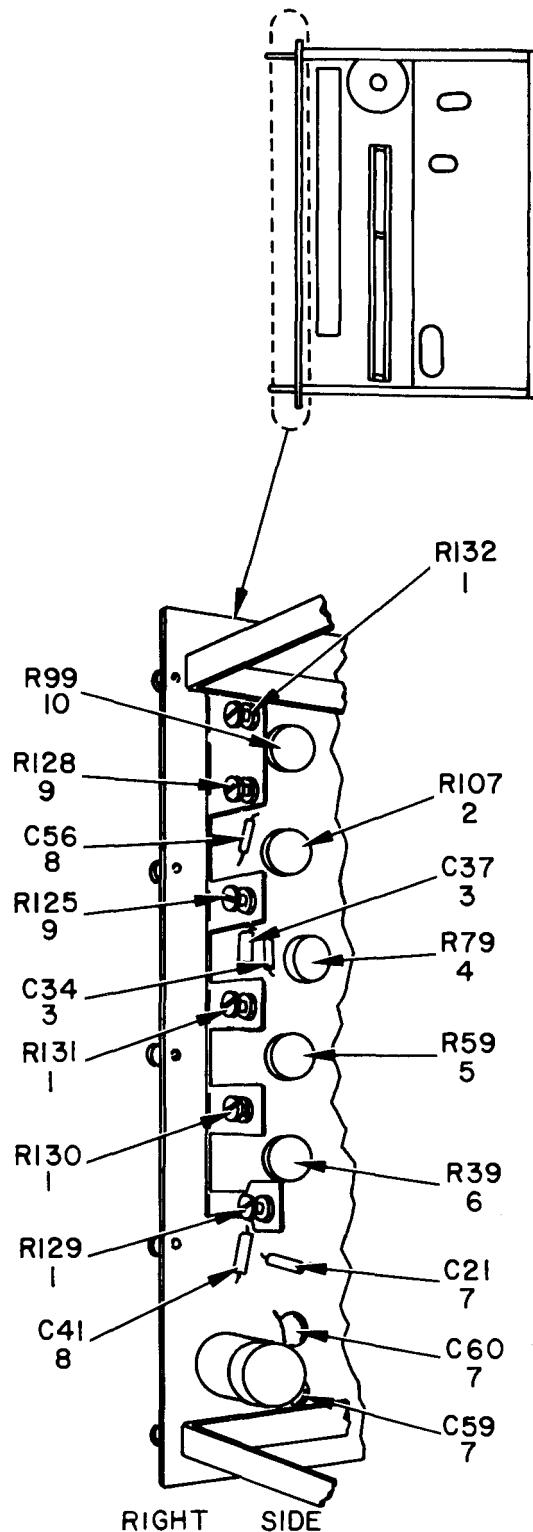

EL2ZI006

Figure 6. Generator, Pulse AN/UPM-15, Chassis, Inside Rear View (Sheet 1 of 2).


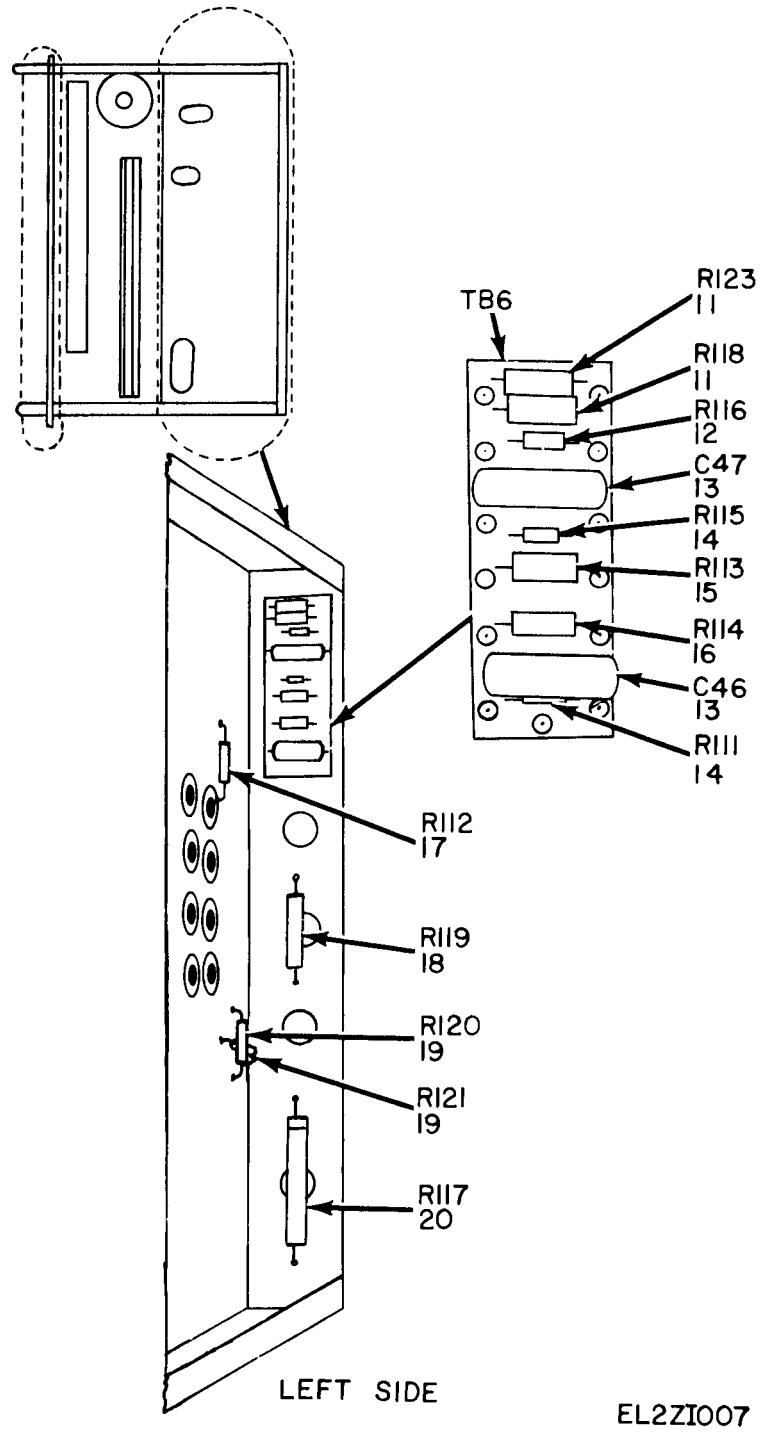



Figure 6. Generator, Pulse AN/UPM-15, Chassis, Inside Rear View (Sheet 2 of 2).

SECTION II ILLUSTRATION		TM11-6625-368-24P					
(A) FIG NO.	(B) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
6	1	PAHZZ	5905-00-676-8669	RV4LATSA503B	81349 RESISTOR, VARIABLE	AMQ	EA 3
6	2	XDHZZ		RV4NATSD352A	81349 RESISTOR, VARIABLE	AMQ	EA 1
6	3	PAHZZ	5910-00-060-9619	CM15FD511G03	81349 CAPACITOR, FIXED, MICA	AMQ	EA 2
6	4	PAHZZ	5905-00-646-5628	190A140	15196 RESISTOR, VARIABLE	AMQ	EA 1
6	5	PAHZZ	5905-00-721-1053	RV3ATRD104A	81349 RESISTOR, VARIABLE	AMQ	EA 1
6	6	XDHZZ		RV4NATSD104A	81349 RESISTOR, VARIABLE	AMQ	EA 1
6	7	XDHZZ		CM35C103M	81349 CAPACITOR, FIXED, MICA	AMQ	EA 3
6	8	PAHZZ	5910-00-850-0540	CM15FD510G03	81349 CAPACITOR, FIXED, MICA	AMQ	EA 2
6	9	XDHZZ		RV41AVSA253A	81349 RESISTOR, VARIABLE	AMQ	EA 2
6	10	PAHZZ	5905-00-686-4108	RV2LAYSA253A	81349 RESISTOR, VARIABLE SELECT	AMQ	EA 1
6	10	PAHZZ	5905-00-252-6968	RV4NATSD105A	81349 RESISTOR, VARIABLE SELECT	AMQ	EA 1
6	11	PAHZZ	5905-00-195-6750	RC42GF362J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 2
6	12	PAHZZ	5905-00-279-3495	RC20GF753J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1
6	13	XDHZZ		CN435104M	81349 CAPACITOR, FIXED, PAPER	AMQ	EA 2
6	14	PAHZZ	5905-00-192-0667	RC20GF224J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 2
6	15	PAHZZ	5905-00-279-3494	RC20GF823J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1
6	16	PAHZZ	5905-00-221-5848	RC20GF824J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1
6	17	PAHZZ	5905-00-299-2013	RC32GF473K	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1
6	18	PAHZZ	5905-00-845-5658	RW29V242	81349 RESISTOR, FIXED, WIRE WOUND	AMQ	EA 1
6	19	PAHZZ	5905-00-412-1121	RC42GF221K	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 2
6	20	PAHZZ	8030-00-849-0071	RW33G252	81349 RESISTOR, FIXED, WIRE WOUND	AMQ	EA 1

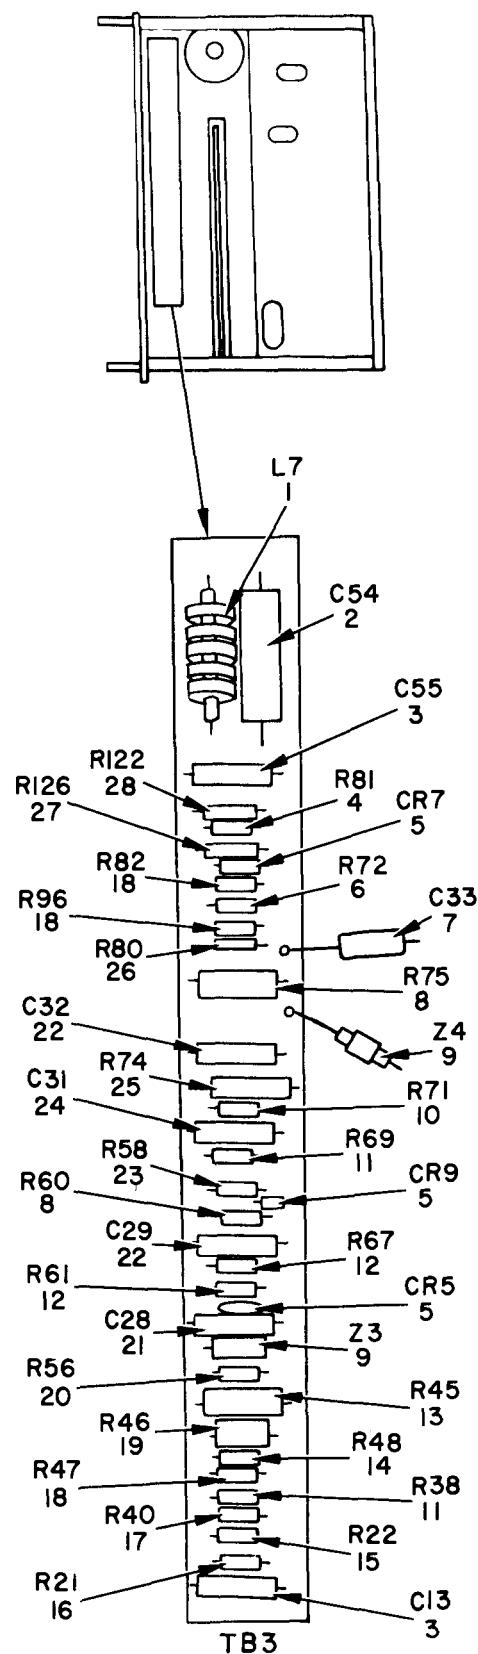

EL2ZI008

Figure 7. Generator, Pulse AN/UPM-15, Terminal Boards (Sheet 1 of 3).

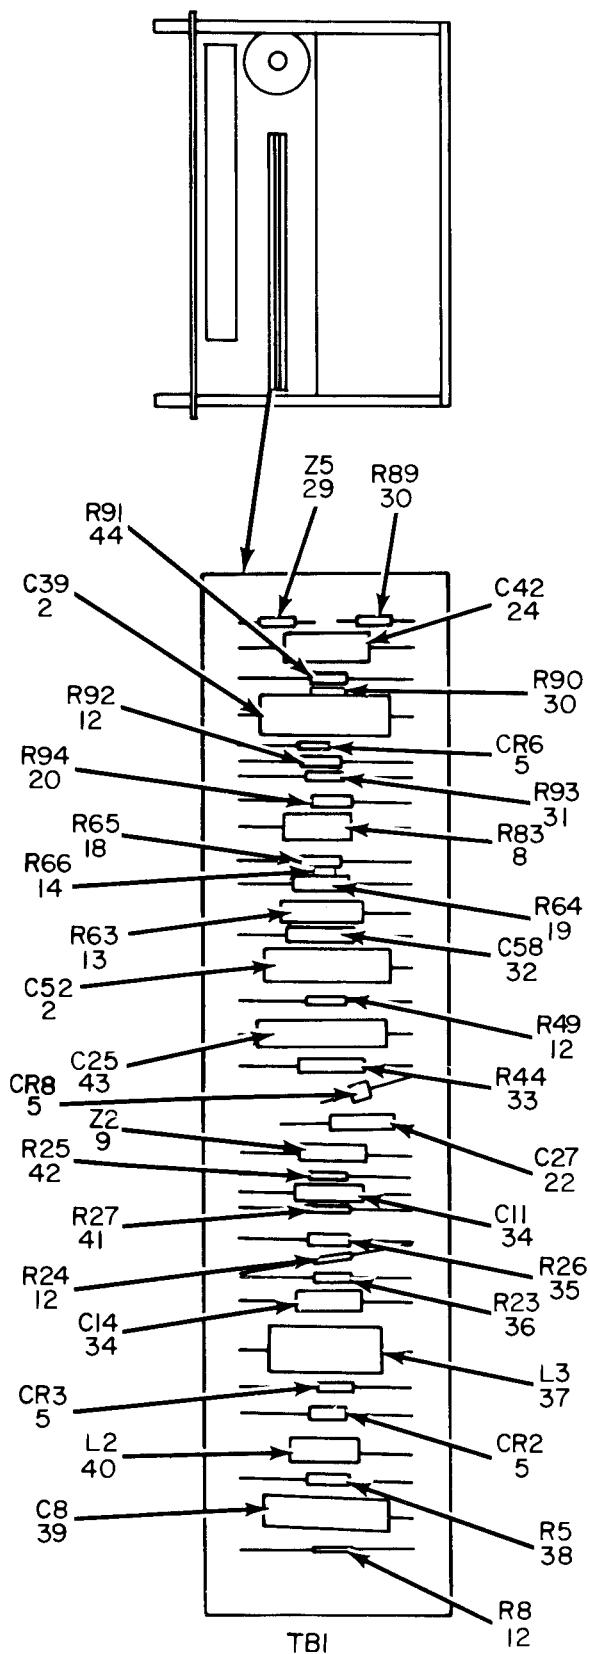

EL22I009

Figure 7. Generator, Pulse AN/UPM-15, Terminal Boards (Sheet 2 of 3).

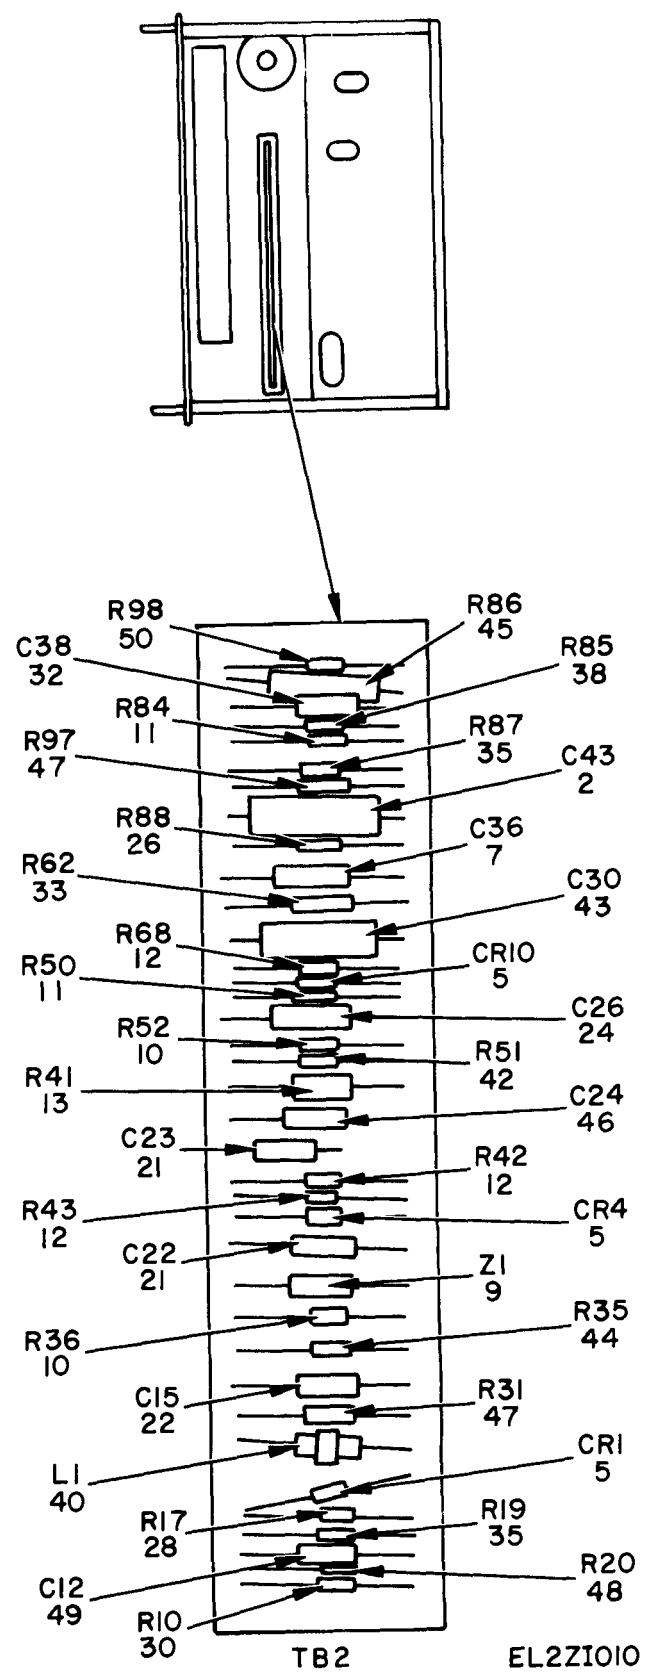


Figure 7. Generator, Pulse AN/UPM-15, Terminal Boards (Sheet 3 of 3).

SECTION II							TM11-6625-368-24P			
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION		(7) USABLE ON CODE	(8) QTY INC IN UNIT		
							U/M			
7	1	PAHZZ	5950-00-645-8954	CK1007	98179 COIL,RADIO FREQUENCY	AMQ	EA	1		
7	2	PAHZZ	5910-00-534-6180	CQR39A1KE104K3	81349 CAPACITOR,FIXED,PAPER	AMQ	EA	4		
7	3	PAHZZ	5910-00-760-7919	CM15FD241G03	81349 CAPACITOR,FIXED,MICA	AMQ	EA	2		
7	4	PAHZZ	5905-00-279-3498	RC20GF433J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	1		
7	5	PAHZZ	5961-00-581-8066	1N69	81350 SEMICONDUCTOR DEVICE,DIODE	AMQ	EA	10		
7	6	PAHZZ	5905-00-171-1998	RC20GF333J	81349 RESISTOR,FIXED,COMPOSITION SELECT	AMQ	EA	1		
7	6	XDHZZ		RC20GF563J	81349 RESISTOR,FIXED,COMPOSITION SELECT	AMQ	EA	1		
7	7	PAHZZ	5910-00-926-8204	CM30FD472G03	81349 CAPACITOR,FIXED,MICA	AMQ	EA	2		
7	8	PAHZZ	5905-00-279-2675	RC42GF333J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	3		
7	9	PAHZZ	5915-00-322-4920	1A680	15196 NETWORK,PULSE FORMING	AMQ	EA	4		
7	10	XDHZZ		RC20GF275K	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	3		
7	11	PAHZZ	5905-00-249-3661	RC20GF683J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	4		
7	12	PAHZZ	5905-00-409-7616	RC20GF105K	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	9		
7	13	PAHZZ	5905-00-279-2527	RC42GF223J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	3		
7	14	PAHZZ	5905-00-279-3499	RC20GF273J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	2		
7	15	PAHZZ	5905-00-171-1998	RC20GF333J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	1		
7	16	PAHZZ	5905-00-279-1883	RC20GF335J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	1		
7	17	PAHZZ	5905-00-617-2606	RV5LAYSBS503A	81349 RESISTOR,VARIABLE	AMQ	EA	1		
7	18	PAHZZ	5905-00-192-0660	RC20GF184J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	4		
7	19	PAHZZ	5905-00-299-2022	RC32GF223J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	2		
7	20	PAHZZ	5905-00-279-1754	RC20GF155J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	2		
7	21	PAHZZ	5910-00-850-0540	CM15FD510G03	81349 CAPACITOR,FIXED,MICA	AMQ	EA	3		
7	22	PAHZZ	5910-00-717-0169	CM20B101J	81349 CAPACITOR,FIXED,MICA	AMQ	EA	4		
7	23	PAHZZ	5905-00-192-3981	RC20GF124J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	1		
7	24	XDHZZ		CM35C103M	81349 CAPACITOR,FIXED,MICA	AMQ	EA	3		
7	25	PAHZZ	5905-00-190-8885	RC20GF225J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	1		
7	26	PAHZZ	5905-00-108-6922	RC20GF151J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	2		
7	27	PAHZZ	5905-00-254-9201	RC20GF473J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	1		
7	28	PAHZZ	5905-00-279-3506	RC20GF332J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	2		
7	29	PAHZZ	5950-00-645-8525	CK1009	98179 COIL,RADIO FREQUENCY SELECT	AMQ	EA	1		
7	29	XDHZZ		1A672	15196 NETWORK,PULSE FORMING SELECT	AMQ	EA	1		
7	30	PAHZZ	5905-00-195-6806	RC20GF102J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	3		
7	31	PAHZZ	5905-00-279-3502	RC20GF123J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	1		
7	32	PAHZZ	5910-00-727-4997	CM20B240J	81349 CAPACITOR,FIXED,MICA	AMQ	EA	2		
7	33	PAHZZ	5905-00-299-2030	RC32GF123J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	2		
7	34	XDHZZ		CM20B331K	81349 CAPACITOR,FIXED,MICA	AMQ	EA	2		
7	35	PAHZZ	5905-00-279-1867	RC20GF114J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	3		
7	36	PAHZZ	5905-00-279-1866	RC20GF106K	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	1		
7	37	XDHZZ		CK1006	98179 COIL,RADIO FREQUENCY	AMQ	EA	1		
7	38	PAHZZ	5905-00-195-6761	RC20GF104J	81349 RESISTOR,FIXED,COMPOSITION	AMQ	EA	2		

SECTION II ILLUSTRATION		TM11-6625-368-24P					
(A) FIG NO.	(B) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
7	39	PAHZZ	5910-00-621-8761	CN42AX503M	81349 CAPACITOR, FIXED, PAPER	AMQ	EA 1
7	40	PAHZZ	5950-00-645-8859	CK1004	98179 COIL, RADIO FREQUENCY	AMQ	EA 2
7	41	PAHZZ	5905-00-192-0667	RC20GF224J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1
7	42	PAHZZ	5905-00-279-3519	RC20GF220J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 2
7	43	PAHZZ	5910-00-823-1145	CP05A1KF223K3	81349 CAPACITOR, FIXED, PAPER	AMQ	EA 2
7	44	PAHZZ	5905-00-279-2515	RC20GF474J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 2
7	45	PAHZZ	5905-00-108-6922	RC20GF151J	81349 RESISTOR, FIXED, COMPOSITION SELECT	AMQ	EA 1
7	45	PAHZZ	5905-00-249-4190	RC42GF562J	81349 RESISTOR, FIXED, COMPOSITION SELECT	AMQ	EA 1
7	46	PAHZZ	5910-00-060-9619	CM15FD511G03	81349 CAPACITOR, FIXED, MICA	AMQ	EA 1
7	47	PAHZZ	5905-00-106-9346	RCR32G103JS	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 2
7	48	PAHZZ	5905-00-279-2522	RC20GF154J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1
7	49	PAHZZ	5910-00-727-4997	CM20B100K	81349 CAPACITOR, FIXED, MICA	AMQ	EA 1
7	50	PAHZZ	5905-00-192-3981	RC20GF814J	81349 RESISTOR, FIXED, COMPOSITION	AMQ	EA 1


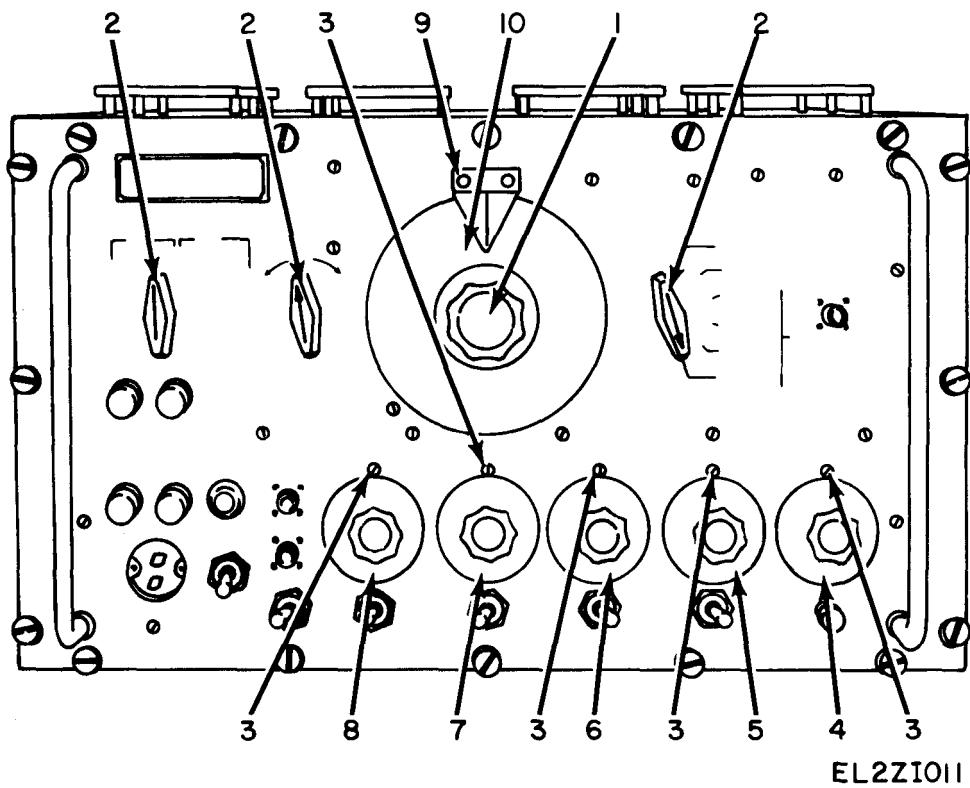


Figure 8. Generator, Pulse AN/UPM-15, Operating Controls.

SECTION II				TM11-6625-368-24P					
(1) ILLUSTRATION (A)	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	USABLE ON CODE	(7) QTY INC IN	(8) U/M UNIT	
FIG NO.					FSCM				
8	1	PAOZZ	5355-00-511-5727	131B104	15196 KNOB	AMQ	EA	1	
8	2	PAOZZ	5355-00-342-5383	KN1006-2	98179 KNOB	AMQ	EA	3	
8	3	PAHZZ	5355-00-685-4819	181894	15196 POINTER,DIAL	AMQ	EA	5	
8	4	PAHZZ	6625-00-668-9170	A1174B	98179 DIAL,CONTROL	AMQ	EA	1	
8	5	XDHZZ		A1151-5	98179 DIAL,CONTROL	AMQ	EA	1	
8	6	XDHZZ		A1151-2	98179 DIAL,CONTROL	AMQ	EA	1	
8	7	XDHZZ		A1151-3	98179 DIAL,CONTROL	AMQ	EA	1	
8	8	XDHZZ		A1151-1	98179 DIAL,CONTROL	AMQ	EA	1	
8	9	XDHZZ		10-1001	98179 POINTER,DIAL	AMQ	EA	1	
8	10	PAHZZ	5355-00-538-6540	A1151-4	98179 DIAL,CONTROL	AMQ	EA	1	

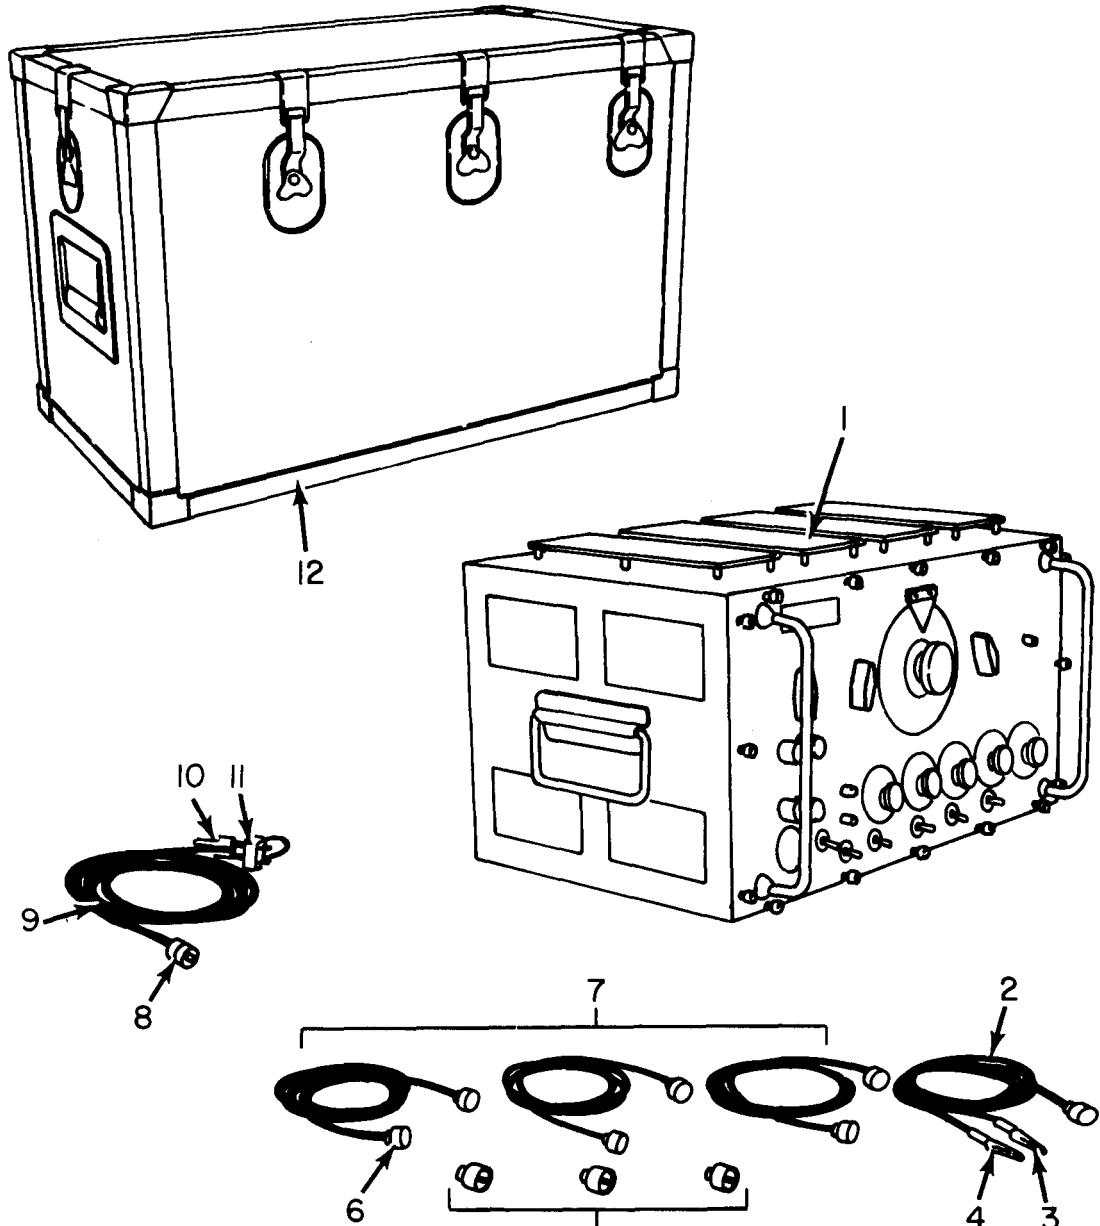

EL2ZI012

Figure 9. Generator, Pulse AN/UPM-15A.

SECTION II		TM11-6625-368-24P					
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	USABLE ON CODE	(7) (8) QTY INC IN UNIT
					FSCM	U/M	
9	1	PAHHD	6625-00-892-3313	SG-343/UPM-15A	80058 PULSE,GENERATOR	AMR	EA 1
9	2	PAHHH	6625-00-643-2716	CG-521/U	80058 RF CABLE ASSEMBLY	AMR	EA 1
9	3	PAHZZ	5999-00-065-1833	85	76545 CLIP,ALLIGATOR	AMR	EA 1
9	4	PAHZZ	5999-00-501-8365	60CHSE	76545 CLIP,ALLIGATOR	AMR	EA 1
9	5	PAOZZ	5935-00-149-3534	UG-273/U	80058 ADAPTER	AMR	EA 3
9	6	PAHZZ	5935-00-149-4066	UG-88/U	80058 CONNECTOR,PLUG,ELECTRICAL	AMR	EA 1
9	7	PAHZZ	5995-00-519-1342	CG-409A/U	80058 CABLE ASSEMBLY	AMR	EA 1
9	8	PAHZZ	5935-00-636-7145	MS91185-1	96906 CONNECTOR,PLUG,ELECTRICAL	AMR	EA 2
9	9	PAOHH	5995-00-823-2588	CX-3135/U(8FT)	80058 CABLE ASSEMBLY,POWER ELECTRICAL	AMR	EA 1
9	10	PAHZZ	5999-00-179-0149	90	72507 CLIP,ELECTRICAL	AMR	EA 1
9	11	PAHZZ	5935-00-539-2650	AN3106A10SL3S	88044 CONNECTOR,PLUG,ELECTRICAL	AMR	EA 1
9	12	XDHZZ		CY-672/U	80058 TRANSIT CASE	AMR	EA 1

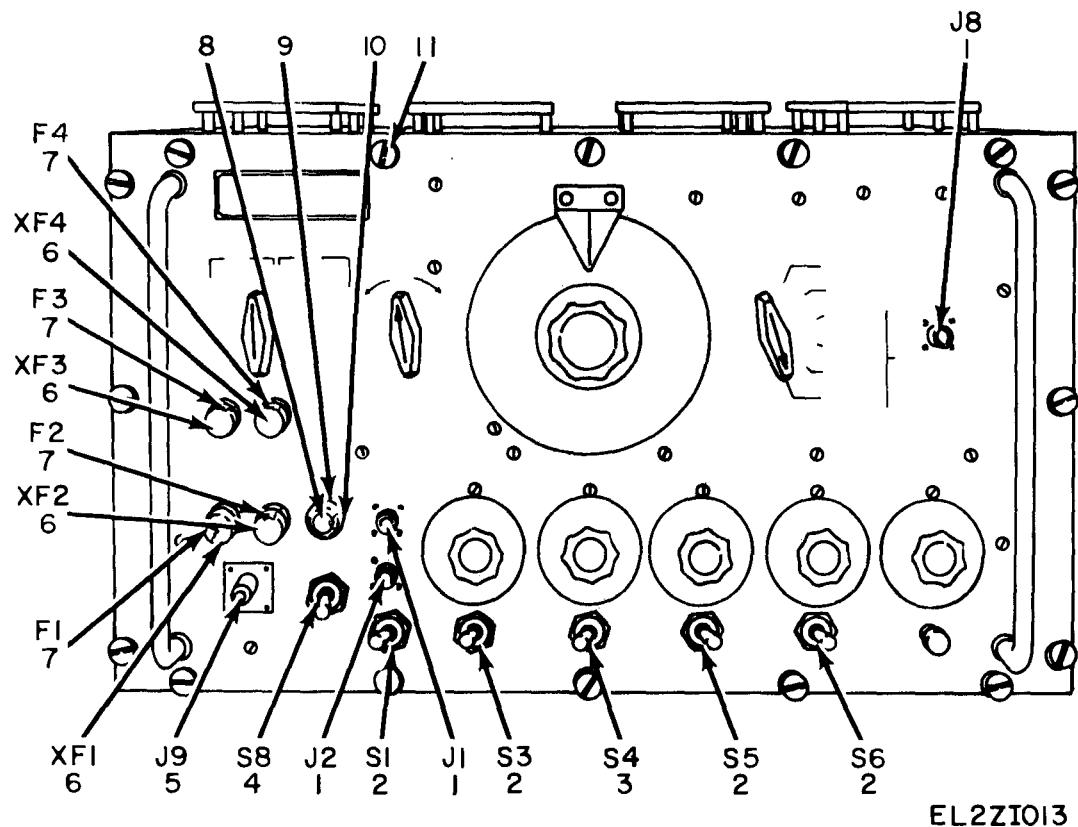


Figure 10. Generator, Pulse AN/UPM-15A, Front Panel.

SECTION II				TM11-6625-368-24P					
(1) ILLUSTRATION (A)	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT		
FIG NO.						U/M			
10	1	PAHZZ	5935-00-201-3511	UG-290/AU	80058 CONNECTOR, RECEPTACLE, ELECTRICAL	AMR	EA	3	
10	2	PAHZZ	5930-00-655-1582	MS35059-23	96906 SWITCH, TOGGLE	AMR	EA	4	
10	3	PAHZZ	5930-00-655-1514	MS35058-22	96906 SWITCH, TOGGLE	AMR	EA	1	
10	4	PAHZZ	5930-00-655-1575	MS35059-22	96906 SWITCH, TOGGLE	AMR	EA	1	
10	5	PAHZZ	5935-00-817-3325	AN3102E10SL3F	88044 CONNECTOR, RECEPTACLE, ELECTRICAL	AMR	EA	1	
10	6	PAHZZ	5920-00-892-9311	HKPJE	71400 FUSEHOLDER	AMR	EA	4	
10	7	PAOZZ	5920-00-557-2647	312004	75915 FUSE, CARTRIDGE, INSTANTANEOUS	AMR	EA	4	
10	8	PAOZZ	6210-00-188-8779	81-121	72619 LENS, INDICATOR LIGHT	AMR	EA	1	
10	9	XDHZZ		810B	72619 LAMPHOLDER	AMR	EA	1	
10	10	PAOZZ	6240-00-155-8706	MS15571-2	96906 LAMP	AMR	EA	1	
10	11	PAOZZ	5305-00-551-7121	201A169	15196 SCREW, EXTERNALLY RELIEVED BODY	AMR	EA	16	

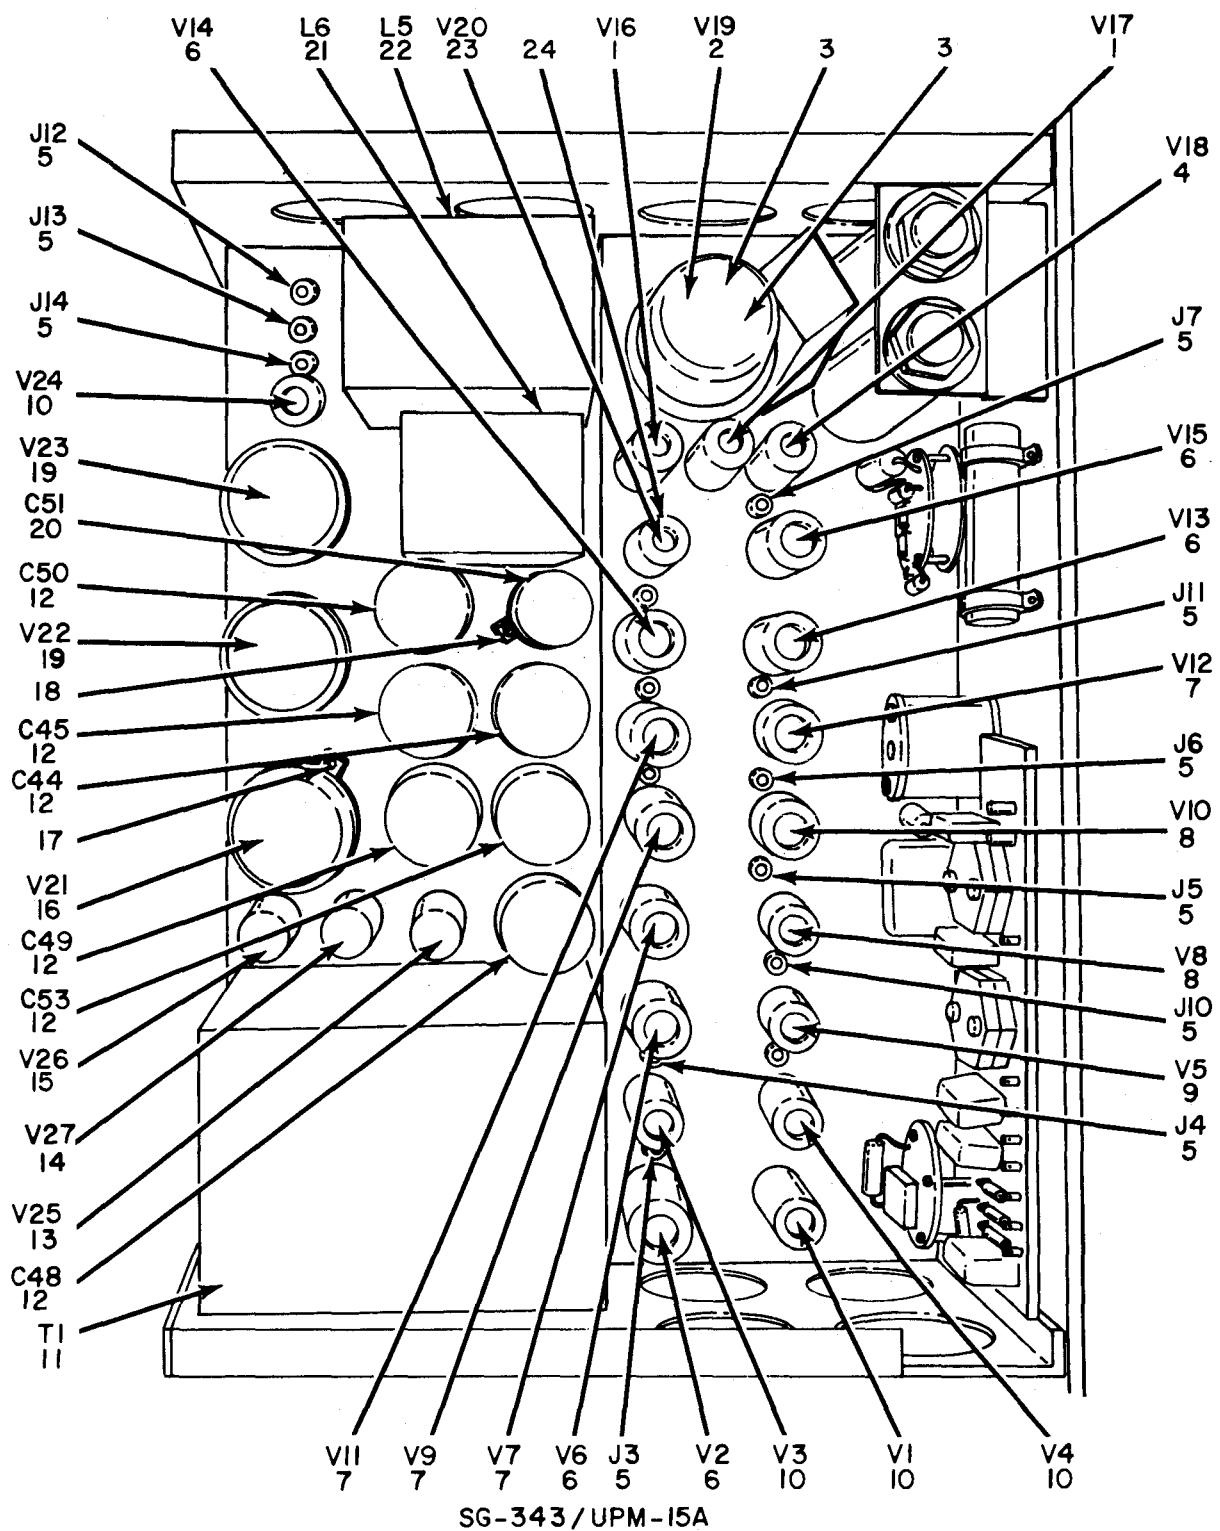


Figure 11. Generator, Pulse AN/UPM-15A, Chassis, Top View.

SECTION II		TM11-6625-368-24P					
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
					FSCM	U/M	
11	1	PAOZZ	5960-00-542-7004	6AH6WA	81349 ELECTRON TUBE	AMR	EA 2
11	2	PAOZZ	5960-00-107-8147	829B	81350 ELECTRON TUBE	AMR	EA 1
11	3	PAOZZ	5999-00-186-8944	10	72307 CLIP,ELECTRICAL	AMR	EA 2
11	4	PAOZZ	5960-00-543-0219	6AN5	81350 ELECTRON TUBE	AMR	EA 1
11	5	PAHZZ	5935-00-283-3826	105-603S	74790 JACK,TIP	AMR	EA 10
11	6	PAOZZ	5960-00-262-0210	5814A	81350 ELECTRON TUBE	AMR	EA 5
11	7	PAOZZ	5960-00-262-0167	12AT7EA	81350 ELECTRON TUBE	AMR	EA 4
11	8	PAOZZ	5960-00-237-6917	5725-6AS6W	81350 ELECTRON TUBE	AMR	EA 2
11	9	PAOZZ	5960-00-108-0263	6D4	81350 ELECTRON TUBE	AMR	EA 1
11	10	PAOZZ	5960-00-262-0152	6AL6WA	81350 ELECTRON TUBE	AMR	EA 4
11	11	PAHZZ	5950-00-688-5793	36-211	15196 TRANSFORMER,POWER,STEP-DOWN AND STEP-UP	AMR	EA 1
11	12	PAHZZ	5910-00-129-9237	CP41B1FF405K1	81349 CAPACITOR,FIXED,PAPER	AMR	EA 6
11	13	PAOZZ	5960-00-503-4880	0A2WA	81349 ELECTRON TUBE	AMR	EA 1
11	14	PAOZZ	5960-00-624-4718	0B2WA	81350 ELECTRON TUBE	AMR	EA 1
11	15	PAOZZ	5960-00-272-9182	6X4W	81350 ELECTRON TUBE	AMR	EA 1
11	16	PAOZZ	5960-00-284-5823	5R4WGA	81350 ELECTRON TUBE	AMR	EA 1
11	17	PAOZZ	5960-00-272-9225	X1817C	71279 RETAINER,ELECTRON TUBE	AMR	EA 2
11	18	PAOZZ	5960-00-519-4562	37B19	15196 RETAINER,ELECTRON TUBE	AMR	EA 1
11	19	PAOZZ	5960-00-166-7674	6AS7G	81350 ELECTRON TUBE	AMR	EA 2
11	20	PAHZZ	5910-00-838-8434	CE56C101K	81349 CAPACITOR,FIXED,ELECTROLYTIC	AMR	EA 1
11	21	PAHZZ	5950-00-688-5794	36-209	15196 REACTOR	AMR	EA 1
11	22	XDHZZ		36-210	15196 REACTOR	AMR	EA 1
11	23	PADZZ	5960-00-669-6861	6005-6AQ5W	81350 ELECTRON TUBE	AMR	EA 1
11	24	PAOZZ	5960-00-729-8150	TS102U03	81350 SHIELD,ELECTRON TUBE	AME	EA 1


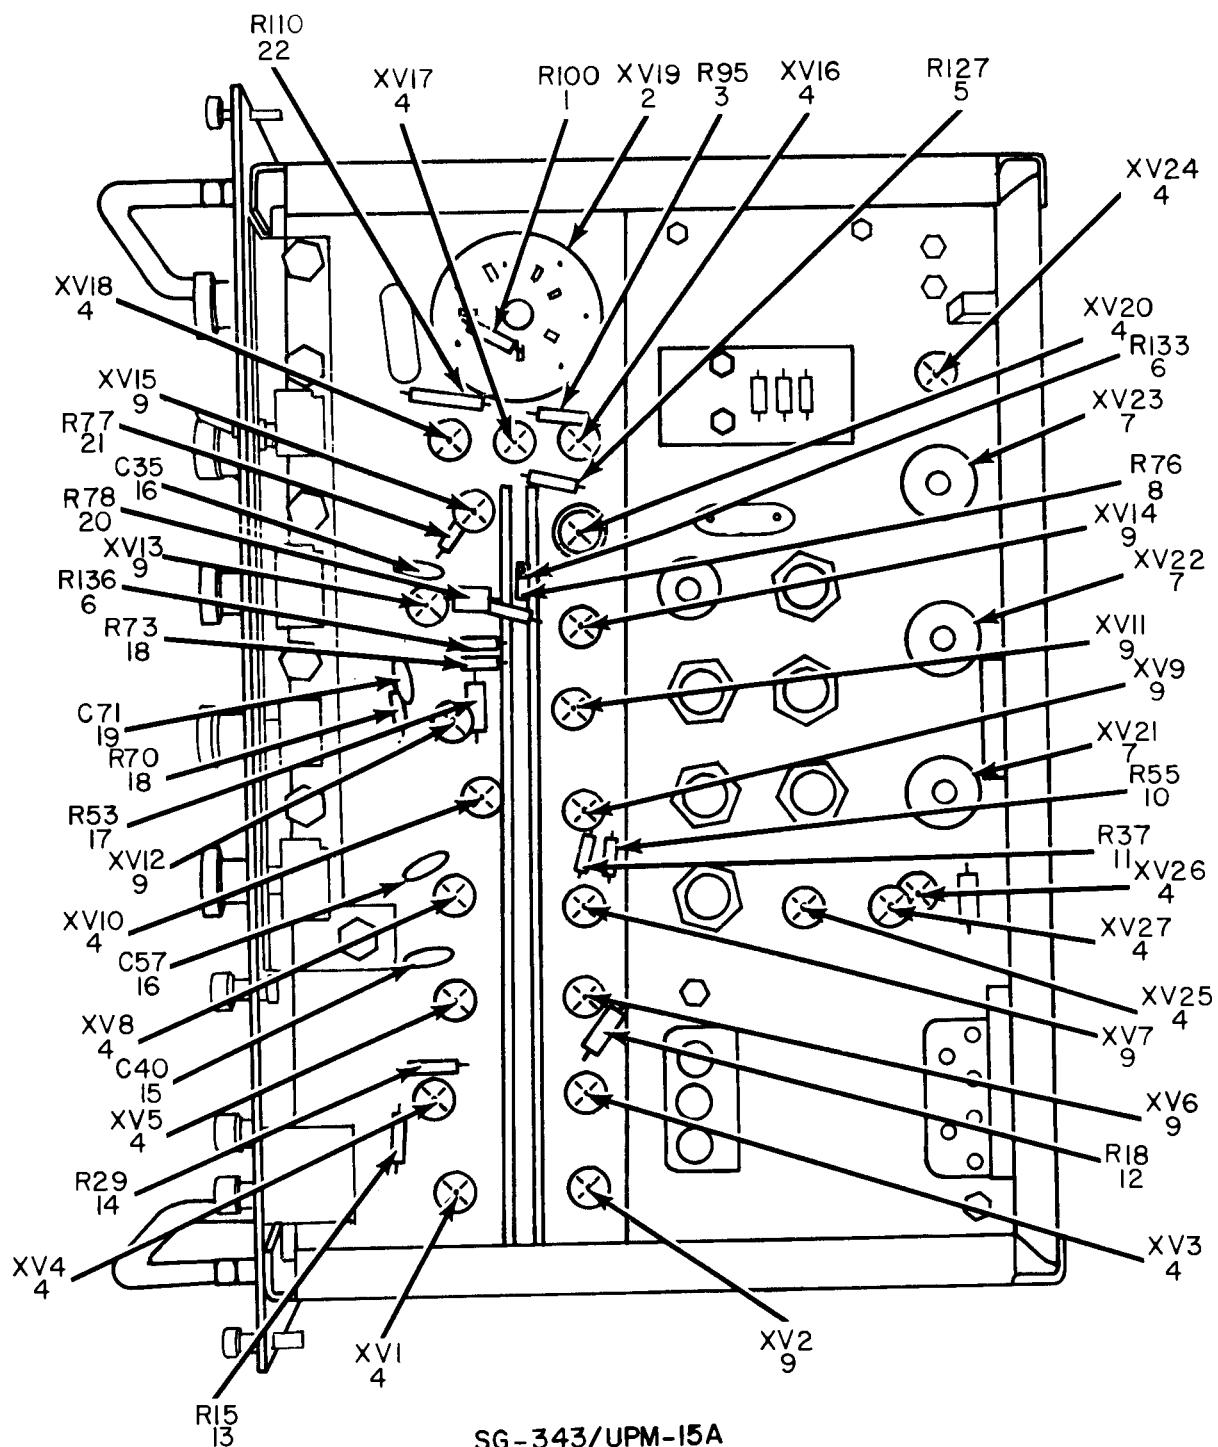


Figure 12. Generator, Pulse AN/UPM-15A, Chassis, Bottom View.


SECTION II		TM11-6625-368-24P						
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT	
					FSCM	U/M		
12	1	XDHZZ		RC42GF681K	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	2	XDHZZ		6A244	26916 SOCKET, ELECTRON TUBE	AMR	EA	1
12	3	PAHZZ	5905-00-256-8352	RC42GF122J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	4	PAHZZ	5935-00-232-3758	TS102C01	81350 SOCKET, ELECTRON TUBE	AMR	EA	14
12	5	PAHZZ	5905-00-186-3008	RC20GF101K	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	6	PAHZZ	5905-00-245-0023	RC20GF682K	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	2
12	7	PAHZZ	5935-00-063-5789	TS101P01	81350 SOCKET, ELECTRON TUBE	AMR	EA	3
12	8	PAHZZ	5905-00-552-6532	RN20X5002F	81349 RESISTOR, FIXED, FILM	AMR	EA	1
12	9	PAHZZ	5935-00-222-9828	TS103C01	81350 SOCKET, ELECTRON TUBE	AMR	EA	9
12	10	PAHZZ	5905-00-195-6761	RC20GF104J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	11	PAHZZ	5905-00-195-6449	RC42GF472K	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	12	PAHZZ	5905-00-171-1998	RC20GF333J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	13	PAHZZ	5905-00-192-3981	RC20GF124J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	14	PAHZZ	5905-00-195-6806	RC20GF102J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	15	PAHZZ	5910-00-101-4711	CM20C241J	81349 CAPACITOR, FIXED, MICA	AMR	EA	1
12	16	PAHZZ	5910-00-727-4997	CM20B240J	81349 CAPACITOR, FIXED, MICA	AMR	EA	2
12	17	PAHZZ	5905-00-279-3506	RC20GF332J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1
12	18	PAHZZ	5905-00-192-0667	RC20GF224J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	2
12	19	PAHZZ	5910-00-837-2577	CK60AW152M	81349 CAPACITOR, FIXED, CERAMIC	AMR	EA	1
12	20	PAHZZ	5905-00-581-1529	RN75B2671F	81349 RESISTOR, FIXED, FILM	AMR	EA	1
12	21	PAHZZ	5905-00-131-5807	RNC65K1003FS	81349 RESISTOR, FIXED, FILM	AMR	EA	1
12	22	PAHZZ	5905-00-254-7101	RC42GF104J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1

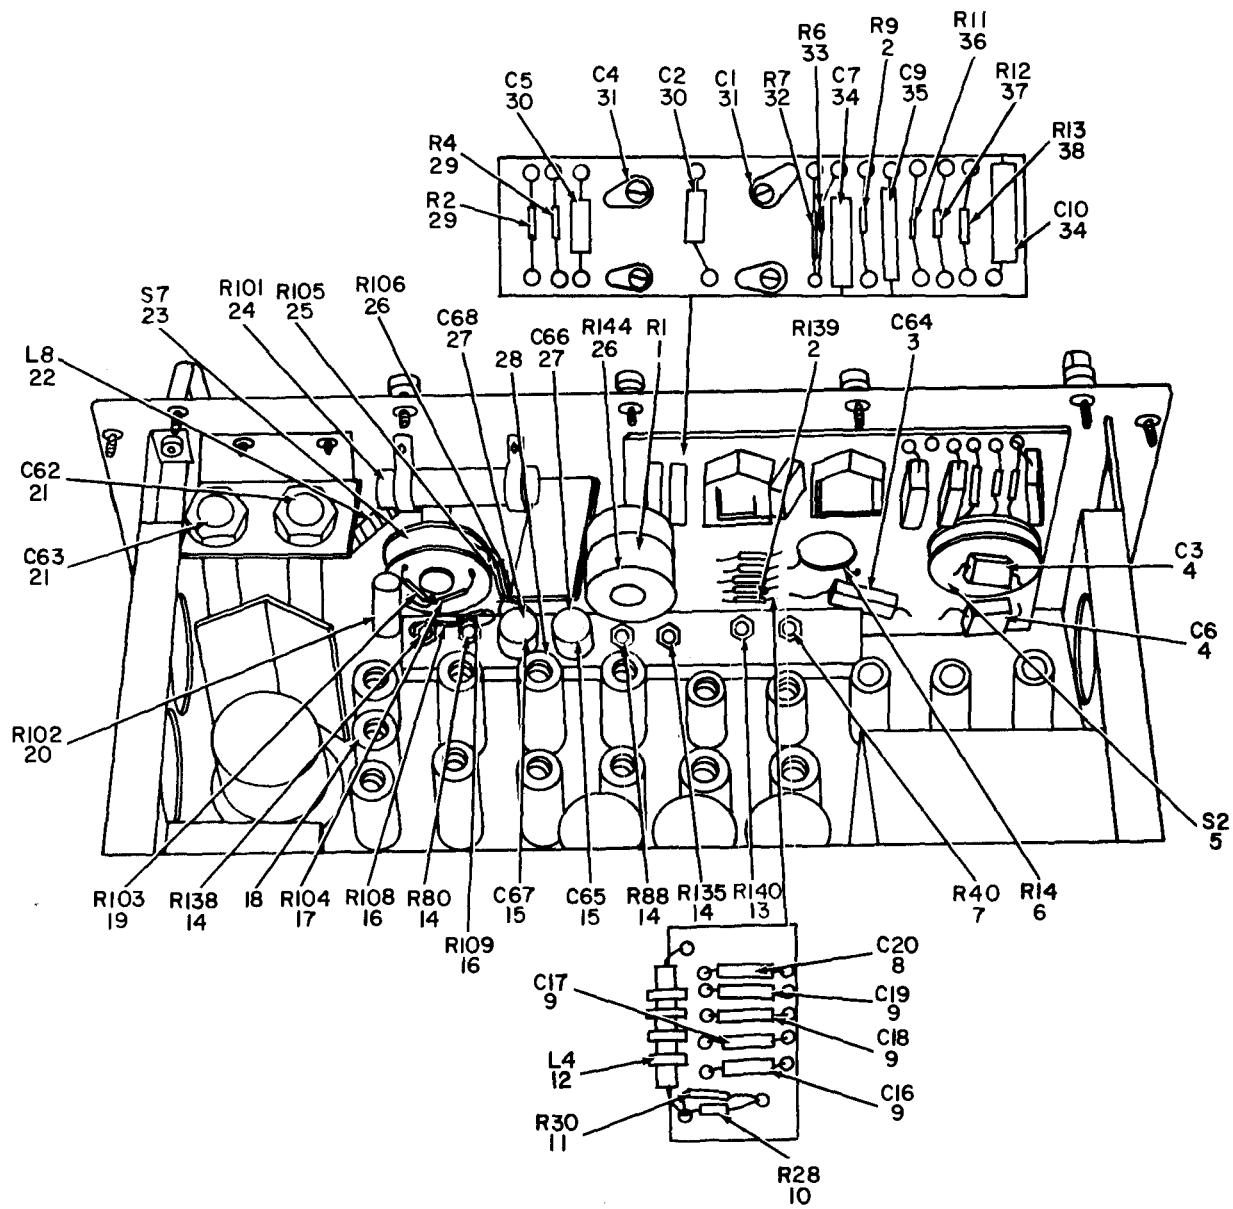

EL2ZI016

Figure 13. Generator, Pulse AN/UPM-15A, Front Panel, Inside Chassis.

SECTION II							TM11-6625-368-24P	
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT U/M	
13	1	XHDZZ		L402	11707 RESISTOR, VARIABLE, LINEAR PRECISION	AMR	EA 1	
13	2	PAHZZ	5905-00-171-1998	RC20GF333J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 2	
13	3	PAHZZ	5910-00-823-1145	CP05A1KF223K3	81349 CAPACITOR, FIXED, PAPER	AMR	EA 1	
13	4	PAHZZ	5910-00-101-4013	CM30E102G	81349 CAPACITOR, FIXED, MICA	AMR	EA 2	
13	5	XDHZZ		53104DH2	76854 SWITCH, ROTARY	AMR	EA 1	
13	6	PAHZZ	5905-00-893-9499	RV4NAYS504A	81349 RESISTOR, VARIABLE	AMR	EA 1	
13	7	PAHZZ	5905-00-617-2606	RV5LAYS503A	81349 RESISTOR, VARIABLE	AMR	EA 1	
13	8	PAHZZ	5910-00-727-4997	CM20B240J	81349 CAPACITOR, FIXED, MICA	AMR	EA 1	
13	9	PAHZZ	5910-00-850-0540	CM15FD510G03	81349 CAPACITOR, FIXED, MICA	AMR	EA 4	
13	10	PAHZZ	5905-00-221-5860	RC20GF334K	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 1	
13	11	PAHZZ	5905-00-195-6806	RC20GF102J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 1	
13	12	PAHZZ	5950-00-518-0612	CK1005	88585 TRANSFORMER, RADIO FREQUENCY	AMR	EA 1	
13	13	PAHZZ	5905-00-643-9817	RV5LAXSB103B	81349 RESISTOR, VARIABLE	AMR	EA 1	
13	14	PAHZZ	5905-00-721-0289	RV5LAXSB502B	81349 RESISTOR, VARIABLE	AMR	EA 4	
13	15	PAHZZ	5910-00-578-1623	CV11C450	81349 CAPACITOR, VARIABLE	AMR	EA 2	
13	16	PAHZZ	5905-00-801-1234	RN20X5100F	81349 RESISTOR, FIXED, FILM	AMR	EA 2	
13	17	PAHZZ	5905-00-079-4057	RN20X62R0F	81349 RESISTOR, FIXED, FILM	AMR	EA 1	
13	18	PAOZZ	5960-00-729-8150	TS102U03	81350 SHIELD, ELECTRON TUBE	AMR	EA 3	
13	19	PAHZZ	5905-00-279-6246	RN20X1100F	81349 RESISTOR, FIXED, FILM	AMR	EA 1	
13	20	XDHZZ		RW55G251	81349 RESISTOR, FIXED, WIRE WOUND	AMR	EA 1	
13	21	PAHZZ	5910-00-129-9237	CP41B1FF405K1	81349 CAPACITOR, FIXED, PAPER	AMR	EA 2	
13	22	XDHZZ		CK1003	98179 COIL, RADIO FREQUENCY	AMR	EA 1	
13	23	XDHZZ		53105DH2	76854 SWITCH, ROTARY	AMR	EA 1	
13	24	PAHZZ	5905-00-685-9939	25NIT	33954 RESISTOR, FIXED, WIRE WOUND	AMR	EA 1	
13	25	XDHZZ		RN20X56R0F	81349 RESISTOR, FIXED, FILM	AMR	EA 1	
13	26	XDHZZ		RN20X1500F	81349 RESISTOR, FIXED, FILM	AMR	EA 2	
13	27	PAHZZ	5910-00-837-2577	CK60AW152M	81349 CAPACITOR, FIXED, CERAMIC	AMR	EA 2	
13	28	XDOZZ		TS102U01	81350 SHIELD, ELECTRON TUBE	AMR	EA 2	
13	29	PAHZZ	5905-00-299-2030	RC32GF153J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 2	
13	30	XDHZZ		CM35E512G	81349 CAPACITOR, FIXED, MICA	AMR	EA 2	
13	31	XDHZZ		CM55E333G	81349 CAPACITOR, FIXED, MICA	AMR	EA 2	
13	32	PAHZZ	5905-00-279-3506	RC20GF332J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 1	
13	33	PAHZZ	5905-00-299-1971	RC20GF822J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 1	
13	34	XDHZZ		CN435104M	81349 CAPACITOR, FIXED, PAPER	AMR	EA 2	
13	35	PAHZZ	5910-00-621-8761	CN42AX503M	81349 CAPACITOR, FIXED, PAPER	AMR	EA 1	
13	36	PAHZZ	5905-00-192-0390	RC20GF105J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 1	
13	37	PAHZZ	5905-00-279-1883	RC20GF335J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 1	
13	38	PAHZZ	5905-00-192-0660	RC20GF184J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA 1	

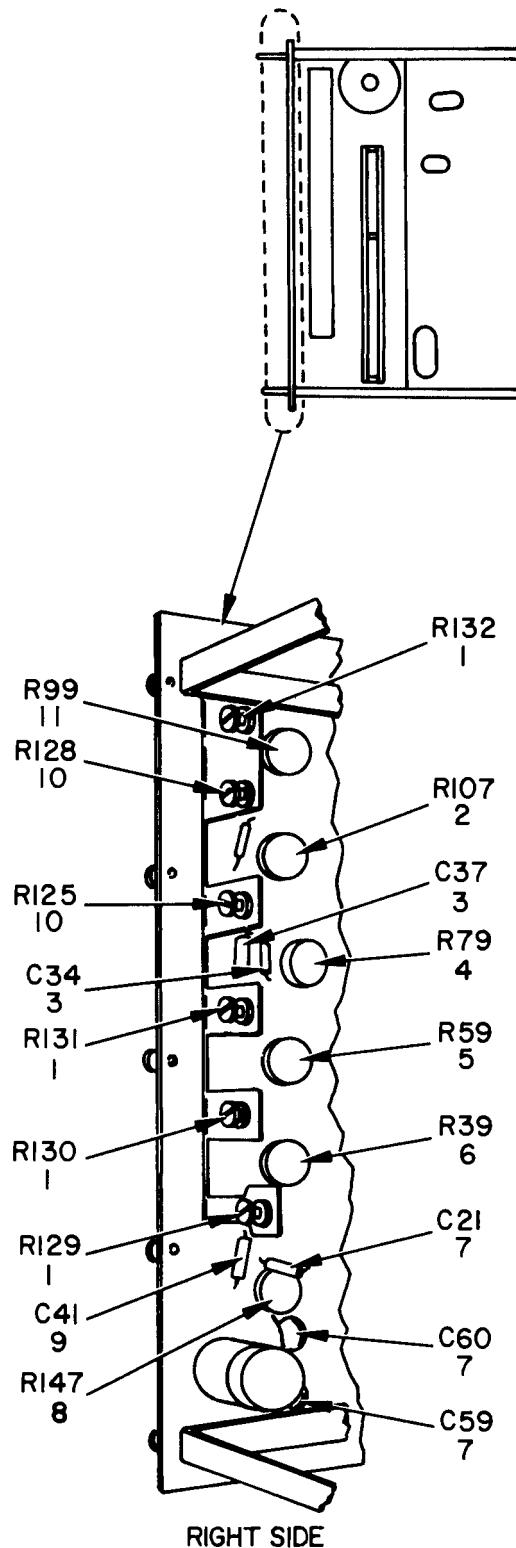

EL2ZI017

Figure 14. Generator, Pulse AN/UPM-15A, Chassis, Inside Rear View
(Sheet 1 of 2).


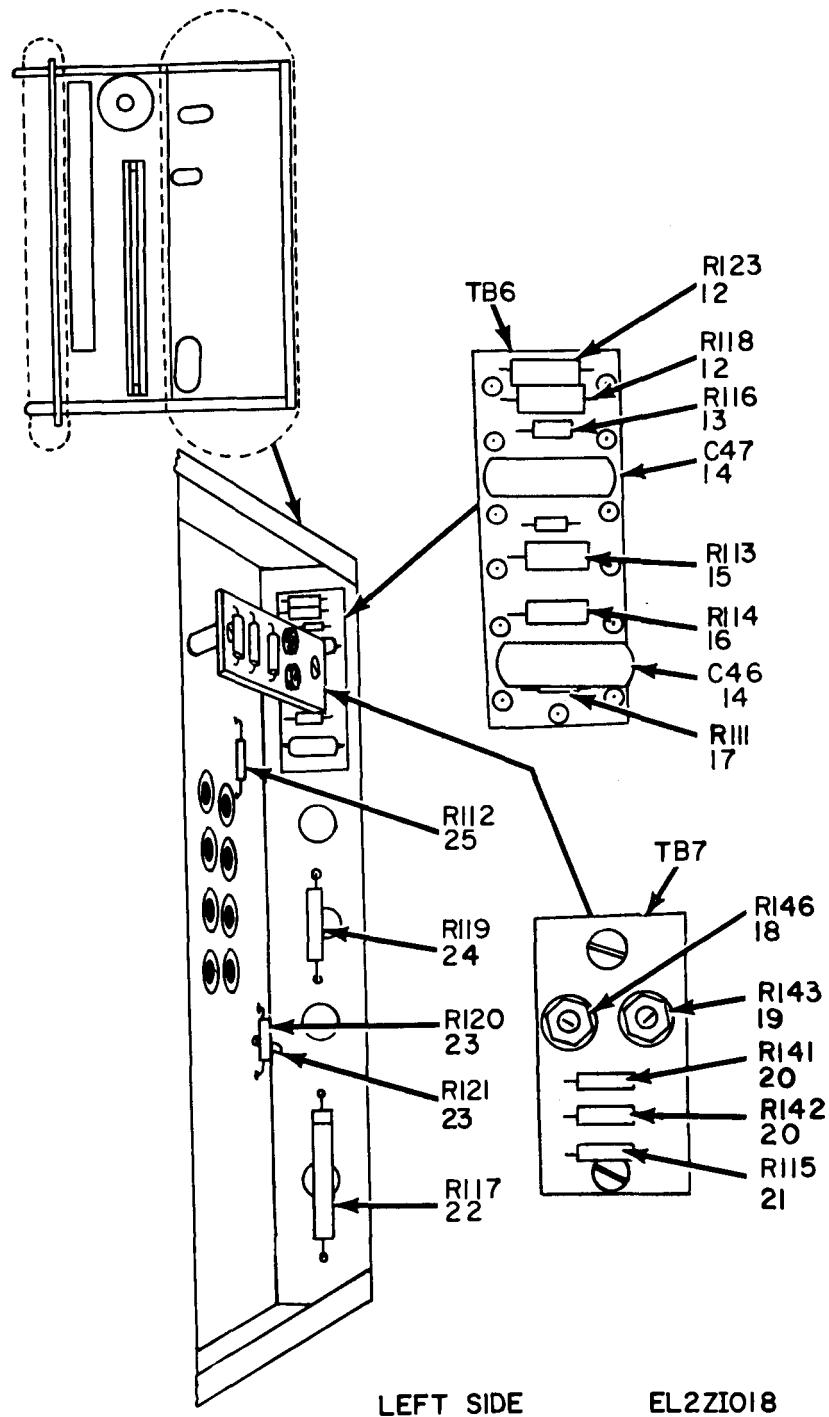


Figure 14. Generator, Pulse AN/UPM-15A, Chassis, Inside, Rear View (Sheet 2 of 2).

SECTION II							TM11-6625-368-24P			
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	USABLE ON CODE	(7) QTY INC IN	(8) U/M UNIT		
14	1	PAHZZ	5905-00-676-8669	RV4LATSA503B	81349 RESISTOR, VARIABLE	AMR	EA	4		
14	2	PAHZZ	5905-00-721-0289	RV5LAXSR502A	81349 RESISTOR, VARIABLE	AMR	EA	1		
14	3	XDHZZ		CM15E181J	81349 CAPACITOR, FIXED, MICA	AMR	EA	2		
14	4	PAHZZ	5905-00-258-6386	2-25-253K	11237 RESISTOR, VARIABLE	AMR	EA	1		
14	5	PAHZZ	5905-00-721-1053	RV3ATRD104A	81349 RESISTOR, VARIABLE	AMR	EA	1		
14	6	XDHZZ		RV4NATSD104A	81349 RESISTOR, VARIABLE	AMR	EA	1		
14	7	XDHZZ		CM35C103M	81349 CAPACITOR, FIXED, MICA	AMR	EA	3		
14	8	PAHZZ	5905-00-279-3506	RC20GF332J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1		
14	9	PAHZZ	5910-00-850-0540	CM15FD510G03	81349 CAPACITOR, FIXED, MICA	AMR	EA	1		
14	10	XDHZZ		RV2LATSA253B	81349 RESISTOR, VARIABLE	AMR	EA	2		
14	11	PAHZZ	5905-00-252-6968	RV4NATSD105A	81349 RESISTOR, VARIABLE	AMR	EA	1		
14	12	PAHZZ	5905-00-171-2001	RC20GF362J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	2		
14	13	XDHZZ		RN20X3003F	81349 RESISTOR, FIXED, FILM	AMR	EA	1		
14	14	XDHZZ		CN435104M	81349 CAPACITOR, FIXED, PAPER	AMR	EA	2		
14	15	PAHZZ	5905-00-553-2219	RN20X8202F	81349 RESISTOR, FIXED, FILM	AMR	EA	1		
14	16	PAHZZ	5905-00-299-2013	RC32GF473K	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1		
14	17	PAHZZ	5905-00-192-0667	RC20GF224J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1		
14	18	PAHZZ	5905-00-617-2606	RV5LAYS503A	81349 RESISTOR, VARIABLE	AMR	EA	1		
14	19	PAHZZ	5905-00-688-4179	RV5LAXSB104B	81349 RESISTOR, VARIABLE	AMR	EA	1		
14	20	PAHZZ	5905-00-131-5807	RNC65K1003FS	81349 RESISTOR, FIXED, FILM	AMR	EA	2		
14	21	XHDZZ		RN70C9103F	81349 RESISTOR, FIXED, FILM	AMR	EA	1		
14	22	PAHZZ	8030-00-849-0071	RW33G252	81349 RESISTOR, FIXED, WIRE WOUND	AMR	EA	1		
14	23	PAHZZ	5905-00-279-2643	RC32GF101J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	2		
14	24	PAHZZ	5905-00-845-5658	RW29V242	81349 RESISTOR, FIXED, WIRE WOUND	AMR	EA	1		
14	25	PAHZZ	5905-00-221-5848	RC20GF824J	81349 RESISTOR, FIXED, COMPOSITION	AMR	EA	1		

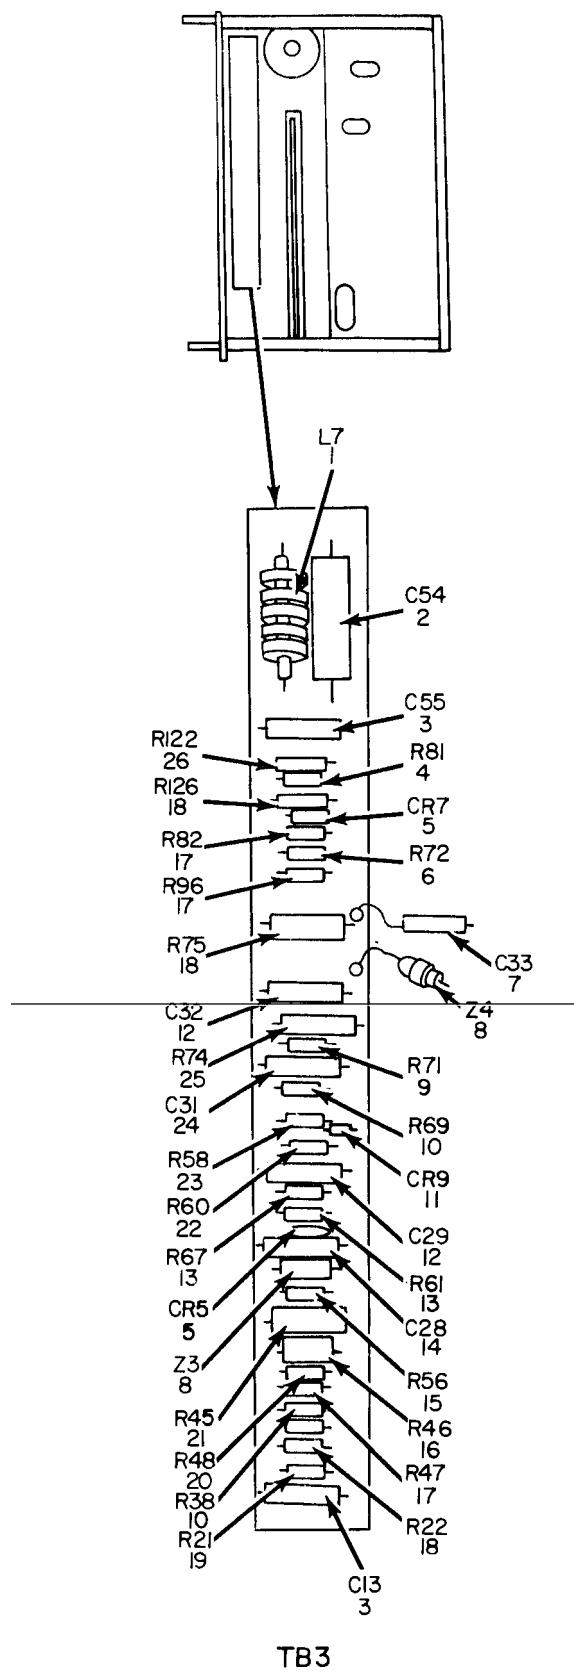

EL2ZI019

Figure 15. Generator Pulse AN/UPM-15A Terminal Boards (Sheet 1 of 3).


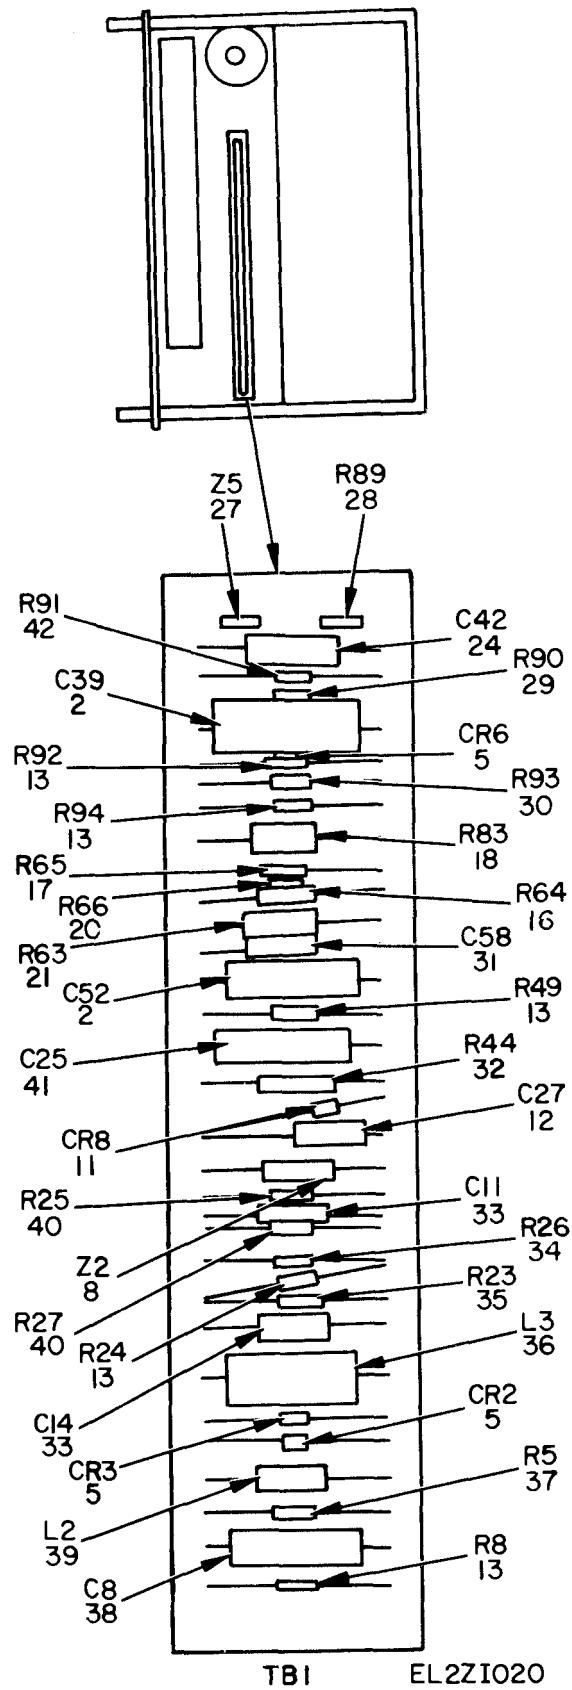


Figure 15. Generator, Pulse AN/UPM-15A, Terminal Boards (Sheet 2 of 3).

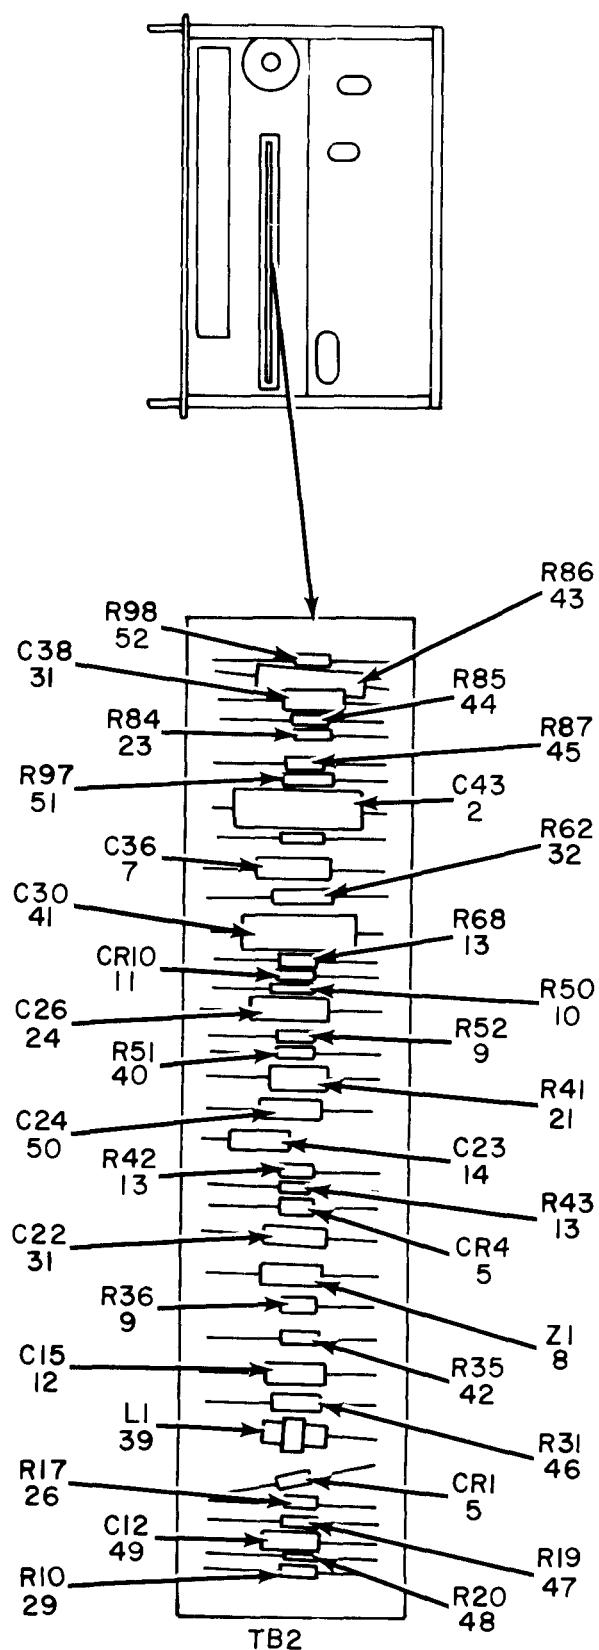

EL2ZI02I

Figure 15. Generator, Pulse AN/UPM-15A, Terminal Boards (Sheet 3 of 3).

SECTION II							TM11-6625-368-24P			
(1)	(2)	(3)	(4)	(5)	(6)		(7)	(8)		
ILLUSTRATION (A) FIG NO.	ITEM NO.	NATIONAL SMR CODE	STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN UNIT		
15	1	PAHZZ	5950-00-645-8954	CK1007	98179	COIL,RADIO FREQUENCY	AMR	EA	1	
15	2	PAHZZ	5910-00-534-6180	CQR39A1KE104K3	81349	CAPACITOR,FIXED,PAPER	AMR	EA	4	
15	3	PAHZZ	5910-00-760-7919	CM15FD241G03	81349	CAPACITOR,FIXED,MICA	AMR	EA	2	
15	4	PAHZZ	5905-00-552-3246	RN70B3922F	81349	RESISTOR,FIXED,FILM	AMR	EA	1	
15	5	PAHZZ	5961-00-581-8066	1N69	81350	SEMICONDUCTOR DEVICE,DIODE	AMR	EA	7	
15	6	XDHZZ		RC20GF563J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	7	XDHZZ		CM30F222G	81349	CAPACITOR,FIXED,MICA	AMR	EA	2	
15	8	PAHZZ	5915-00-322-4920	1A680	15196	NETWORK,PULSE FORMING	AMR	EA	4	
15	9	XDHZZ		RC20GF275K	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	3	
15	10	PAHZZ	5905-00-249-3661	RC20GF683J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	3	
15	11	PAHZZ	5961-00-600-1439	SG211	99180	SEMICONDUCTOR DEVICE,DIODE	AMR	EA	3	
15	12	PAHZZ	5910-00-717-0169	CM20B101J	81349	CAPACITOR,FIXED,MICA	AMR	EA	4	
15	13	PAHZZ	5905-00-192-0390	RC20GF105J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	10	
15	14	PAHZZ	5910-00-850-0540	CM15FD510G03	81349	CAPACITOR,FIXED,MICA	AMR	EA	2	
15	15	PAHZZ	5905-00-279-1754	RC20GF155J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	16	PAHZZ	5905-00-299-2022	RC32GF223J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	2	
15	17	PAHZZ	5905-00-192-0660	RC20GF184J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	4	
15	18	PAHZZ	5905-00-171-1998	RC20GF333J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	4	
15	19	PAHZZ	5905-00-279-1883	RC20GF335J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	20	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	2	
15	21	PAHZZ	5905-00-279-2527	RC42GF223J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	3	
15	22	XDHZZ		RN20X1503F	81349	RESISTOR,FIXED,FILM	AMR	EA	1	
15	23	PAHZZ	5905-00-552-6532	RN20X5002F	81349	RESISTOR,FIXED,FILM	AMR	EA	2	
15	24	XDHZZ		CM35G103M	81349	CAPACITOR,FIXED,MICA	AMR	EA	3	
15	25	PAHZZ	5905-00-190-8885	RC20GF225J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	26	PAHZZ	5905-00-279-3506	RC20GF332J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	2	
15	27	XDHZZ		1B672	15196	COIL,RADIO FREQUENCY SELECT	AMR	EA	1	
15	27	XDHZZ		1A672	15196	NETWORK,PULSE FORMING SELECT	AMR	EA	1	
15	28	PAHZZ	5905-00-195-5514	RC20GF152K	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	29	PAHZZ	5905-00-195-6806	RC20GF102J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	2	
15	30	PAHZ	5905-00-254-9201	RC20GF473J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	31	PAHZZ	5910-00-727-4997	CM20B240J	81349	CAPACITOR,FIXED,MICA	AMR	EA	3	
15	32	PAHZZ	5905-00-299-2030	RC32GF123J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	2	
15	33	PAHZZ	5910-00-067-8681	CM15FD331G03	81349	CAPACITOR,FIXED,MICA	AMR	EA	2	
15	34	PAHZZ	5905-00-279-1867	RC20GF114J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	35	PAHZZ	5905-00-279-1866	RC20GF106K	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	36	PAHZZ	5950-00-688-5789	1A677	15196	COIL,RADIO FREQUENCY SELECT	AMR	EA	1	
15	37	PAHZZ	5905-00-195-6761	RC20GF104J	81349	RESISTOR,FIXED,COMPOSITION	AMR	EA	1	
15	38	PAHZZ	5910-00-621-8761	CN42AX503M	81349	CAPACITOR,FIXED,PAPER	AMR	EA	1	

SECTION II		TM11-6625-368-24P					
(1) ILLUSTRATION (A) FIG NO.	(2) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
15	39	PAHZZ	5950-00-645-8859	CK1004	98179 COIL,RADIO FREQUENCY	AMR	EA 2
15	40	PAHZZ	5905-00-192-0667	RC20GF224J	81349 RESISTOR,FIXED,COMPOSITION	AMR	EA 3
15	41	PAHZZ	5910-00-823-1145	CP05A1KF223K3	81349 CAPACITOR,FIXED,PAPER	AMR	EA 1
15	42	PAHZZ	5905-00-279-2515	RC20GF474J	81349 RESISTOR,FIXED,COMPOSITION	AMR	EA 2
15	43	PAHZZ	5905-00-581-1529	RN75B2671F	81349 RESISTOR,FIXED,FILM	AMR	EA 1
15	44	PAHZZ	5905-00-131-5807	RNC65K1003FS	81349 RESISTOR,FIXED,FILM	AMR	EA 1
15	45	PAHZZ	5905-00-553-2219	RN20X8202F	81349 RESISTOR,FIXED,FILM	AMR	EA 1
15	46	PAHZZ	5905-00-106-9346	RCR32G103JS	81349 RESISTOR,FIXED,COMPOSITION	AMR	EA 1
15	47	PAHZZ	5905-00-279-3494	RC20GF823J	81349 RESISTOR,FIXED,COMPOSITION	AMR	EA 1
15	48	PAHZZ	5905-00-279-2522	RC20GF154J	81349 RESISTOR,FIXED,COMPOSITION	AMR	EA 1
15	49	PAHZZ	5910-00-727-4997	CM20B100K	81349 CAPACITOR,FIXED,MICA	AMR	EA 1
15	50	XDHZZ		CM20D621J	81349 CAPACITOR,FIXED,MICA	AMR	EA 1
15	51	PAHZZ	5905-00-201-6784	RN25X1002F	81349 RESISTOR,FIXED,FILM	AMR	EA 1
15	52	PAHZZ	5905-00-254-7100	RC20GF913J	81349 RESISTOR,FIXED,COMPOSITION	AMR	EA 1

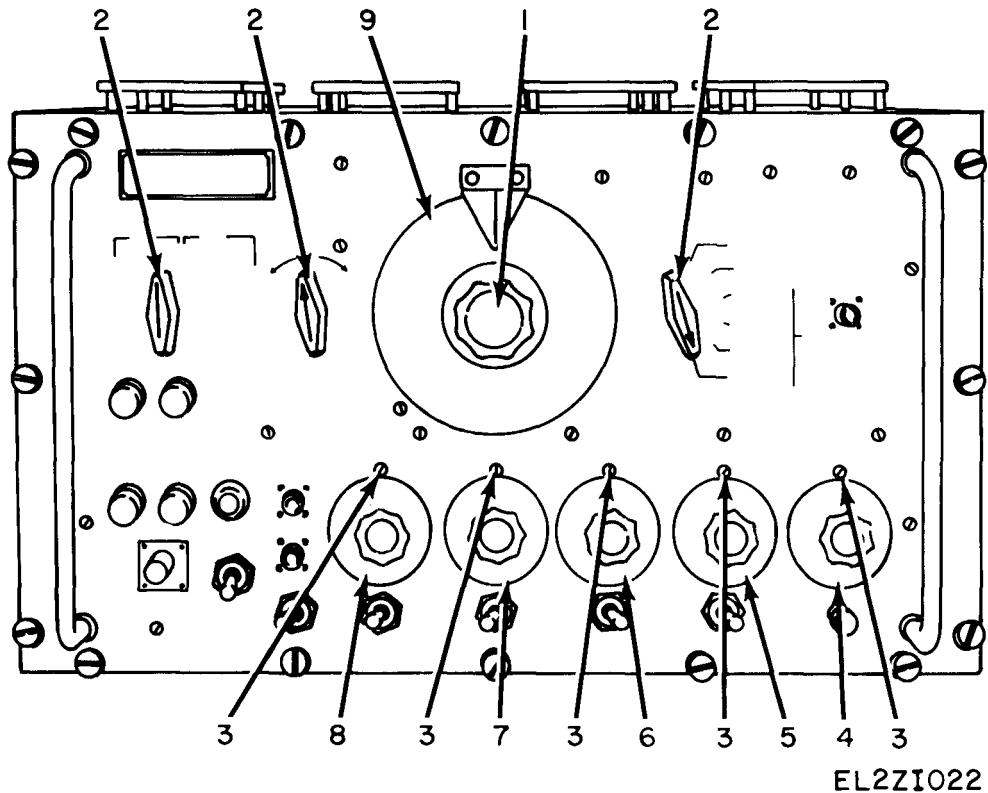


Figure 16. Generator, Pulse AN/UPM-15A, Operating Controls.

SECTION II		TM11-6625-368-24P					
(1) ILLUSTRATION (A)	(2)	(3)	(4)	(5)	(6)	DESCRIPTION	
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	(7) (8) QTY INC IN UNIT
16	1	PAOZZ	5355-00-511-5727	1318104	15196 KNOB	AMR	EA 1
16	2	PAOZZ	5355-00-342-5383	46A42256	80813 KNOB	AMR	EA 3
16	3	PAHZZ	5355-00-685-4819	181894	15196 POINTER,DIAL	AMR	EA 5
16	4	PAHZZ	5355-00-720-5305	1-2007	15196 DIAL,CONTROL	AMR	EA 1
16	5	XDHZZ		1-2008	15196 DIAL,CONTROL	AMR	EA 1
16	6	PAHZZ	5355-00-720-5187	1-2009	15196 DIAL,CONTROL	AMR	EA 1
16	7	PAHZZ	5355-00-685-4825	1B1907	15196 DIAL,CONTROL	AMR	EA 1
16	8	XDHZZ		1-2010	15196 DIAL,CONTROL	AMR	EA 1
16	9	PAHZZ	5355-00-803-6206	62-154	15196 DIAL,SCALE	AMR	EA 1

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX.

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5935-00-063-5789	4	4	5905-00-249-3661	7	11
5935-00-063-5789	12	7	5905-00-249-3661	15	10
5999-00-065-1833	1	3	5905-00-249-4190	4	15
5905-00-079-4057	13	17	5905-00-249-4190	7	45
5910-00-101-4013	5	2	5905-00-252-6968	6	10
5910-00-101-4013	13	4	5905-00-252-6968	14	11
5960-00-107-8147	3	2	5905-00-254-7100	15	52
5960-00-107-8147	11	2	5905-00-254-7101	12	22
5960-00-108-0263	3	9	5905-00-254-9201	7	27
5960-00-108-0263	11	9	5905-00-254-9201	15	30
5905-00-108-6922	4	15	5905-00-256-8352	4	1
5905-00-108-6922	7	26	5905-00-256-8352	12	3
5905-00-108-6922	7	45	5960-00-262-0152	3	10
5935-00-149-3092	2	6	5960-00-262-0152	11	10
5935-00-149-3534	1	5	5960-00-262-0167	3	7
5935-00-149-3534	9	5	5960-00-262-0167	11	7
5935-00-149-4066	1	6	5960-00-262-0210	3	6
5935-00-149-4066	9	6	5960-00-262-0210	11	6
			5960-00-264-3004	5	21
5960-00-166-7674	3	18	5960-00-272-9182	3	15
5960-00-166-7674	11	19	5960-00-272-9182	11	15
5905-00-171-1998	5	30	5960-00-272-9225	3	17
5905-00-171-1998	7	6	5905-00-279-1686	5	13
5905-00-171-1998	7	15	5905-00-279-1754	7	20
5905-00-171-1998	12	12	5905-00-279-1754	15	15
5905-00-171-1998	13	2	5905-00-279-1760	5	12
			5905-00-279-1866	7	36
5905-00-171-2001	14	12	5905-00-279-1866	15	35
5999-00-179-0149	9	10	5905-00-279-1867	7	35
5905-00-186-3008	4	3	5905-00-279-1867	15	34
5905-00-186-3008	12	5	5905-00-279-1883	5	33
5999-00-186-8944	3	3	5905-00-279-1883	7	16
5999-00-186-8944	11	3	5905-00-279-1883	13	37
6210-00-188-8779	2	9	5905-00-279-1883	15	19
6210-00-188-8779	10	8	5905-00-279-2515	7	44
5905-00-190-8885	7	25	5905-00-279-2515	15	42
5905-00-190-8885	15	25	5905-00-279-2522	7	48
5905-00-190-8887	4	7	5905-00-279-2522	15	48
5905-00-192-0390	13	36	5905-00-279-2527	7	13
5905-00-192-0390	15	13	5905-00-279-2527	15	21
5905-00-192-0660	5	34	5905-00-279-2616	5	24
5905-00-192-0660	13	38	5905-00-279-2675	4	8
5905-00-192-0660	15	17	5905-00-279-2675	7	8
5905-00-192-0667	4	14	5905-00-279-3494	6	15
5905-00-192-0667	6	14	5905-00-279-3494	15	473
5905-00-192-0667	7	41	5905-00-279-3495	6	12
5905-00-192-0667	12	18	5905-00-279-3498	7	4
5905-00-192-0667	14	17	5905-00-279-3499	7	14
5905-00-192-0667	15	40	5905-00-279-3499	15	20
5905-00-192-3981	4	9	5905-00-279-3502	7	31
5905-00-192-3981	7	23	5905-00-279-3506	4	13
5905-00-192-3981	7	50	5905-00-279-3506	5	27
5905-00-192-3981	12	13	5905-00-279-3506	7	28
5905-00-195-5514	15	28	5905-00-279-3506	12	17
5905-00-195-6449	12	11	5905-00-279-3506	13	32
5905-00-195-6750	6	11	5905-00-279-3506	14	8
5905-00-195-6761	4	6	5905-00-279-3506	15	26
5905-00-195-6761	7	38	5905-00-279-3511	5	11
5905-00-195-6761	12	10	5905-00-279-3519	7	42
5905-00-195-6761	15	37	5905-00-279-6246	13	19
5905-00-195-6806	4	10	5935-00-283-3826	11	5
5905-00-195-6806	5	8	5960-00-284-5823	3	16
5905-00-195-6806	7	30	5960-00-284-5823	11	16
5905-00-195-6806	12	14	5905-00-299-1971	5	28
5905-00-195-6806	13	11	5905-00-299-1971	13	33
5905-00-195-6806	15	29	5905-00-299-2013	6	17
5935-00-201-3511	2	1	5905-00-299-2013	14	16
5935-00-201-3511	10	1	5905-00-299-2022	7	19
5905-00-221-5848	6	16	5905-00-299-2022	15	16
5905-00-221-5848	14	25	5905-00-299-2030	7	633
5905-00-221-5860	5	7	5905-00-299-2030	13	29
5905-00-221-5860	13	10	5905-00-299-2030	15	32
5935-00-222-9828	4	5			
5935-00-222-9828	12	9	5915-00-322-4920	7	9-
5935-00-232-3758	4	2	5915-00-322-4920	15	8
5935-00-232-3758	12	4	5355-00-342-5383	8	2
5960-00-237-6917	3	8	5355-00-342-5383	16	2
5960-00-237-6917	11	8	5905-00-409-7616	5	32
5905-00-245-0023	2	6	5905-00-409-7616	7	12
5905-00-249-3661	4	16	5935-00-501-5488	3	5

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.	
5999-00-501-8365	9	4	5930-00-655-1582	10	2	
5355-00-511-5727	8	1	6625-00-668-9170	8	4	
5355-00-511-5727	16	1	5960-00-669-6861	3	22	
			5960-00-669-6861	11	23	
5305-00-515-9860	5	22	5905-00-676-8669	6	1	
5960-00-519-4562	11	18	5905-00-676-8669	14	1	
6625-00-519-7600	1	1	5355-00-685-4819	8	3	
5355-00-538-6540	8	10	5355-00-685-4819	16	3	
5935-00-539-2650	9	11	5905-00-685-9939	5	18	
5960-00-543-0219	3	4	5905-00-685-9939	13	24	
5960-00-543-0219	11	4	5905-00-688-4179	14	19	
5305-00-551-7121	10	11	5950-00-688-5789	15	36	
5905-00-552-3246	15	4	5950-00-688-5793	11	11	
5905-00-552-6532	12	8	5950-00-688-5794	11	21	
5905-00-552-6532	15	23	5910-00-717-0169	7	22	
5905-00-553-2219	14	15	5910-00-717-0169	15	12	
5905-00-553-2219	15	45	5355-00-720-5187	16	6	
5920-00-557-2647	2	8	5355-00-720-5305	16	4	
5920-00-557-2647	10	7	5905-00-721-0289	13	14	
5910-00-578-1623	13	15	5905-00-721-0289	14	2	
5961-00-581-8066	7	5	5905-00-721-1053	6	5	
5961-00-581-8066	15	5	5905-00-721-1053	14	5	
5961-00-600-1439	15	11	5910-00-727-4997	4	12	
5930-00-615-7896	2	4	5910-00-727-4997	5	5	
5960-00-624-4718	3	14	5910-00-727-4997	7	32	
5960-00-624-4718	11	14	5910-00-727-4997	7	49	
5935-00-636-7145	9	8	5910-00-727-4997	12	16	
6625-00-643-2716	1	2	5910-00-727-4997	13	8	
5950-00-645-0543	3	11	5910-00-727-4997	15	31	
5950-00-645-1099	3	21	5905-00-801-1234	13	16	
5950-00-645-1266	3	20	5355-00-803-6206	16	9	
5950-00-645-8525	7	29				
5950-00-645-8859	7	40	5935-00-817-3325	10	5	
5950-00-645-8859	15	39	5930-00-829-3748	2	3	
5950-00-645-8954	7	1	8030-00-849-0071	6	20	
5950-00-645-8954	15	1	8030-00-849-0071	14	22	
5905-00-646-5628	6	4	6625-00-892-3313	9	1	
5930-00-655-1508	2	5	5905-00-893-9499	5	4	
5930-00-655-1514	10	3	5905-00-893-9499	13	6	
PART NUMBER	FSCM	FIG NO	ITEM NO	PART NUMBER	FIG NO	ITEM NO
AN3102E10SL3F	88044	10	5	CM20B100K	81349	7
AN3106A10SL3S	88044	9	11	CM20B101J	81349	7
A1151-1	98179	8	8	CM20B101J	81349	15
A1151-2	98179	8	6	CM20B240J	81349	7
A1151-3	98179	8	7	CM20B240J	81349	12
A1151-4	98179	8	10	CM20B331K	81349	7
A1151-5	98179	8	5	CM30E102G	81349	5
A1174B	98179	8	4	CM30E102G	81349	13
CF41C800K	81349	3	19	CM30F222G	81349	15
CG-521/U	80058	1	2	CM35C103M	81349	6
CK1003	98179	5	17	CM35C103M	81349	7
CK1003	98179	13	22	CM35C103M	81349	14
CK1004	98179	7	40	CM35E512G	81349	5
CK1004	98179	15	39	CM35E512G	81349	13
CK1005	88585	5	9	CM35G103M	81349	15
CK1005	88585	13	12	CM55E33G	81349	5
CK1006	98179	7	37	CM55E33G	81349	26
CK1007	98179	7	1	CN42AX503M	81349	13
CK1007	98179	15	1	CN42AX503M	81349	31
CK1009	98179	7	29	CN42AX503M	81349	7
				CN42AX503M	81349	39
				CN42AX503M	81349	35

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CV11C450	81349	13	15	RC20GF275K	81349	7	10
CX-3135/U(8FT)	80058	9	9	RC20GF275K	81349	15	9
				RC20GF332J	81349	4	13
				RC20GF332J	81349	5	27
				RC20GF332J	81349	7	28
				RC20GF332J	81349	12	17
				RC20GF332J	81349	13	32
				RC20GF332J	81349	14	8
CX-337/U	80058	1	8	RC20GF332J	81349	15	26
				RC20GF333J	81349	5	30
				RC20GF333J	81349	7	6
CY-672/U	80058	9	12	RC20GF333J	81349	7	15
CY672U	80058	1	9	RC20GF333J	81349	12	12
				RC20GF334K	81349	5	7
				RC20GF334K	81349	13	10
KN1006-2	98179	8	2	RC20GF335J	81349	5	33
L402	11707	5	23	RC20GF335J	81349	7	16
MS15571-2	96906	2	11	RC20GF335J	81349	13	37
MS15571-2	9690610	10	10	RC20GF335J	81349	15	19
MS25098-22	96906	2	4	RC20GF362J	81349	14	12
MS25100-22	96906	2	3	RC20GF433J	81349	7	4
MS25100-23	96906	2	5	RC20GF473J	81349	7	27
MS35058-22	96906	10	3	RC20GF473J	81349	15	30
MS35059-23	96906	10	2	RC20GF474J	81349	7	44
				RC20GF474J	81349	15	42
MS91185-1	96906	9	8	RC20GF511J	81349	5	11
				RC20GF563J	81349	7	6
				RC20GF563J	81349	15	6
				RC20GF620J	81349	5	12
				RC20GF682K	81349	12	6
RC20GF101K	81349	4	3	RC20GF683J	81349	4	16
RC20GF101K	81349	12	5	RC20GF683J	81349	7	11
RC20GF102J	81349	4	10	RC20GF683J	81349	15	10
RC20GF102J	81349	5	8	RC20GF753J	81349	6	12
RC20GF102J	81349	7	30	RC20GF814J	81349	7	50
RC20GF102J	81349	12	14	RC20GF822J	81349	5	28
RC20GF102J	81349	13	11	RC20GF822J	81349	13	33
RC20GF102J	81349	15	29	RC20GF823J	81349	6	15
RC20GF104J	81349	4	6	RC20GF823J	81349	15	47
RC20GF104J	81349	7	38	RC20GF824J	81349	6	16
RC20GF104J	81349	12	10	RC20GF824J	81349	14	25
RC20GF104J	81349	15	37	RC20GF913J	81349	15	52
RC20GF105J	81349	13	36				
RC20GF105J	81349	15	13				
RC20GF105K	81349	5	32				
RC20GF105K	81349	7	12	RC32GF123J	81349	7	33
RC20GF106K	81349	7	36	RC32GF123J	81349	15	32
RC20GF106K	81349	15	35	RC32GF153J	81349	13	29
RC20GF114J	81349	7	35	RC32GF223J	81349	7	19
RC20GF114J	81349	15	34	RC32GF223J	81349	15	16
RC20GF123J	81349	7	31	RC32GF224K	81349	4	18
RC20GF124J	81349	4	9	RC32GF473K	81349	6	17
RC20GF124J	81349	7	23	RC32GF473K	81349	14	16
RC20GF124J	81349	12	13	RC32GF560J	81349	5	13
RC20GF151J	81349	4	15				
RC20GF151J	81349	7	26	RC42GF104J	81349	12	2
RC20GF151J	81349	7	45	RC42GF122J	81349	4	1
RC20GF152K	81349	15	28	RC42GF122J	81349	12	3
RC20GF153J	81349	5	24	RC42GF221K	81349	6	19
RC20GF154J	81349	7	48	RC42GF223J	81349	7	13
RC20GF154J	81349	15	48	RC42GF223J	81349	15	21
RC20GF155J	81349	7	20	RC42GF333J	81349	4	8
RC20GF155J	81349	15	15	RC42GF333J	81349	7	8
RC20GF184J	81349	5	34	RC42GF362J	81349	6	11
RC20GF184J	81349	38		RC42GF472K	81379	12	11
RC20GF184J	81349	15	17	RC42GF562J	81349	4	15
RC20GF202J	81349	4	7	RC42GF562J	81349	7	45
RC20GF220J	81349	7	42	RC42GF681K	81349	4	19
RC20GF224J	81349	4	14	RC42GF681K	81349	12	1
RC20GF224J	81349	6	14				
RC20GF224J	81349	7	41				
RC20GF224J	81349	12	18				
RC20GF224J	81349	14	17	RN20X1100F	81349	13	19
RC20GF224J	81349	15	40	RN20X1500F	81349	13	26
RC20GF225J	81349	7	25	RN20X1503F	81349	15	22
RC20GF225J	81349	15	25	RN20X3003F	81349	14	13
RC20GF273J	81349	7	14	RN20X5002F	81349	12	8
RC20GF273J	81349	15	20	RN20X5002F	81349	15	23

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
RN20X5100F	81349	13	16	1A680	15196	7	9
RN20X56R0F	81349	5	19	1A680	15196	15	8
RN20X56R0F	81349	13	25	1B672	15196	15	27
RN20X62R0F	81349	13	17	1N69	81350	7	5
RN20X8202F	81349	14	15	1N69	81350	15	5
RN20X8202F	81349	15	45	10	72307	3	3
RN25X1002F	81349	15	51	10	72307	11	3
				10-1001	98179	8	9
				105-603-1	74970	3	
RN70B3922F	81349	15	4	105-603S	74970	11	5
RN70C9103F	81349	14	21	12AT7EA	81350	11	7
				12AT7WA	81350	3	7
RV2LATSA253B	81349	14	10	131B104	15196	8	1
RV3ATRD104A	81349	6	5	131B104	15196	16	1
RV4LATSA503B	81349	6	1				
RV4LATSA5038	81349	14	1	165	23616	3	11
RV4NATSD104A	81349	6	6	166	23616	3	21
RV4NATSD105A	81349	6	10	167	23616	3	20
RV4NATSD105A	81349	14	11	181894	15196	8	3
RV4NATSD352A	81349	6	2	181894	15196	16	3
RV4NAYS504A	81349	5	1				
RV4NAYS504A	81349	13	6	190A140	15196	6	4
RV4LAVSA253A	81349	6	9	201A169	15196	10	11
RV5LAXSB103A	81349	13	13	234C120	15196	3	11
				25NIT	33954	5	18
RV5LAXSB502B	81349	13	14	25NIT	33954	13	24
				312004	75915	2	8
				312004	75915	10	7
RV5LAXSR502A	81349	14	2	36-209	15196	11	21
				36-210	15196	11	22
				36-211	15196	11	11
				37B19	15196	11	18
RW33G252	81349	6	20	46A42256	80813	16	2
RW33G252	81349	14	22	4891	74545	2	6
RW55G251	81349	5	14	5R4WGA	81350	3	16
RW55G251	81349	13	20	5R4WGA	81350	11	16
SG-343/UPM-15A	80058	9	1	53104DH2	76854	5	3
SG211	99180	15	11	53104DH2	76854	13	5
SM1035	98179	5	22				
SW1004	98179	2	2	5725-6AS6W	81350	3	8
TS-592A/UPM-15	80058	1	1	5725-6AS6W	81350	11	8
TS101P01	81350	4	4	5814A	81350	3	6
TS101P01	81350	12	7	5814A	81350	11	6
TS102C01	81350	4	2				
TS102C01	81350	12	4				
TS102U01	81350	3	23	6AL6WA	81350	11	10
TS102U01	81350	13	28	6AN5	81350	3	4
TS102U02	81349	4	17	6AN5	81350	11	4
				6AS7G	81350	3	18
TS102U03	81350	5	20	6AS7G	81350	11	19
				6AU6WA	81350	3	10
TS103C01	81350	4	5	6A244	26916	4	20
TS103C01	81350	12	9	6D4	81350	3	9
TS103U02	81350	5	21	6D4	81350	11	9
UG-273/U	80058	1	5	6X4W	81350	3	15
UG-273/U	80058	9	5	6X4W	81350	11	15
UG-290/AU	80058	2	1	60CHSE	76545	9	4
UG-290/AU	80058	10	1				
UG-88/U	80058	1	6	6005-6AQ5W	81350	3	22
UG-88/U	80058	9	6	6005-6AQ5W	81350	11	23
				62-154	15196	16	9
OA2WA	81349	3	13				
OA2WA	81349	11	13	81-121	72619	2	9
OB2WA	81350	3	14	810B	72619	2	10
OB2WA	81350	11	14	810B	72619	10	9
Jan-07	15196	16	4	829B	81350	3	2
Jan-08	15196	16	5	829B	81350	11	2
Jan-09	15196	16	6	85	76545	9	3
Jan-10	15196	16	8	85	76545	1	3
1A672	15196	7	29	90	72507	9	10
1A672	15196	15	27				
1A677	15196	15	36				

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

LATEST NATIONAL STOCK NUMBER ASSIGNMENTS			
STOCK NUMBER	FIG. NO.	ITEM NO.	STOCK NUMBER
			FIG. NO.
5910-00-060-9619	6	3	5905-00-617-2606
5910-00-060-9619	7	46	5910-00-621-8761
5999-00-065-1833	9	3	5910-00-621-8761
5910-00-067-8681	15	33	5910-00-621-8761
5910-00-101-4711	2	15	5910-00-621-8761
5905-00-106-9346	7	47	6625-00-643-2716
5905-00-106-9346	15	46	5905-00-643-9817
5910-00-129-9237	3	12	5930-00-655-1575
5910-00-129-9237	5	16	5355-00-685-4825
5910-00-129-9237	11	12	5905-00-686-4108
5910-00-129-9237	13	21	5910-00-727-4997
5905-00-131-5807	12	21	5960-00-729-8150
5905-00-131-5807	14	20	5960-00-729-8150
5905-00-131-5807	15	44	5960-00-729-8150
6240-00-155-8706	2	11	5910-00-760-7919
6240-00-155-8706	10	10	5910-00-760-7919
5905-00-171-1998	15	18	5910-00-760-7919
5905-00-192-0660	7	18	5910-00-823-1145
5905-00-201-6784	15	51	5910-00-823-1145
5905-00-247-8738	5	10	5910-00-823-1145
5960-00-272-9225	11	17	5910-00-823-1145
5905-00-279-2643	14	23	5995-00-823-2588
5905-00-412-1121	6	19	5910-00-837-2577
5999-00-501-8365	1	4	5910-00-837-2577
5960-00-503-4880	3	13	5910-00-838-8434
5960-00-503-4880	11	13	5905-00-845-5658
5950-00-518-0612	5	9	5905-00-845-5658
5950-00-518-0612	13	12	5910-00-850-0540
5995-00-519-1342	9	7	5910-00-850-0540
5910-00-534-6180	7	2	5910-00-850-0540
5910-00-534-6180	15	2	5910-00-850-0540
5960-00-542-7004	3	1	5910-00-850-0540
5960-00-542-7004	11	1	5910-00-850-0540
5995-00-577-3470	1	8	5920-00-892-9311
5905-00-581-1529	12	20	5920-00-892-9311
5905-00-581-1529	15	43	5910-00-926-8204
5905-00-617-2606	7	17	
5905-00-617-2606	13	7	

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FIG NO	ITEM NO	PART NUMBER	FIG NO	ITEM NO	
FSCM	FIG NO	ITEM NO	FSCM	FIG NO	ITEM NO	
CE56C101K	81349	11	20	CQR39A1KE104K3	81349	7
CG-409A/U	80058	9	7	CQR39A1KE104K3	81349	2
CG-521/U	80058	9	2	HKPJE	71400	2
CK60AW152M	81349	12	19	HKPJE	71400	7
CK60AW152M	81349	13	27	L402	11707	6
CM15E181J	81349	14	3	MS35059-22	96906	1
CM15FD241G03	81349	4	11	RCR32G103JS	81349	10
CM15FD241G03	81349	7	3	RCR32G103JS	81349	47
CM15FD241G03	81349	15	3	RCR32G750JS	81349	46
CM15FD331G03	81349	15	33	RC20GF184J	81349	10
CM15FD510G03	81349	5	6	RC20GF333J	81349	18
CM15FD510G03	81349	6	8	RC32GF101J	81349	23
CM15FD510G03	81349	7	21	RNC65K1003FS	81349	21
CM15FD510G03	81349	13	9	RNC65K1003FS	81349	20
CM15FD510G03	81349	14	9	RNC65K1003FS	81349	44
CM15FD510G03	81349	15	14	RN75B2671F	81349	20
CM15FD511G03	181349	6	3	RN75B2671F	81349	43
CM15FD511G03	81349	7	46	RV2LAYSAB253A	81349	10
CM20B100K	81349	15	49	RV3ATRD104A	81349	5
CM20B240J	81349	4	12	RV4NATSD104A	81349	6
CM20B240J	81349	5	5	RV5LAXSB104B	81349	19
CM20B240J	81349	13	8	RV5LAYSAB503A	81349	17
CM20B240J	81349	15	31	RV5LAYSAB503A	81349	7
CM20C241J	81349	12	15	RV5LAYSAB503A	81349	18
CM20D621J	81349	15	50	RW29V242	81349	18
CM30FD472G03	81349	7	7	RW29V242	81349	24
CN42AX503M	81349	15	38	TS102U03	81350	24
CN435104M	81349	5	29	TS102U03	81350	18
CN435104M	81349	6	13	X1817C	71279	17
CN435104M	81349	13	34	X1817C	71279	17
CN435104M	81349	14	14	LB1907	15196	7
CP05A1KF223K3	81349	5	1	53105DH2	76854	15
CP05A1KF223K3	81349	7	43	53105DH2	76854	513
CP05A1KF223K3	81349	13	3	6AH6WA	81349	1
CP05A1KF223K3	81349	15	41	6AH6WA	81349	1
CP41B1FF405K1	81349	3	12	6A244	26916	5
CP41B1FF405K1	81349	5	16	60CHSB	76545	4
CP41B1FF405K1	81349	11	12	81-121	72619	8
CP41B1FF405K1	81349	13	21			

NOTE: SEE PAGE 53 FOR ADDITIONAL LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS

ADDITIONAL LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG. NO.	ITEM NO.
5905-00-258-6386	14	4
5995-00-519-1342	1	7

ADDITIONAL LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
CG409A/U 2-25-253K	80058 11237	1 14	7 4

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

Commander

Stateside Army Depot

ATTN: AMSTA-US

Stateside, N.J. 07703

DATE 10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-12

DATE

23 Jan 74

TITLE

Radar Set AN/PS-76

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG DOTTED LINE

PAGE NO.

PARA-

GRAPH

FIGURE

NO.

TABLE

NO.

- | | | | | |
|------|------|-----|--|---|
| 2-25 | 2-28 | | | Recommend that the installation antenna alignment procedure be changed throughout to specify a 2° IFF antenna lag rather than 1°.

REASON: Experience has shown that with only a 1° lag, the antenna servo system is too sensitive to wind gusting in excess of 25 knots, and has a tendency to rapidly accelerate and decelerate as it hunts, causing strain to the drive train. Hunting is minimized by adjusting the lag to 2° without degradation of operation. |
| 3-10 | 3-3 | 3-1 | | Item 5, Function column. Change "2 db" to "3db."

REASON: The adjustment procedure for the TRANS POWER FAULT indicator calls for a 3 db (500 watts) adjustment to light the TRANS POWER FAULT indicator. |
| 5-6 | 5-8 | | | Add new step f.1 to read, "Replace cover plate removed in step e.1, above."

REASON: To replace the cover plate. |
| | | FO3 | | Zone C 3. On J1-2, change "+24 VDC to "+5 VDC."

REASON: This is the output line of the 5 VDC power supply. + 24 VDC is the input voltage. |

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I. M. DeSpirito 999-1776

SIGN HERE:

DA FORM 1 AUG 74 2028-2 (TEST)

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND" MAKE
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

HISA 1686-75

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

ATE

TITLE

BE EXACT...PIN-POINT WHERE IT IS

**IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:**

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.
----------	------------	------------	-----------

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2 (TEST)

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS



FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-914



Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

DATE

TITLE

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE NO. PARAGRAPH FIGURE NO. TABLE NO.

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 2028-2 (TEST) 1 AUG 74

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS



FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

DATE

TITLE

BE EXACT...PIN-POINT WHERE IT IS

**IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:**

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.
----------	------------	------------	-----------

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2 (TEST)

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS



FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Electronics Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

By Order of the Secretary of the Army:

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Official:

PAUL T. SMITH
Major General, United States Army
The Adjutant General

Distribution:

Active Army:	
USASA (2)	Fort Gordon (10)
COE (1)	Fort Huachuca (10)
TSG (1)	Ft Richardson (ECOM Ofc) (2)
USAARENBD (1)	LBAD (14)
DARCOM (1)	SAAD (30)
TRADOC (2)	TOAD (14)
Os Maj Comd (4)	SHAD (3)
TECOM (2)	Units org under fol TOE: (1)
USACC (4)	9-47
MDW (1)	9-87
Armies (2)	9-227
Corps (2)	9-500
HISA (Ft Monmouth) (33)	11-16
Svc Colleges (1)	11-96
USASIGS (5)	11-97
USAADS (2)	11-98
USAFFAS (2)	11-117
USAARMS (2)	11-500(AA-AC)
USAIS (2)	29-134
USAES (2)	29-136
USAICS (3)	44-435
MAAG (1)	44-436
USARMIS (1)	44-437
USAERDAA (1)	44-445
USAERDAW (1)	44-535
Sig FLDMS (1)	44-536
Installations (2) except	44-537
Fort Carson (5)	44-545
Fort Gillem (10)	44-546
	44-547

NG: State AG (3) Units- Same as Active Army except allowance is one copy per unit

USAR: None

For explanation of abbreviations used, see AR 310-50

DEPARTMENT OF THE ARMY
US ARMY AG PUBLICATIONS CENTER
1655 WOODSON ROAD
ST. LOUIS, MISSOURI 63114

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314



FOURTH CLASS
SPECIAL RATE - BOOKS

TM 11- 3421- 0-
CDR
US ARMY MAINT MC
ATTN. MGT SVC BR
LEXINGTON KY 40507

This fine document...

Was brought to you by me:



Liberated Manuals -- free army and government manuals

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals

- Sincerely
Igor Chudov
<http://igor.chudov.com/>
- [Chicago Machinery Movers](http://chicagomachinerymovers.com)