

---

**TECHNICAL MANUAL**

**ORGANIZATIONAL MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS  
FOR  
RADAR TEST SET AN/UPM-98  
(NSN 6625-00-580-3771)**

---

**HEADQUARTERS, DEPARTMENT OF THE ARMY**

**FEBRUARY 1977**

TECHNICAL MANUAL

No. 11-6625-403-20P



HEADQUARTERS  
DEPARTMENT OF THE ARMY  
WASHINGTON, DC, 3 February 1977

# ORGANIZATIONAL MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS

FOR

RADAR TEST SET AN/UPM-98

(NSN 6625-00-580-3771)

Current as of 20 September 1976

## REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 (Test) located in the back of the manual. Simply tear out the self addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 (Test) in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Electronics Command, ATTN.: DRSEL-MA-Q, Fort Monmouth, New Jersey 07703.

In either case a reply will be furnished direct to you.

## Table of Contents

|              |   | Page | Illus.<br>Figure |
|--------------|---|------|------------------|
| SECTION I.   | Introduction .....  | 1    |                  |
| SECTION II.  | Repair parts list .....   | 5    |                  |
| Group 00     | RadarTestSetAN/UPM-981 .....  | 5    |                  |
| 01           | Radar Test Set TS- 1253/UP (No parts authorized)                              |      |                  |
|              | 0101 Display unit .....   | 6    | 2,3              |
|              | 0102 Sweep and intensity mark .....   | 8    | 4                |
|              | 0103 Crystal mark and sync unit.....  | 9    | 5                |
|              | 0104 SIF coder unit .....   | 10   | 6                |
|              | 0105 Main chassis assembly .....  | 11   | 7,8              |
| 02           | Coder Simulator SM-197/UPM-98 (No parts authorized)                           |      |                  |
|              | 0201 Panel chassis assembly.....  | 13   | 9                |
|              | 0202 CAL control unit. ....   | 14   | 10               |
|              | 0203 Mark X coder unit .....  | 15   | 11               |
| 03           | Test Lead Assembly MX-2681/U (No parts authorized)                            |      |                  |
| 04           | Electrical Equipment Case CY-2726/UPM-98 .....                                | 16   | 12               |
| 05           | Cable Assembly, Radio Frequency CG-530B/U (No parts authorized)               |      |                  |
| 06           | Cable Assembly, Radio Frequency CG-409E/U (No parts authorized)               |      |                  |
| 07           | Cable Assembly, Special Purpose, Electrical CX-4963/UPM (No parts authorized) |      |                  |
| 08           | Cable Assembly, Special Purpose, Electrical CX-6092/U (No parts authorized)   |      |                  |
| 09           | Cable Assembly, Radio Frequency CG-530B/U (No parts authorized)               |      |                  |
| 10           | Cable Assembly, Radio Frequency CG-409E/U (No parts authorized)               |      |                  |
| SECTION III. | Special tools list (Not applicable)   |      |                  |
| SECTION IV.  | National stock number and part number index .....                             | 17   |                  |

\*This manual supersedes TM 11-25403-20P, 2 July 193.

## SECTION I INTRODUCTION

### 1. Scope

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of organizational maintenance of the AN/VPM-98. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

### 2. General

This Repair Parts and Special Tools List is divided into the following sections

*a. Section II. Repair Parts List.* A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

*b. Section III. Special Tools List.* Not applicable.

*c. Section IV. National Stock Number and Part Number Index.* A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphanumeric sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

### 3. Explanation of Columns

*a. Illustration.* This column is divided as follows:

*(1) Figure number.* Indicates the figure number of the illustration on which the item is shown.

*(2) Item number.* The number used to identify item called out in the illustration.

*b. Source, Maintenance, and Recoverability (SMR) Codes.*

*(1) Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

| Code | Definition   |
|------|--|
| PA-  | Item procured and stocked for anticipated or known usage.  |
| PD-  | Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues |

#### Code

#### Definition

|     |  |
|-----|--|
|     | or outfittings. Not subject to automatic replenishment.  |
| XD- | A support item that is not stocked. When required, item will be procured through normal supply channels. |

#### NOTE

**Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.**

*(2) Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

*(a)* The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

| Code | Application/Explanation  |
|------|--|
| O-   | Support item is removed, replaced, used at the organizational level. |

*(b)* The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

| Code | Application/Explanation   |
|------|---|
| H-   | The lowest maintenance level capable of complete repair of the support item is the general support level. |
| Z-   | Nonreparable. No repair is authorized.  |

*(3) Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

| Recoverability codes | Definition   |
|----------------------|--|
| Z                    | Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3. |
| H                    | Reparable item. When uneconomically reparable, condemn and dispose at the general support level. |

c. *National Stock Number.* Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. *Part Number.* Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

#### NOTE

**When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.**

e. *Federal Supply Code for Manufacturer (FSCM).* The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. *Description.* Indicates the Federal item name and, if required, a minimum description to identify the item.

g. *Unit of Measure (U/M).* Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. *Quantity Incorporated in Unit.* Indicated the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

#### 4. Special Information

a. The following publication pertains to the AN/UPM-98 and its components:

TM 11-6625-403-14, Radar Test Set AN/UPM-98

b. The illustrations in this manual are identical to those published in TM 11-6625-403-40P. Only those parts assigned the third position SMR maintenance code "C" or "0" are listed in the tabular listing; therefore, there may be a break in the item number sequence. Only illustrations containing organizational authorized items appear in this manual.

#### 5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.

(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

#### 6. Abbreviations

Not applicable.

(Next printed page is 5)

2/3/4 (Blank)


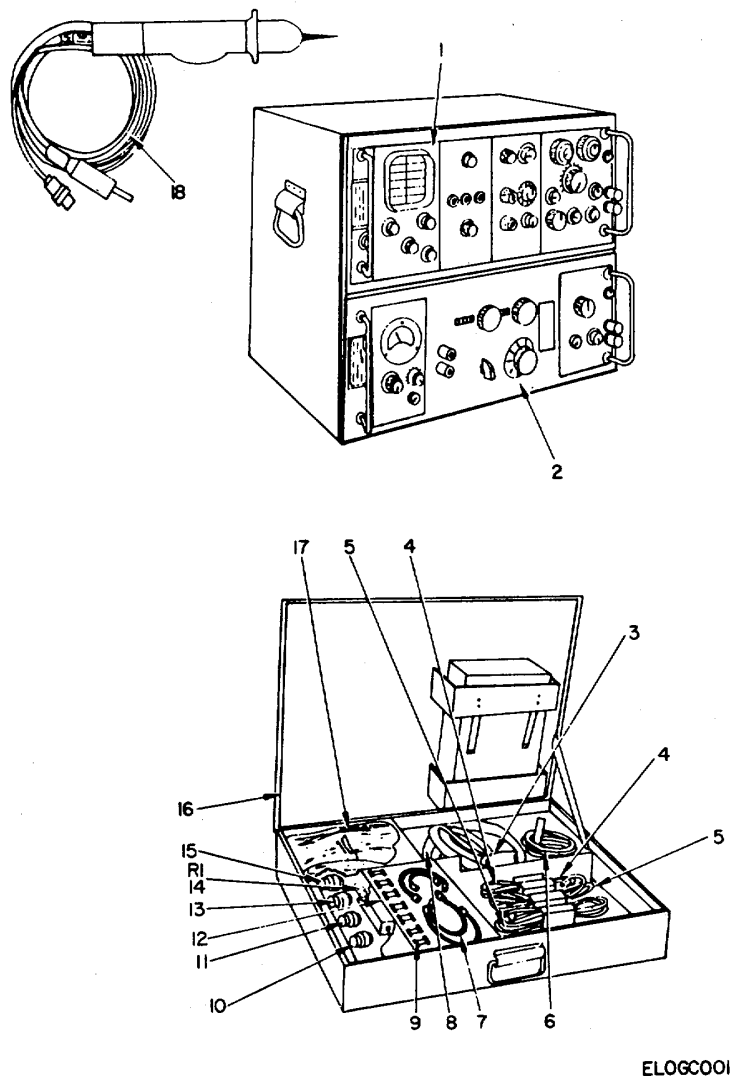


Figure 1. Radar Test Set AN/UPM-98.


| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION                          | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|---|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC   | U/M | QTY<br>INC<br>IN<br>UNIT |
| 1                   | 3                  | PDOHH       | 5995-00-889-1047            | CX963UPN       | 80058 | GROUP 00 RADAR TEST SET AN/UPH98            | EA  | 1                        |
| 1                   | 4                  | XDOHH       | 5995-00-503-0470            | CG530BU        | 80058 | CABLE ASSEMBLY, SPECIAL PURPOSE, ELECTRICAL | EA  | 2                        |
| 1                   | 5                  | PDOHH       | 5995-00-889-1048            | CG409EU        | 80058 | CABLE ASSEMBLY, RADIO FREQUENCY             | EA  | 2                        |
| 1                   | 8                  | PDOHH       |                             | CX6092U        | 80058 | CABLE ASSEMBLY, SPECIAL PURPOSE, ELECTRICAL | EA  | 1                        |

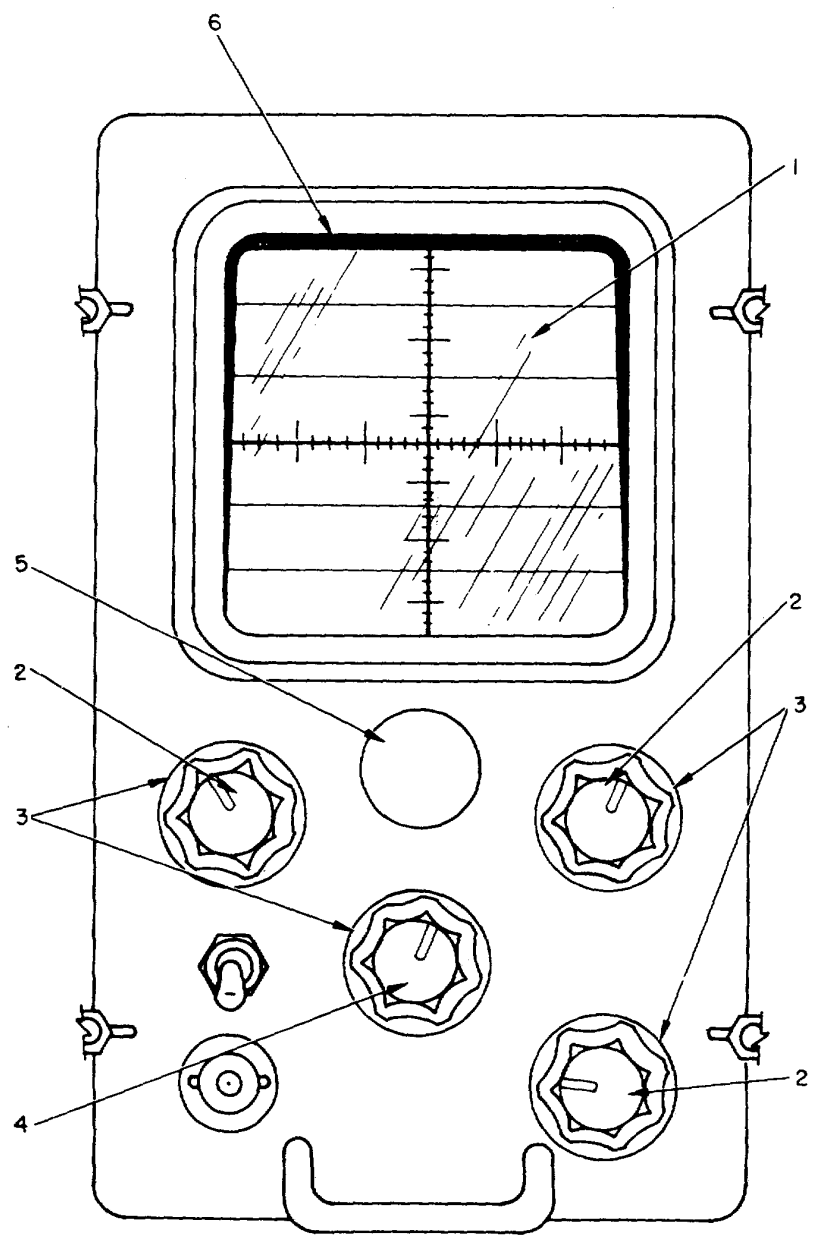

ELOGC002

Figure 2. Display Unit, Front View.


| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION      | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|-------------------------|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC                     | U/M | QTY<br>INC<br>IN<br>UNIT |
| 2                   | 2                  | PAOZZ       | 5355-00-739-8152            | 533A98-1       | 70117 | GROUP 0101 DISPLAY UNIT | EA  | 3                        |
| 2                   | 3                  | PAOZZ       | 5355-00-753-5164            | S645-5LBB538   | 75376 | KNOB                    | EA  | 4                        |
| 2                   | 4                  | PAOZZ       | 5355-00-819-0067            | 533A98-3       | 70117 | KNOB                    | EA  | 1                        |

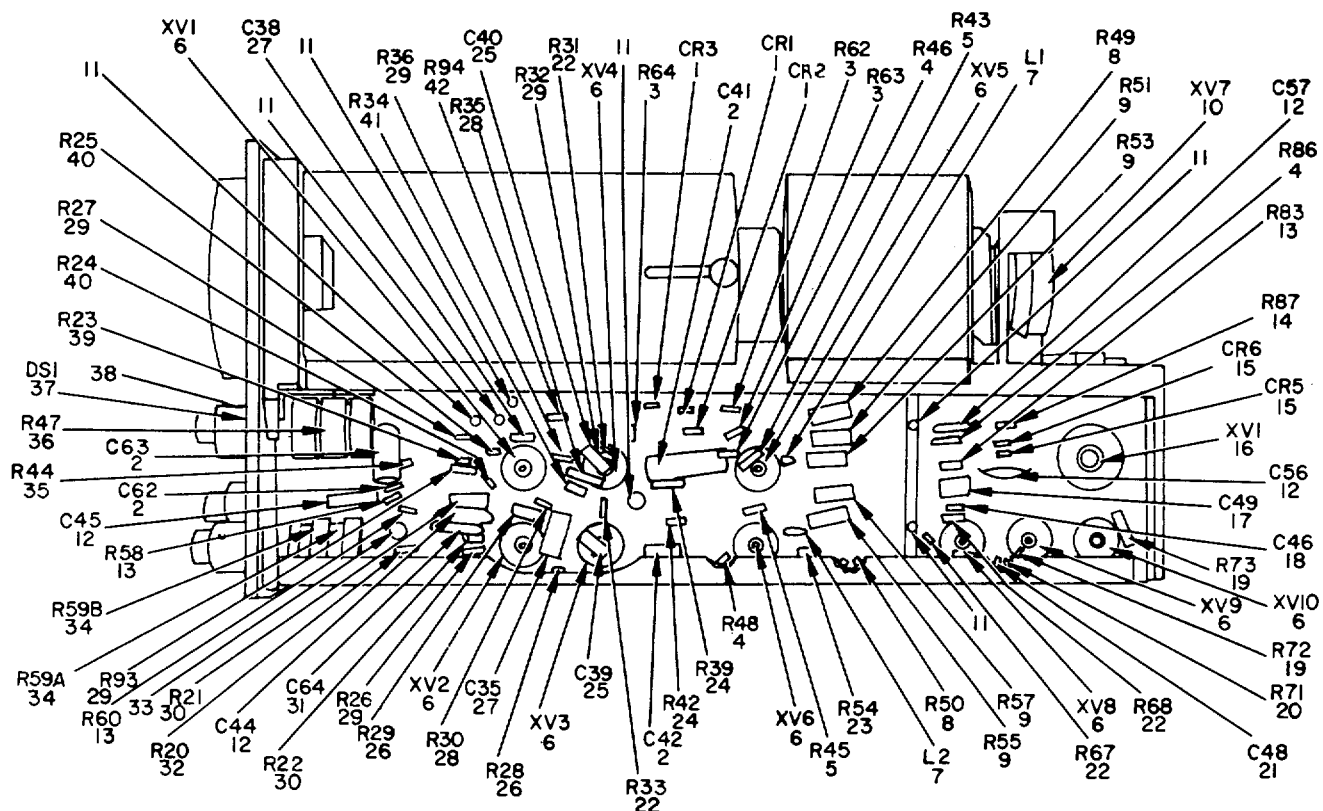

ELOGC003

Figure 3. Display Unit, Right Side View.

[illegible]

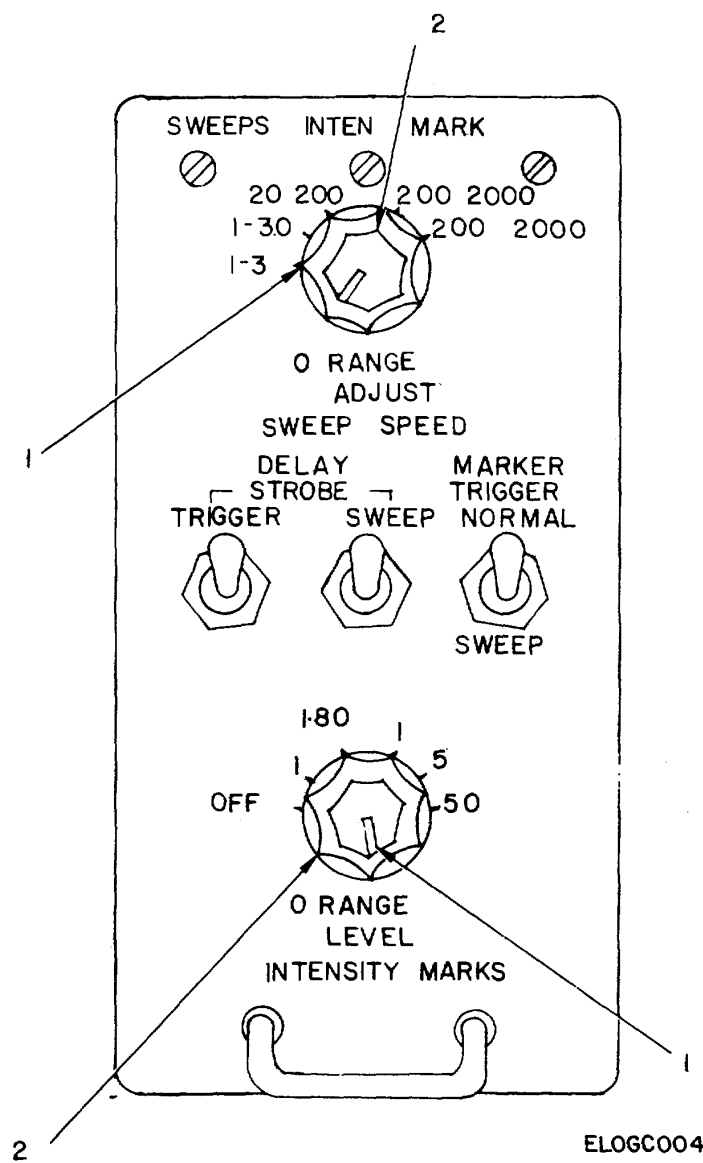


ELOGC004

Figure 4. Sweep and Intensity Mark Unit, Front View.

| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION  | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|---|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC   | U/M | QTY<br>INC<br>IN<br>UNIT |
| 4                   | 1                  | XDOZZ       |                             | 5645-52BB      | 75376 | GROUP 0102 SWEEP & INTENSITY MARK UNIT<br>KNOB SWEEP SPEED ADJUST AND INTENSITY MARKS LEVEL | EA  | 2                        |
| 4                   | 2                  | PAOZZ       | 5355-00-819-0067            | 533A98-3       | 70117 | KNOB SWEEP SPEED RANGE AND INTENSITY MARKS RANGE  | EA  | 2                        |




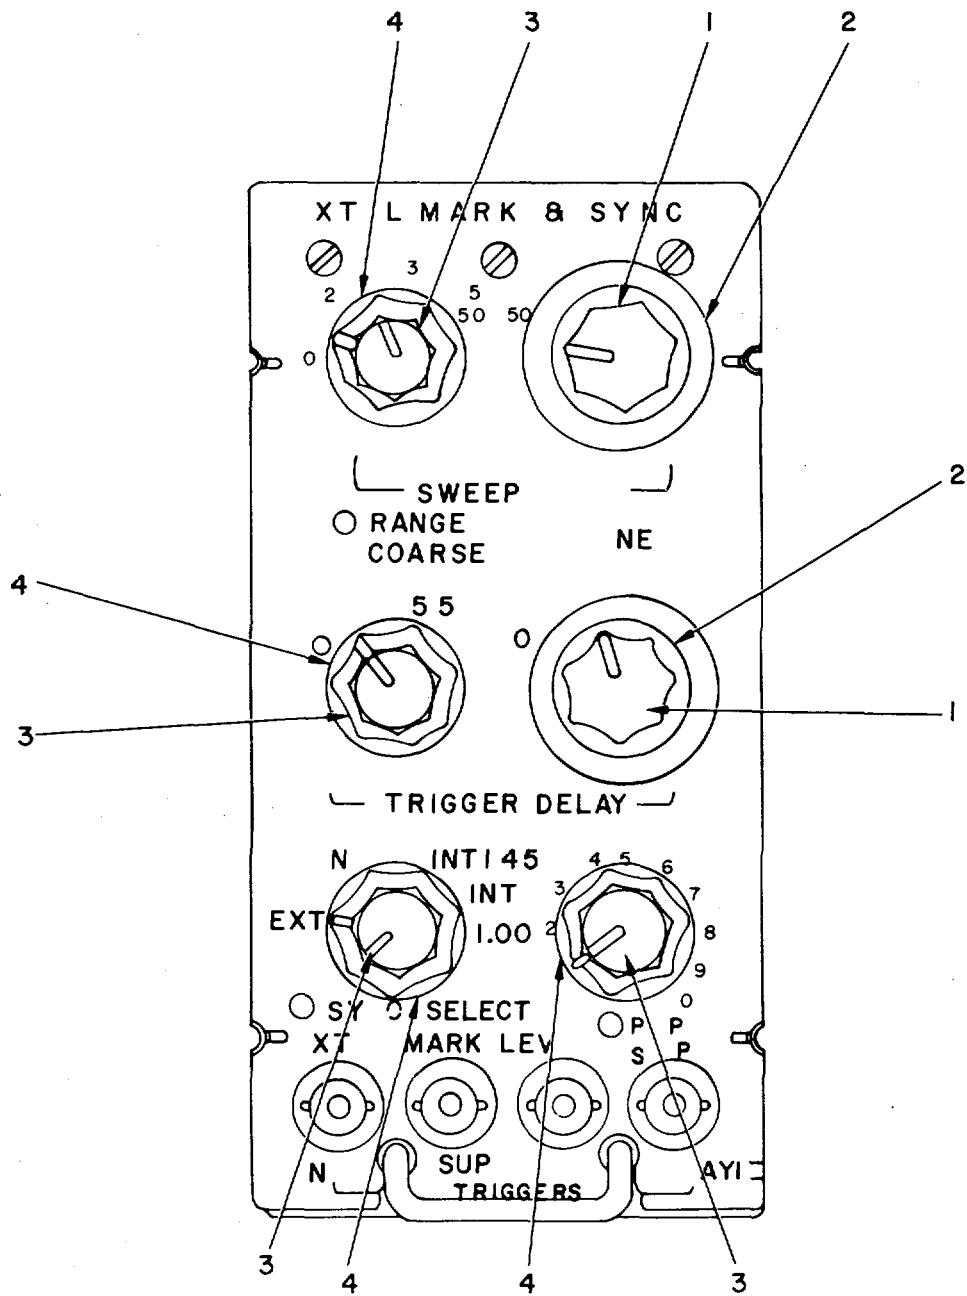

ELOGC005

Figure 5. Crystal Mark and Sync Unit.

| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION                    | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|---------------------------------------|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC                                   | U/M | QTY<br>INC<br>IN<br>UNIT |
| 5                   | 1                  | PAOZZ       | 5355-00-473-5857            | S647-4LBB      | 75376 | GROUP 0103 CRYSTAL MARK AND SYNC UNIT | EA  | 2                        |
| 5                   | 3                  | XDOZZ       | 5355-00-819-0067            | S645-5LBB      | 75376 | KNOB                                  | EA  | 4                        |
| 5                   | 4                  | PAOZZ       | 5355-00-819-0067            | S33A98-3       | 70117 | KNOB                                  | EA  | 4                        |

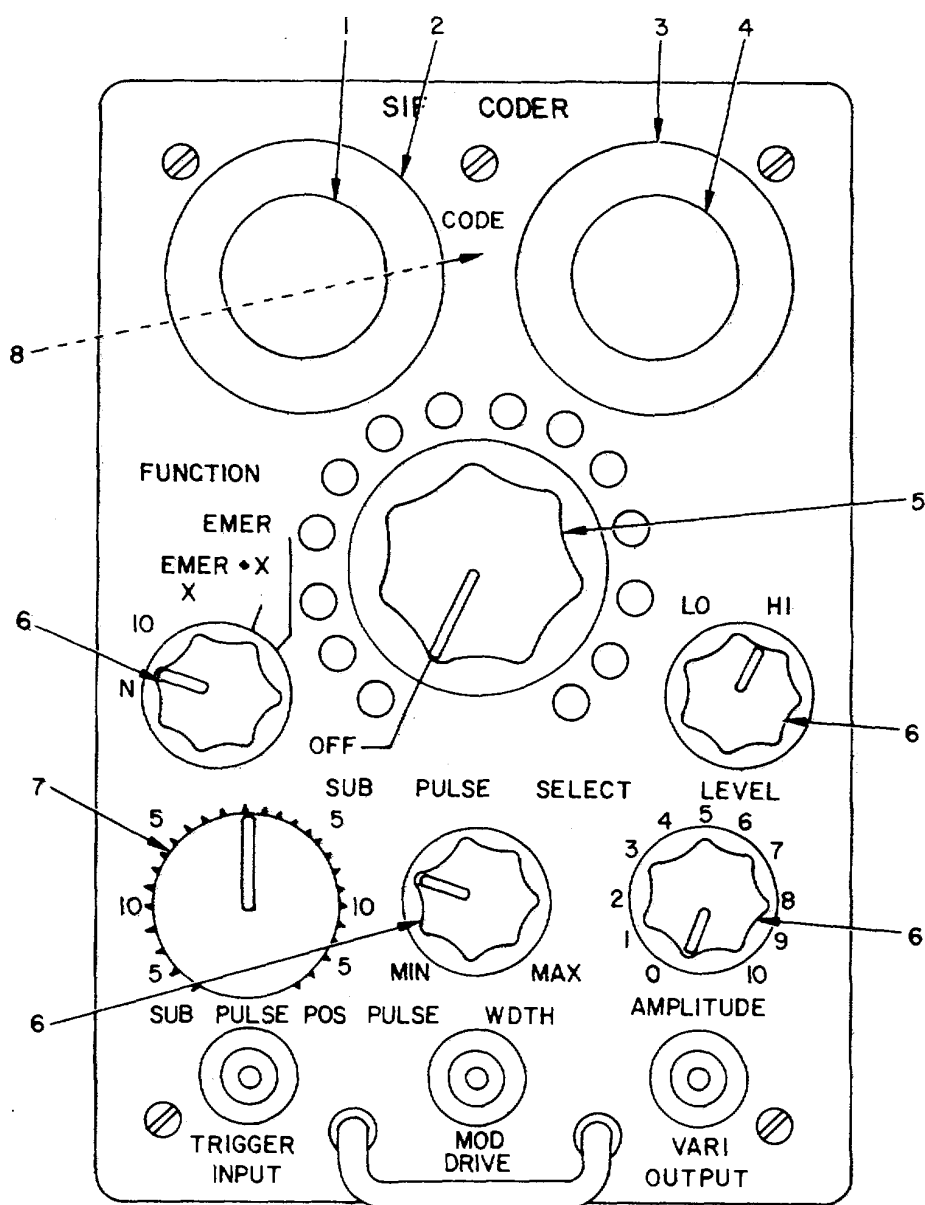

ELOGC006

Figure 6. SIF Coder Unit, Front View.

| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION        | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|---------------------------|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC                       | U/M | QTY<br>INC<br>IN<br>UNIT |
| 6                   | 5                  | PAOZZ       | 5355-00-668-4634            | S649-3LBB      | 75376 | GROUP 0104 SIF CODER UNIT | EA  | 1                        |
| 6                   | 6                  | PAOZZ       | 5355-00-519-9375            | S647-3LBB      | 75376 | KNOB                      | EA  | 4                        |
| 6                   | 7                  | PAOZZ       | 5355-00-474-3849            | 533B106        | 70117 | KNOB                      | EA  | 1                        |


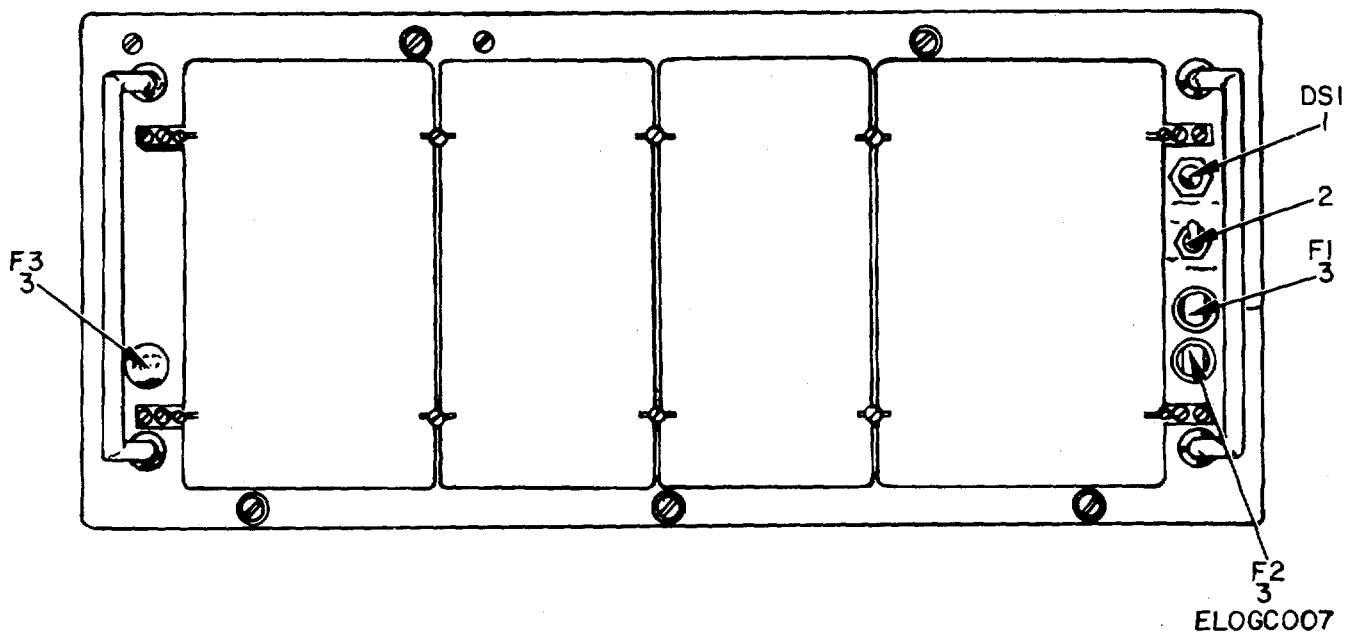


Figure 7. Main Chassis Assembly, Front View.


| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)                              | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|----------------------------------|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | DESCRIPTION<br><br>UOC           | U/M | QTY<br>INC<br>IN<br>UNIT |
| 7                   | 1                  | PAOZZ       | 6240-00-155-8706            | TB14           | 81349 | GROUP 0105 MAIN CHASSIS ASSEMBLY | EA  | 1                        |
| 7                   | 3                  | PAOZZ       | 5920-00-060-2424            | F02G5ROOA      | 81349 | FUSE, CARTRIDGE                  | EA  | 3                        |

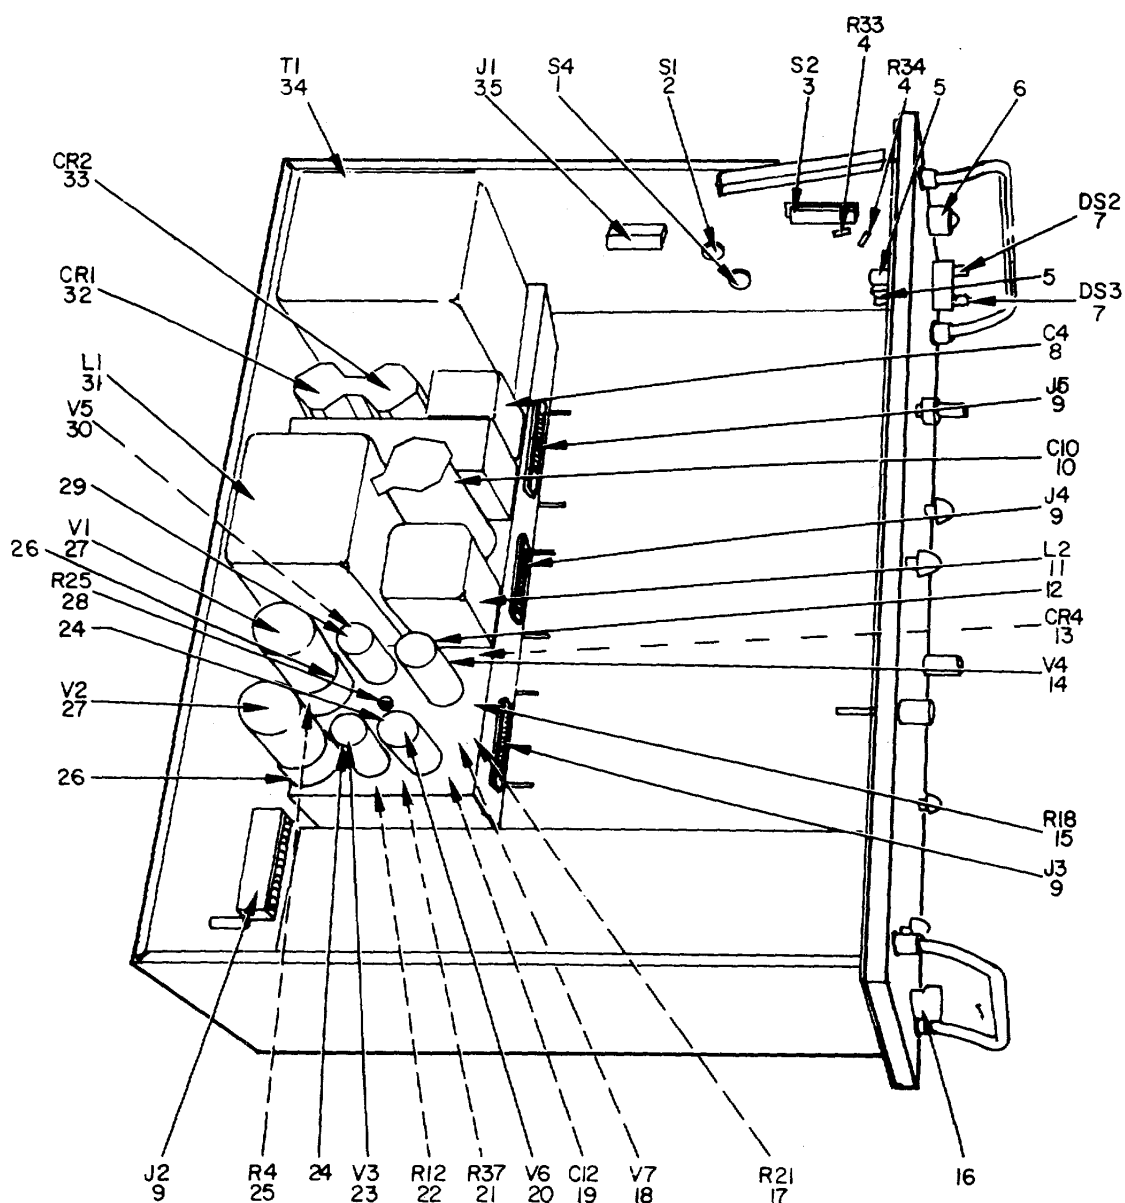

ELOGC008

Figure 8. Main Chassis Assembly, Top View.


| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|--------------------|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC                | U/M | QTY<br>INC<br>IN<br>UNIT |
| 8                   | 7                  | XD0ZZ       |                             | 63231-2        | 80058 | LAMP, GLOW         | EA  | 2                        |

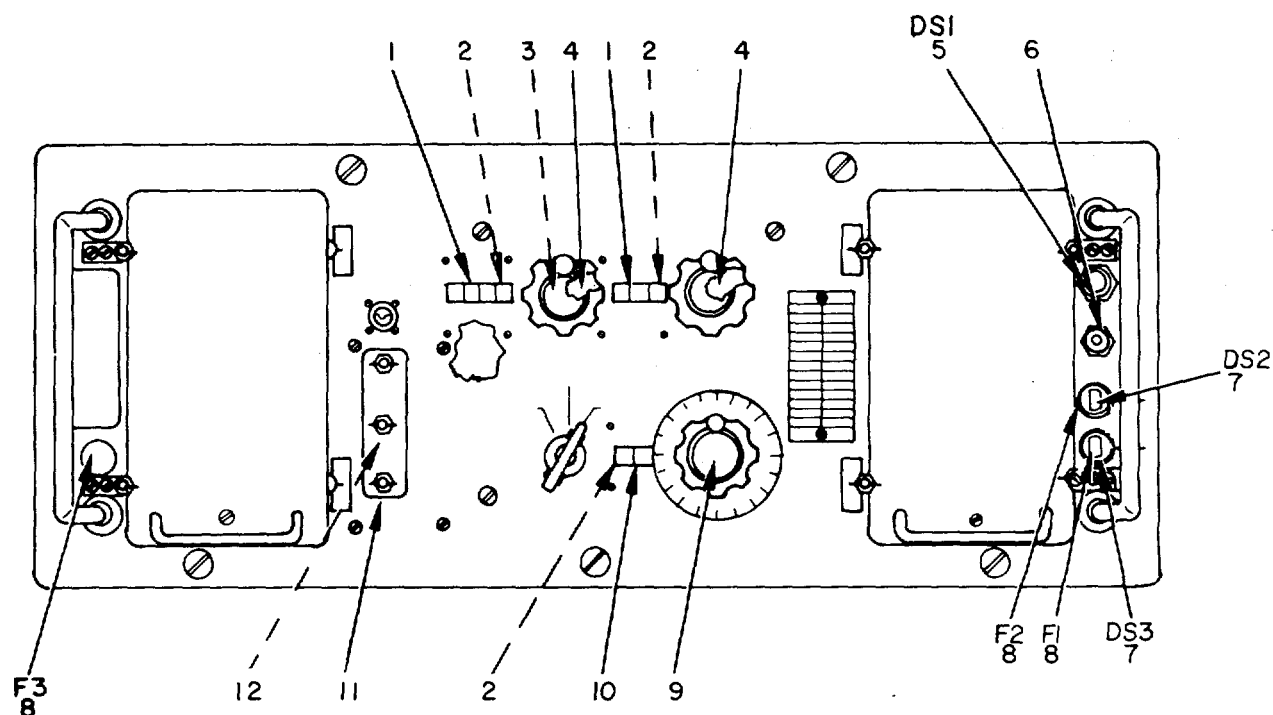

ELOGC009

Figure 9. Panel Chassis Assembly, Front View.

| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)                               | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|-----------------------------------|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | DESCRIPTION<br><br>UOC            | U/M | QTY<br>INC<br>IN<br>UNIT |
| 9                   | 5                  | PAOZZ       | 6240-00-155-8706            | TB14           | 81349 | GROUP 0201 PANEL CHASSIS ASSEMBLY | EA  | 1                        |
| 9                   | 7                  | XDOZZ       | 5920-00-474-5743            | 63231-2        | 80058 | LAMP, INCANDESCENT                | EA  | 2                        |
| 9                   | 8                  | PAOZZ       | 5355-00-813-5386            | F02G3ROOA      | 81349 | LAMP, GLOW                        | EA  | 3                        |
| 9                   | 9                  | PAOZZ       |                             | SCH309-64BB    | 75376 | FUSE, CARTRIDGE<br>KNOB           | EA  | 1                        |

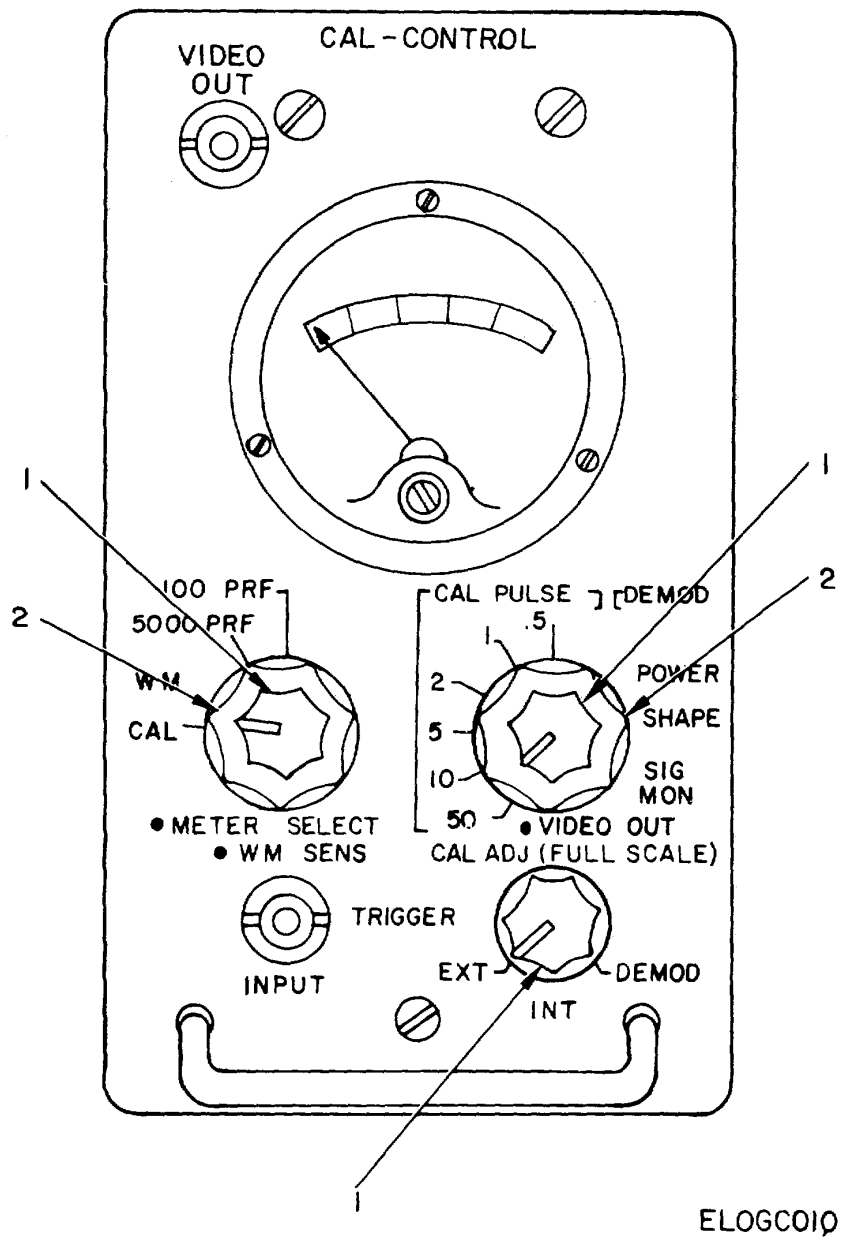

ELOGC010

Figure 10. CAL Control Unit, Front View.

| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION          | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|-----------------------------|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC                         | U/M | QTY<br>INC<br>IN<br>UNIT |
| 10                  | 1                  | XDOZZ       | 5355-00-819-0067            | S645-5LBB      | 75376 | GROUP 0202 CAL CONTROL UNIT | EA  | 3                        |
| 10                  | 2                  | PAOZZ       |                             | 533A98-3       | 70117 | KNOB<br>KNOB                | EA  | 2                        |


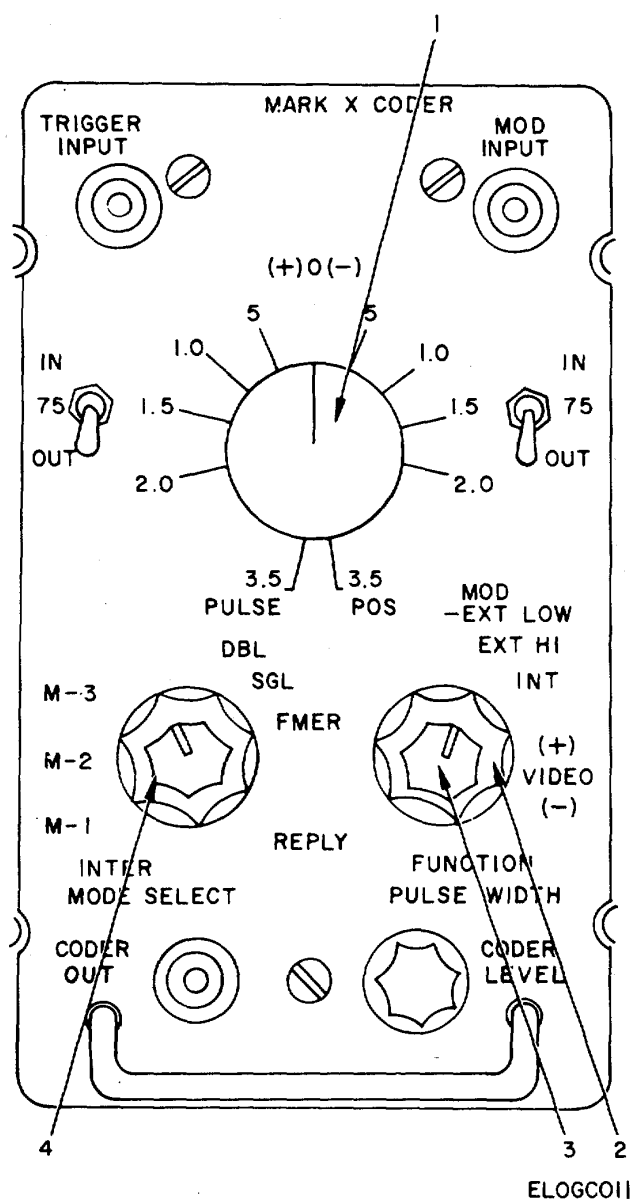


Figure 11. Mark X Coder Unit, Front View.

| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION           | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|------------------------------|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC                          | U/M | QTY<br>INC<br>IN<br>UNIT |
| 11                  | 1                  | PAOZZ       | 5355-00-474-3849            | 533B106        | 70117 | GROUP 0203 MARK X CODER UNIT | EA  | 1                        |
| 11                  | 2                  | XDOZZ       |                             | S645-5LBB      | 75376 | KNOB                         | EA  | 1                        |
| 11                  | 3                  | PAOZZ       | 5355-00-819-0067            | 533A98-3       | 70117 | KNOB                         | EA  | 1                        |
| 11                  | 4                  | PAOZZ       | 5355-00-519-9375            | S647-3LBB      | 75376 | KNOB                         | EA  | 1                        |

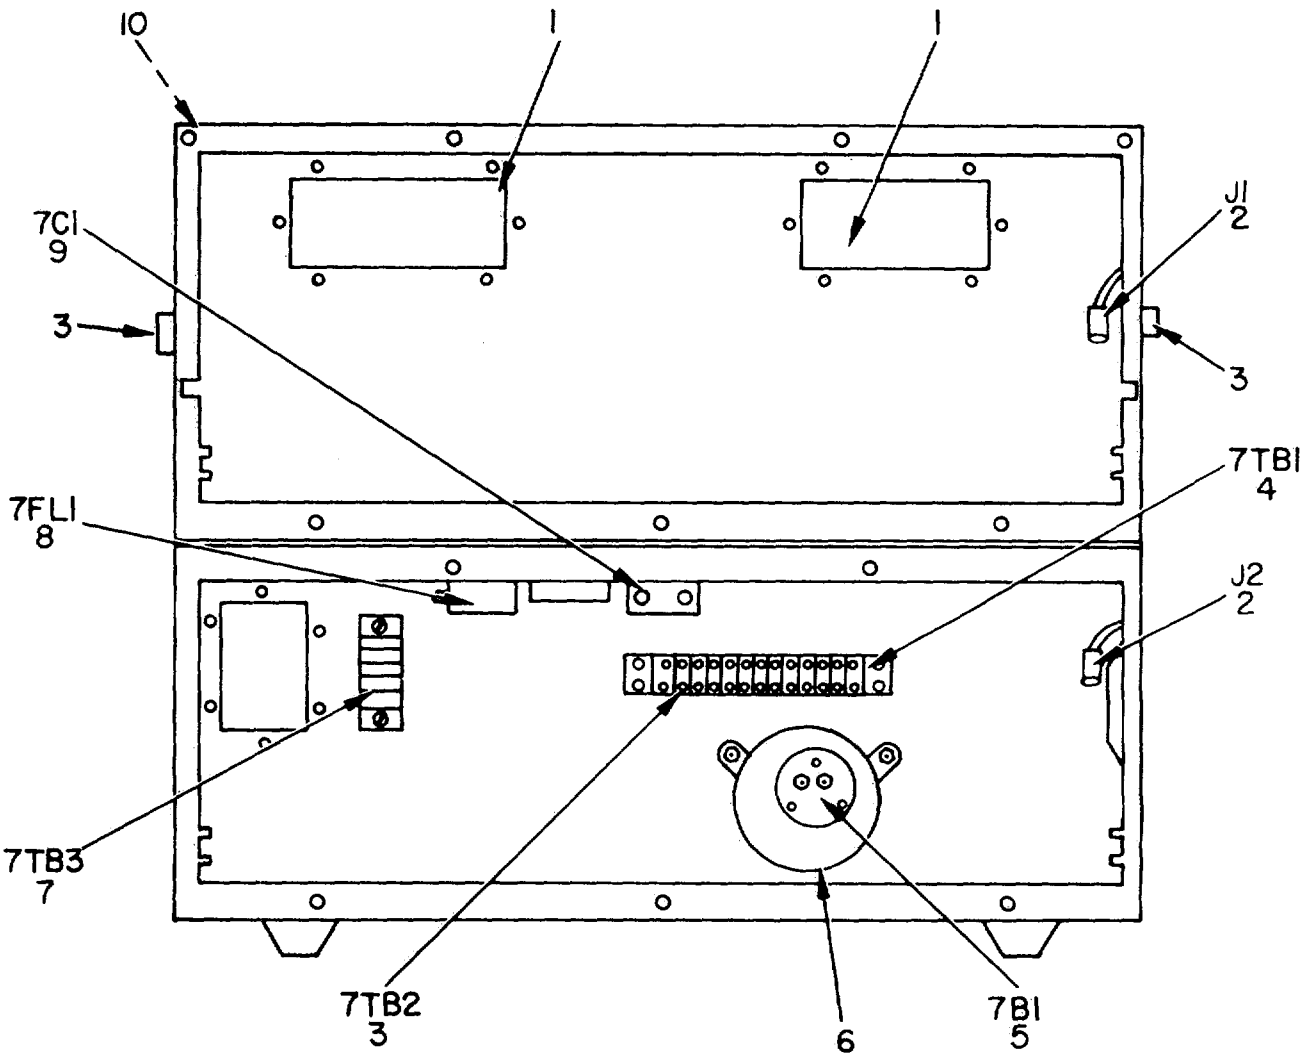

ELOGC012

Figure 12. Electrical Equipment Case CY-2726/UPM-98.

| (1)<br>ILLUSTRATION |                    | (2)         | (3)                         | (4)            | (5)   | (6)<br>DESCRIPTION   | (7) | (8)                      |
|---------------------|--------------------|-------------|-----------------------------|----------------|-------|--|-----|--------------------------|
| (a)<br>FIG<br>NO.   | (b)<br>ITEM<br>NO. | SMR<br>CODE | NATIONAL<br>STOCK<br>NUMBER | PART<br>NUMBER | FSCM  | UOC  | U/M | QTY<br>INC<br>IN<br>UNIT |
| 12                  | 1                  | PAOZZ       | 4130-00-725-4823            | AF1952B        | 82866 | GROUP 04 ELECTRICAL EQUIPMENT CASE                                     | EA  | 1                        |
| 12                  | 6                  | PAOZZ       | 4130-00-779-0845            | 9200X          | 82866 | CY-2726/UPM-98<br>FILTER, AIR CONDITIONING<br>FILTER, AIR CONDITIONING | EA  | 1                        |



**SECTION IV NATIONAL STOCK NUMBER AND PART NUMBER INDEX****NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX**

| <b>STOCK NUMBER</b> | <b>FIGURE NO.</b> | <b>ITEM NO.</b> | <b>STOCK NUMBER</b> | <b>FIGURE NO.</b> | <b>ITEM NO.</b> |
|---------------------|-------------------|-----------------|---------------------|-------------------|-----------------|
| 5920-00-060-2424    | 7                 | 3               | 5355-00-739-8152    | 2                 | 2               |
| 6240-00-155-8706    | 7                 | 1               | 5355-00-753-5164    | 2                 | 3               |
| 5355-00-474-3849    | 6                 | 7               | 5355-00-819-0067    | 2                 | 4               |
| 5355-00-474-3849    | 11                | 1               | 5355-00-819-0067    | 4                 | 2               |
| 5920-00-474-5743    | 9                 | 8               | 5355-00-819-0067    | 5                 | 4               |
| 5995-00-503-0470    | 1                 | 5               | 5355-00-819-0067    | 10                | 2               |
| 5355-00-519-9375    | 6                 | 6               | 5355-00-819-0067    | 11                | 3               |
| 5355-00-519-9375    | 11                | 4               | 5995-00-889-1047    | 1                 | 3               |
| 5355-00-668-4634    | 6                 | 5               | 5995-00-889-1048    | 1                 | 8               |
| 4130-00-725-4823    | 12                | 1               |                     |                   |                 |

| <b>PART NUMBER</b> | <b>FSCM</b> | <b>FIG. NO.</b> | <b>ITEM NO.</b> | <b>PART NUMBER</b> | <b>FSCM</b> | <b>FIG. NO.</b> | <b>ITEM NO.</b> |
|--------------------|-------------|-----------------|-----------------|--------------------|-------------|-----------------|-----------------|
| AF1952B            | 82866       | 12              | 1               | S649-3LBB          | 75376       | 6               | 5               |
| CG409EU            | 80058       | 1               | 5               | TB14               | 81349       | 7               | 1               |
| CG530BU            | 80058       | 1               | 4               | TB14               | 81349       | 9               | 5               |
| CX4963UPM          | 80058       | 1               | 3               | 328R               | 24455       | 3               | 37              |
| CX6092U            | 80058       | 1               | 8               | 533A98-1           | 70117       | 2               | 2               |
| F02G3ROOA          | 81349       | 9               | 8               | 533A98-3           | 70117       | 2               | 4               |
| FO2GSROOA          | 81349       | 7               | 3               | 533A98-3           | 70117       | 4               | 2               |
| SCH309-65BB        | 75376       | 9               | 9               | 533A98-3           | 70117       | 5               | 4               |
| S645-5LBB          | 75376       | 5               | 3               | 533A98-3           | 70117       | 10              | 2               |
| S645-5LBB          | 75376       | 10              | 1               | 533A98-3           | 70117       | 11              | 3               |
| S645-5LBB          | 65376       | 11              | 2               | 533B106            | 70117       | 6               | 7               |
| S645-5LBB538       | 75376       | 2               | 3               | 533B106            | 70117       | 11              | 1               |
| S645-52BB          | 75376       | 4               | 1               | 63231-2            | 80058       | 8               | 7               |
| S647-3LBB          | 75376       | 6               | 6               | 63231-2            | 80058       | 9               | 7               |
| S647-3LBB          | 75376       | 11              | 4               | 9200X              | 82866       | 12              | 6               |

**LATEST NATIONAL STOCK NUMBER ASSIGNMENTS**

| <b>STOCK NUMBER</b> | <b>FIGURE NO.</b> | <b>ITEM NO.</b> |
|---------------------|-------------------|-----------------|
| 6240-00-155-8706    | 9                 | 5               |
| 6240-00-274-4015    | 3                 | 37              |
| 5355-00-473-5857    | 5                 | 1               |
| 4130-00-779-0845    | 12                | 6               |
| 5355-00-813-5386    | 9                 | 9               |

**LATEST PART NUMBER ASSIGNMENT**

| <b>PART NUMBER</b> | <b>FIGURE FSCM</b> | <b>ITEM NO.</b> | <b>NO.</b> |
|--------------------|--------------------|-----------------|------------|
| S647-4LBB          | 75376              | 5               | 1          |

By Order of the Secretary of the Army:

Official:

PAUL T. SMITH  
*Major General, United States Army*  
*The Adjutant General*

BERNARD W. ROGERS  
*General, United States Army*  
*Chief of Staff*

DISTRIBUTION:

*Active Army:*

USASA (2)  
COE (1)  
TSG(1)  
USAARENB (1)  
DARCOM (1)  
MICOM (2)  
TECOM (2)  
USACC (4)  
TRADOC (2)  
OS Maj Comd(4)  
LOGCOMD (3)  
MDW (1)  
Armies (2)  
Corps (2)  
Instl (2) except  
    Ft Gillem (10)  
    Ft Gordon (10)  
    Ft Huachuca (10)  
    Ft Carson (5)  
    SAAD (30)  
    LBAD (14)  
    TOAD (14)  
    SHAD (3)  
HISA (Ft Monmouth) (33)  
Ft Richardson (ECOM Ofc) (2)  
Svc Colleges (1)  
USASIGS (5)  
USAICS (3)  
USAADS (2)  
USAFAS (2)  
USAARMS (2)  
USAIS (2)  
USAES (2)  
MAAG (1)  
USARMIS (1)  
USAERDAA (1)  
USAERDAW (1)  
Sig FLDMS (1)  
Units org under fol TOE:- 1 ea.  
    11-16  
    11-117  
    11-500(AA AC)

ARNG: State AG (3).

USAR: None.

For explanation of abbreviations used, see AR 310-50.

GPO 18--265

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



THEN... JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM, CAREFULLY TEAR IT  
OUT, FOLD IT AND DROP IT  
IN THE MAIL!

**SOMETHING WRONG** WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

PUBLICATION DATE

PUBLICATION TITLE

BE EXACT... PIN-POINT WHERE IT IS

PAGE  
NO.

PARA-  
GRAPH

FIGURE  
NO.

TABLE  
NO.

IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

TEAR ALONG PERFORATED LINE

DA FORM 2028-2  
1 JUL 79

PREVIOUS EDITIONS  
• ARE OBSOLETE.

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR  
RECOMMENDATION MAKE A CARBON COPY OF THIS  
AND GIVE IT TO YOUR HEADQUARTERS.



This fine document...

Was brought to you by me:



### [Liberated Manuals -- free army and government manuals](#)

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to [liberatedmanuals.com](http://liberatedmanuals.com), so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals</A>

- Sincerely  
Igor Chudov  
<http://igor.chudov.com/>
- [Chicago Machinery Movers](#)