

**TECHNICAL MANUAL**

**GENERAL SUPPORT MAINTENANCE  
REPAIR PARTS AND SPECIAL TOOLS LISTS**

**FOR**

**TEST SET, TELETYPEWRITER  
TS-799/UGM-1 AND TS-799A/UGM-1  
(NSN 6625-00-965-0196)**

---

**HEADQUARTERS, DEPARTMENT OF THE ARMY  
28 FEBRUARY 1979**



TECHNICAL MANUAL  
No. 11-6625-620-40P-1 }

HEADQUARTERS  
DEPARTMENT OF THE ARMY  
WASHINGTON, DC, 28 February 1979

**GENERAL SUPPORT MAINTENANCE  
REPAIR PARTS AND SPECIAL TOOLS LISTS  
FOR  
TEST SET, TELETYPEWRITER  
TS-799/UGM-1 AND TS-799A/UGM-1  
(NSN 6625-00-965-0196)**

*Current as of 5 October 1978*

**REPORTING OF ERRORS**

You can improve this manual by recommending improvements using DA Form 2028-2 located in the back of the manual. Simply tear out the self-addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Form 2028-2 in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-ME-MQ, Fort Monmouth, NJ 07703.

In either case a reply will be furnished direct to you.

**Table of Contents**

SECTION	Page	Illus	Figure
S ECTION I. Introduction . . . . .	1		
II. Repair Parts List . . . . .	5		
Group 02 Teletypewriter Test Set TS-799/UGM-1 and TS-799A/UGM-1 . . . . .	5	1	
0201 Teletypewriter Test Set (SMD552591 and SMD889357) . . . . .	7	2	
Front Panel Assembly . . . . .	9	3	
Chassis Assembly . . . . .	13	4	
020101 Power Supply Assembly . . . . .	17	5	
Component Board Assembly 2A3A1 . . . . .	19	6	
020102 Test Set Subassembly A1 . . . . .	21	7	
020103 Test Set Subassembly A2 . . . . .	23	8	
020104 Test Set Subassembly A3 . . . . .	25	9	
020105 Test Set Subassembly A4 . . . . .	27	10	
020106 Test Set Subassembly A5 . . . . .	29	11	
020107 Test Set Subassembly A6 . . . . .	31	12	
020108 Test Set Subassembly A7 . . . . .	33	13	
020109 Test Set Subassembly A8 . . . . .	35	14	
020110 Test Set Subassembly A9 . . . . .	37	15	
020111 Test Set Subassembly A10 . . . . .	39	16	
020112 Test Subassembly All Thru A14 . . . . .	41	17	

\* This manual, together with TM 11-6625-620-20P, 28 February 1979 supersedes TM 11-6625-620-25P-1, 25 May 1971.

**Table of Contents—Continued**

SECTION		Page	Illus	Figure
	020113 Test Set Subassembly A15 Thru A18 . . . . .	43	18	
	020114 Test Set Subassembly A19 . . . . .	45	19	
	020115 Test Set Subassembly 2A1A1 . . . . .	47	20	
	020116 Harness Board Assembly 2A2 . . . . .	49	21	
SECTION	III. Special Tools List (Nonapplicable)			
	IV. National Stock Number and Part Number Index . . . . .	50		

# SECTION I

## INTRODUCTION

---

### **1. Scope**

This manual lists spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of general support maintenance of the TS-799/UGM-1 and TS-799A/UGM-1. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

### **2. General**

This Repair Parts and Special Tools List is divided into the following sections:

*a. Section II. Repair Parts List.* A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

*b. Section III. Special Tools List.* Not applicable.

*c. Section IV. National Stock Number and Part Number Index.* A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

### **3. Explanation of Columns**

*a. Illustration.* This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

*b. Source, Maintenance, and Recoverability (SMR) Codes.*

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source males are entered in the first and second positions of the Uniform SMR Code format as follows:

#### *Code                      Definition*

PA—Item procured and stocked for anticipated or known usage.

XA—Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.

<i>Code</i>	<i>Definition</i>
XB	Item is not procured or stocked. If not available through salvage, requisition.
XD-A	Support item that is not stocked. When required, item will be procured through normal supply channels.

#### **NOTE**

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

*(2) Maintenance code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance:

<i>Code</i>	<i>Application/Explanation</i>
O	Support item is removed, replaced, used at the organizational level.

H	Support item is removed, replaced, used at the general support level.
---	-----------------------------------------------------------------------

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
H	The lowest maintenance level capable of complete repair of the support item is the general support level.

Z—Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

#### *Recoverability codes                      Definition*

Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
---	--------------------------------------------------------------------------------------------------

<i>Recoverability codes</i>	<i>Definition</i>	<i>Code</i>	<i>Used on</i>
D	D-Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.	DRC	TS-799/UGM-1
DRD	c. <i>National Stock Number.</i> Indicates the National stock number assigned to the item and will be used for requisitioning purposes.	DRD	TS-799A/UGM-1
<i>d. Part Number.</i> Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.			
<b>NOTE</b>			
When a stock-numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.			
e. <i>Federal Supply Code for Manufacturer (FSCM).</i> The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.			
f. <i>Description.</i> Indicates the Federal item name and, if required, a minimum description to identify the item.			
g. <i>Unit of Measure (U/M).</i> Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.			
h. <i>Quantity Incorporated in Unit.</i> Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.			
<b>4. Special Information</b>			
a. Usable on codes are shown in the description column. Uncoded items are applicable to all models. Identification of the usable on codes used in this publication are:			
(Next printed page is 4)			



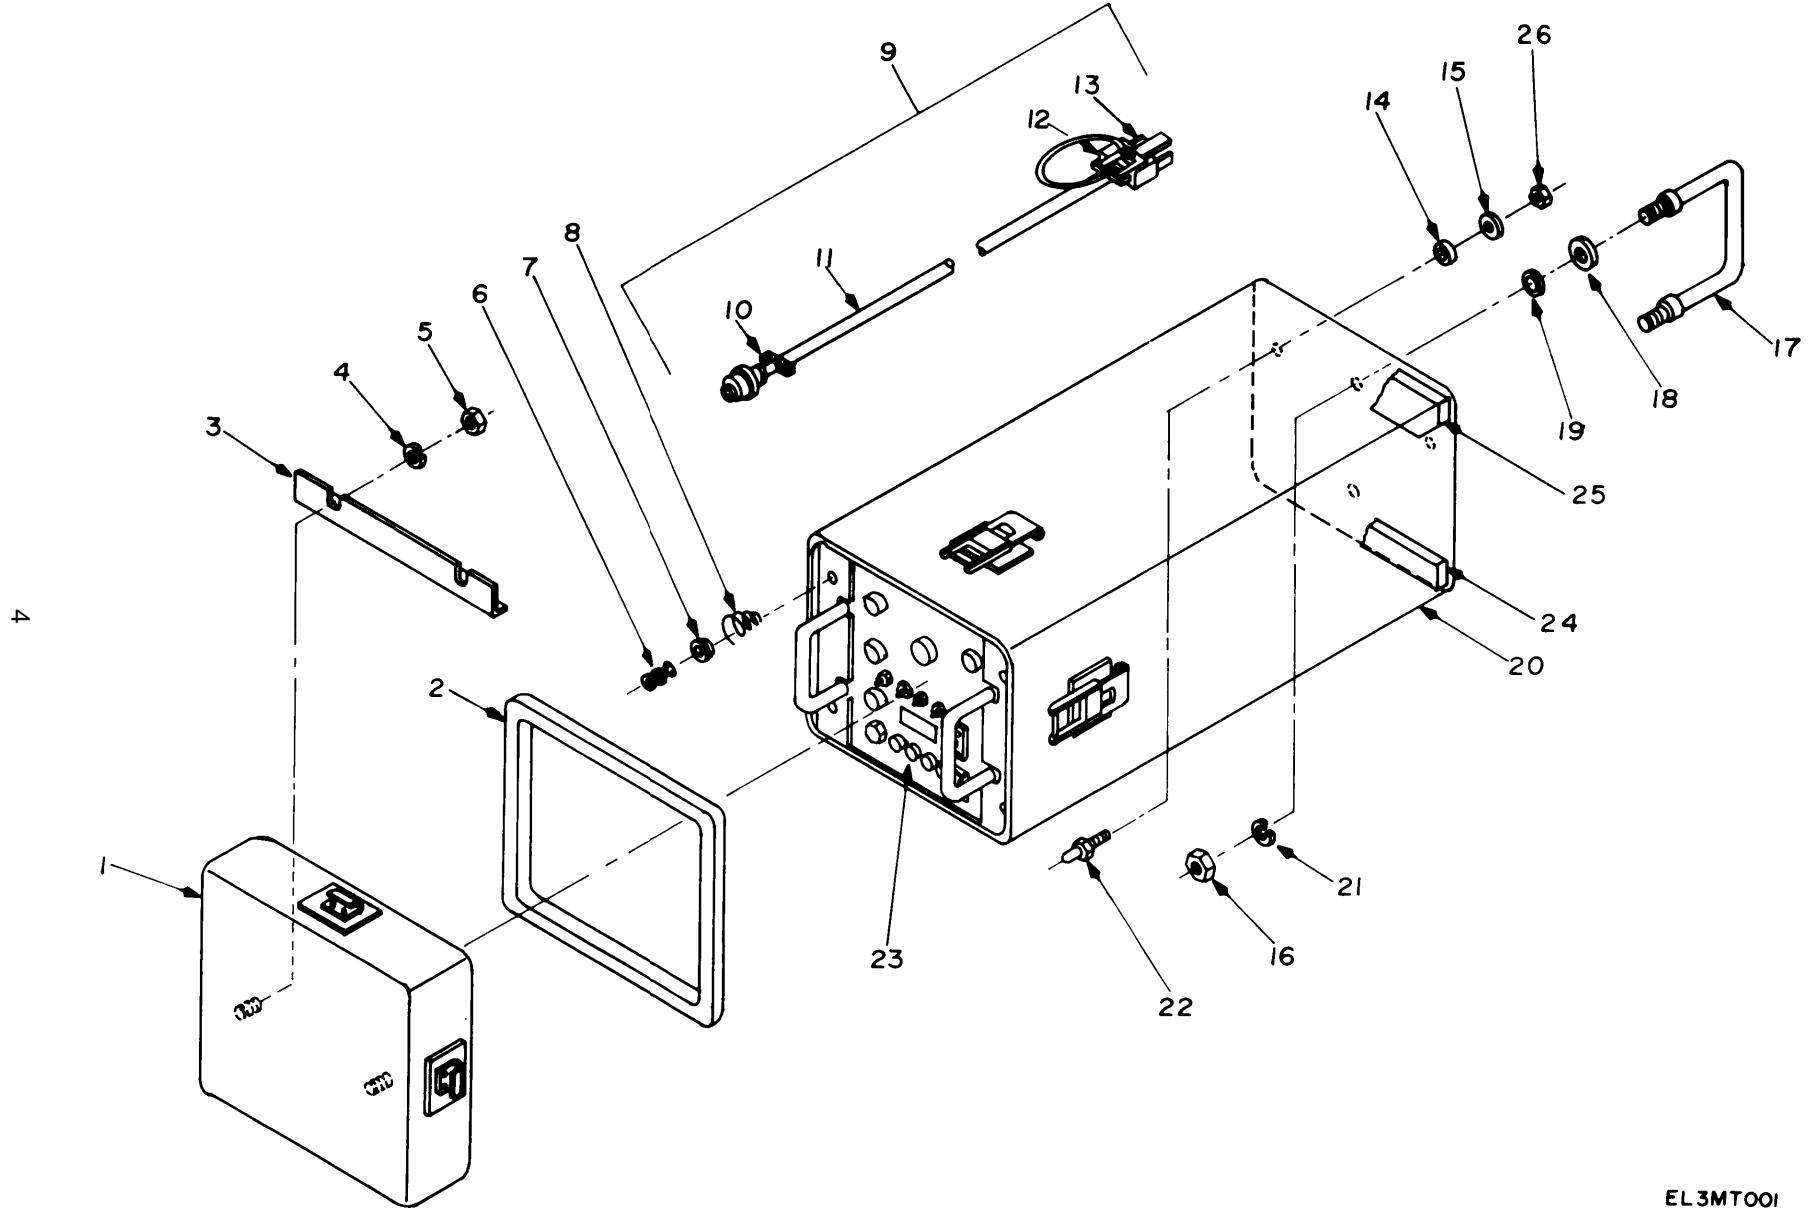


Figure 1. Teletypewriter Test Set TS-799/UGM-1 and TS-799A/UGM-1.

SECTION II ILLUSTRATION FIG NO.		(2) (B) ITEM NO.	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) QTY INC IN	(8) QTY INC IN
						FSCM	USABLE ON CODE	U/M UNIT
GROUP 02 TELETYPEWRITER TEST SET								
TS-799/UGM-1 AND TS-799A/UGM-1								
1	1	XDHZZ		SMD552572	80063	COVER	EA	1
1	2	XDHZZ		SMC552632	80063	GASKET,RUBBER	EA	1
1	3	XDHZZ		SMC552736	80063	BRACKET	EA	1
1	4	PAHZZ	5310-00-543-5933	MS35333-73	96906	WASHER,LOCK	EA	2
1	5	PAHZZ	5310-00-934-9765	MS35650-304	96906	NUT,PLAIN,HEX	EA	2
1	6	XDHZZ		SMC552765-22	80063	STUD ASSEMBLY	EA	4
1	7	XDHZZ		SMA552767-1	80063	WASHER,RETAINING	EA	4
1	8	XDHZZ		SMB552571	80063	SPRING,COMPRESSION	EA	4
1	9	PAHZZ	5995-00-469-2277	SM-B-552580	80063	CABLE ASSEMBLY,SPEC	EA	1
1	10	PAHZZ	5935-00-814-6598	MS3116E12-3S	96906	CONNECTOR,PLUG,ELEC	EA	1
1	11	XDHZZ	6145-00-284-0579	CO03MGF3-18-0340	81349	CABLE,POWER,ELECTRI	IN	91
1	12	PAHZZ	5935-00-843-7362	UP131M	81349	CONNECTOR,PLUG,ELEC	EA	1
1	13	XDHZZ		SMB430875	80063	TERMINAL,LUG	EA	1
1	14	XDHZZ		SMB552633-3	80063	WASHER,SEAL	EA	2
1	15	PAHZZ	5310-00-582-5677	MS15795-810	96906	WASHER,FLAT	EA	4
1	16	PAHZZ	5310-00-903-1524	MS35690-630	96906	NUT,PLAIN,HEXAGON	EA	2
1	17	XDHZZ		SMC552634	80063	HANDLE,BAIL	EA	1
1	18	PAHZZ	5310-00-773-7618	MS15795-814	96906	WASHER,FLAT	EA	2
1	19	XDHZZ		SMB552633-2	80063	WASHER,SEAL	EA	2
1	20	XDHZZ		SMD552567	80063	CASE,TEST	EA	1
1	21	PAHZZ	5310-00-616-7998	MS35334-21	96906	WASHER,LOCK	EA	2
1	22	XDHZZ		SMB552630	80063	PIN,GUIDE	EA	2
1	23	XDHHD		SMD552591	80063	TEST SET	DRC	EA 1
1	24	XDHHD		SMD889357	80063	TEST SET	DRD	EA 1
1	24	XDHZZ		SMB552681	80063	CUSHION,SUPPORT	EA	1
1	25	XDHZZ		SMB552680	80063	CUSHION,SUPPORT	EA	1
1	26	PAHZZ	5310-00-903-5966	MS35690-410	96906	NUT,PLAIN,HEXAGON	EA	2

6


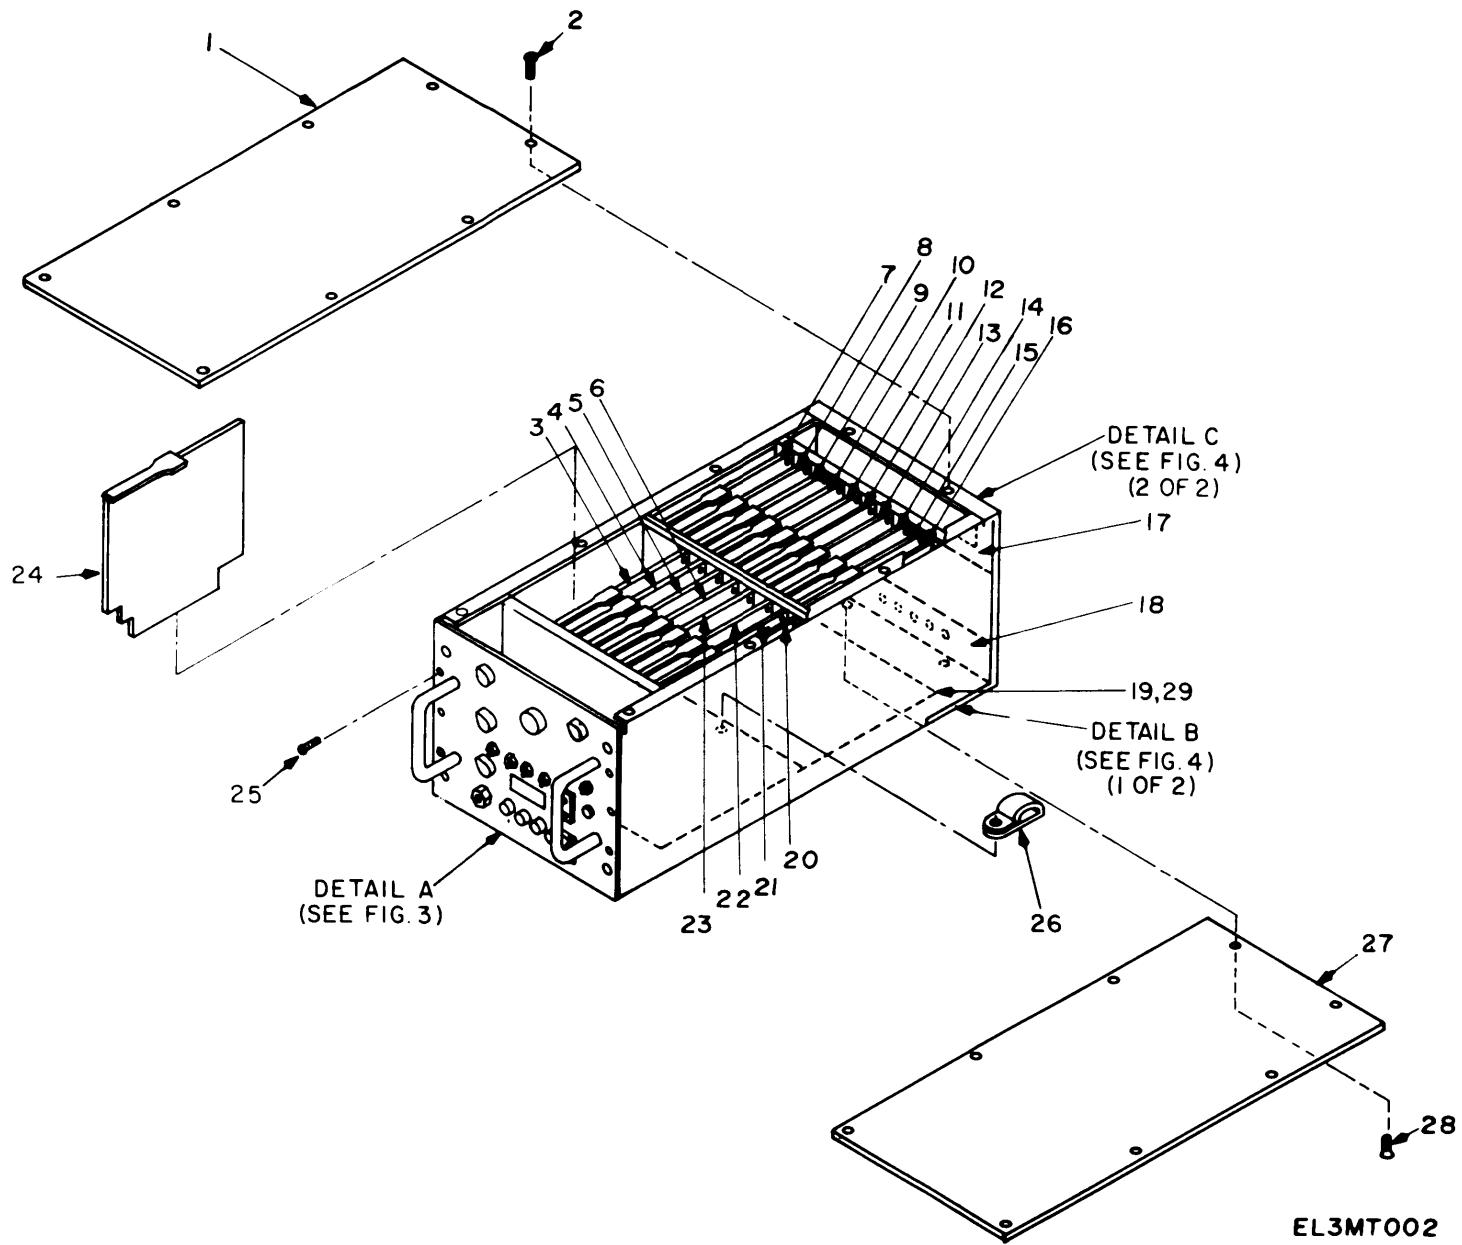


Figure 2. Teletypewriter Test Set (SMD552591 and SMD889357).

{

(

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN UNIT
GROUP 0201 TELETYPEWRITER TEST SET (SMD552591 AND SMD889357)								
2	1	XDHZZ		SMC552550	80063	COVER, TOP		EA 1
2	2	XDHZZ		MS35233-30	96906	SCREW, MACHINE		EA 8
2	3	PAHHD	6625-00-950-8491	SMD552471	80063	ASSEMBLY BOARD A2		EA 1
2	4	PAHHD	6625-00-950-8445	SMD552472	80063	ASSEMBLY BOARD A3		EA 1
2	5	PAHHD	6625-00-950-8447	SMD552477	80063	ASSEMBLY BOARD A4		EA 1
2	6	PAHHD	6625-00-950-8464	SMD552474	80063	ASSEMBLY BOARD A5		EA 1
2	7	PAHHD	6625-00-959-4968	SMD552473	80063	ASSEMBLY BOARD A10		EA 1
2	8	PAHHD	6625-00-950-8486	SMD552468	80063	ASSEMBLY BOARD A11		EA 1
2	9	PAHHD	6625-00-950-8486	SMD552468	80063	ASSEMBLY BOARD A12		EA 1
2	10	PAHHD	6625-00-950-8486	SMD552468	80063	ASSEMBLY BOARD A13		EA 1
2	11	PAHHD	6625-00-950-8486	SMD552468	80063	ASSEMBLY BOARD A14		EA 1
2	12	PAHHD	6625-00-950-8481	SMD552467GRP1	80063	ASSEMBLY BOARD A15		EA 1
2	13	PAHHD	6625-00-950-8466	SMD552467GRP2	80063	ASSEMBLY BOARD A16		EA 1
2	14	PAHHD	6625-00-950-8465	SMD552467GRP3	80063	ASSEMBLY BOARD A17		EA 1
2	15	PAHHD	6625-00-950-8489	SMD552467GRP4	80063	ASSEMBLY BOARD A18		EA 1
2	16	PAHHD	6625-00-926-7677	SMD552478	80063	ASSEMBLY BOARD A19		EA 1
2	17	XDHZZ		MS35233-29	96906	SCREW, MACHINE		EA 6
2	18	XDHHHD		SMD552605	80063	POWER SUPPLY		EA 1
2	19	PAHHD	6625-00-760-3921	SMD552713	80063	ASSEMBLY HARNESS BD		EA 1
2	20	PAHHD	6625-00-950-9112	SMD552462GRP1	80063	ASSEMBLY BOARD A9		EA 1
2	21	PAHHD	6625-00-950-8490	SMD552470	80063	ASSEMBLY BOARD A8		EA 1
2	22	PAHHD	6625-00-950-8459	SMD552475	80063	ASSEMBLY BOARD A7		EA 1
2	23	PAHHD	6625-00-950-8462	SMD552476	80063	ASSEMBLY BOARD A6		EA 1
2	24	PAHHD	6625-00-950-8498	SMD552469	80063	ASSEMBLY BOARD A1		EA 1
2	25	PAHZZ	5305-00-764-0068	MS35249-52	96906	SCREW, MACHINE		EA 6
2	26	PAHZZ	5340-00-954-3134	MS25281-7	96906	CLAMP, LOOP		EA 2
2	27	XDHZZ		SMD552628	80063	COVER, BOTTOM		EA 1
2	28	XDHZZ		MS35233-30	96906	SCREW, MACHINE		EA 8
2	29	PAHZZ	5305-00-054-6651	MS35233-27	96906	SCREW, MACHINE		EA 12

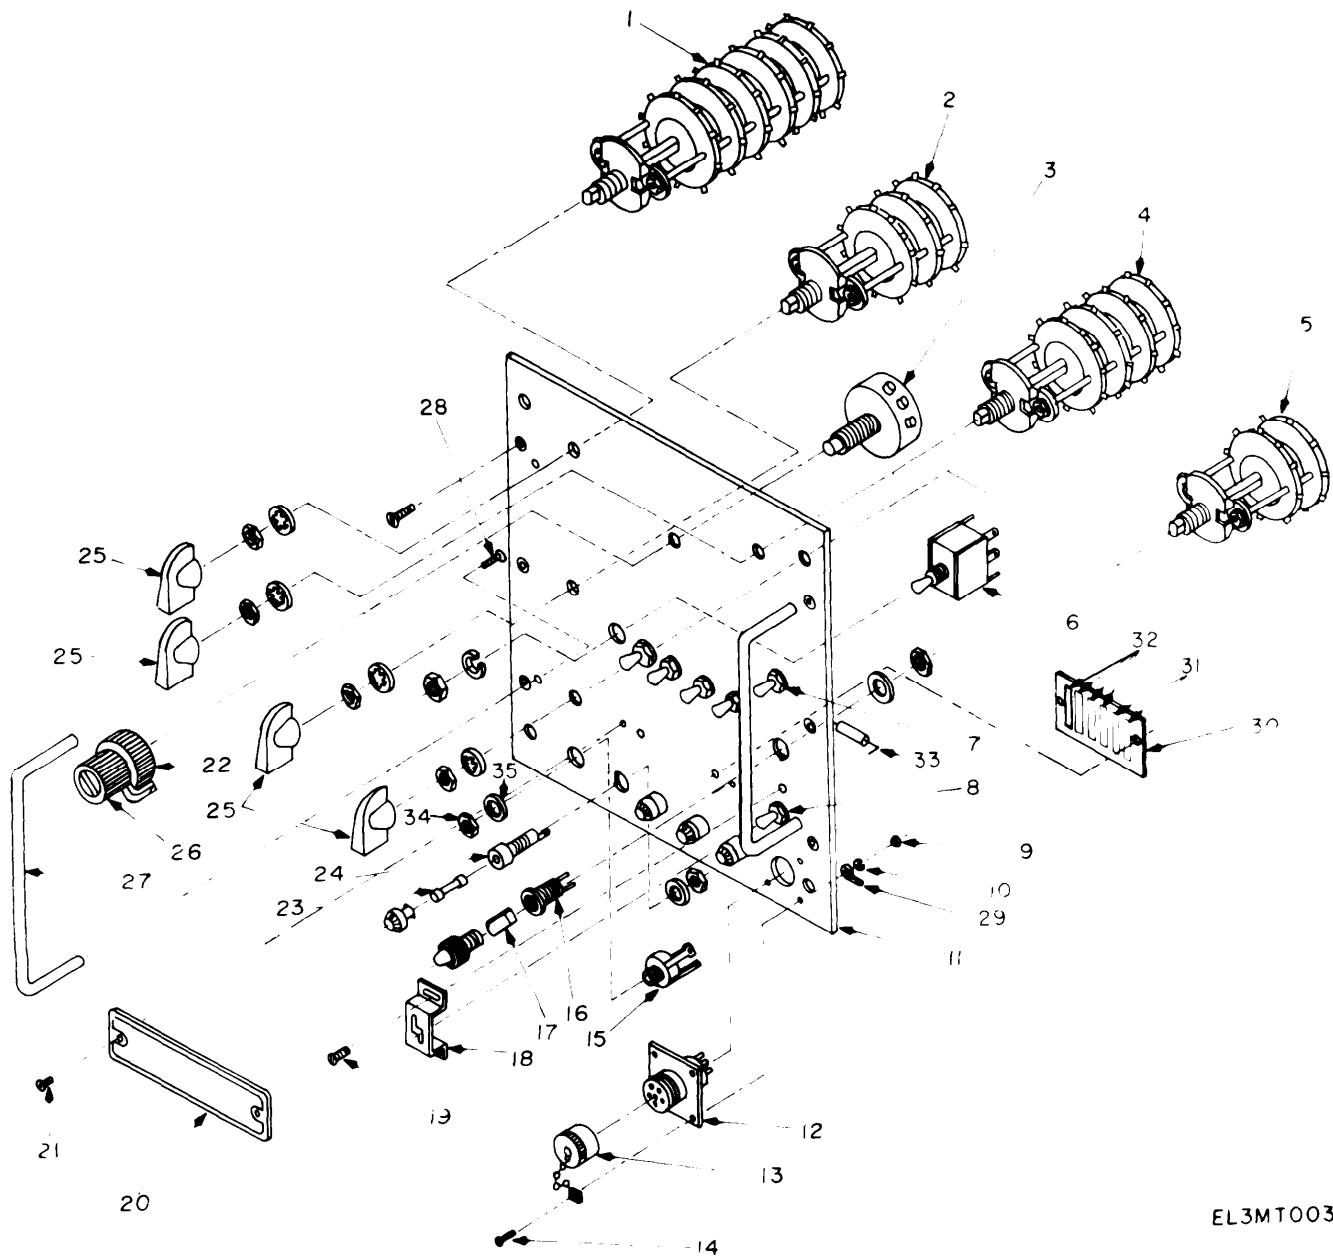

EL3MT003


Figure 3. Front Panel Assembly.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
3	1	XDHZZ		SMA552584	80063	SWITCH,ROTARY		EA 1
3	2	XDHZZ		SMA552581	80063	SWITCH,ROTARY		EA 1
3	3	PAHZZ	5905-00-689-1489	SMC552588	80063	RESISTOR, VARIABLE, W		EA 1
3	4	XDHZZ		SMA552583	80063	SWITCH,ROTARY		EA 1
3	5	XDHZZ		SMA552582	80063	SWITCH,ROTARY		EA 1
3	6	PAHZZ	5930-00-615-7896	MS25098-22	96906	SWITCH, TOGGLE		EA 5
3	7	PAHZZ	5930-00-655-1923	MS25098-23	96906	SWITCH, TOGGLE		EA 1
3	8	PAHZZ	5930-00-615-9376	MS35059-21	96906	SWITCH, TOGGLE		EA 1
3	9	PAHZZ	5310-00-934-9748	MS35649-244	96906	NUT, PLAIN, HEX		EA 4
3	10	PAHZZ	5310-00-933-8118	MS35338-78	96906	WASHER, SPLIT		EA 4
3	11	XDHZZ		SMD552585	80063	PANEL, FRONT		EA 1
3	12	PAHZZ	5935-00-995-5782	MS3112E12-3P	96906	CONNECTOR, RECEPTACL		EA 1
3	13	XDHZZ		SMB552646	80063	CAP, PROTECTIVE DUST		EA 1
3	14	PAHZZ	5305-00-054-5649	MS35233-15	96906	SCREW, MACHINE		EA 4
3	15	XDHZZ		SMB552779	80063	JACK, TELEPHONE		EA 1
3	16	PAHZZ	6210-00-808-8604	MS25257-4	96906	LIGHT, INDICATOR		EA 1
3	17	PAOZZ	5240-00-892-4420	MS25252NE2D	96906	LAMP, INCADESCENT		EA 1
3	18	XDHZZ		SMB552791	80063	STOP, SWITCH		EA 1
3	19	XDHZZ		MS35233-29	96906	SCREW, MACHINE		EA 2
3	20	XDHZZ		SMB552595	80063	PLAT		EA 1
3	21	PAHZZ	5305-00-175-3230	MS21318-14	96906	SCREW, DRIVE		EA 2
3	22	PAOZZ	5340-00-168-7136	SMB552590	80063	LOCK, FRICTION		EA 1
3	23	PAOZZ	5920-00-199-9498	FO2B250V1-2A	81349	FUSE, CARTRIDGE		EA 4
3	24	PAHZZ	5920-00-556-0144	FHN20G	81349	FUSEHOLDER, EXTRACTO		EA 4
3	25	PAOZZ	5355-00-556-0145	MS91528-1K2B	96906	KNOB		EA 4
3	26	PAOZZ	5355-00-715-1499	701LK2G	49956	KNOB		EA 1
3	27	XDHZZ	5340-00-840-0954	MS39087-4	96906	HANDLE, BOW		EA 2
3	28	PAHZZ	5305-00-059-3660	MS35234-64	96906	SCREW, MACHINE		EA 4
3	29	XDHZZ		SMB579852-1	80063	TERMINAL, LUG		EA 1
3	30	XDHZZ		SMB552593	80063	TERMIMAL BOARD		EA 1
3	31	PAHZZ	5905-00-192-4504	RC42GF822J	81349	RESISTOR, FIXED, COMP		EA 2
3	32	PAHZZ	5961-00-577-6084	1N645	81349	SEMICONDUCTOR DIVIE		EA 1
3	33	PAHZZ	5910-00-925-1747	CH09A1NC474K	81349	CAPACITO	DRC	EA 1
3	34	XDHZZ		SMB552657	80063	NUT, PLAIN, HEX		EA 1
3	35	XDHZZ		SMB552135	80063	WASHER, FLAT, NYLON		EA 1



TM 11-6625-620-40P-1

11

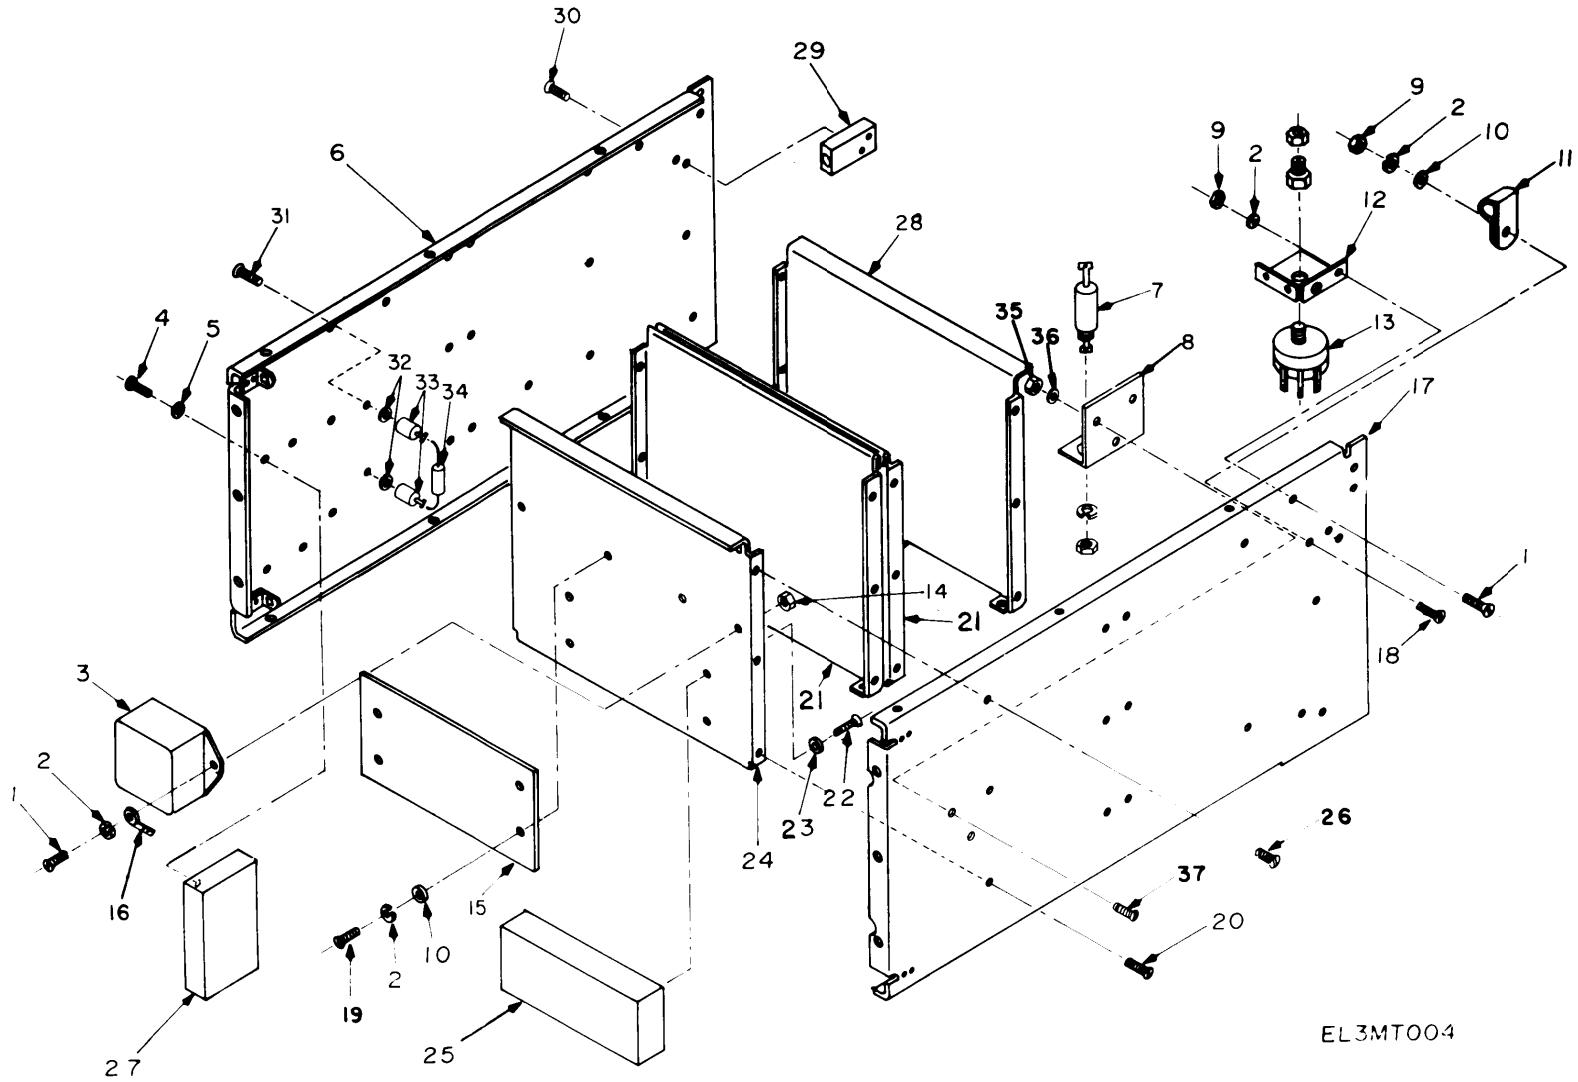

EL3MT004

Figure 4. Chassis Assembly (Sheet 1 of 2).

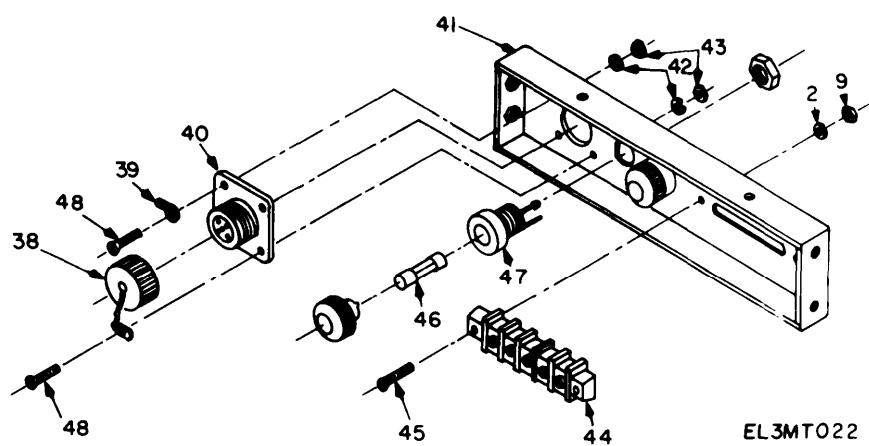


Figure 4. Chassis Assembly (Sheet 2 of 2).

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8) QTY INC IN UNIT
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	U/M
4	1	XDHZZ		MS35233-29	96906	SCREW,MACHINE		EA 6
4	2	PAHZZ	5310-00-011-1041	MS35338-79	96906	WASHER		EA 13
4	3	PAHZZ	5915-00-230-8529	SMB552612	80063	FILTER,RADIO FREQUE		EA 1
4	4	XDHZZ		SMB552776-1	80063	SCREW,MACHINE		EA 2
4	5	PAHZZ	5310-00-011-1041	MS35338-79	96906	WASHER		EA 2
4	6	XDHZZ		SMD552599	80063	PANEL,LEFT		EA 1
4	7	PAHZZ	5915-00-451-4261	RF2550-20	13619	FILTER RF	DRD	EA 2
4	8	XDHZZ		SMB889349	80063	BRACKET,MOUNTING	DRD	EA 1
4	9	PAHZZ	5310-00-934-9761	MS35649-264	96906	NUT,PLAIN,HEX		EA 7
4	10	PAHZZ	5310-00-983-8483	MS27183-5	96906	WASHER,FLAT		EA 5
4	11	PAHZZ	5340-00-721-5315	MS25281-5	96906	CLAMP,CABLE		EA 1
4	12	XDHZZ		SMB552604	80063	BRACKET,POTEN		EA 1
4	13	PAHZZ	5905-00-917-5533	RP101UB502KK	81349	RESISTOR,VARIABLE,W		EA 1
4	14	PAHZZ	5310-00-934-9761	MS35649-264	96906	NUT,PLAIN,HEX		EA 2
4	15	PAHHD	6625-00-405-9103	SMD552466	80063	ASSEMBLY BOARD2A1A1		EA 1
4	16	XDHZZ		SMB579852-2	80063	TERMINAL,LUG		EA 1
4	17	XDHZZ		SMD552602	80063	PANEL,RIGHT		EA 1
4	18	PAHZZ	5305-00-054-6655	MS35233-31	96906	SCREW,MACHINE		EA 1
4	19	PAHZZ	5305-00-054-6651	MS35233-26	96906	SCREW,MACHINE		EA 4
4	20	PAHZZ	5305-00-068-6529	MS35233-28	96906	SCREW,MACHINE		EA 8
4	21	XDHZZ		SMD552613	80063	CARD GUIDE		EA 2
4	22	PAHZZ	5305-00-054-6651	MS35233-27	96906	SCREW,MACHINE		EA 4
4	23	PAHZZ	5310-00-011-1041	MS35338-79	96906	WASHER		EA 4
4	24	XDHZZ		SMD552617	80063	CARD GUIDE		EA 1
4	25	PAHZZ	5915-00-930-2783	SMC552624-1	80063	OSCILLATOR		EA 1
4	26	PAHZZ	5305-00-054-6651	MS35233-27	96906	SCREW,MACHINE		EA 16
4	27	PAHZZ	5915-00-930-2782	SMC552601	80063	FILTER,LOW PASS		EA 1
4	28	XDHZZ		SMD552626	80063	CARD GUIDE REAR		EA 1
4	29	XDHZZ		SMB552600	80063	RECEPTACLE,GUIDE		EA 2
4	30	XDHZZ		SMB552776-2	80063	SCREW,MACHINE		EA 4
4	31	PAHZZ	5305-00-054-6651	MS35233-27	96906	SCREW,MACHINE	DRD	EA 2
4	32	PAHZZ	5310-00-616-3555	MS35333-71	96906	WASHER,LOCK	DRD	EA 2
4	33	XDHZZ		SMB434365	80063	STANDOFF	DRD	EA 2
4	34	PAHZZ	5910-00-913-0226	CH09A1NC105K	81349	CAPACITOR	DRD	EA 1
4	35	PAHZZ	5310-00-934-9761	MS35649-264	96906	NUT,PLAIN,HEX	DRD	EA 3
4	36	PAHZZ	5310-00-011-1041	MS35338-79	96906	WASHER	DRD	EA 3
4	37	PAHZZ	5305-00-054-6651	MS35233-27	96906	SCREW,MACHINE	DRD	EA 3
4	38	XDHZZ		SMB552646	80063	CAP,PROTECTIVE DUST		EA 1
4	39	XDHZZ		SMB579852-1	80063	TERMINAL,LUG		EA 2
4	40	PAHZZ	5935-00-995-5782	MS3112E12-3P	96906	CONNECTOR,RECEPTACL		EA 1

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	DESCRIPTION	USABLE ON CODE	(7) QTY INC IN	(8) U/M UNIT
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM					
4	41	XDHZZ		SMC552609	80063	PAN ASSEMBLY			EA	1
4	42	PAHZZ	5310-00-933-8118	MS35338-78	96906	WASHER, SPLIT			EA	4
4	43	PAHZZ	5310-00-934-9748	MS35649-244	96906	NUT, PLAIN, HEX			EA	4
4	44	XDHZZ		SMB552611	80063	TERMINAL BOARD			EA	1
4	45	PAHZZ	5305-00-543-2774	MS35233-32	96906	SCREW MACHINE			EA	2
4	46	PAOZZ	5920-00-296-0451	FO2A250V1-8A	81349	FUSE, CARTRIDGE			EA	2
4	47	PAHZZ	5920-00-556-0144	FHN20G	81349	FUSEHOLDER, EXTRACTO			EA	2
4	48	PAHZZ	5305-00-054-5649	MS35233-15	96906	SCREW, MACHINE			EA	4



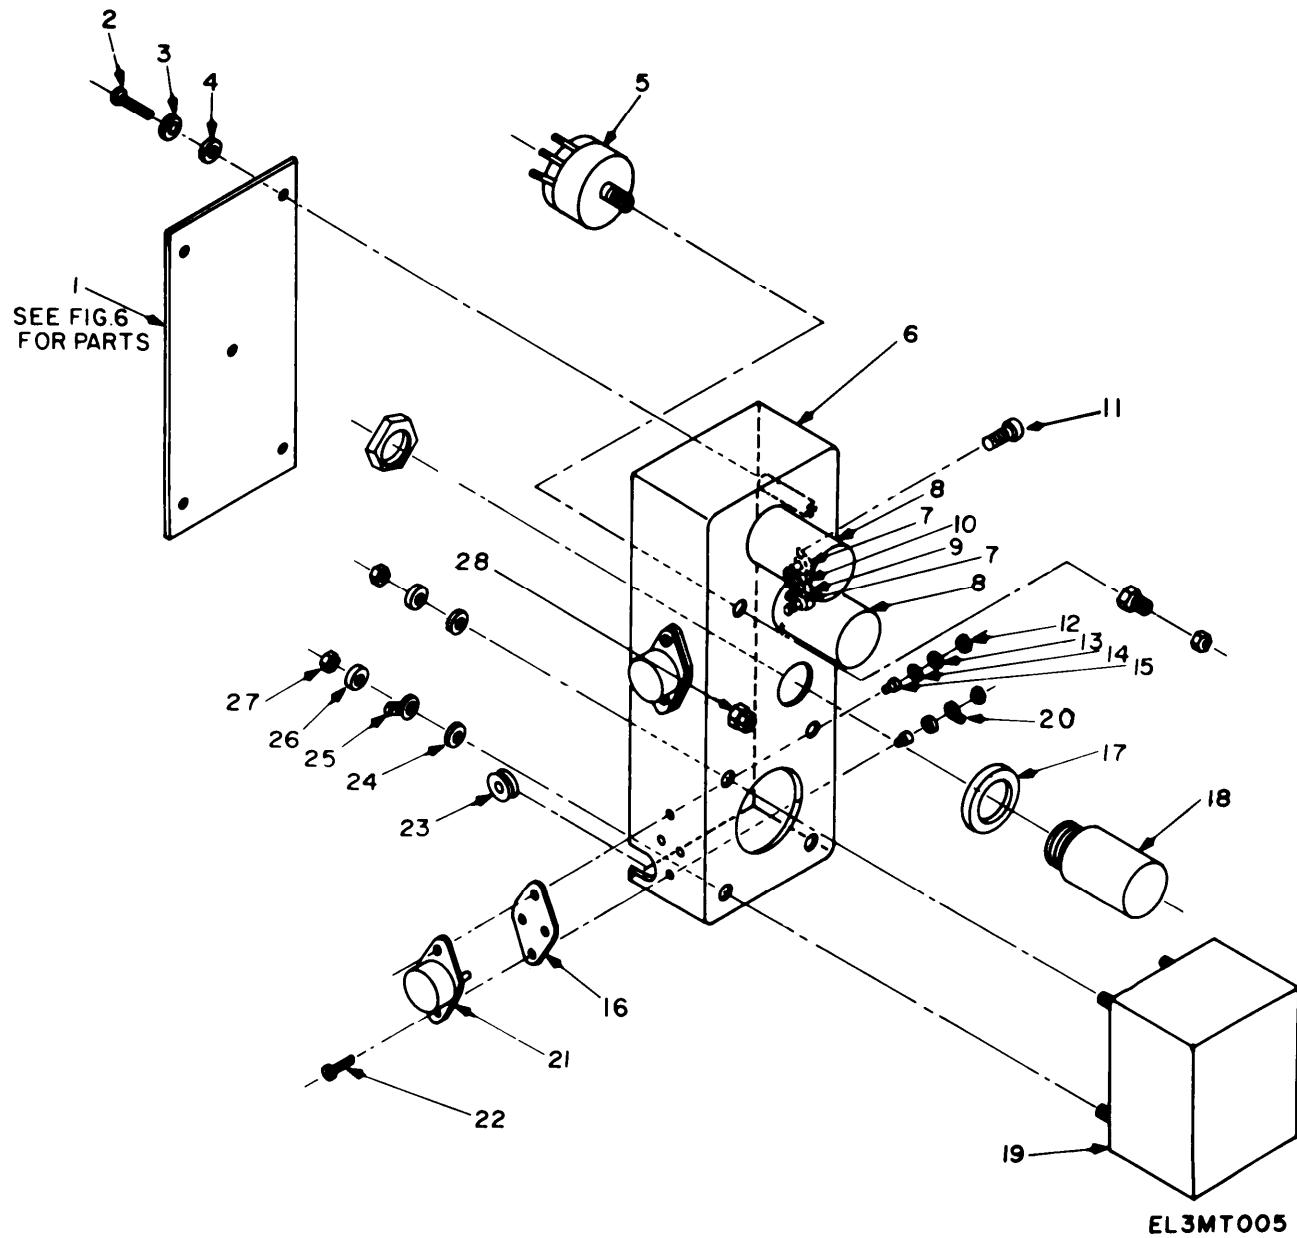


Figure 5. Power Supply Assembly.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020101 POWER SUPPLY ASSEMBLY								
5	1	PAHHD	6625-00-405-9099	SMD552479	80063	ASSEMBLY BOARD2A3A1		EA 1
5	2	PAHZZ	5305-00-054-6655	MS35233-31	96906	SCREW,MACHINE		EA 5
5	3	PAHZZ	5310-00-011-1041	MS35338-79	96906	WASHER		EA 5
5	4	PAHZZ	5310-00-983-8483	MS27183-5	96906	WASHER,FLAT		EA 5
5	5	PAHZZ	5905-00-539-4897	RV4LAYS4501A	81349	RESISTOR,VARIABLE,N		EA 1
5	6	XDHZZ		SMD552606	80063	CHASSIS ASSEMBLY		EA 1
5	7	XHDZZ		SMB552623-3	80063	JACK,TIP		EA 2
5	8	PAHZZ	5910-00-944-3501	CE41C451G	81349	CAPACITOR,FIXED,ELE		EA 2
5	9	XDHZZ		SMB552623-1	80063	JACK,TIP		EA 1
5	10	XDHZZ		SMB552633-8	80063	JACK,TIP		EA 1
5	11	XDHZZ		SMB552623-10	80063	JACK,TIP		EA 1
5	12	PAHZZ	5310-00-934-9748	MS35649-244	96906	NUT,PLAIN,HEXAGON		EA 4
5	13	PAHZZ	5310-00-933-8118	MS35338-78	96906	WASHER,LOCK		EA 2
5	14	XDHZZ	5310-00-782-1349	MS15795-804	96906	WASHER,FLAT		EA 4
5	15	XDHZZ		SMB552159-2	80063	SPACER,SLEEVE		EA 4
5	16	XDHZZ		SMB552159-1	80063	INSULATOR,MICA		EA 2
5	17	XDHZZ		SMB552774	80063	WASHER,INSULATED		EA 3
5	18	PAHZZ	5910-00-938-4900	CE41C111M	81349	CAPACITOR,FIXED,ELE		EA 1
5	19	XDHZZ		SMC552622	80063	TRANSFORMER,ELECTRI		EA 1
5	20	XDHZZ	5940-00-682-2477	MS77068-1	96906	TERMINAL,LUG		EA 2
5	21	PAHZZ	5961-00-821-8976	JAN2N297A	81349	TRANSISTOR		EA 2
5	22	PAHZZ	5305-00-054-5652	MS51957-18	96906	SCREW,MACHINE		EA 4
5	23	XDHZZ		SMB552636	80063	GROMMET		EA 1
5	24	PAHZZ	5310-00-809-8544	MS27183-7	96906	WASHER,FLAT		EA 4
5	25	XDHZZ		SMB552169-1	80063	TERMINAL,LUG		EA 1
5	26	PAHZZ	5310-00-054-1830	MS35338-80	96906	WASHER		EA 4
5	27	PAHZZ	5310-00-934-9759	MS35649-284	96906	NUT,PLAIN,HEX		EA 4
5	28	PAHZZ	5905-00-539-2479	RV4LAYS4502A	81349	RESISTOR,VARIABLE,N		EA 1

TM 11-6625-620-40P-1

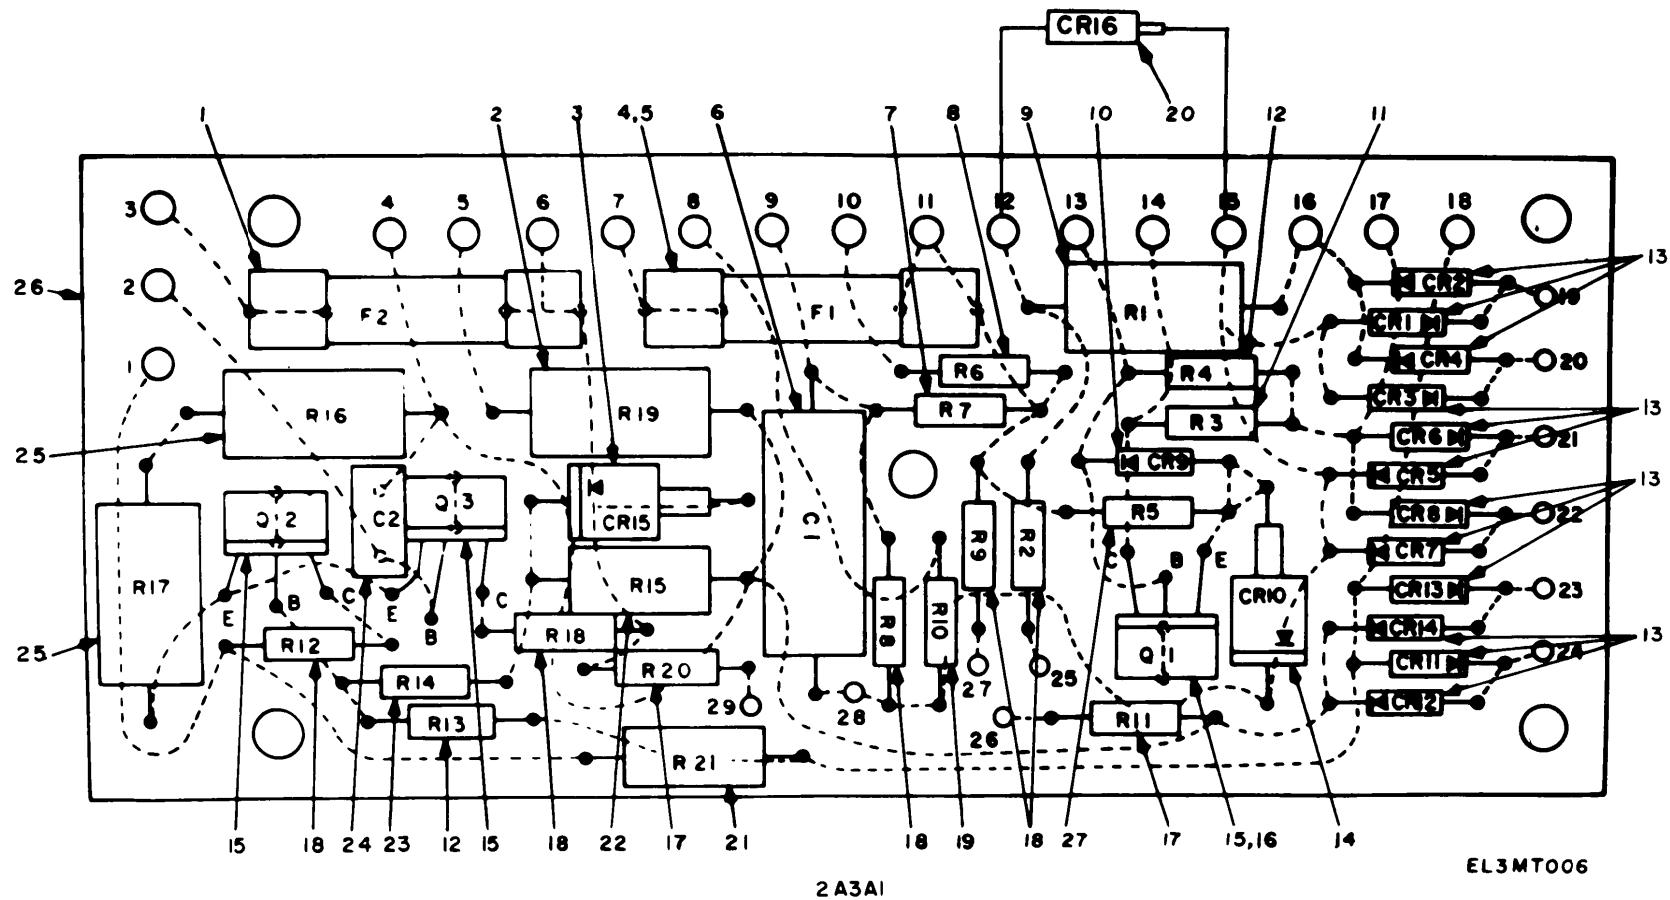


Figure 6. Component Board Assembly 2A3AI.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN UNIT
6	1	PAHZZ	5920-00-296-0451	FO2A250V1-8A	81349	FUSE,CARTRIDGE		EA 1
6	2	PAHZZ	5905-00-279-1963	RC42GF133J	81349	RESISTOR,FIXED,COMP		EA 1
6	3	PAHZZ	5961-00-853-1065	1N3026B	81349	SEMICONDUCTOR		EA 1
6	4	PAHZZ	5920-00-280-8344	F02A250V1-2A	81349	FUSE,CARTRIDGE		EA 1
6	5	XDHZZ		SMB552752	80063	CLIP,ELECTRICAL		EA 4
6	6	PAHZZ	5910-00-621-9880	CP05A1KB104K1	81349	6CAPACITOR,FIXED,PL		EA 1
6	7	PAHZZ	5905-00-279-2669	RC20GF133J	81349	RESISTOR,FIXED,COMP		EA 1
6	8	PAHZZ	5905-00-195-6800	RC20GF561J	81349	RESISTOR,FIXED,COMP		EA 1
6	9	PAHZZ	5905-00-279-2024	RC42GF301J	81349	RESISTOR,FIXED,COMP		EA 1
6	10	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR		EA 1
6	11	PAHZZ	5905-00-279-1877	RC20GF242J	81349	RESISTOR,FIXED,COMP		EA 1
6	12	PAHZZ	5905-00-279-2522	RC20GF154J	81349	RESISTOR,FIXED,COMP		EA 2
6	13	PAHZZ	5961-00-577-6084	1N645	81349	SEMICONDUCTOR DEVIC		EA 12
6	14	PAHZZ	5961-00-883-8906	JAN1N3016B	81349	SEMICONDUCTOR		EA 1
6	15	PAHZZ	5961-00-892-3473	JAN2N526	81349	TRANSISTOR		EA 3
6	16	XDHZZ		SMB552753	80063	CLIP,ELECTRICAL		EA 3
6	17	PAHZZ	5905-00-279-3506	RC20GF332J	81349	RESISTOR,FIXED,COMP		EA 2
6	18	PAHZZ	5905-00-195-6806	RC20GF102J	81349	RESISTOR,FIXED,COMP		EA 5
6	19	PAHZZ	5905-00-279-3512	RC20GF431J	81349	RESISTOR,FIXED,COMP		EA 1
6	20	PAHZZ	5961-00-826-0491	1N3024B	81349	SEMICONDUCTOR DVC D		EA 1
6	21	XDHZZ		RC32GF882J	81349	RESISTOR,FIXED		EA 1
6	22	PAHZZ	5905-00-369-6923	RC32GF223J	81349	RESISTOR,FIXED,COMP		EA 1
6	23	PAHZZ	5905-00-279-1876	RC20GF222J	81349	RESISTOR,FIXED,COMP		EA 1
6	24	XDHZZ		CM05D101KN3	81349	CAPACITOR,FIXEDMICA		EA 1
6	25	PAHZZ	5905-00-185-6935	RC42GF302J	81349	RESISTOR,FIXED,COMP		EA 2
6	26	XAHZZ		SMD5520509	80063	BAORD,CIRCUIT		EA 1
6	27	PAHZZ	5905-00-279-1757	RC20GF152J	81349	RESISTOR,FIXED,COMP		EA 1

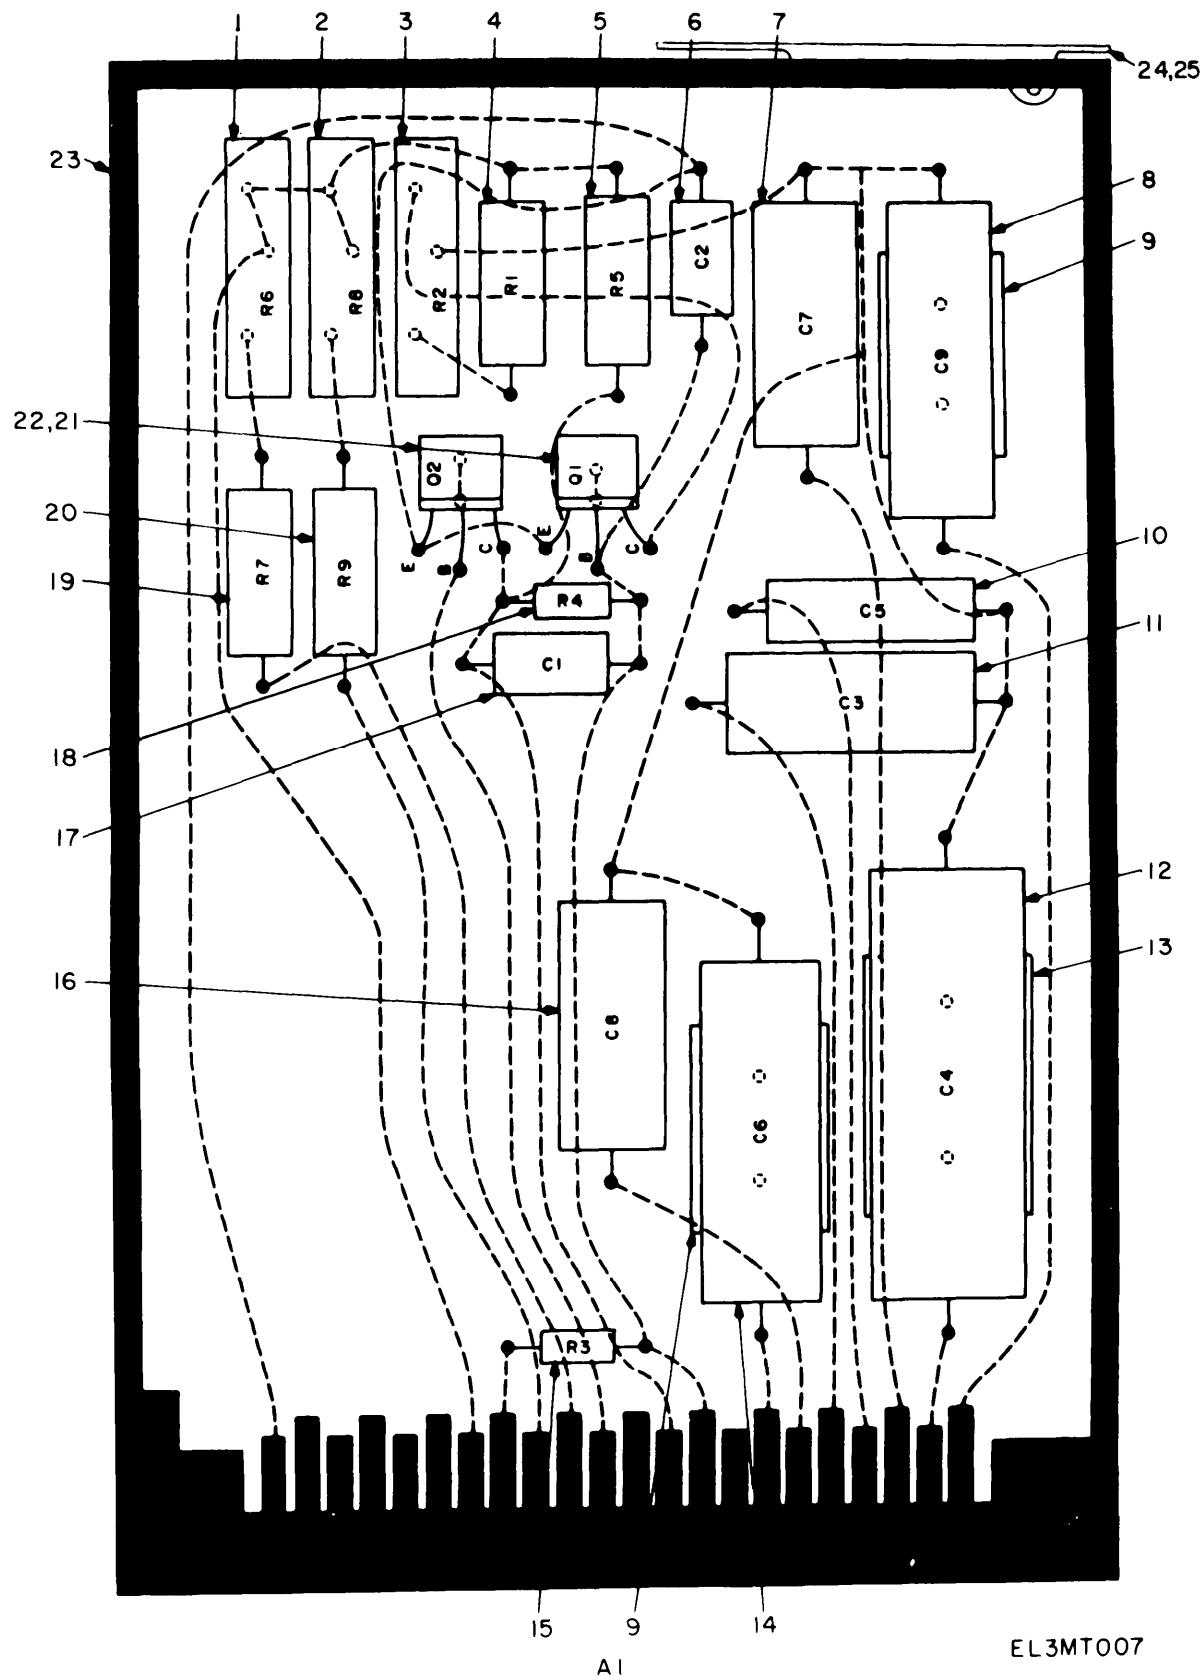


Figure 7. Test Set Subassembly A1.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	DESCRIPTION	(7)	(8)
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		USABLE ON CODE	QTY IN U/M	INC IN UNIT
GROUP 020102 TEST SET SUBASSEMBLY A1									
7	1	PAHZZ	5905-00-761-5398	RT11C2P103	81349	RESISTOR, VARIABLE, W		EA	1
7	2	PAHZZ	5905-00-165-3119	RT11C2P203	81349	RESISTOR, VARIABLE		EA	1
7	3	PAHZZ	5905-00-079-3501	RT11C2P102	81349	RESISTOR, VARIABLE, W		EA	1
7	4	PAHZZ	5905-00-078-8755	RN70D6491F	81349	RESISTOR, FIXED, FILM		EA	1
7	5	PAHZZ	5905-00-993-3174	RN70D2002F	81349	RESISTOR, FIXED, FILM		EA	1
7	6	PAHZZ	5910-00-725-1993	CM15FD201JN3	81349	CAPACITOR, FIXED, MIC		EA	1
7	7	XDHZZ		SMB552757-3	80063	CAPACITO		EA	1
7	8	XDHZZ		CQ08A1PC333F3	81349	CAPACITO		EA	1
7	9	XDHZZ		SMB552747	80063	CLIP, ELECTRICAL		EA	2
7	10	PAHZZ	5910-00-232-3164	SM-B-552757-7	80063	CAPACITOR, FIXED, PLA		EA	1
7	11	PAHZZ	5910-00-232-3162	SMB552757-4	80063	CAPACITOR, FIXED, PLA		EA	1
7	12	XDHZZ		CQ08A1PC224F3	81349	CAPACITO		EA	1
7	13	XDHZZ		SMB552750	80063	CLIP, ELECTRICAL		EA	1
7	14	PAHZZ	5910-00-232-3158	SMB552749	80063	CAPACITOR, FIXED, PLA		EA	1
7	15	PAHZZ	5905-00-279-2515	RC20GF474J	81349	RESISTOR, FIXED, COMP		EA	1
7	16	PAHZZ	5910-00-232-3163	SMB552757-5	80063	CAPACITOR, FIXED, PLA		EA	1
7	17	PAHZZ	5910-00-003-5050	CM15FD101JN3	81349	CAPACITOR, FIXED, MIC		EA	1
7	18	PAHZZ	5905-00-192-0649	RC20GF203J	81349	RESISTOR, FIXED, COMP		EA	1
7	19	PAHZZ	5905-00-059-9324	RN70D5622F	81349	RESISTOR, FIXED, FILM		EA	1
7	20	PAHZZ	5905-00-225-3934	RN70D1103F	81349	RESISTOR, FIXED, FILM		EA	1
7	21	PAHZZ	5961-00-845-3954	JAN2N329A	81349	TRANSISTOR		EA	2
7	22	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL		EA	2
7	23	XAHZZ		SMD552499	80063	PRINTED		EA	1
7	24	XDHZZ		SMC552178-2	80063	HANDLE, EXTRACTOR		EA	1
7	25	XDHZZ		SMB552185-3	80063	EYELET		EA	1

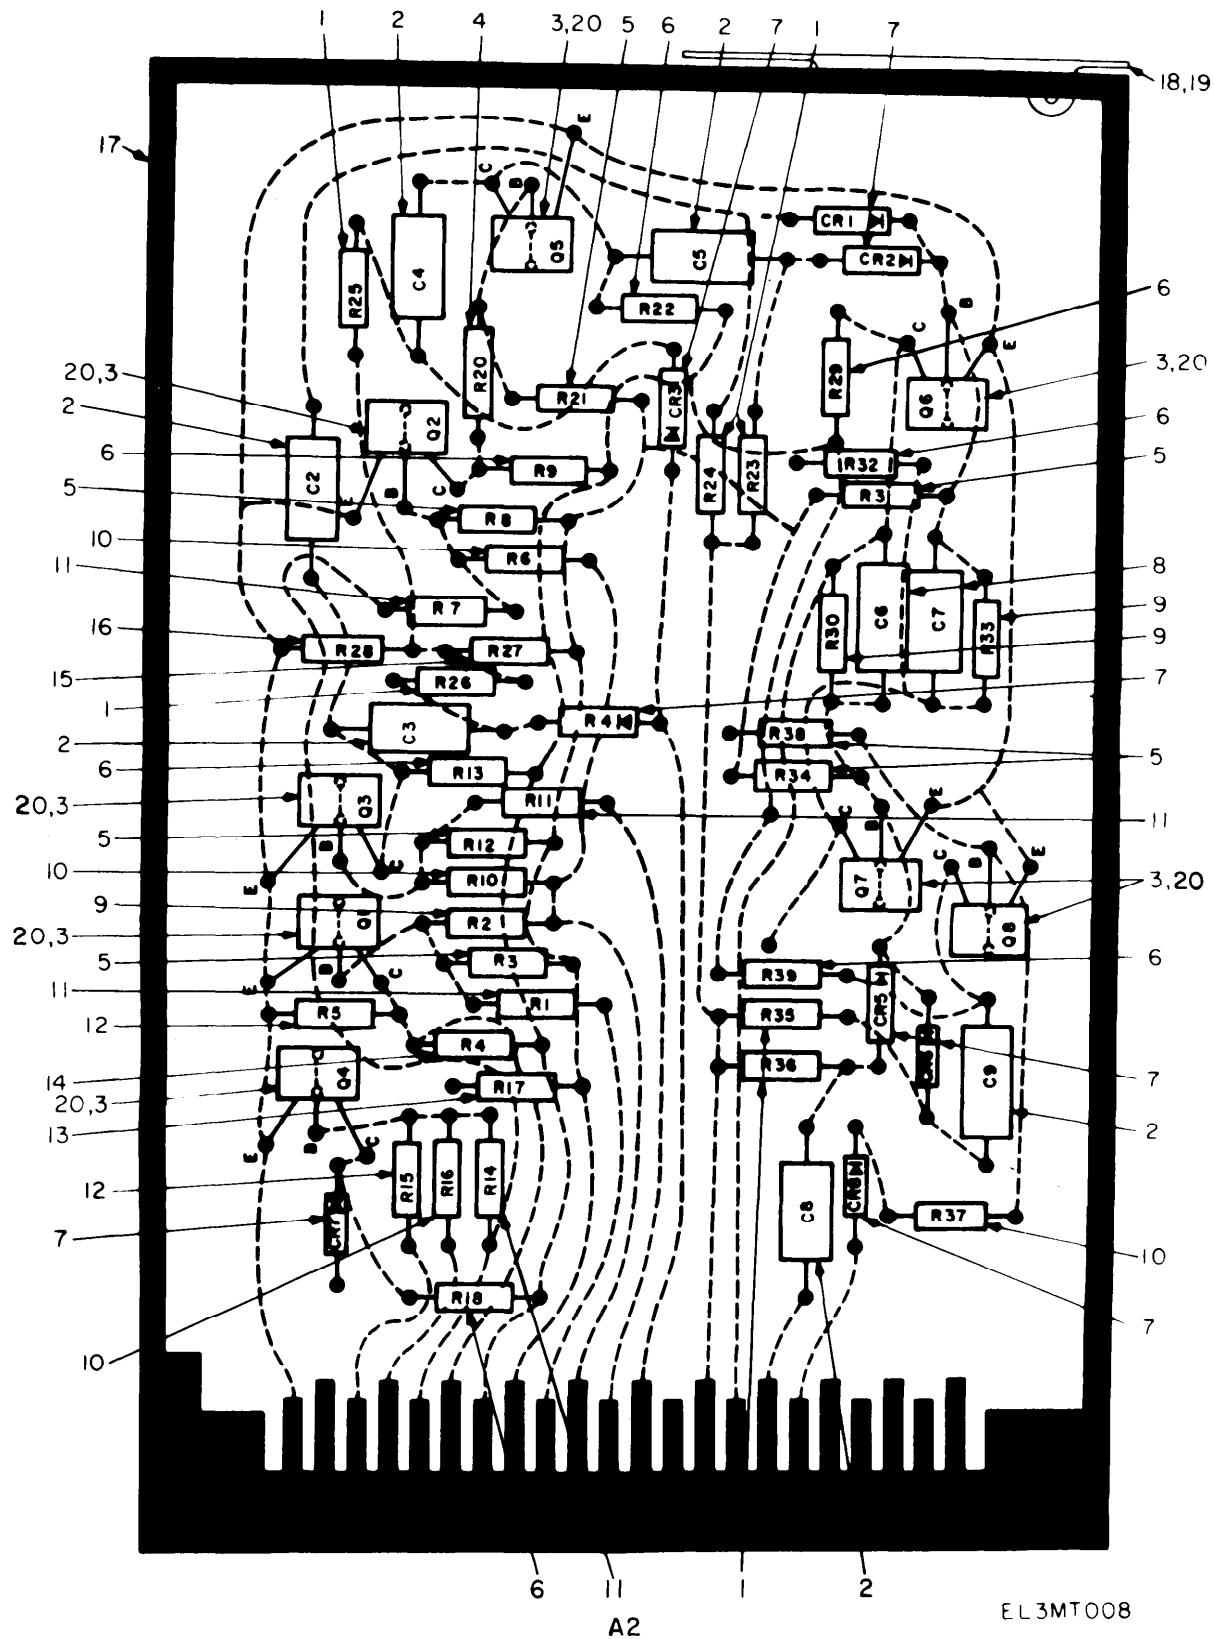


Figure 8. Test Set Subassembly A2.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON	QTY INC IN U/M UNIT
GROUP 020103 TEST SET SUBASSEMBLY A2								
8	1	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR, FIXED, COMP	EA	6
8	2	XDHZZ		CM15FD151JN3	81349	CAPACITOR, FIXEDMICA	EA	6
8	3	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR	EA	8
8	4	PAHZZ	5905-00-249-3656	RC20GF623J	81349	RESISTOR, FIXED, COMP	EA	1
8	5	PAHZZ	5905-00-279-1871	RC20GF164J	81349	RESISTOR, FIXED, COMP	EA	7
8	6	PAHZZ	5905-00-185-8510	RC20GF103J	81349	RESISTOR, FIXED, COMP	EA	7
8	7	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR	EA	8
8	8	XDHZZ		CM15FD241JN3	81349	CAPACITOR, FIXEDMICA	EA	2
8	9	PAHZZ	5905-00-114-5441	RC20GF563J	81349	RESISTOR, FIXED, COMP	EA	3
8	10	PAHZZ	5905-00-254-9201	RC20GF473J	81349	RESISTOR, FIXED, COMP	EA	4
8	11	PAHZZ	5905-00-279-3494	RC20GF823J	81349	RESISTOR, FIXED, COMP	EA	4
8	12	PAHZZ	5905-00-249-3661	RC20GF683J	81349	RESISTOR, FIXED, COMP	EA	2
8	13	PAHZZ	5905-00-249-9468	RC20GF134J	81349	RESISTOR, FIXED, COMP	EA	1
8	14	PAHZZ	5905-00-192-0649	RC20GF203J	81349	RESISTOR, FIXED, COMP	EA	1
8	15	PAHZZ	5905-00-279-2669	RC20GF133J	81349	RESISTOR, FIXED, COMP	EA	1
8	16	PAHZZ	5905-00-195-6806	RC20GF102J	81349	RESISTOR, FIXED, COMP	EA	1
8	17	XAHZZ		SMD552501	80063	PRINTED	EA	1
8	18	XDHZZ		SMB552178-4	80063	HANDLE, EXTRACTOR	EA	1
8	19	XDHZZ		SMB552185-3	80063	EYELET	EA	1
8	20	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL	EA	8

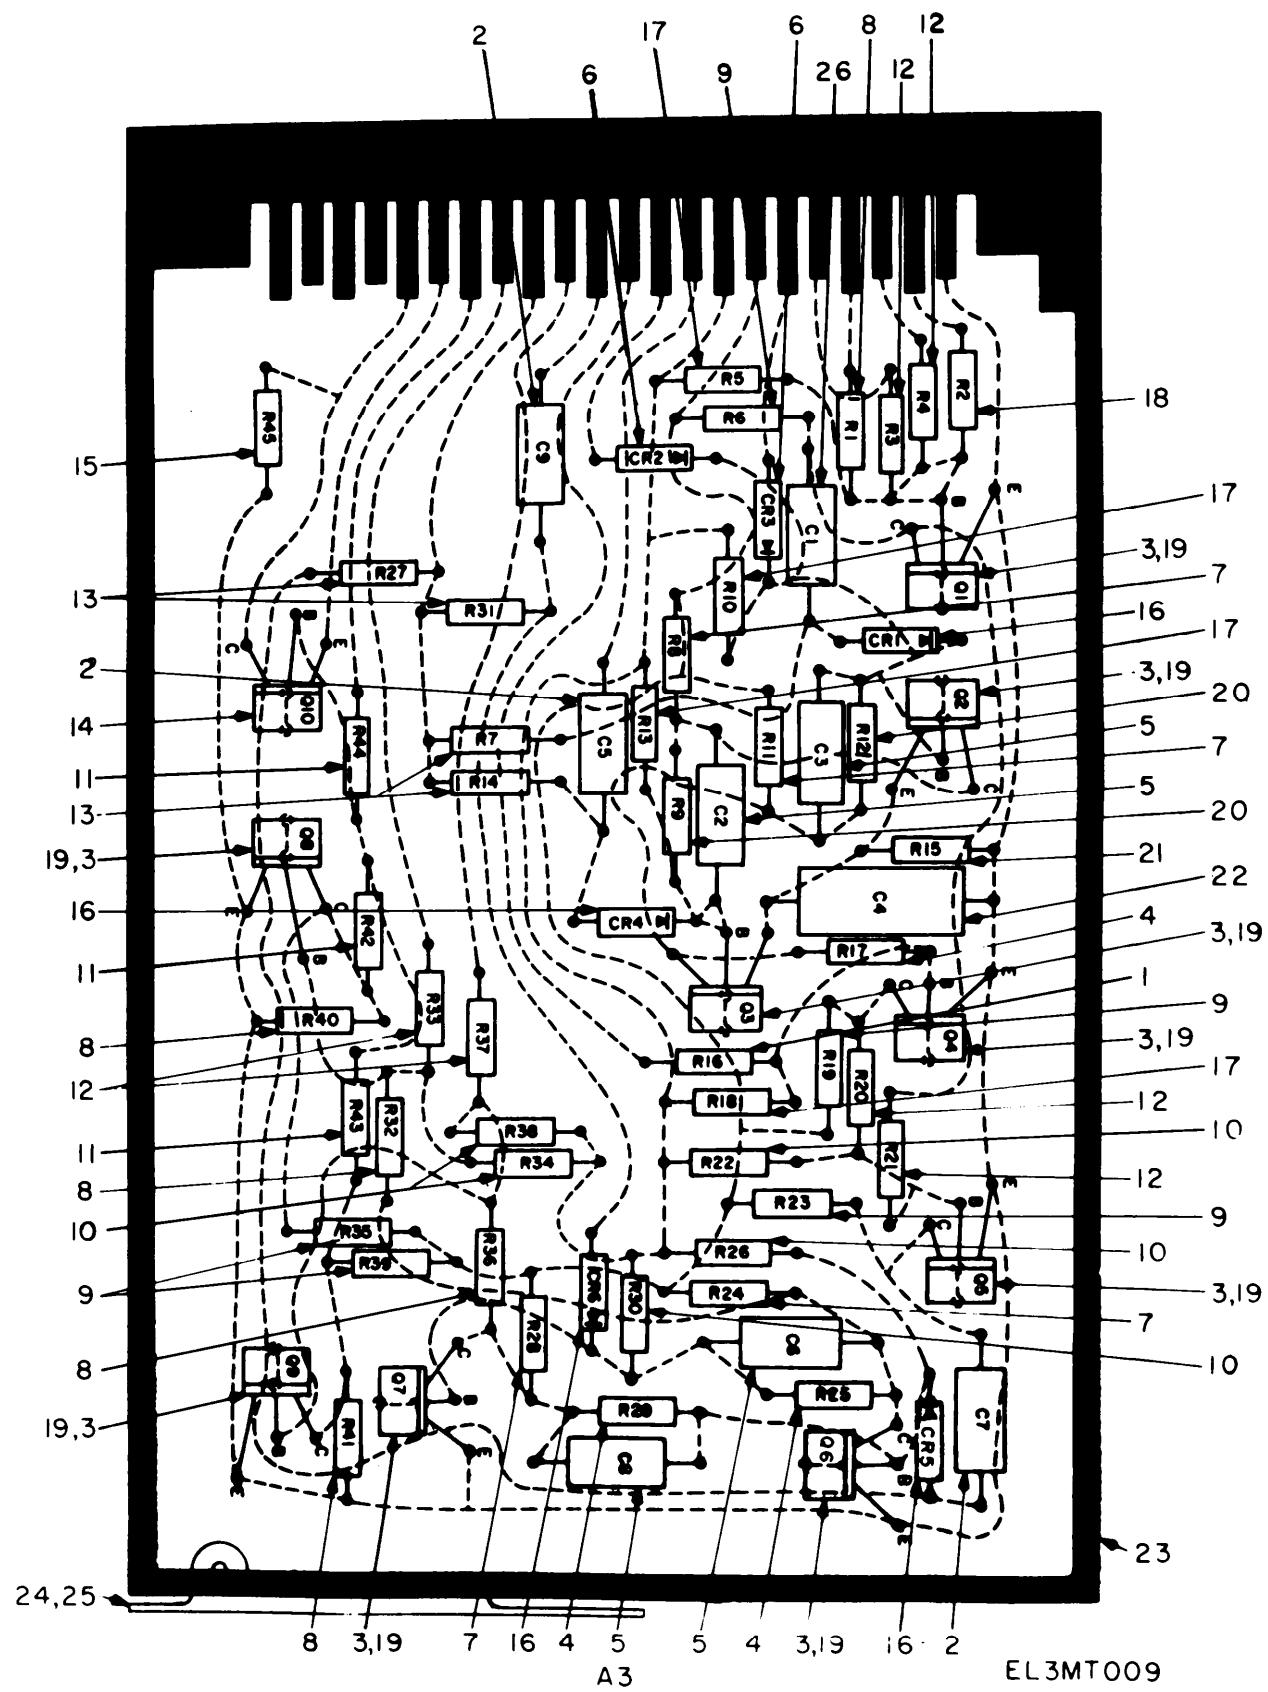


Figure 9. Test Set Subassembly A3.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020104 TEST SET SUBASSEMBLY A3								
9	1	PAHZZ	5905-00-192-3978	RC20GF303J	81349	RESISTOR, FIXED, COMP		EA 1
9	2	XDHZZ		CM15FD151JN3	81349	CAPACITOR, FIXEDMICA		EA 3
9	3	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR		EA 9
9	4	PAHZZ	5905-00-114-5441	RC20GF563J	81349	RESISTOR, FIXED, COMP		EA 3
9	5	XDHZZ		CM15FD241JN3	81349	CAPACITOR, FIXEDMICA		EA 4
9	6	PAHZZ	5961-00-866-0476	1N457	81349	SEMICONDUCTOR DEVUC		EA 2
9	7	PAHZZ	5905-00-185-8510	RC20GF103J	81349	RESISTOR, FIXED, COMP		EA 4
9	8	PAHZZ	5905-00-249-3661	RC20GF683J	81349	RESISTOR, FIXED, COMP		EA 5
9	9	PAHZZ	5905-00-192-0649	RC20GF203J	81349	RESISTOR, FIXED, COMP		EA 5
9	1	PAHZZ	5905-00-279-1871	RC20GF164J	81349	RESISTOR, FIXED, COMP		EA 5
9	11	PAHZZ	5905-00-279-3495	RC20GF753J	81349	RESISTOR, FIXED, COMP		EA 3
9	12	PAHZZ	5905-00-279-3494	RC20GF823J	81349	RESISTOR, FIXED, COMP		EA 6
9	13	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR, FIXED, COMP		EA 4
9	14	PAHZZ	5961-00-892-0800	JAN2N1304	81349	TRANSISTOR		EA 1
9	15	PAHZZ	5905-00-279-2616	RC20GF153J	81349	RESISTOR, FIXED, COMP		EA 1
9	16	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR		EA 4
9	17	PAHZZ	5905-00-249-9468	RC20GF134J	81349	RESISTOR, FIXED, COMP		EA 4
9	18	PAHZZ	5905-00-254-9201	RC20GF473J	81349	RESISTOR, FIXED, COMP		EA 1
9	19	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL		EA 9
9	20	PAHZZ	5905-00-279-3497	RC20GF393J	81349	RESISTOR, FIXED, COMP		EA 2
9	21	PAHZZ	5905-00-111-8357	RC20GF681J	81349	RESISTOR, FIXED, COMP		EA 1
9	22	XDHZZ		CP09A1KB103K1	81349	CAPACITOR, FIXED, PAP		EA 1
9	23	XAHZZ		SMD552502	80063	PRINTED		EA 1
9	24	XDHZZ		SMC552178-6	80063	HANDLE, EXTRACTOR		EA 1
9	25	XDHZZ		SMB552185-3	88063	EYELET		EA 1
9	26	XDHZZ	5910-00-724-6078	CM15FD391JN3	81349	CAPACITOR, FIXED, MIC		EA 1


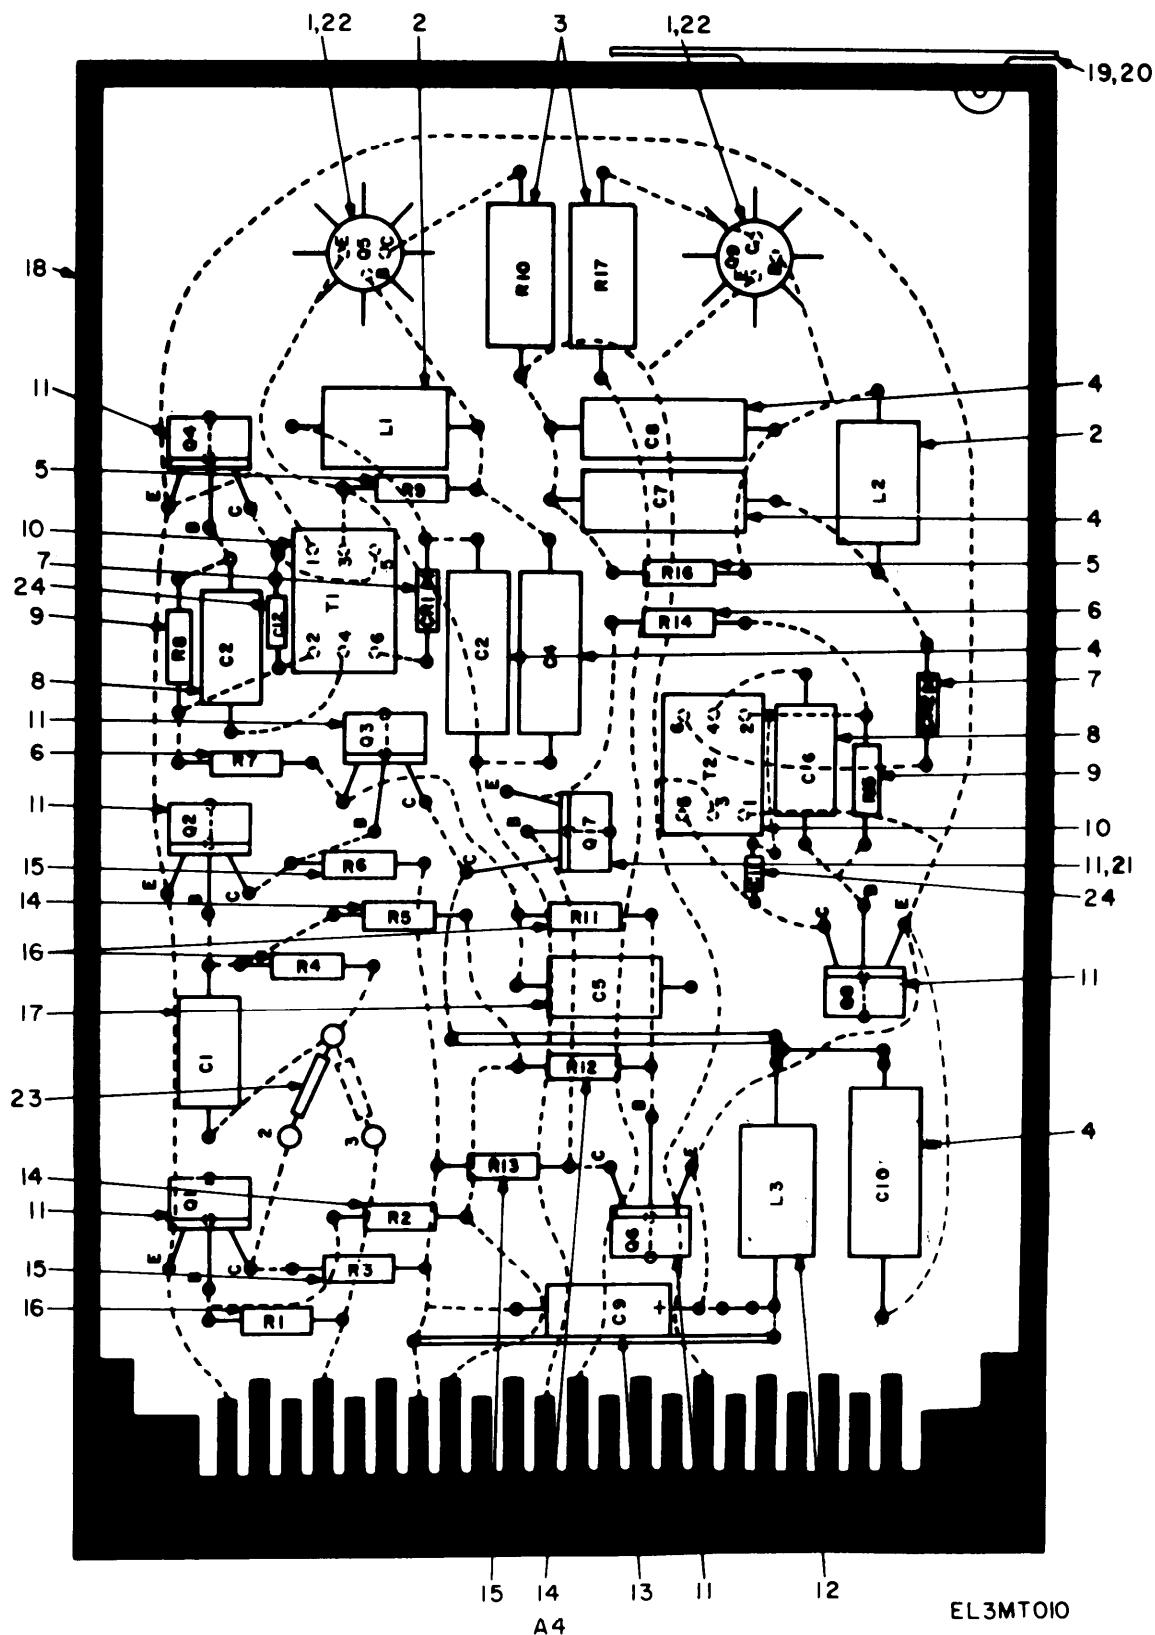


Figure 10. Test Set Subassembly A4.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020105 TEST SET SUBASSEMBLY A4								
10	1	PAHZZ	5961-00-022-5670	2N3439	81349	TRANSISTOR		EA 2
10	2	PAHZZ	5950-00-892-8329	MS75053-2	96906	COIL,RADIO FREQUENC		EA 2
10	3	PAHZZ	5905-00-256-0412	RC42GF181J	81349	RESISTOR,FIXED,COMP		EA 2
10	4	XDHZZ		CP09A1KB153K1	81349	CAPACITO		EA 5
10	5	PAHZZ	5905-00-190-8889	RC20GF101J	81349	RESISTOR,FIXED,COMP		EA 2
10	6	PAHZZ	5905-00-935-8544	RC20GF181J	81349	RESISTOR,FIXED,COMP		EA 2
10	7	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR		EA 2
10	8	XDHZZ		CM15FD151JN3	81349	CAPACITOR,FIXEDMICA		EA 2
10	9	PAHZZ	5905-00-106-1282	RC20GF223J	81349	RESISTOR,FIXED,COMP		EA 2
10	10	XDHZZ		SMB552760	80063	TRANSFORMER		EA 2
10	11	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR		EA 7
10	12	PAHZZ	5950-00-781-9745	MS75055-2	81349	COIL,RADIO FREQUENC		EA 1
10	13	XDHZZ		CSR13F365K0312	81349	CAPACITO		EA 1
10	14	PAHZZ	5905-00-249-9468	RC20GF134J	81349	RESISTOR,FIXED,COMP		EA 3
10	15	PAHZZ	5905-00-279-1757	RC20GF152J	81349	RESISTOR,FIXED,COMP		EA 3
10	16	PAHZZ	5905-00-185-8510	RC20GF103J	81349	RESISTOR,FIXED,COMP		EA 3
10	17	XDHZZ		CM15FD111JN3	81349	CAPACITOR,FIXEDIMICA		EA 2
10	18	XAHZZ		SMD552507	80063	PRINTED		EA 1
10	19	XDHZZ		SMB552178-8	80063	HANDLE, EXTRACTOR		EA 1
10	20	XDHZZ		SMB552185-3	80063	EYELET		EA 1
10	21	XDHZZ		SMB552753	80063	CLIP,ELECTRICAL		EA 7
10	22	XDHZZ		SMB552751	80063	HEAT SINK		EA 2
10	23	XDHZZ		SMB552759	80063	JUMPER		EA 1
10	24	PAHZZ	5910-00-881-8945	CK06BX222K	81349	CAPACITOR	DRD	EA 2

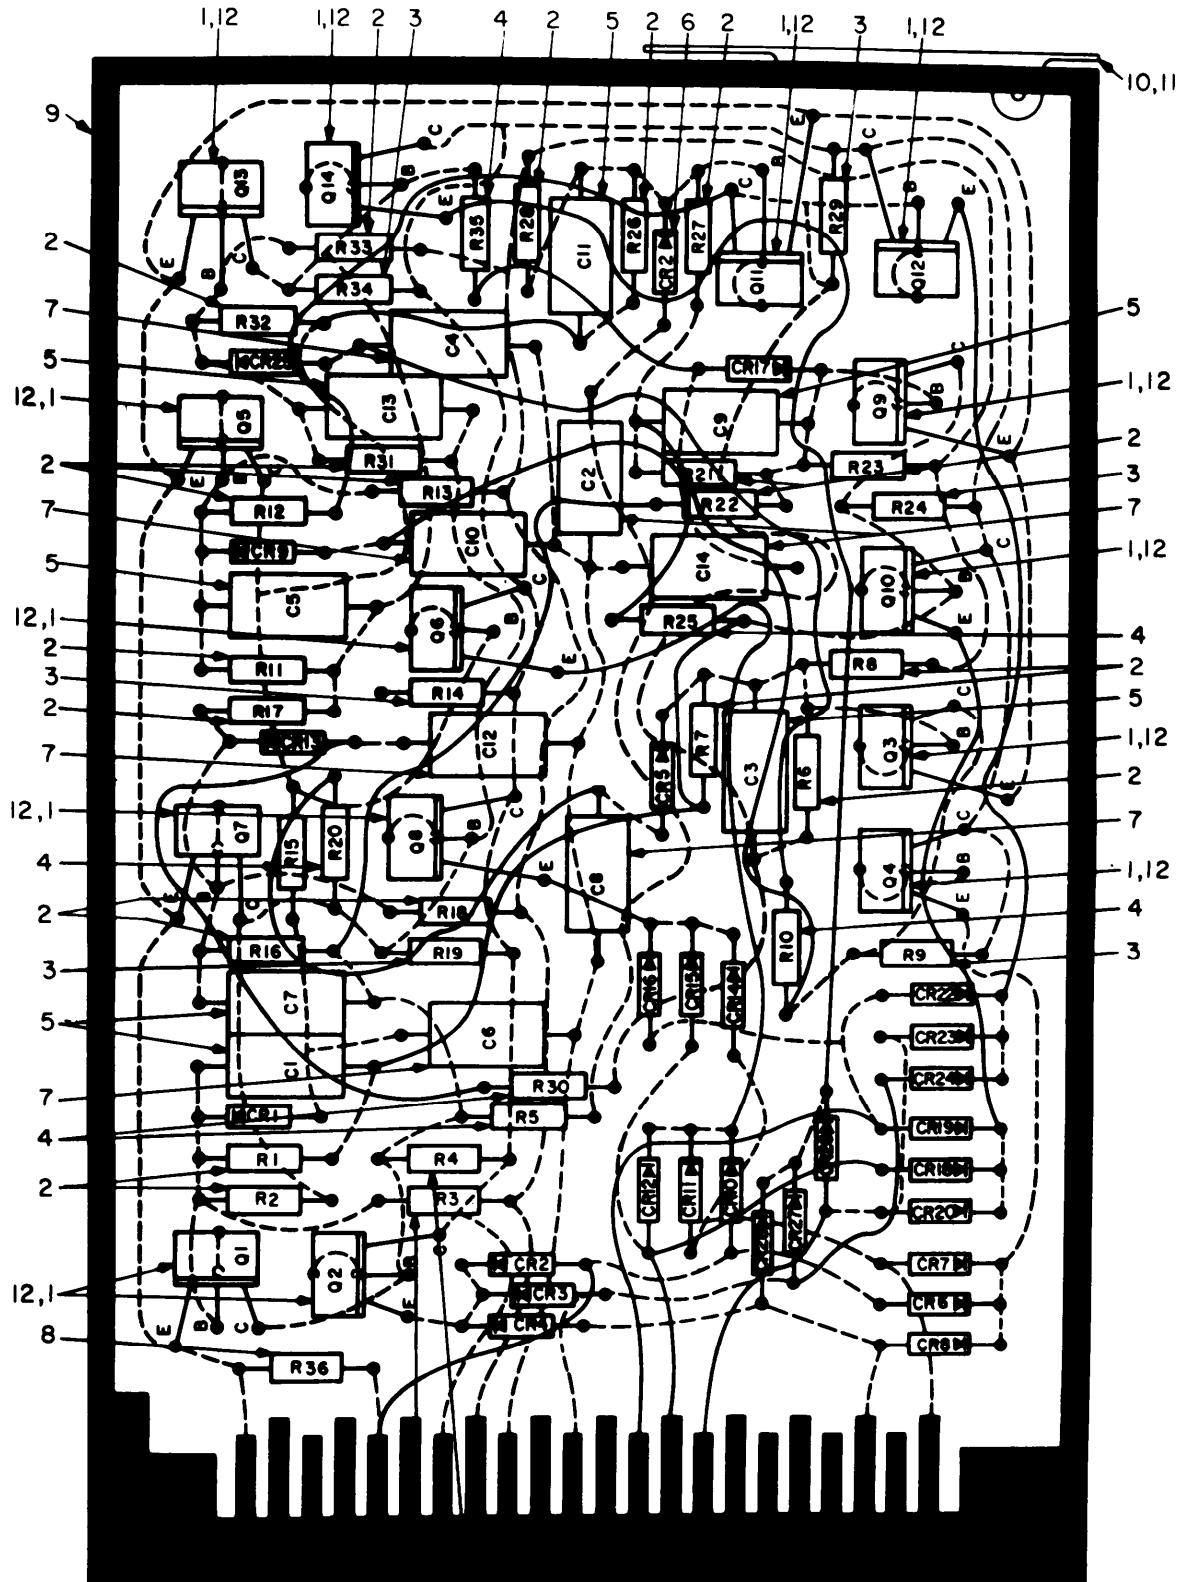

**NOTE**

ALL DIODES ITEM 6. 2 3

A5

EL3MT0II

Figure 11. Test Set Subassembly A5.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON	QTY INC IN UNIT
GROUP 020106 TEST SET SUBASSEMBLY A5								
11	1	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR	EA	14
11	2	PAHZZ	5905-00-192-3978	RC20GF303J	81349	RESISTOR, FIXED, COMP	EA	21
11	3	PAHZZ	5905-00-279-3503	RC20GF682J	81349	RESISTOR, FIXED, COMP	EA	7
11	4	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR, FIXED, COMP	EA	7
11	5	PAHZZ	5910-00-003-5050	CM15FD101JN3	81349	CAPACITOR, FIXED, MIC	EA	7
11	6	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR	EA	28
11	7	XDHZZ	5910-00-832-5724	CM15ED680JN3	81349	CAPACITOR, FIXED, MIC	EA	7
11	8	PAHZZ	5905-00-279-2673	RC20GF622J	81349	RESISTOR, FIXED, COMP	EA	1
11	9	XAHZZ		SMD552504	80063	PRINTED	EA	1
11	10	XDHZZ		SMC552178-10	80063	HANDLE, EXTRACTOR	EA	1
11	11	XDHZZ		SMB552185-3	80063	EYELET	EA	1
11	12	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL	EA	14

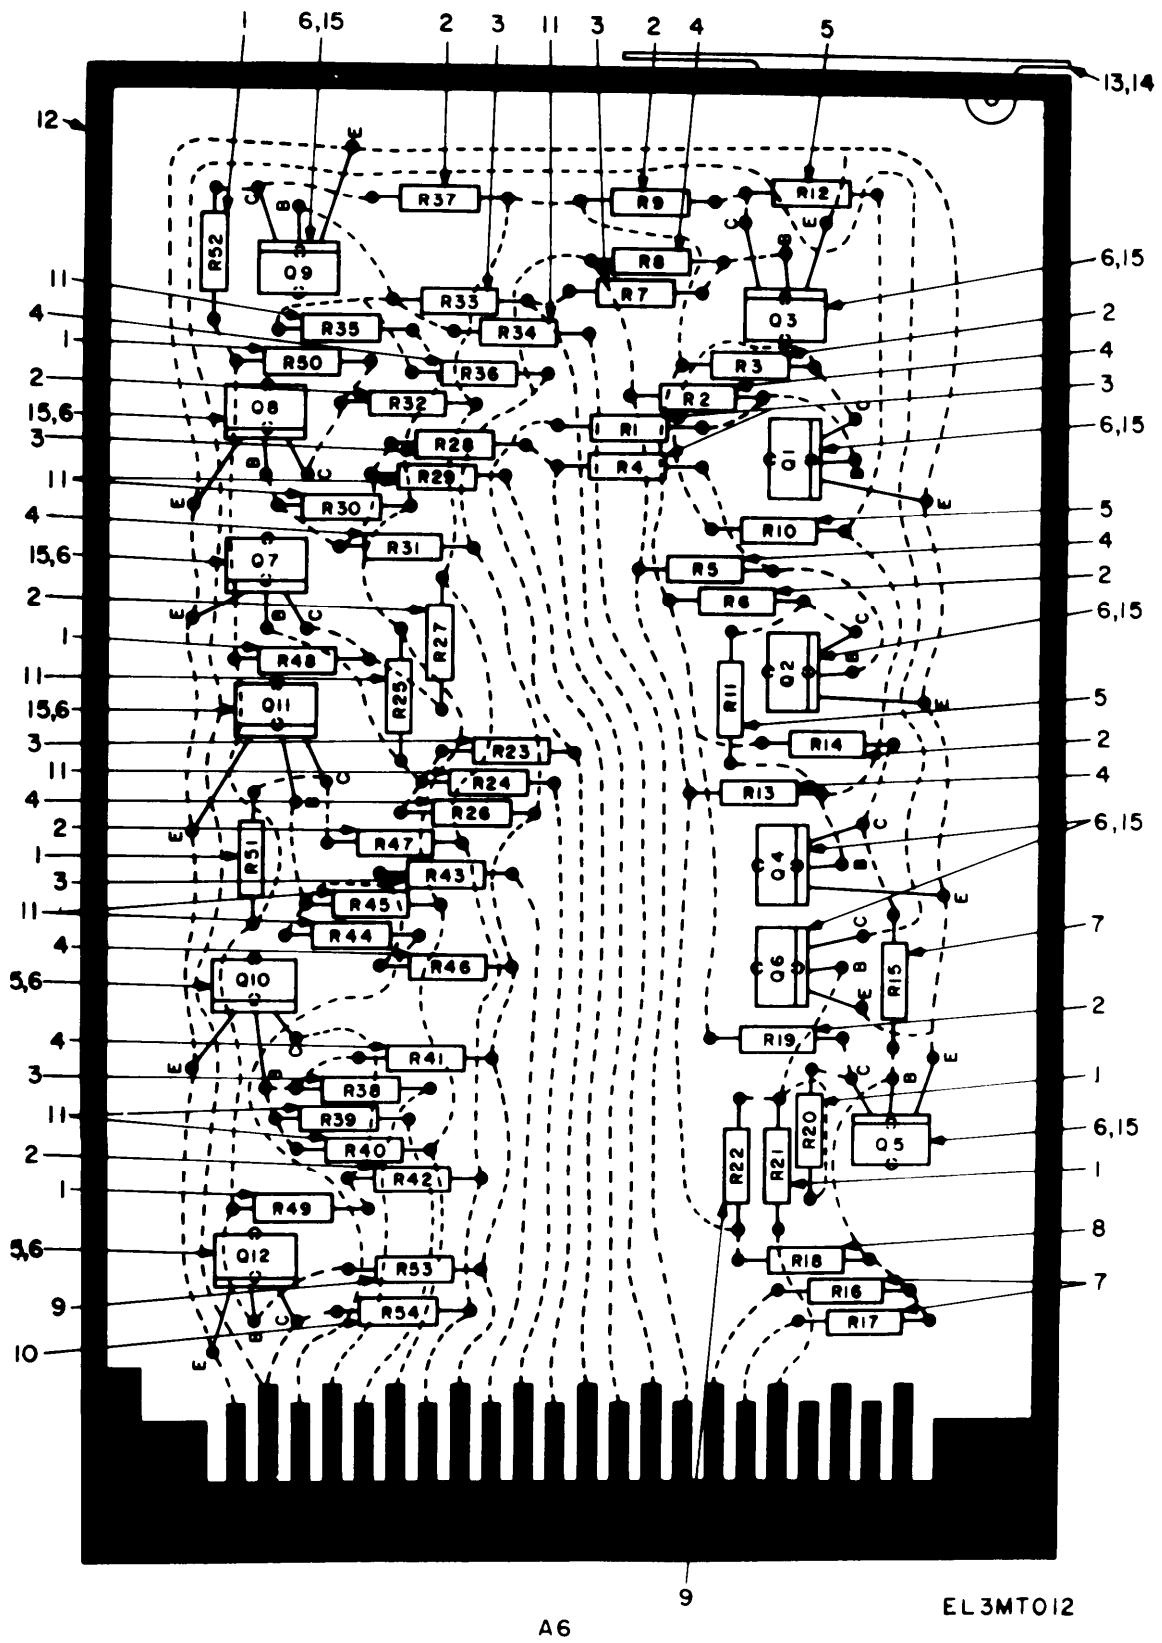


Figure 12. Test Set Subassembly A6.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN UNIT
GROUP 020107 TEST SET SUBASSEMBLY A6								
12	1	PAHZZ	5905-00-279-3497	RC20GF393J	81349	RESISTOR, FIXED, COMP	EA	7
12	2	PAHZZ	5905-00-192-0649	RC20GF203J	81349	RESISTOR, FIXED, COMP	EA	10
12	3	PAHZZ	5905-00-254-9201	RC20GF473J	81349	RESISTOR, FIXED, COMP	EA	8
12	4	PAHZZ	5905-00-249-9468	RC20GF134J	81349	RESISTOR, FIXED, COMP	EA	9
12	5	PAHZZ	5905-00-171-1998	RC20GF333J	81349	RESISTOR, FIXED, COMP	EA	3
12	6	PAHZZ	5961-00-949-1440	SMB954336	80063	TRANSISTOR	EA	12
12	7	PAHZZ	5905-00-249-3656	RC20GF623J	81349	RESISTOR, FIXED, COMP	EA	3
12	8	PAHZZ	5905-00-279-2522	RC20GF154J	81349	RESISTOR, FIXED, COMP	EA	1
12	9	PAHZZ	5905-00-192-3981	RC20GF124J	81349	RESISTOR, FIXED, COMP	EA	2
12	10	PAHZZ	5905-00-185-8510	RC20GF103J	81349	RESISTOR, FIXED, COMP	EA	1
12	11	PAHZZ	5905-00-279-3494	RC20GF823J	81349	RESISTOR, FIXED, COMP	EA	10
12	12	XAHZZ		SMD552506	80063	PRINTED	EA	1
12	13	XDHZZ		SMC552178-12	80063	HANDLE, EXTRACTOR	EA	1
12	14	XDHZZ		SMB552185-3	80063	EYELET	EA	1
12	15	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL	EA	12

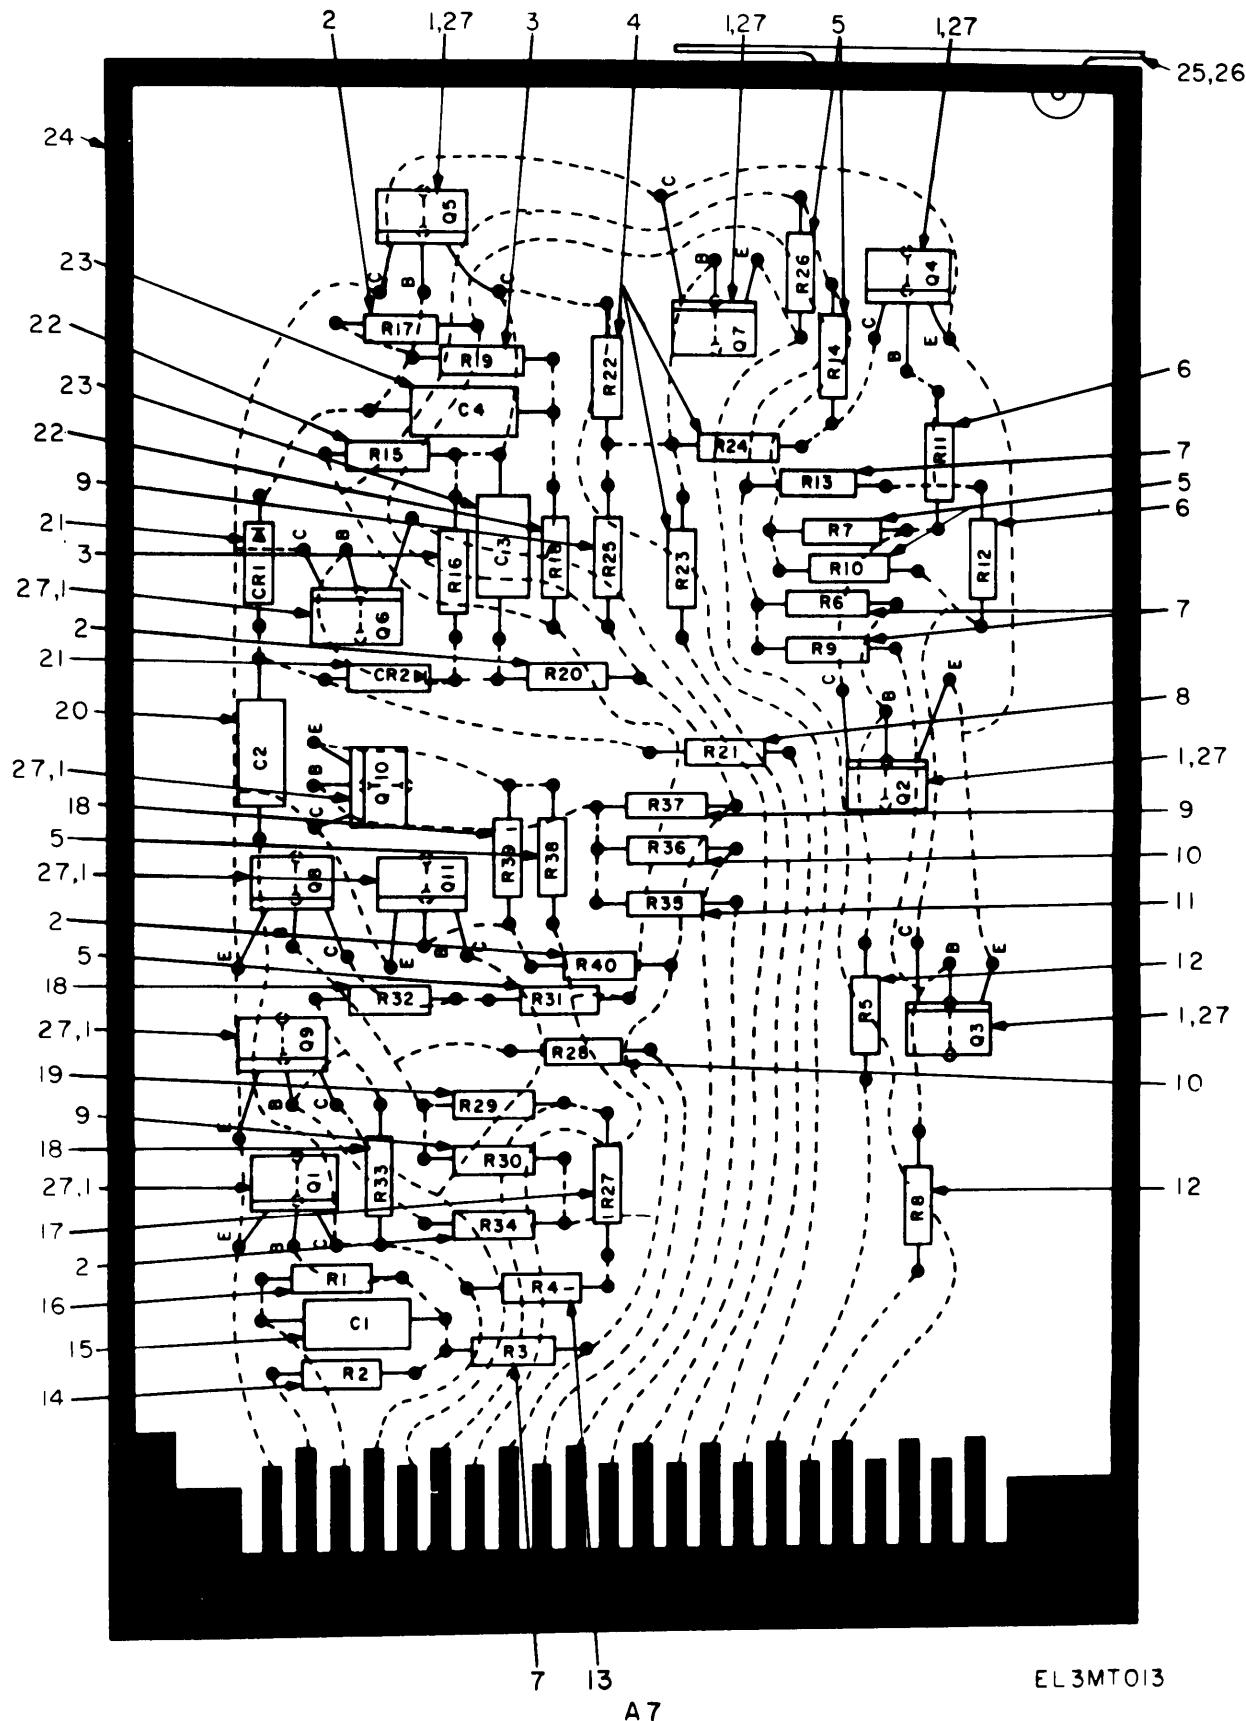


Figure 13. Test Set Subassembly A7.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020108 TEST SET SUBASSEMBLY A7								
13	1	PAHZZ	5961-00-949-1440	SMB954336	80063	TRANSISTOR		EA 11
13	2	PAHZZ	5905-00-192-3981	RC20GF124J	81349	RESISTOR, FIXED, COMP		EA 4
13	3	PAHZZ	5905-00-279-2667	RC20GF113J	81349	RESISTOR, FIXED, COMP		EA 2
13	4	PAHZZ	5905-00-249-3656	RC20GF623J	81349	RESISTOR, FIXED, COMP		EA 3
13	5	PAHZZ	5905-00-192-0649	RC20GF203J	81349	RESISTOR, FIXED, COMP		EA 6
13	6	PAHZZ	5905-00-171-1998	RC20GF333J	81349	RESISTOR, FIXED, COMP		EA 2
13	7	PAHZZ	5905-00-249-9468	RC20GF134J	81349	RESISTOR, FIXED, COMP		EA 4
13	8	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR, FIXED, COMP		EA 1
13	9	PAHZZ	5905-00-279-2522	RC20GF154J	81349	RESISTOR, FIXED, COMP		EA 3
13	10	PAHZZ	5905-00-254-7100	RC20GF913J	81349	RESISTOR, FIXED, COMP		EA 2
13	11	PAHZZ	5905-00-249-3661	RC20GF683J	81349	RESISTOR, FIXED, COMP		EA 1
13	12	PAHZZ	5905-00-254-9201	RC20GF473J	81349	RESISTOR, FIXED, COMP		EA 2
13	13	PAHZZ	5905-00-195-6453	RC20GF562J	81349	RESISTOR, FIXED, COMP		EA 1
13	14	PAHZZ	5905-00-279-3494	RC20GF823J	81349	RESISTOR, FIXED, COMP		EA 1
13	15	XDHZZ		CM15FD241JN3	81349	CAPACITOR, FIXEDMICA		EA 1
13	16	PAHZZ	5905-00-106-1282	RC20GF223J	81349	RESISTOR, FIXED, COMP		EA 1
13	17	PAHZZ	5905-00-185-8510	RC20GF103J	81349	RESISTOR, FIXED, COMP		EA 1
13	18	PAHZZ	5905-00-279-3497	RC20GF393J	81349	RESISTOR, FIXED, COMP		EA 3
13	19	PAHZZ	5905-00-279-3498	RC20GF433J	81349	RESISTOR, FIXED, COMP		EA 1
13	20	XDHZZ		CM15FD151JN3	81349	CAPACITOR, FIXEDMICA		EA 1
13	21	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR		EA 2
13	22	PAHZZ	5905-00-195-6806	RC20GF102J	81349	RESISTOR, FIXED, COMP3		EA 2
13	23	XDHZZ		CM15FD111JN3	81349	CAPACITOR, FIXEDMICA		EA 2
13	24	XAHZZ		SMD552505	80063	PRINTED		EA 1
13	25	XDHZZ		SMC552178-14	80063	HANDLE, EXTRACTOR		EA 1
13	26	XDHZZ		SMB552185-3	80063	EYLET		EA 1
13	27	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL		EA 11


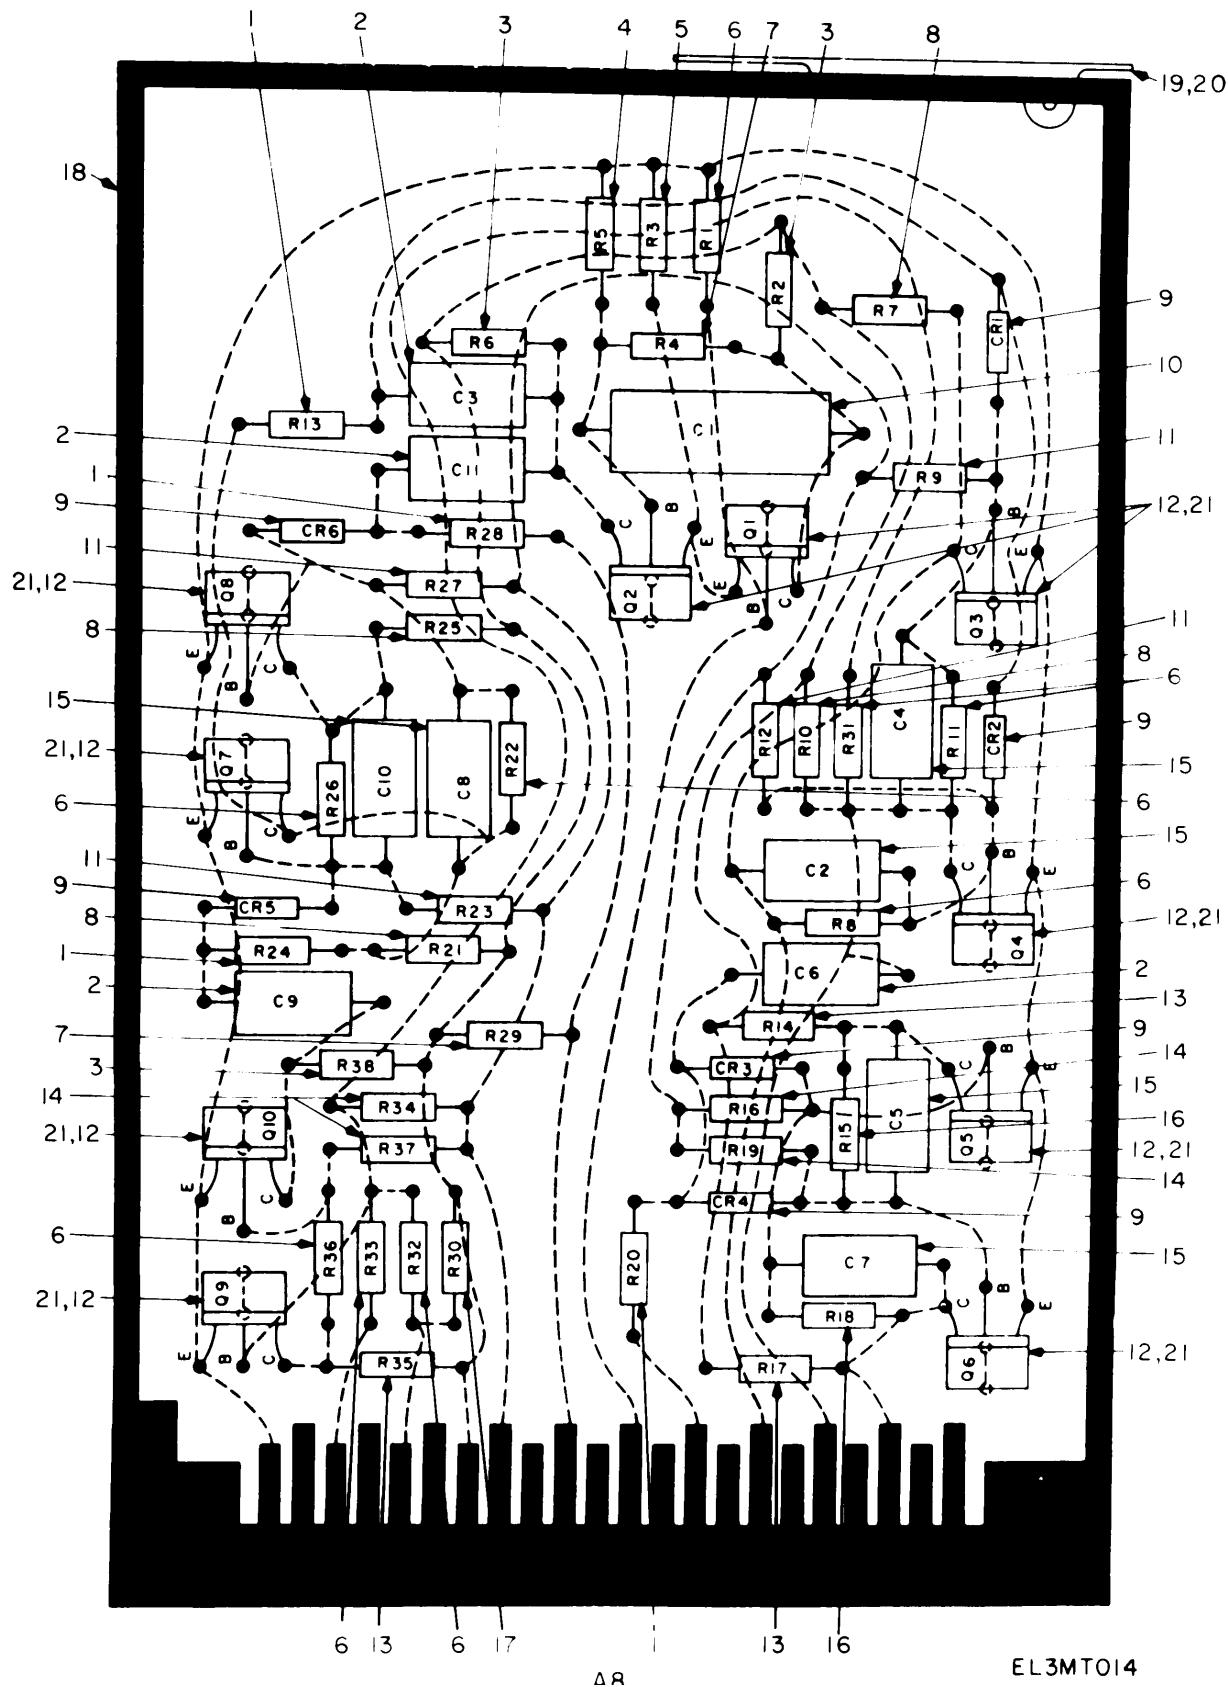


Figure 14. Test Set Subassembly A8.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	DESCRIPTION	(7)	(8)
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		USABLE ON CODE	QTY U/M	INC IN UNIT
GROUP 020109 TEST SET SUBASSEMBLY A8									
14	1	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR, FIXED, COMP		EA	4
14	2	XDHZZ	5910-00-725-1993	CM15FD201JN3	81349	CAPACITOR, FIXED, MIC		EA	4
14	3	PAHZZ	5905-00-116-8568	RC20GF752J	81349	RESISTOR, FIXED, COMP		EA	3
14	4	PAHZZ	5905-00-249-4256	RC20GF363J	81349	RESISTOR, FIXED, COMP		EA	1
14	5	PAHZZ	5905-00-190-8881	RC20GF182J	81349	RESISTOR, FIXED, COMP		EA	1
14	6	PAHZZ	5905-00-192-3978	RC20GF303J	81349	RESISTOR, FIXED, COMP		EA	9
14	7	PAHZZ	5905-00-254-9201	RC20GF473J	81349	RESISTOR, FIXED, COMP		EA	1
14	8	PAHZZ	5905-00-279-1751	RC20GF302J	81349	RESISTOR, FIXED, COMP		EA	4
14	9	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR		EA	6
14	10	PAHZZ	5910-00-840-5737	CP09A1KC682K1	81349	CAPACITO		EA	1
14	11	PAHZZ	5905-00-279-2522	RC20GF154J	81349	RESISTOR, FIXED, COMP		EA	4
14	12	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR		EA	10
14	13	PAHZZ	5905-00-185-8510	RC20GF103J	81349	RESISTOR, FIXED, COMP		EA	3
14	14	PAHZZ	5905-00-279-1871	RC20GF164J	81349	RESISTOR, FIXED, COMP		EA	4
14	15	XDHZZ		CM15FD241JN3	81349	CAPACITOR, FIXEDMICA		EA	6
14	16	PAHZZ	5905-00-114-5441	RC20GF563J	81349	RESISTOR, FIXED, COMP		EA	2
14	17	PAHZZ	5905-00-195-6806	RC20GF102J	81349	RESISTOR, FIXED, COMP		EA	1
14	18	XAHZZ		SMD552500	80063	PRINTER		EA	1
14	19	XDHZZ		SMC552178-16	80063	HANDLE, EXTRACTOR		EA	1
14	20	XDHZZ		SMB552185-3	80063	EYELET		EA	1
14	21	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL		EA	10

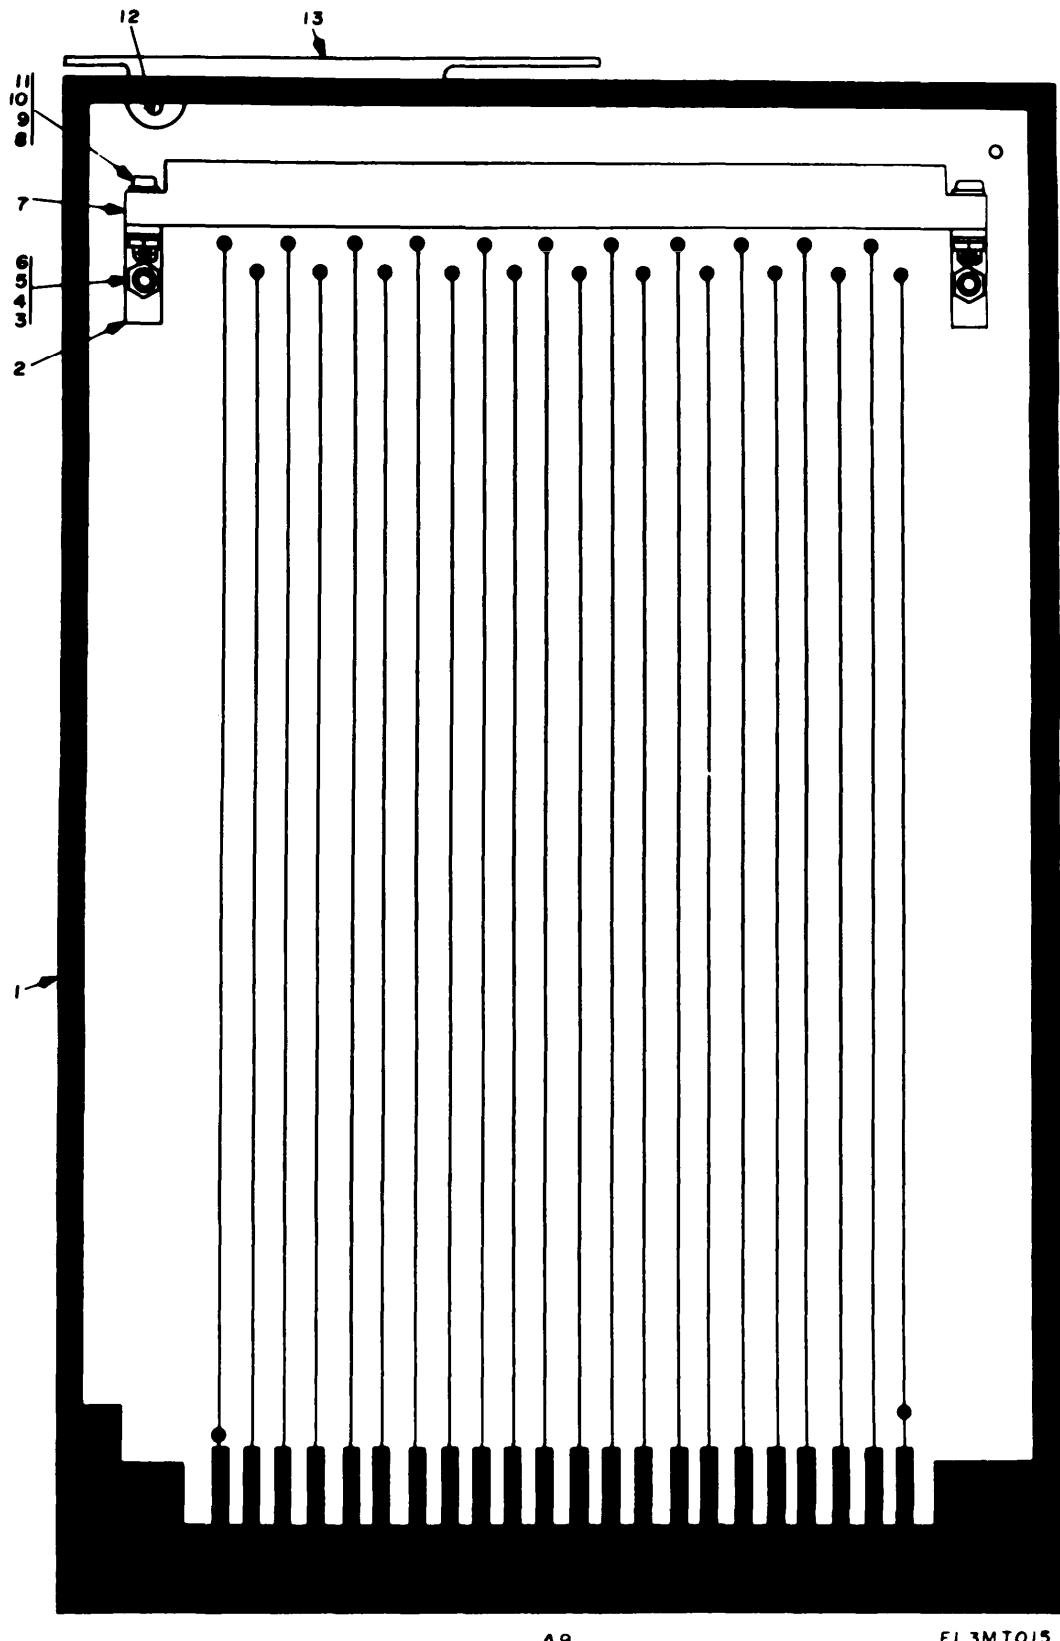

A9

EL 3M TO 15

Figure 15. Test Set Subassembly A9.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	DESCRIPTION	(7)	(8)
FIG NO.	ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM		USABLE ON CODE	QTY IN U/M	INC IN UNIT
GROUP 020110 TEST SET SUBASSEMBLY A9									
15	1	XAHZZ		SMD552492GRP1	80063	PRINTED		EA	1
15	2	XDHZZ		SMB552739	80063	BRACKET		EA	2
15	3	XBHZZ	5305-00-054-5647	MS35233-13	96906	SCREW, MACHINE		EA	2
15	4	PAHZZ	5310-00-934-9748	MS35649-244	96906	NUT, PLAIN, HEX		EA	2
15	5	PAHZZ	5310-00-782-1349	MS15795-304	96906	WASHER, FLAT		EA	2
15	6	PAHZZ	5310-00-933-8118	MS35338-78	96906	WASHER, SPLIT		EA	2
15	7	XDHZZ		SMB552541	80063	CONNECTO		EA	1
15	8	PAHZZ	5305-00-515-7219	MS35233-17	96906	SCREW, MACHINE		EA	2
15	9	PAHZZ	5310-00-934-9748	MS35649-244	96906	NUT, PLAIN, HEX		EA	2
15	10	PAHZZ	5310-00-782-1349	MS15795-304	96906	WASHER, FLAT		EA	2
15	11	PAHZZ	5310-00-933-8118	MS35338-78	96906	WASHER, SPLIT		EA	2
15	12	XDHZZ		SMB552185-3	80063	EYELET		EA	1
15	13	XDHZZ		SMC552178-18	80063	HANDLE, EXTRACTOR		EA	1


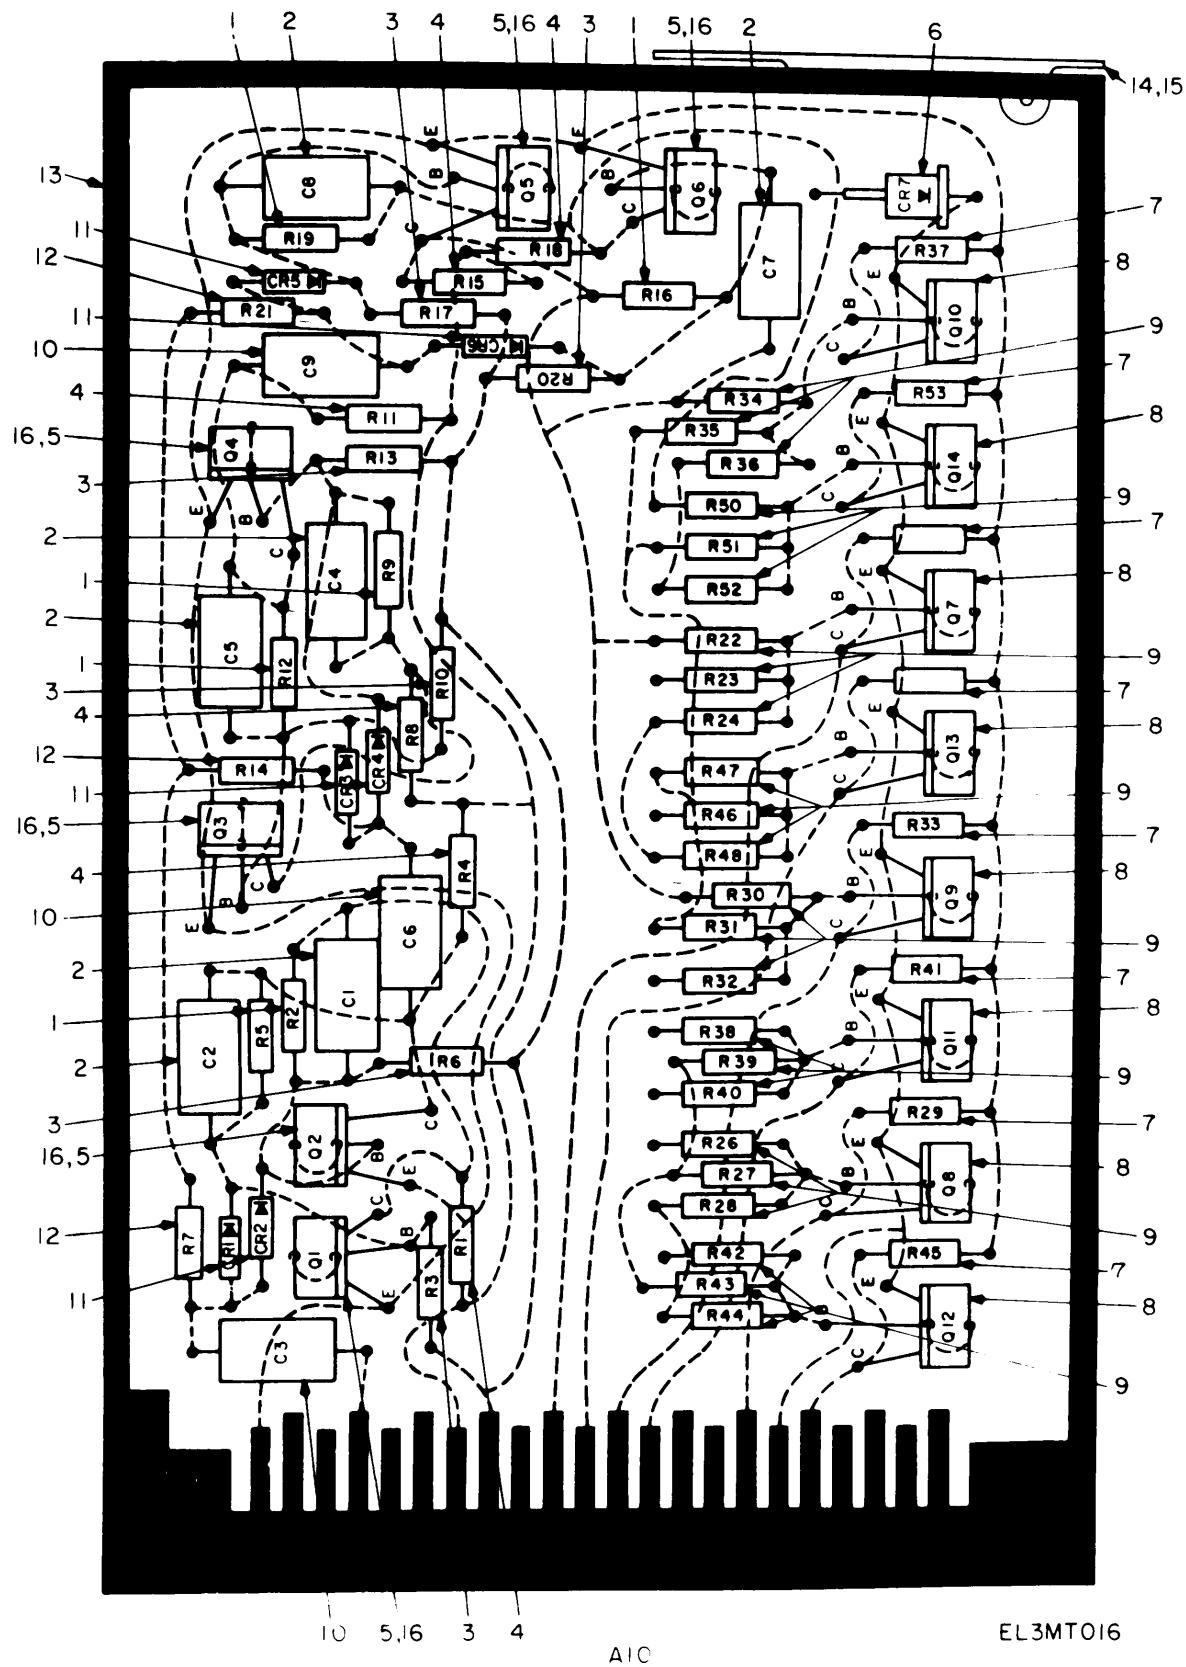


Figure 16. Test Set Subassembly

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020111 TEST SET AUBASSEMBLY A10								
16	1	PAHZZ	5905-00-279-3496	RC20GF513J	81349	RESISTOR, FIXED, COMP		EA 6
16	2	XDHZZ		CM15FD241JN3	81349	CAPACITOR, FIXEDMICA		EA 6
16	3	PAHZZ	5905-00-279-1871	RC20GF164J	81349	RESISTOR, FIXED, COMP		EA 6
16	4	PAHZZ	5905-00-116-8568	RC20GF752J	81349	RESISTOR, FIXED, COMP		EA 6
16	5	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR		EA 6
16	6	PAHZZ	5961-00-892-3361	JAN1N750A	81349	SEMICONDUCTOR		EA 1
16	7	PAHZZ	5905-00-279-2616	RC20GF153J	81349	RESISTOR, FIXED, COMP		EA 8
16	8	PAHZZ	5961-00-892-0800	JAN2N1304	81349	TRANSISTOR		EA 8
16	9	PAHZZ	5905-00-279-3495	RC20GF753J	81349	RESISTOR, FIXED, COMP		EA 24
16	10	XDHZZ	5910-00-832-5724	CM15ED680JN3	81349	CAPACITOR, FIXED, MIC		EA 3
16	11	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR		EA 6
16	12	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR, FIXED, COMP		EA 3
16	13	XAHZZ		SMD552503	80063	PRINTE		EA 1
16	14	XDHZZ		SMC552178-20	80063	HANDLE, EXTRACTOR		EA 1
16	15	XDHZZ		SMB552185-3	80063	EYELET		EA 1
16	16	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL		EA 14



SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020112 TEST SET SUBASSEMBLY								
A11 THRU A14								
17	1	PAHZZ	5961-00-813-7283	2N1307	81349	TRANSISTOR	EA	10
17	2	PAHZZ	5905-00-279-3495	RC20GF753J	81349	RESISTOR, FIXED, COMP	EA	10
17	3	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR, FIXED, COMP	EA	10
17	4	PAHZZ	5905-00-192-3978	RC20GF303J	81349	RESISTOR, FIXED, COMP	EA	10
17	5	PAHZZ	5905-00-192-0649	RC20GF203J	81349	RESISTOR, FIXED, COMP	EA	20
17	6	PAHZZ	5905-00-254-7100	RC20GF913J	81349	RESISTOR, FIXED, COMP	EA	2
17	7	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR	EA	2
17	8	XAHZZ		SMD552498	80063	PRINTED	EA	1
17	9	XDHZZ		SMC552178-22	80063	HANDLE, EXTRACTOR	EA	1
17	10	XDHZZ		SMB552185-3	80063	EYELET	EA	1
17	11	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL	EA	12

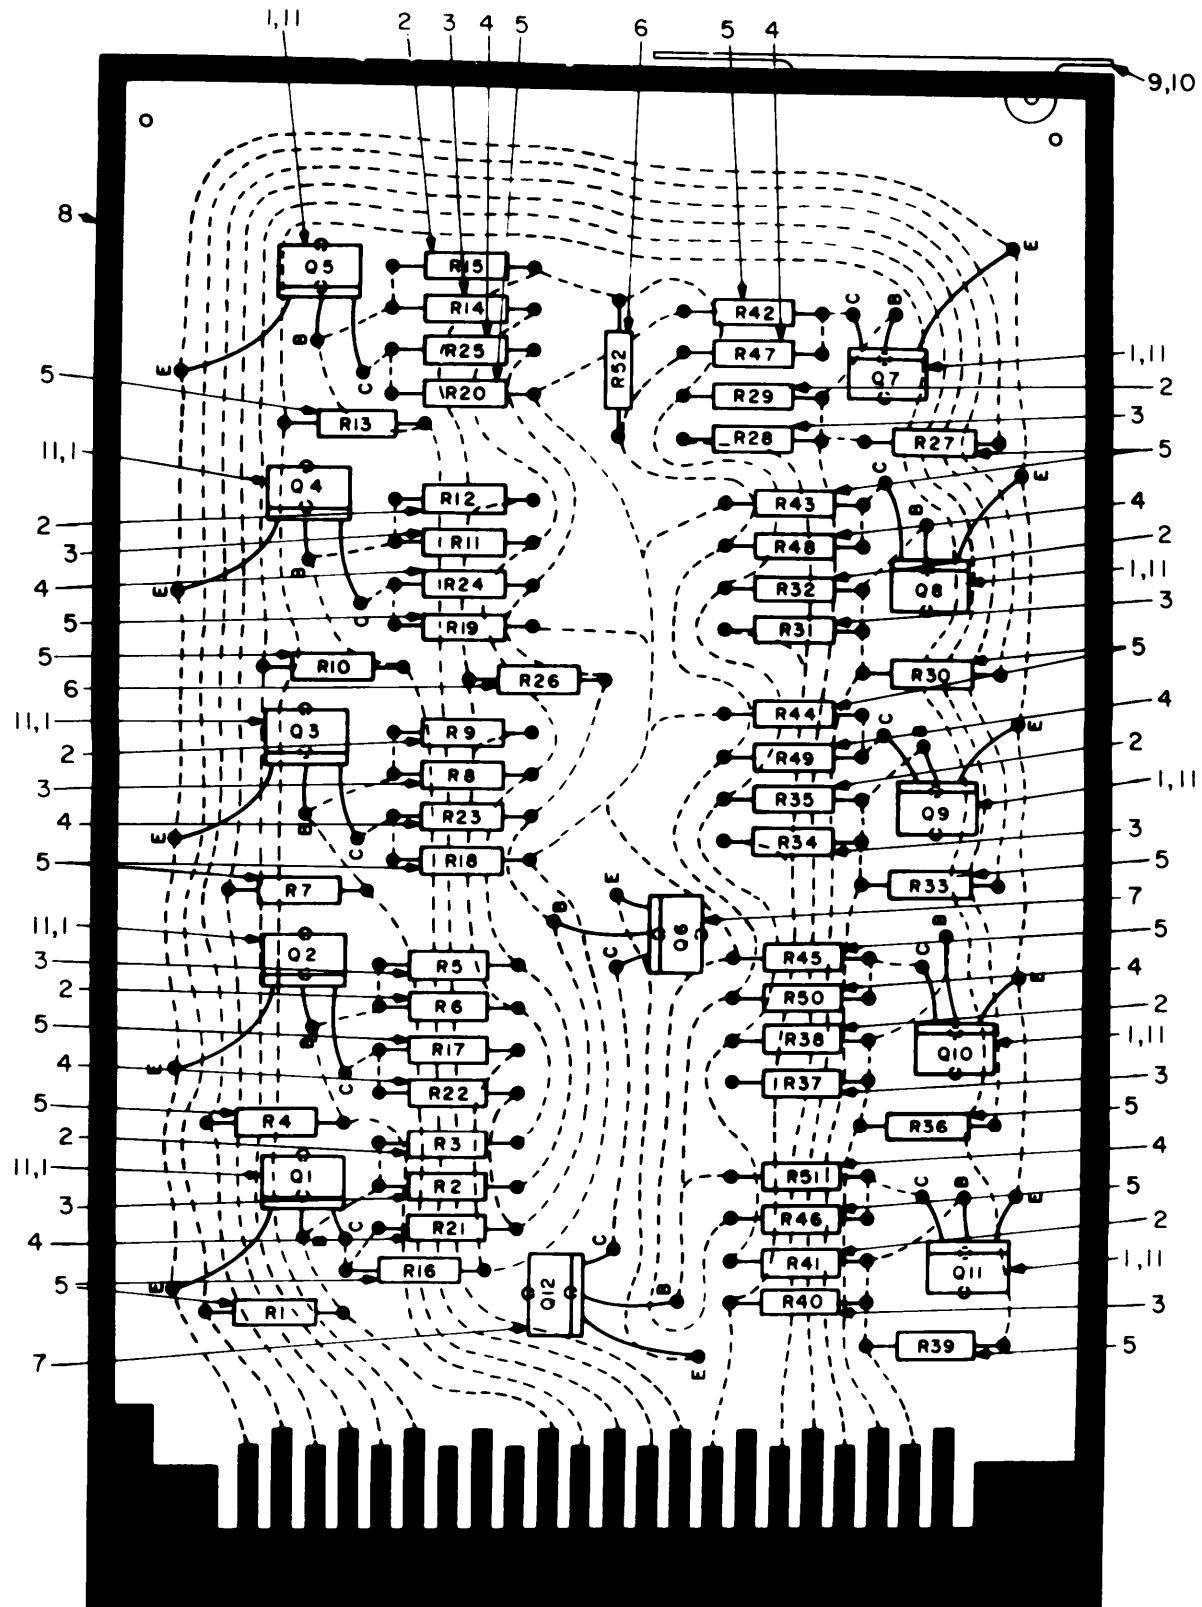

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020113 TEST SET SUBASSEMBLY								
A15 THRU A18								
18	1	PAHZZ	5905-00-279-3498	RC20GF433J	81349	RESISTOR, FIXED, COMP	EA	47
18	2	PAHZZ	5905-00-279-3498	RC20GF433J	81349	RESISTOR, FIXED, COMP	EA	46
18	3	PAHZZ	5905-00-279-3498	RC20GF433J	81349	RESISTOR, FIXED, COMP	EA	59
18	4	PAHZZ	5905-00-279-3498	RC20GF433J	81349	RESISTOR, FIXED, COMP	EA	55
18	5	XAHZZ		SMD552497	80063	PRINTED	EA	1
18	6	XDHZZ		SMC552178-30	80063	HANDLE, EXTRACTOR	EA	1
18	7	XDHZZ		SMB552185-3	80063	EYELET	EA	1

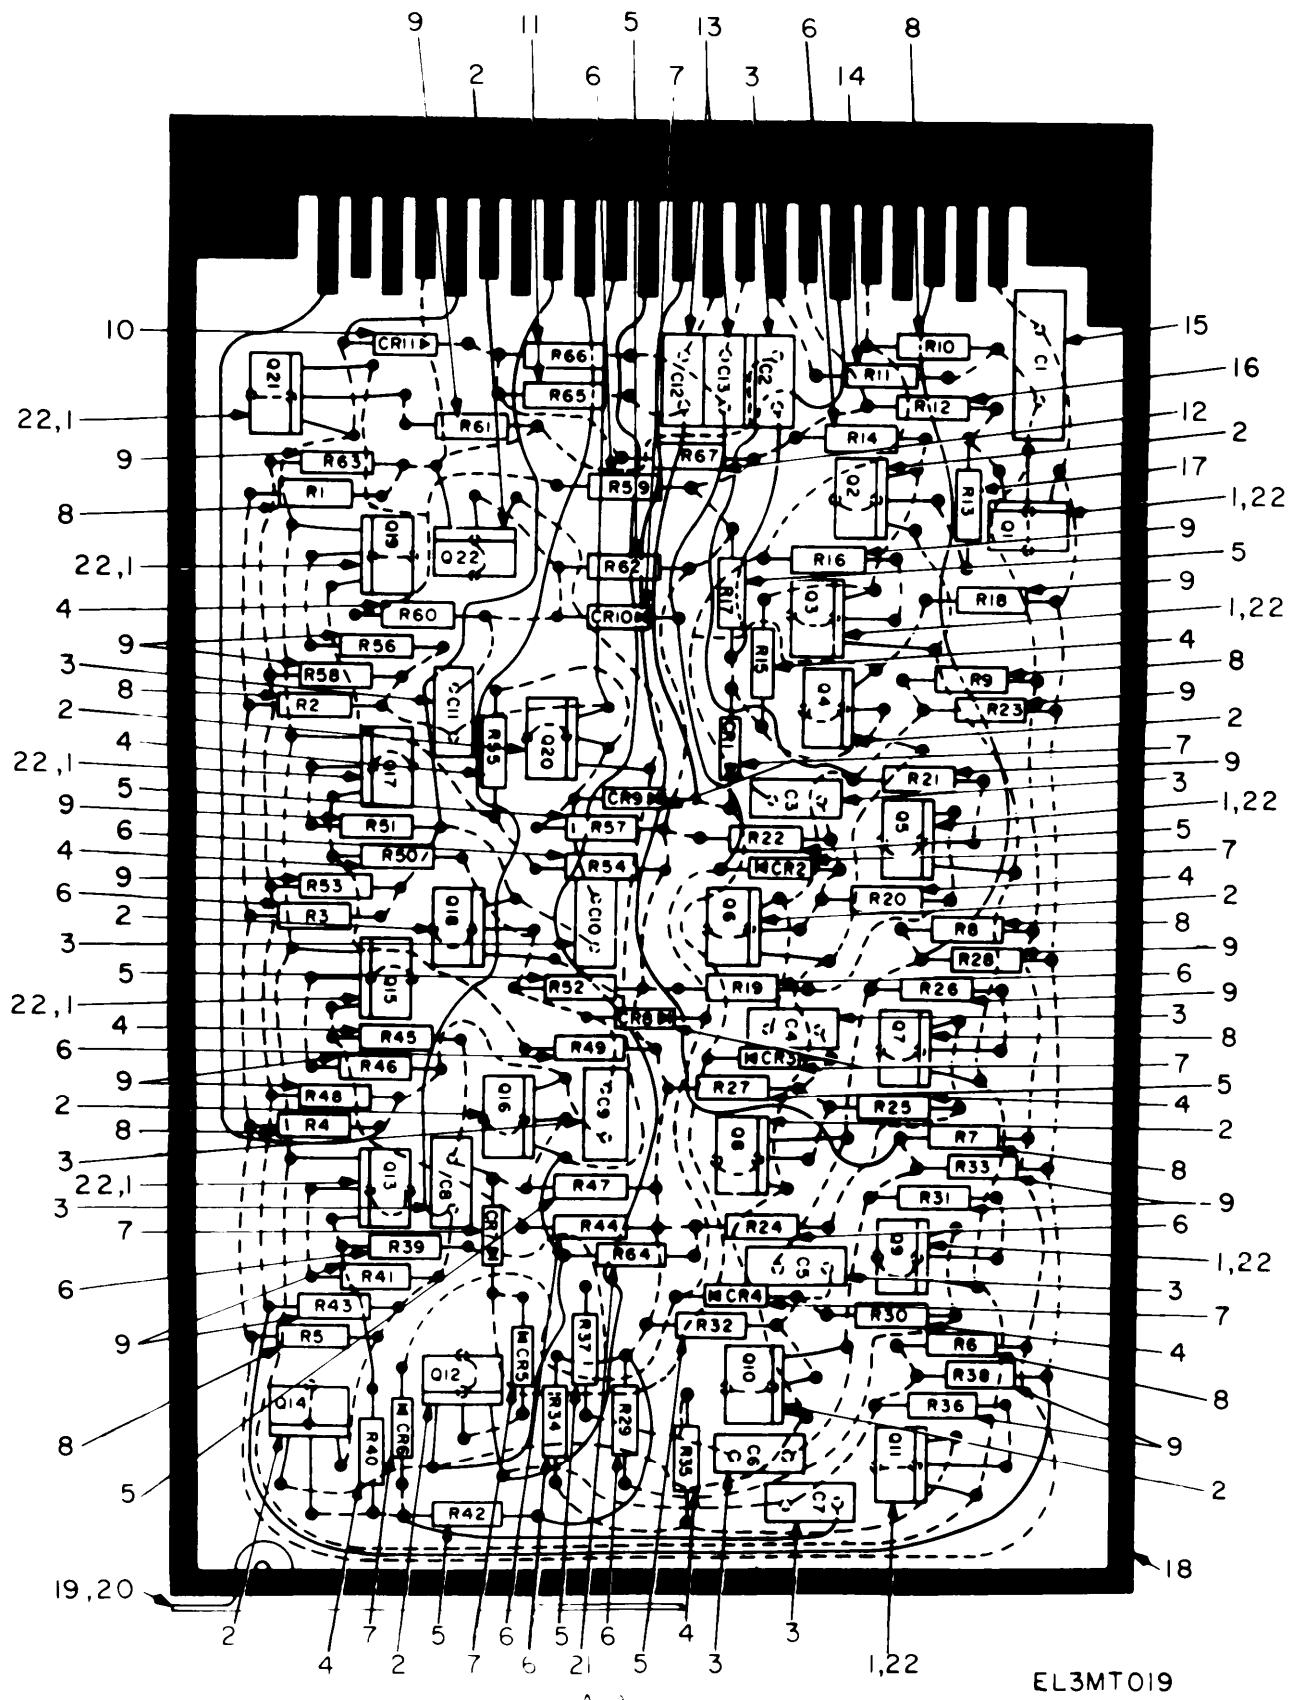
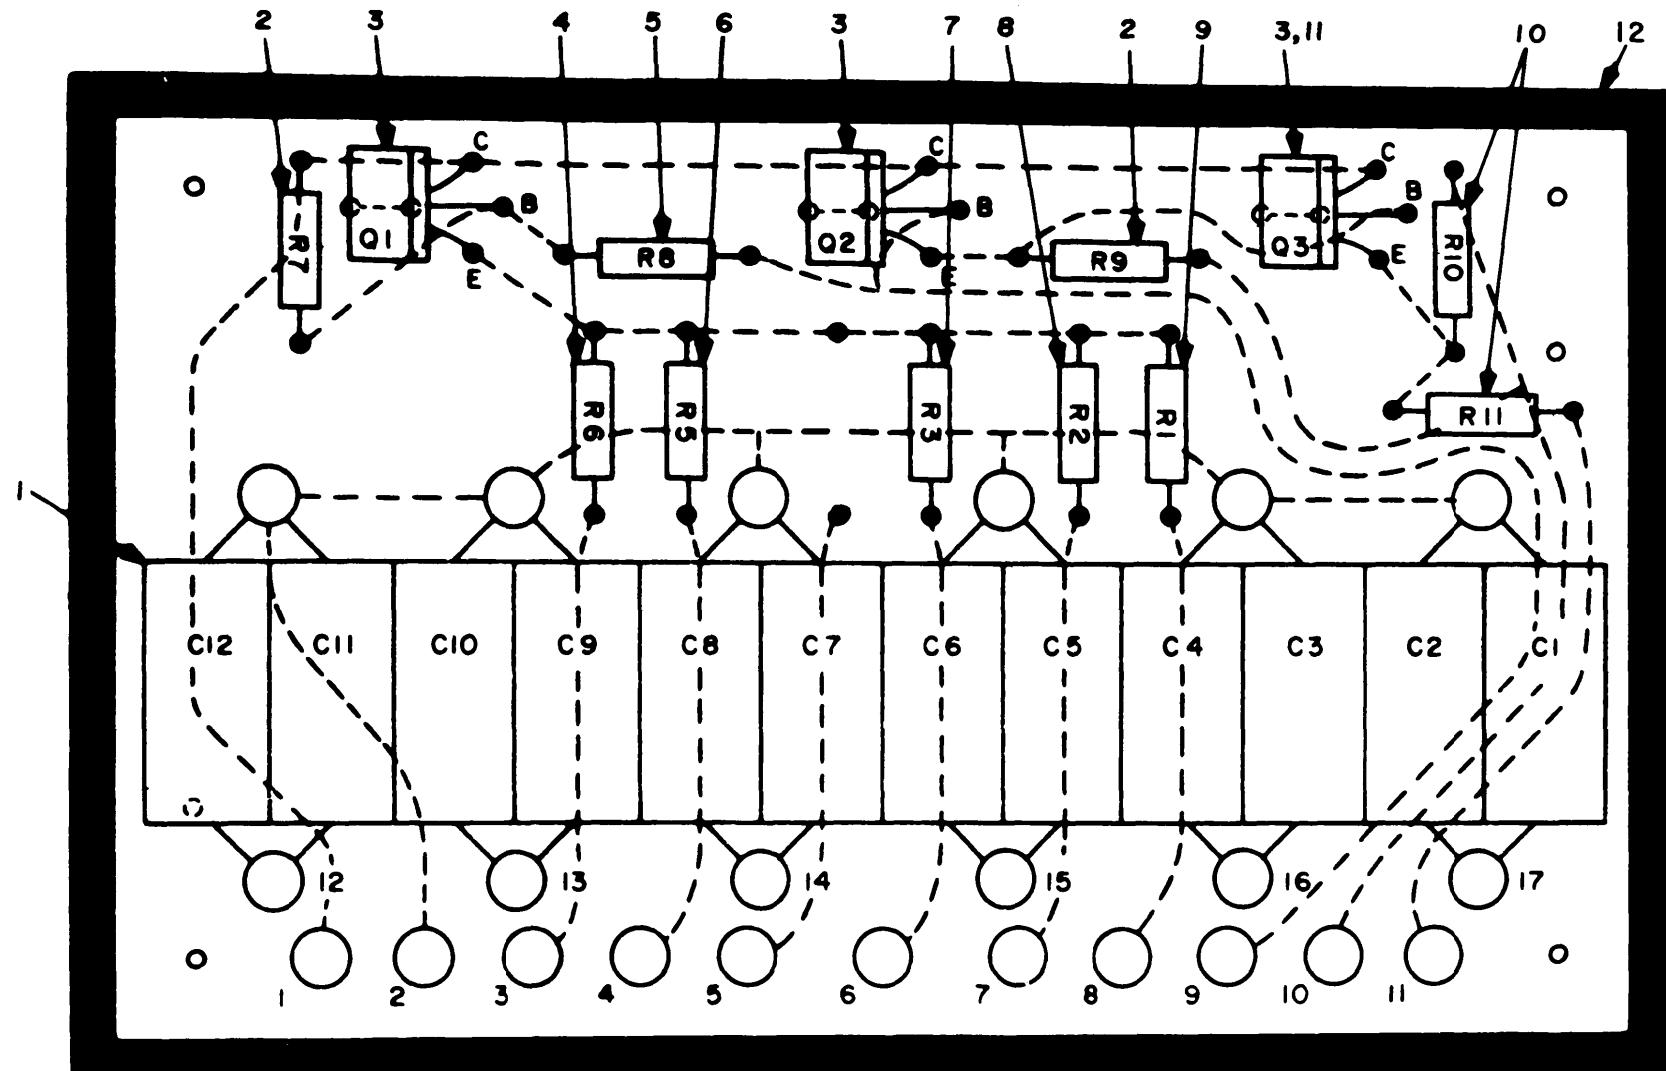


Figure 19. Test Set Subassembly A19.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020114 TEST SET ASSEMBLY A19								
19	1	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR		EA 12
19	2	PAHZZ	5961-00-892-0800	JAN2N1304	81349	TRANSISTOR		EA 10
19	3	PAHZZ	5910-00-702-8057	CM05FD331JN3	81349	CAPACITOR, FIXDEMICA		EA 10
19	4	PAHZZ	5905-00-279-1880	RC20GF272J	81349	RESISTOR, FIXED, COMP		EA 10
19	5	PAHZZ	5905-00-279-3506	RC20GF332J	81349	RESISTOR, FIXED, COMP		EA 10
19	6	PAHZZ	5905-00-279-3501	RC20GF163J	81349	RESISTOR, FIXED, COMP		EA 10
19	7	PAHZZ	5961-00-556-2091	JAN1N270	81349	SEMICONDUCTOR		EA 10
19	8	PAHZZ	5905-00-192-3978	RC20GF303J	81349	RESISTOR, FIXED, COMP		EA 10
19	9	PAHZZ	5905-00-185-8510	RC20GF103J	81349	RESISTOR, FIXED, COMP		EA 20
19	10	PAHZZ	5961-00-577-6084	1N645	81349	SEMICONDUCTOR DEVIC		EA 1
19	11	PAHZZ	5905-00-279-3503	RC20GF682J	81349	RESISTOR, FIXED, COMP		EA 2
19	12	PAHZZ	5905-00-141-0592	RC20GF122J	81349	RESISTOR, FIXED, COMP		EA 1
19	3	PAHZZ	5910-00-997-5399	DM15F471J03	72136	CAPACITOR, FIXED, MIC		EA 2
19	14	PAHZZ	5905-00-279-3495	RC20GF753J	81349	RESISTOR, FIXED, COMP		EA 1
19	15	PAHZZ	5910-00-806-3412	CM06FD202JN3	81349	CAPACITOR, FIXEDMICA		EA 1
19	16	PAHZZ	5905-00-279-2616	RC20GF153J	81349	RESISTOR, FIXED, COMP		EA 1
19	17	PAHZZ	5905-00-279-3497	RC20GF393J	81349	RESISTOR, FIXED, COMP		EA 1
19	18	XAHZZ		SMD552508	80063	PRINTED		EA 1
19	19	XDHZZ		SMC552178-38	80063	HANDLE, EXTRACTOR		EA 1
19	20	XDHZZ		SMB552185-3	80063	EYELET		EA 1
19	21	PAHZZ	5905-00-104-8350	RC20GF221J	81349	RESISTOR, FIXED, COMP		EA 1
19	22	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL		EA 22

**NOTE:**


1) ALL CAPACITORS ARE ITEM 1.

2A1AI

EL3MT020

Figure 20. Test Set Subassembly 2A1AI.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON CODE	QTY INC IN U/M UNIT
GROUP 020115 TEST SET ASSEMBLY								
2A1A1								
20	1	PAHZZ	5910-00-765-6238	CM30E272J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	PAHZZ	5910-00-101-5800	CM30E302J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	XDHZZ	5910-00-765-6239	CM30E332J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	XDHZZ		CM35E263J	81349	CAPACITOR, FIXEDMICA	SELECT AT TEST	EA 1
20	1	PAHZZ	5910-00-101-3852	CM35E392J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	XDHZZ		CM35E432J	81349	CAPACITOR, FIXEDMICA	SELECT AT TEST	EA 1
20	1	PAHZZ	5910-00-926-8204	CM35E472J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	PAHZZ	5910-00-898-1214	CM35E512J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	PAHZZ	5910-00-068-3883	CM35E562J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	PAHZZ	5910-00-067-6514	CM35E622J	81350	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	PAHZZ	5910-00-074-4247	CM35E682J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	1	PAHZZ	5910-00-851-0361	CM35E752J	81349	CAPACITOR, FIXED, MIC	SELECT AT TEST	EA 1
20	2	PAHZZ	5905-00-279-3499	RC20GF273J	81349	RESISTOR, FIXED, COMP		EA 2
20	3	PAHZZ	5961-00-853-1079	JAN2N1305	81349	TRANSISTOR		EA 3
20	4	PAHZZ	5905-00-104-8337	RC20GF751J	81349	RESISTOR, FIXED, COMP		EA 1
20	5	PAHZZ	5905-00-279-1757	RC20GF152J	81349	RESISTOR, FIXED, COMP		EA 1
20	6	PAHZZ	5905-00-171-1999	RC20GF821J	81349	RESISTOR, FIXED, COMP		EA 1
20	7	PAHZZ	5905-00-279-1870	RC20GF132J	81349	RESISTOR, FIXED, COMP		EA 1
20	8	PAHZZ	5905-00-190-8887	RC20GF202J	81349	RESISTOR, FIXED, COMP		EA 1
20	9	PAHZZ	5905-00-279-1876	RC20GF222J	81349	RESISTOR, FIXED, COMP		EA 1
20	10	PAHZZ	5905-00-195-6806	RC20GF102J	81349	RESISTOR, FIXED, COMP		EA 2
20	11	XDHZZ		SMB552753	80063	CLIP, ELECTRICAL		EA 3
20	12	XAHZZ		SMD552496	80063	PRINTED		EA 1

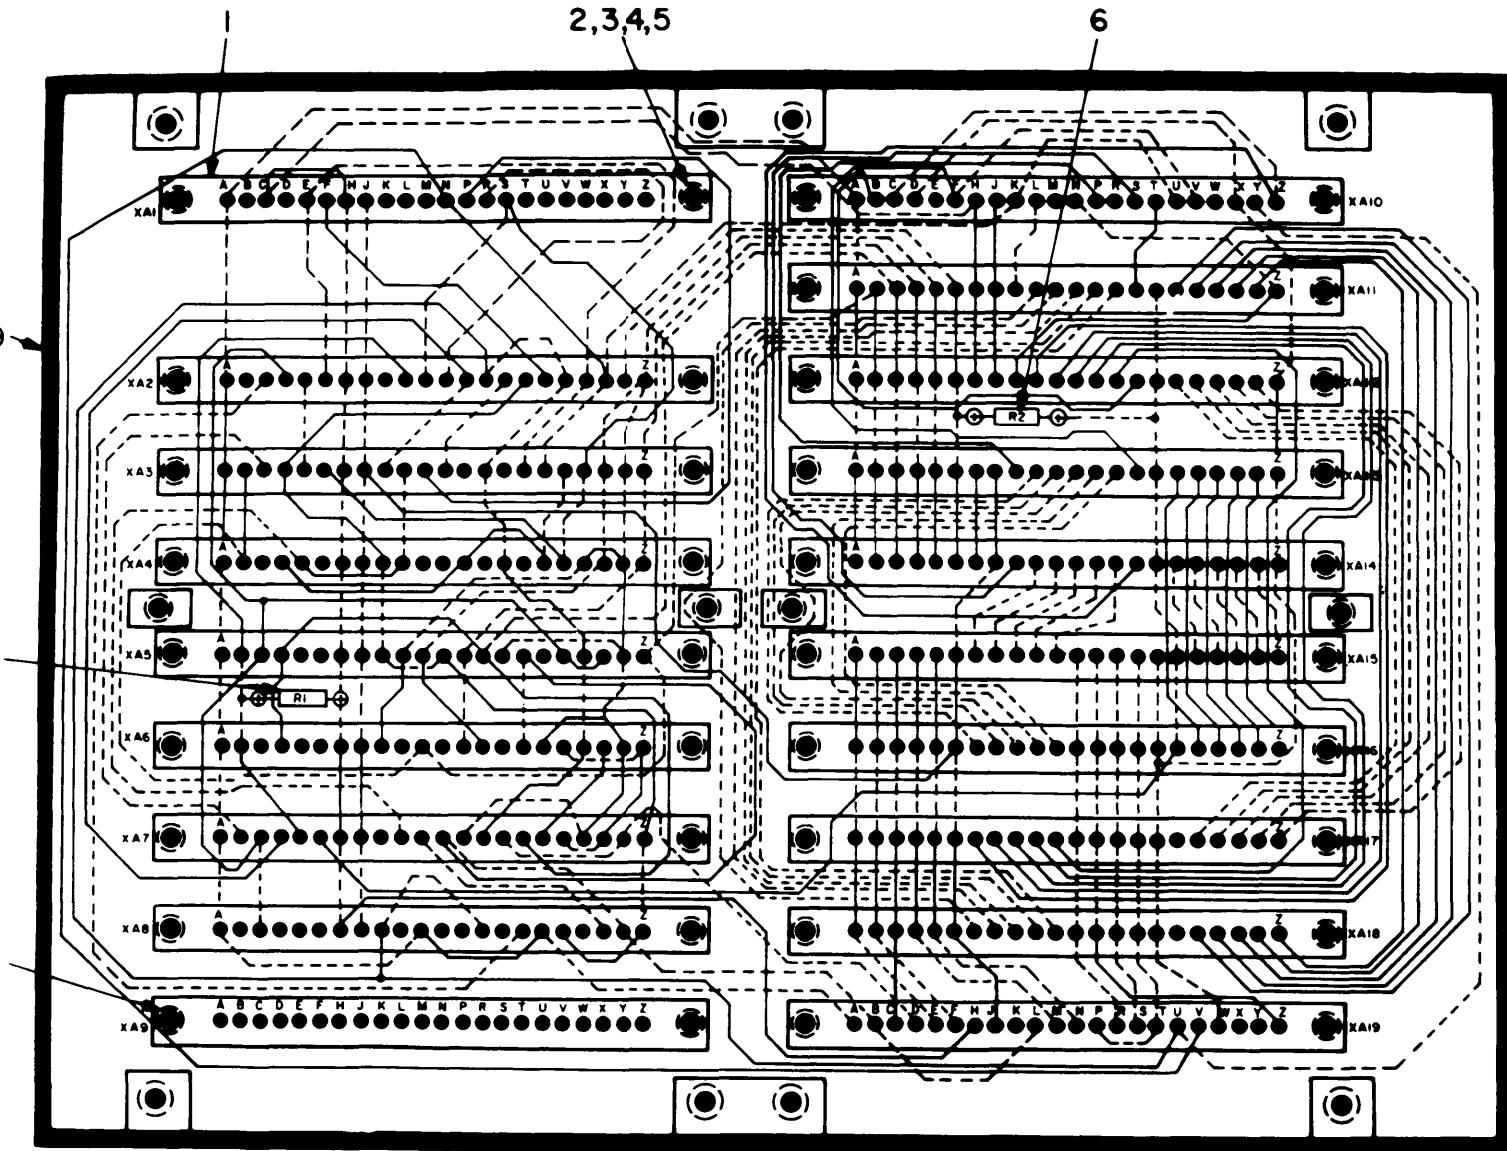

## NOTE

1) ALL CONNECTORS ARE ITEM 1

2A2

EL3MT021

Figure 21. Harness Board Assembly 2A2.

SECTION II ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(A) FIG NO.	(B) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	USABLE ON	QTY INC IN UNIT
GROUP 020116 HARNESS BOARD ASSEMBLY 2A2								
21	1	XDHZZ		SMB552540	80063	CONNECTO	EA	19
21	2	PAHZZ	5305-00-054-6655	MS35233-31	96906	SCREW,MACHINE	EA	36
21	3	PAHZZ	5310-00-934-9761	MS35649-264	96906	NUT,PLAIN,HEX	EA	38
21	4	PAHZZ	5310-00-983-8483	MS27183-5	96906	WASHER,FLAT	EA	38
21	5	XDHZZ		MS35335-79	96906	WASHER,LOCK	EA	38
21	6	PAHZZ	5905-00-279-2616	RC20GF153J	81349	RESISTOR,FIXED,COMP	EA	1
21	7	XDHZZ	5305-00-054-6657	MS35233-33	96906	SCREW,MACHINE	EA	2
21	8	PAHZZ	5905-00-279-2673	RC20GF622J	81349	RESISTOR,FIXED,COMP	EA	1
21	9	XDHZZ		SME552480	80063	HARNESS BOARD	EA	1

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5910-00-003-5050	7	17	5905-00-195-6800	6	8
5910-00-003-5050	11	5	5905-00-195-6806	6	18
5310-00-011-1041	4	2	5905-00-195-6806	8	16
5310-00-011-1041	4	5	5905-00-195-6806	13	22
5310-00-011-1041	4	23	5905-00-195-6806	14	17
5310-00-011-1041	4	36	5905-00-195-6806	20	10
5310-00-011-1041	5	3	5920-00-199-9498	3	23
5961-00-022-5670	10	1	5905-00-225-3934	7	20
5310-00-054-1830	5	26	5915-00-230-8529	4	3
5305-00-054-5647	15	3	5910-00-232-3158	7	14
5305-00-054-5649	3	14	5910-00-232-3162	7	11
5305-00-054-5649	4	48	5910-00-232-3163	7	16
5305-00-054-5652	5	22	5910-00-232-3164	7	10
5305-00-054-6651	2	29	5905-00-249-3656	8	4
5305-00-054-6651	4	19	5905-00-249-3656	12	7
5305-00-054-6651	4	22	5905-00-249-3656	13	4
5305-00-054-6651	4	26	5905-00-249-3661	8	12
5305-00-054-6651	4	31	5905-00-249-3661	9	8
5305-00-054-6651	4	37	5905-00-249-3661	13	11
5305-00-054-6655	4	18	5905-00-249-4256	14	4
5305-00-054-6655	5	2	5905-00-249-9468	8	13
5305-00-054-6655	21	2	5905-00-249-9468	9	17
5305-00-054-6657	21	7	5905-00-249-9468	10	14
5305-00-059-3660	3	28	5905-00-249-9468	12	4
5905-00-059-9324	7	19	5905-00-249-9468	13	7
			5905-00-254-7100	13	10
			5905-00-254-7100	17	6
			5905-00-254-9201	8	10
5910-00-067-6514	20	1	5905-00-254-9201	9	18
5910-00-068-3883	20	1	5905-00-254-9201	12	3
5305-00-068-6529	4	20	5905-00-254-9201	13	12
			5905-00-254-9201	14	7
5910-00-074-4247	20	1	5905-00-256-0412	10	3
5905-00-078-8755	7	4	5905-00-279-1751	14	8
5905-00-079-3501	7	3	5905-00-279-1757	6	27
5910-00-101-3852	20	1	5905-00-279-1757	10	15
5910-00-101-5800	20	1	5905-00-279-1757	20	5
5905-00-104-8337	20	4	5905-00-279-1870	20	7
5905-00-104-8350	19	21	5905-00-279-1871	8	5
5905-00-106-1282	10	9	5905-00-279-1871	9	10
5905-00-106-1282	13	16	5905-00-279-1871	14	14
5905-00-111-8357	9	21	5905-00-279-1871	16	3
5905-00-114-5441	8	9	5905-00-279-1876	6	23
5905-00-114-5441	9	4	5905-00-279-1876	20	9
5905-00-114-5441	14	16	5905-00-279-1877	6	11
5905-00-116-8568	14	3	5905-00-279-1880	19	4
5905-00-116-8568	16	4	5905-00-279-1963	6	2
5905-00-141-0592	19	12	5905-00-279-2024	6	9
5905-00-165-3119	7	2	5905-00-279-2515	7	15
5340-00-168-7136	3	22	5905-00-279-2522	6	12
5905-00-171-1998	12	5	5905-00-279-2522	12	8
5905-00-171-1998	13	6	5905-00-279-2522	13	9
5905-00-171-1999	20	6	5905-00-279-2522	14	11
5305-00-175-3230	3	21	5905-00-279-2616	9	15
5905-00-185-6935	6	25	5905-00-279-2616	16	7
5905-00-185-8510	8	6	5905-00-279-2616	19	16
5905-00-185-8510	9	7	5905-00-279-2616	21	6
5905-00-185-8510	10	16	5905-00-279-2667	13	3
5905-00-185-8510	12	10	5905-00-279-2669	6	7
5905-00-185-8510	13	17	5905-00-279-2669	8	15
5905-00-185-8510	14	13	5905-00-279-2673	11	8
5905-00-185-8510	19	9	5905-00-279-2673	21	8
5905-00-190-8881	14	5	5905-00-279-3494	8	11
5905-00-190-8887	20	8	5905-00-279-3494	9	12
5905-00-190-8889	10	5	5905-00-279-3494	12	11
5905-00-192-0649	7	18	5905-00-279-3494	13	14
5905-00-192-0649	8	14	5905-00-279-3495	9	11
5905-00-192-0649	9	9	5905-00-279-3495	16	9
5905-00-192-0649	12	2	5905-00-279-3495	17	2
5905-00-192-0649	13	5	5905-00-279-3495	19	14
5905-00-192-0649	17	5	5905-00-279-3496	16	1
5905-00-192-3978	9	1	5905-00-279-3497	9	20
5905-00-192-3978	11	2	5905-00-279-3497	12	1
5905-00-192-3978	14	6	5905-00-279-3497	13	18
5905-00-192-3978	17	4	5905-00-279-3497	19	17
5905-00-192-3978	19	8	5905-00-279-3498	13	19
5905-00-192-3981	12	9	5905-00-279-3498	18	1
5905-00-192-3981	13	2	5905-00-279-3498	18	2
5905-00-192-4504	3	31	5905-00-279-3498	18	3
5905-00-195-6453	13	13	5905-00-279-3498	18	4

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.
5905-00-279-3499	8	1	5961-00-821-8976	5	21
5905-00-279-3499	9	13	5961-00-826-0491	6	20
5905-00-279-3499	11	4	5910-00-832-5724	11	7
5905-00-279-3499	13	8	5910-00-832-5724	16	10
5905-00-279-3499	14	1	5340-00-840-0954	3	27
5905-00-279-3499	16	12	5910-00-840-5737	14	10
5905-00-279-3499	17	3	5935-00-843-7362	1	12
5905-00-279-3499	20	2	5961-00-845-3954	7	21
5905-00-279-3501	19	6	5910-00-851-0361	20	1
5905-00-279-3503	11	3	5961-00-853-1065	6	3
5905-00-279-3503	19	11	5961-00-853-1079	8	3
5905-00-279-3506	6	17	5961-00-853-1079	9	3
5905-00-279-3506	19	5	5961-00-853-1079	10	11
5905-00-279-3512	6	19	5961-00-853-1079	11	1
6145-00-284-0579	1	11			
5920-00-296-0451	4	46			
5905-00-369-6923	6	22	5961-00-853-1079	14	12
6625-00-405-9099	5	1	5961-00-853-1079	16	5
6625-00-405-9103	4	15	5961-00-853-1079	17	7
5995-00-469-2277	1	9	5961-00-853-1079	19	1
5305-00-515-7219	15	8	5961-00-853-1079	20	3
5905-00-539-2479	5	28	5961-00-866-0476	9	3
5905-00-539-4897	5	5	5961-00-892-0800	9	14
5305-00-543-2774	4	45	5961-00-892-0800	16	8
5310-00-543-5933	1	4	5961-00-892-0800	19	2
5920-00-556-0144	3	24	5950-00-892-8329	10	2
5920-00-556-0144	4	47	5910-00-898-1214	20	1
5355-00-556-0145	3	25	5310-00-903-1524	1	16
5961-00-556-2091	6	10	5310-00-903-5966	1	26
5961-00-556-2091	8	7	5905-00-917-5533	4	13
5961-00-556-2091	9	16	5910-00-925-1747	3	33
5961-00-556-2091	10	7	6625-00-926-7677	2	16
5961-00-556-2091	11	6	5910-00-926-8204	20	1
5961-00-556-2091	13	21	5915-00-930-2782	4	27
5961-00-556-2091	14	9	5310-00-933-8118	3	10
5961-00-556-2091	16	11	5310-00-933-8118	4	42
5961-00-556-2091	19	7	5310-00-933-8118	5	13
5961-00-577-6084	3	32	5310-00-933-8118	15	6
5961-00-577-6084	6	13	5310-00-933-8118	15	11
5961-00-577-6084	19	10	5310-00-934-9748	3	9
5310-00-582-5677	1	15	5310-00-934-9748	4	43
5930-00-615-7896	3	6	5310-00-934-9748	5	12
5930-00-615-9376	3	8	5310-00-934-9748	15	4
5310-00-616-3555	4	32	5310-00-934-9748	15	9
5310-00-616-7998	1	21	5310-00-934-9759	5	27
5910-00-621-9880	6	6	5310-00-934-9765	1	5
			5905-00-935-8544	10	6
5930-00-655-1923	3	7	5910-00-938-4900	5	18
5940-00-682-2477	5	20	5910-00-944-3501	5	8
			6625-00-950-8445	2	4
5905-00-689-1489	3	3	6625-00-950-8447	2	5
5910-00-702-8057	19	3	6625-00-950-8459	2	22
5340-00-721-5315	4	11	6625-00-950-8462	2	23
5910-00-724-6078	9	26	6625-00-950-8464	2	6
5910-00-725-1993	7	6	6625-00-950-8486	2	8
5910-00-725-1993	14	2	6625-00-950-8486	2	9
6625-00-760-3921	2	19	6625-00-950-8486	2	10
5905-00-761-5398	7	1	6625-00-950-8486	2	11
5305-00-764-0068	2	25	6625-00-950-8490	2	21
5910-00-765-6238	20	1	6625-00-950-8491	2	3
5910-00-765-6239	20	1	6625-00-950-8498	2	24
5310-00-773-7618	1	18	5340-00-954-3134	2	26
5950-00-781-9745	10	12	6625-00-959-4968	2	7
5310-00-782-1349	5	14	5310-00-983-8483	4	10
5310-00-782-1349	15	5	5310-00-983-8483	5	4
5310-00-782-1349	15	10	5310-00-983-8483	21	4
5910-00-806-3412	19	15			
6210-00-808-8604	3	16	5905-00-993-3174	7	5
5310-00-809-8544	5	24	5935-00-995-5782	3	12
5961-00-813-7283	17	1	5935-00-995-5782	4	40
5935-00-814-6598	1	10	5910-00-997-5399	19	13

PART NUMBER	FIG. FSCM	ITEM NO.	PART NUMBER	FIG. FSCM	ITEM NO.		
CE41C111M	81349	5	18	CK06BX222K	81349	10	24
CE41C451G	81349	5	8	CM05D101KN3	81349	6	24
CH09A1NC105K	81349	4	34	CM05FD331JN3	81349	19	3
CH09A1NC474K	81349	3	33	CM06FD202JN3	81349	19	15

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER	FIG. FSCM	ITEM NO.	PART NUMBER	FIG. FSCM	ITEM NO.	
CM15ED680JN3	81349	11	7	MS35233-30	96906 2	28
CM15ED680JN3	81349	16	10	MS35233-31	96906 4	18
CM15FD101JN3	81349	7	17	MS35233-31	96906 5	2
CM15FD101JN3	81349	11	5	MS35233-31	96906 21	2
CM15FD111JN3	81349	10	17	MS35233-32	96906 4	45
CM15FD111JN3	81349	13	23	MS35233-33	96906 21	7
CM15FD151JN3	81349	8	2	MS35234-64	96906 3	28
CM15FD151JN3	81349	9	2	MS35249-52	96906 2	25
CM15FD151JN3	81349	10	8	MS35333-71	96906 4	32
CM15FD151JN3	81349	13	20	MS35333-73	96906 1	4
CM15FD201JN3	81349	7	6	MS35334-21	96906 1	21
CM15FD201JN3	81349	14	2	MS35335-79	96906 21	5
CM15FD241JN3	81349	8	8	MS35338-78	96906 3	10
CM15FD241JN3	81349	9	5	MS35338-78	96906 4	42
CM15FD241JN3	81349	13	15	MS35338-78	96906 5	13
CM15FD241JN3	81349	14	15	MS35338-78	96906 15	6
CM15FD241JN3	81349	16	2	MS35338-78	96906 15	11
CM15FD391JN3	81349	9	26	MS35338-79	96906 4	2
CM30E272J	81349	20	1	MS35338-79	96906 4	5
CM30E302J	81349	20	1	MS35338-79	96906 4	23
CM30E332J	81349	20	1	MS35338-79	96906 4	36
CM35E263J	81349	20	1	MS35338-79	96906 5	3
CM35E392J	81349	20	1	MS35338-80	96906 5	26
CM35E432J	81349	20	1	MS35649-244	96906 3	9
CM35E472J	81349	20	1	MS35649-244	96906 4	43
CM35E512J	81349	20	1	MS35649-244	96906 5	12
CM35E562J	81349	20	1	MS35649-244	96906 15	4
CM35E622J	81350	20	1	MS35649-244	96906 15	9
CM35E682J	81349	20	1	MS35649-264	96906 4	9
CM35E752J	81349	20	1	MS35649-264	96906 4	14
CO03MCF3-18-0340	81349	1	11	MS35649-264	96906 4	35
CP05A1KB104K1	81349	6	6	MS35649-264	96906 21	3
CP09A1KB103K1	81349	9	22	MS35649-284	96906 5	27
CP09A1KB153K1	81349	10	4	MS35650-304	96906 1	5
CP09A1KC682K1	81349	14	10	MS35690-410	96906 1	26
CQ08A1PC224F3	81349	7	12	MS35690-630	96906 1	16
CQ08A1PC333F3	81349	7	8	MS39087-4	96906 3	27
CSR13F365K0312	81349	10	13	MS51957-18	96906 5	22
DM15F471J03	72136	19	13	MS75053-2	96906 10	2
FHN20G	81349	3	24	MS75055-2	81349 10	12
FHN20G	81349	4	47	MS77068-1	96906 5	20
FO2A250V1-2A	81349	6	4	MS91528-1K2B	96906 3	25
FO2A250V1-8A	81349	4	46	RC20GF101J	81349 10	5
FO2A250V1-8A	81349	6	1	RC20GF102J	81349 6	18
FO2B250V1-2A	81349	3	23	RC20GF102J	81349 8	16
MS15795-304	96906	15	5	RC20GF102J	81349 13	22
MS15795-304	96906	15	10	RC20GF102J	81349 14	17
MS15795-804	96906	5	14	RC20GF102J	81349 20	10
MS15795-810	96906	1	15	RC20GF103J	81349 8	6
MS15795-814	96906	1	18	RC20GF103J	81349 9	7
MS21318-14	96906	3	21	RC20GF103J	81349 10	16
MS25098-22	96906	3	6	RC20GF103J	81349 12	10
MS25098-23	96906	3	7	RC20GF103J	81349 13	17
				RC20GF103J	81349 14	13
MS25252NE2D	96906	3	17	RC20GF103J	81349 19	9
MS25257-4	96906	3	16	RC20GF113J	81349 13	3
MS25281-5	96906	4	11	RC20GF122J	81349 19	12
MS25281-7	96906	2	26	RC20GF124J	81349 12	9
MS27183-5	96906	4	10	RC20GF124J	81349 13	2
MS27183-5	96906	5	4	RC20GF132J	81349 20	7
MS27183-5	96906	21	4	RC20GF133J	81349 6	7
MS27183-7	96906	5	24	RC20GF133J	81349 8	15
MS3112E12-3P	96906	3	12	RC20GF134J	81349 8	13
MS3112E12-3P	96906	4	40	RC20GF134J	81349 9	17
MS3116E12-3S	96906	1	10	RC20GF134J	81349 10	14
MS35059-21	96906	3	8	RC20GF134J	81349 12	4
				RC20GF134J	81349 13	7
MS35233-13	96906	15	3	RC20GF152J	81349 6	27
MS35233-15	96906	3	14	RC20GF152J	81349 10	15
MS35233-15	96906	4	48	RC20GF152J	81349 20	5
MS35233-17	96906	15	8	RC20GF153J	81349 9	15
MS35233-26	96906	4	19	RC20GF153J	81349 16	7
MS35233-27	96906	2	29	RC20GF153J	81349 19	16
MS35233-27	96906	4	22	RC20GF153J	81349 21	6
MS35233-27	96906	4	26	RC20GF154J	81349 6	12
MS35233-27	96906	4	31	RC20GF154J	81349 12	8
MS35233-27	96906	4	37	RC20GF154J	81349 13	9
MS35233-28	96906	4	20	RC20GF154J	81349 14	11
MS35233-29	96906	4	1	RC20GF163J	81349 19	6
MS35233-30	96906	2	2	RC20GF164J	81349 8	5

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER	FIG. FSCM	ITEM NO.	PART NUMBER	FIG. FSCM	ITEM NO.		
RC20GF164J	81349	9	10	RC20GF823J	81349	9	12
RC20GF164J	81349	14	14	RC20GF823J	81349	12	11
RC20GF164J	81349	16	3	RC20GF823J	81349	13	14
RC20GF181J	81349	10	6	RC20GF913J	81349	13	10
RC20GF182J	81349	14	5	RC20GF913J	81349	17	6
RC20GF202J	81349	20	8	RC32GF223J	81349	6	22
RC20GF203J	81349	7	18	RC32GF882J	81349	6	21
RC20GF203J	81349	8	14	RC42GF133J	81349	6	2
RC20GF203J	81349	9	9	RC42GF181J	81349	10	3
RC20GF203J	81349	12	2	RC42GF301J	81349	6	9
RC20GF203J	81349	13	5	RC42GF302J	81349	6	25
RC20GF203J	81349	17	5	RC42GF822J	81349	3	31
RC20GF221J	81349	19	21	RN70D1103F	81349	7	20
RC20GF222J	81349	6	23	RN70D2002F	81349	7	5
RC20GF222J	81349	20	9	RN70D5622F	81349	7	19
RC20GF223J	81349	10	9	RN70D6491F	81349	7	4
RC20GF223J	81349	13	16	RP10UB502KK	81349	4	13
RC20GF242J	81349	6	11	RT11C2P102	81349	7	3
RC20GF272J	81349	19	4	RT11C2P103	81349	7	1
RC20GF273J	81349	8	1	RT11C2P203	81349	7	2
RC20GF273J	81349	9	13	RV4LAYSA501A	81349	5	5
RC20GF273J	81349	11	4	RV4LAYSA502A	81349	5	28
RC20GF273J	81349	13	8	SM-B-552580	80063	1	9
RC20GF273J	81349	14	1	SM-B-552757-7	80063	7	10
RC20GF273J	81349	16	12	SMA552581	80063	3	2
RC20GF273J	81349	17	3	SMA552582	80063	3	5
RC20GF273J	81349	20	2	SMA552583	80063	3	4
RC20GF302J	81349	14	8	SMA552584	80063	3	1
RC20GF303J	81349	9	1	SMA552767-1	80063	1	7
RC20GF303J	81349	11	2	SMB430875	80063	1	13
RC20GF303J	81349	14	6	SMB434365	80063	4	33
RC20GF303J	81349	17	4	SMB552135	80063	3	35
RC20GF303J	81349	19	8	SMB552159-1	80063	5	16
RC20GF332J	81349	6	17	SMB552159-2	80063	5	15
RC20GF332J	81349	19	5	SMB552169-1	80063	5	25
RC20GF333J	81349	12	5	SMB552178-4	80063	8	18
RC20GF333J	81349	13	6	SMB552178-8	80063	10	19
RC20GF363J	81349	14	4	SMB552185-3	80063	7	25
RC20GF393J	81349	9	20	SMB552185-3	80063	8	19
RC20GF393J	81349	12	1	SMB552185-3	80063	10	20
RC20GF393J	81349	13	18	SMB552185-3	80063	11	11
RC20GF393J	81349	19	17	SMB552185-3	80063	12	14
RC20GF431J	81349	6	19	SMB552185-3	80063	13	26
RC20GF433J	81349	13	19	SMB552185-3	80063	14	20
RC20GF433J	81349	18	1	SMB552185-3	80063	15	12
RC20GF433J	81349	18	2	SMB552185-3	80063	16	15
RC20GF433J	81349	18	3	SMB552185-3	80063	17	10
RC20GF433J	81349	18	4	SMB552185-3	80063	18	7
RC20GF473J	81349	8	10	SMB552185-3	80063	19	20
RC20GF473J	81349	9	18	SMB552185-3	88063	9	25
RC20GF473J	81349	12	3	SMB552540	80063	21	1
RC20GF473J	81349	13	12	SMB552541	80063	15	7
RC20GF473J	81349	14	7	SMB552571	80063	1	8
RC20GF474J	81349	7	15				
RC20GF513J	81349	16	1	SMB552590	80063	3	22
RC20GF561J	81349	6	8	SMB552593	80063	3	30
RC20GF562J	81349	13	13	SMB552595	80063	3	20
RC20GF563J	81349	8	9	SMB552600	80063	4	29
RC20GF563J	81349	9	4	SMB552604	80063	4	12
RC20GF563J	81349	14	16	SMB552611	80063	4	44
RC20GF622J	81349	11	8	SMB552612	80063	4	3
RC20GF622J	81349	21	8	SMB552623-1	80063	5	9
RC20GF623J	81349	8	4	SMB552623-10	80063	5	11
RC20GF623J	81349	12	7	SMB552623-3	80063	5	7
RC20GF623J	81349	13	4	SMB552630	80063	1	22
RC20GF681J	81349	9	21	SMB552633-2	80063	1	19
RC20GF682J	81349	11	3	SMB552633-3	80063	1	14
RC20GF682J	81349	19	11	SMB552633-8	80063	5	10
RC20GF683J	81349	8	12	SMB552636	80063	5	23
RC20GF683J	81349	9	8	SMB552646	80063	3	13
RC20GF683J	81349	13	11	SMB552646	80063	4	38
RC20GF751J	81349	20	4	SMB552657	80063	3	34
RC20GF752J	81349	14	3	SMB552680	80063	1	25
RC20GF752J	81349	16	4	SMB552681	80063	1	24
RC20GF753J	81349	9	11	SMB552739	80063	15	2
RC20GF753J	81349	16	9	SMB552747	80063	7	9
RC20GF753J	81349	17	2	SMB552749	80063	7	14
RC20GF753J	81349	19	14	SMB552750	80063	7	13
RC20GF821J	81349	20	6	SMB552751	80063	10	22
RC20GF823J	81349	8	11	SMB552752	80063	6	5

## NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER	FSCM	FIG. NO.	ITEM NO.	PART NUMBER	FSCM	FIG. NO.	ITEM NO.
SMB552753	80063	6	16	SMD552477	80063	2	5
SMB552753	80063	7	22	SMD552478	80063	2	16
SMB552753	80063	8	20	SMD552479	80063	5	1
SMB552753	80063	9	19	SMD552492GRP1	80063	15	1
SMB552753	80063	10	21	SMD552496	80063	20	12
SMB552753	80063	11	12	SMD552497	80063	18	5
SMB552753	80063	12	15	SMD552498	80063	17	8
SMB552753	80063	13	27	SMD552499	80063	7	23
SMB552753	80063	14	21	SMD552500	80063	14	18
SMB552753	80063	16	16	SMD552501	80063	8	17
SMB552753	80063	17	11	SMD552502	80063	9	23
SMB552753	80063	19	22	SMD552503	80063	16	13
SMB552753	80063	20	11	SMD552504	80063	11	9
SMB552757-3	80063	7	7	SMD552505	80063	13	24
SMB552757-4	80063	7	11	SMD552506	80063	12	12
SMB552757-5	80063	7	16	SMD552507	80063	10	18
SMB552759	80063	10	23	SMD552508	80063	19	18
SMB552760	80063	10	10	SMD552509	80063	6	26
SMB552774	80063	5	17	SMD552567	80063	1	20
SMB552776-1	80063	4	4	SMD552572	80063	1	1
SMB552776-2	80063	4	30	SMD552585	80063	3	11
SMB552779	80063	3	15	SMD552591	80063	1	23
SMB552791	80063	3	18	SMD552599	80063	4	6
SMB579852-1	80063	3	29	SMD552602	80063	4	17
SMB579852-1	80063	4	39	SMD552605	80063	2	18
SMB579852-2	80063	4	16	SMD552606	80063	5	6
				SMD552613	80063	4	21
SMB889349	80063	4	8	SMD552617	80063	4	24
SMB954336	80063	12	6	SMD552626	80063	4	28
SMB954336	80063	13	1	SMD552628	80063	2	27
SMC552178-10	80063	11	10	SMD552713	80063	2	19
SMC552178-12	80063	12	13	SMD889357	80063	1	23
SMC552178-14	80063	13	25	SME552480	80063	21	9
SMC552178-16	80063	14	19	UP131M	81349	1	12
SMC552178-18	80063	15	13				
SMC552178-2	80063	7	24				
SMC552178-20	80063	16	14				
SMC552178-22	80063	17	9				
SMC552178-30	80063	18	6				
SMC552178-38	80063	19	19				
SMC552178-6	80063	9	24				
SMC552550	80063	2	1				
SMC552588	80063	3	3				
SMC552601	80063	4	27				
SMC552609	80063	4	41	1N3024B	81349	6	20
SMC552622	80063	5	19	1N3026B	81349	6	3
SMC552624-1	80063	4	25	1N457	81349	9	6
SMC552632	80063	1	2	1N645	81349	3	32
SMC552634	80063	1	17	1N645	81349	6	13
SMC552736	80063	1	3	1N645	81349	19	10
SMC552765-22	80063	1	6	2N1307	81349	17	1
SMD552462GRP1	80063	2	20	2N3439	81349	10	1
SMD552466	80063	4	15				
SMD552467GRP1	80063	2	12				
SMD552467GRP2	80063	2	13				
SMD552467GRP3	80063	2	14				
SMD552467GRP4	80063	2	15				
SMD552468	80063	2	8				
SMD552468	80063	2	9				
SMD552468	80063	2	10				
SMD552468	80063	2	11				
SMD552469	80063	2	24				
SMD552470	80063	2	21				
SMD552471	80063	2	3				
SMD552472	80063	2	4				
SMD552473	80063	2	7				
SMD552474	80063	2	6				
SMD552475	80063	2	22				
SMD552476	80063	2	23				

## LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIGURE NO.	ITEM NO.
5920-00-280-8344	6	4
5920-00-296-0451	6	1
5915-00-451-4261	4	7
5355-00-715-1499	3	26
5910-00-881-8945	10	24
5961-00-883-8906	6	14
5961-00-892-3361	16	6
5961-00-892-3473	6	15
5240-00-892-4420	3	17
5910-00-913-0226	4	34
5915-00-930-2783	4	25
5310-00-934-9761	4	9
5310-00-934-9761	4	14
5310-00-934-9761	4	35
5310-00-934-9761	21	3
5961-00-949-1440	12	6
5961-00-949-1440	13	1
6625-00-950-8465	2	14
6625-00-950-8466	2	13
6625-00-950-8481	2	12
6625-00-950-8489	2	15
6625-00-950-9112	2	20

## LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG. NO.	ITEM NO.
JAN1N270	81349	6	10
JAN1N270	81349	8	7
JAN1N270	81349	9	16
JAN1N270	81349	10	7
JAN1N270	81349	11	6
JAN1N270	81349	13	21
JAN1N270	81349	14	9
JAN1N270	81349	16	11
JAN1N270	81349	19	7
JAN1N3016B	81349	6	14
JAN1N750A	81349	16	6
JAN2N1304	81349	9	14
JAN2N1304	81349	16	8
JAN2N1304	81349	19	2
JAN2N1305	81349	8	3
JAN2N1305	81349	9	3
JAN2N1305	81349	10	11
JAN2N1305	81349	11	1
JAN2N1305	81349	14	12
JAN2N1305	81349	16	5
JAN2N1305	81349	17	7
JAN2N1305	81349	19	1
JAN2N1305	81349	20	3
JAN2N297A	81349	5	21
JAN2N329A	81349	7	21
JAN2NS26	81349	6	15
MS35233-29	96906	2	17
MS35233-29	96906	3	19
RF2550-20	13619	4	7
701LK2G	49956	3	26



## RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

**SOMETHING WRONG WITH THIS MANUAL?**

THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

Commander  
Stateside Army Depot  
ATTN: AMSTA-US  
Stateside, N.J. 07703

DATE 10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-20P

DATE

23 Jan 78

TITLE

Radar Set AN/PRC-76

BE EXACT... PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG DOTTED LINE

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.
33			
44		19	
45			

For item 2, change the NSN to read: 5835-00-134-9186.  
Reason: Accuracy.



Identify the cover on the junction box (item no. 5).  
Reason: It is a separate item and is not called out on figure 19.



Add the cover of the junction box as an item in the listing for figure 19.  
Reason: Same as above.



TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I. M. DeSpiritof 999-1776

SIGN HERE:

DA FORM 2028-2  
1 AUG 74

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.



## **RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS**



**SOMETHING WRONG** WITH THIS MANUAL?

THEN. . .JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM, TEAR IT OUT, FOLD  
IT AND DROP IT IN THE  
MAIL!

**FROM: (YOUR UNIT'S COMPLETE ADDRESS)**

**DATE**

**PUBLICATION NUMBER**

TM 11-6625-620-40P-1

DATE  
28 FEB 79

**TITLE** Test Set, Teletypewriter  
TS-799/UGM-1 and TS-799A/UGM-1

**BE EXACT...PIN-POINT WHERE IT IS**

**IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:**

TEAR ALONG DOTTED LINE

				<h1>SOMETHING WRONG WITH THIS MANUAL?</h1>		
<p>THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!</p>				<p>FROM: (YOUR UNIT'S COMPLETE ADDRESS)</p>		
				DATE		
<b>PUBLICATION NUMBER</b> TM 11-6625-620-40P-1				<b>DATE</b> 28 FEB 79	<b>TITLE</b> Test Set, Teletypewriter TS-799/UGM-1 and TS-799A/UGM-1	
<b>BE EXACT...PIN-POINT WHERE IT IS</b>				<b>IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:</b>		
PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.			
<b>TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER</b>				<b>SIGN HERE:</b>		

**TYPE OR PRINT NAME, GRADE OR TITLE, AND TELEPHONE NUMBER**

**SIGN HERE:**

**DA FORM 1 AUG 74 2028-2**

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR  
UNIT'S ADDRESS



FOLD BACK

**DEPARTMENT OF THE ARMY**

**OFFICIAL BUSINESS**

PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD-314



Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL-ME-MQ  
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

## **RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS**



**SOMETHING WRONG** WITH THIS MANUAL?

THEN. . .JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM, TEAR IT OUT, FOLD  
IT AND DROP IT IN THE  
MAIL!

**FROM: (YOUR UNIT'S COMPLETE ADDRESS)**

DATE

PUBLICATION NUMBER	DATE	TITLE
TM 11-6625-620-40P-1	28 FEB 79	Test Set, Teletypewriter TS-799/UGM-1 and TS-799A/UGM-1

TM 11-6625-620-40P-1

PAGE

28 FEB 79

**TITLE**

Test Set, Teletypewriter  
9/UGM-1 and TS-799A/UGM-1

**BE EXACT...PIN-POINT WHERE IT IS**

**IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:**

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

**TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER**

**SIGN HERE:**

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR  
UNIT'S ADDRESS



FOLD BACK

**DEPARTMENT OF THE ARMY**

---

---

**OFFICIAL BUSINESS**

PENALTY FOR PRIVATE USE, \$500

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD-814



TEAR ALONG DOTTED LINE

Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL-ME-MQ  
Fort Monmouth, New Jersey 07703

FOLD BACK

## RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

**SOMETHING WRONG WITH THIS MANUAL?**

THEN...JOT DOWN THE  
DOPE ABOUT IT ON THIS  
FORM, TEAR IT OUT, FOLD  
IT AND DROP IT IN THE  
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER  TM 11-6625-620-4OP-1	DATE  28 FEB 79	TITLE  Test Set, Teletypewriter TS-799/UGM-1 and TS-799A/UGM-1
------------------------------------------------	-----------------------	-------------------------------------------------------------------------

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG  
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.
.			

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE  
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR  
UNIT'S ADDRESS



FOLD BACK

**DEPARTMENT OF THE ARMY**

\_\_\_\_\_

\_\_\_\_\_

**OFFICIAL BUSINESS**

PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID  
DEPARTMENT OF THE ARMY  
DOD-314



TEAR ALONG DOTTED LINE

Commander  
US Army Communications and  
Electronics Materiel Readiness Command  
ATTN: DRSEL-ME-MQ  
Fort Monmouth, New Jersey 07703

FOLD BACK

By Order of the Secretary of the Army:

Official:

BERNARD W. ROGERS  
*General, United States Army*  
*Chief of Staff*

J. C. PENNINGTON  
*Major General United States Army*  
*The Adjutant General*

DISTRIBUTION:

*Active Army*

	Units org under fol TOE:
USAISCOM (2)	9(1 cy each, UNOINDC)
COE (1)	29-207 (2) 57
TSG (1)	29-610 (2) 57-100
USAARENBD (1)	6-615 67
DARCOM (1)	6-616 77-100
TRADOC (2)	7
OS Maj Comd (4)	10-207
TECOM (2)	11-15
USACC (4)	11-16
MDW(l)	11-17
Armies (2)	11-19
Corps (2)	11-35
Svc Colleges(1)	11-37
USASIGS (5)	11-38
USAADS (2)	11-97
USAFAFS (2)	11-98
USAARMS (2)	11-117
USAIS (2)	11-215
USAES (2)	11-216
USAICS (3)	11-302
MAAG (1)	11-327
USARMIS(l)	11-347
USAERDAW (1 )	11-357
USAERDAA (1)	11-367
HQ 7th Sig Comd (5)	11-368
Fort Gordon (10)	11-377
Fort Gillem (10)	29-51
Fort Carson (5)	29-55
Ft Monmouth (HISA) (26)	29-57
Ft Richardson (CERCOM) (2)	29-102
Army Dep (1 ) except	29-105
LBAD (14)	29-134
SAAD (30)	29-136
TOAD (14)	29-207
SHAD (3)	29-245
USA DEP (l)	29-500
Sig Sec USA Dep (1)	

*NG:* None

*USAAR:* None

For explanation of abbreviations used, see AR 310-50

**PIN: 038996-000**

This fine document...

Was brought to you by me:



## Liberated Manuals -- free army and government manuals

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to [liberatedmanuals.com](http://liberatedmanuals.com), so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals</A>

- Sincerely  
Igor Chudov  
<http://igor.chudov.com/>
- [Chicago Machinery Movers](http://chicagomachinerymovers.com)