

TM 11-6625-623-40P

TECHNICAL MANUAL

**GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS
FOR**

**MAINTENANCE KIT, ELECTRONIC EQUIPMENT MK-722/URC
(NSN 6625-00-082-4275)**

**HEADQUARTERS, DEPARTMENT OF THE ARMY
JULY 1978**

TECHNICAL MANUAL
NO.11-6625-623-40P }

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, 25 July 1978

**GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS
FOR
MAINTENANCE KIT, ELECTRONIC EQUIPMENT MK-722/URC
(NSN 6625-00-082-4275)**

Current as of 15 February 1978

REPORTING OF ERRORS

You can improve this manual by recommending improvements using DA Form 2028-2 located in the back of the manual. Simply tear out the self addressed form, fill it out as shown on the sample, fold it where shown, and drop it in the mail.

If there are no blank DA Forms 2028-2 in the back of your manual, use the standard DA Form 2028 (Recommended Changes to Publications and Blank Forms) and forward to the Commander, US Army Communications and Electronics Materiel Readiness Command, ATTN: DRSEL-MA - Q, Fort Monmouth, New Jersey 07703.

In either case a reply will be furnished direct to you.

Table of Contents

SECTION	Page	Illus
GROUP	Figure	
I. Introduction	1	
II. Repair parts list	5	
00 Maintenance Kit, Electronic Equipment MK-722/URC (I)	5	1
01 Extender Module MX-4890/URC (IA1)	9	2
02 Extender Module MX-4888/URC (IA2)	11	3
03 Extender Module MX-4892/URC (IA3)	13	4
0301 Intermediate frequency translator load (IA3A1)	15	5
04 Extender Module MX-4895/URC (IA4)	17	6
05 Extender Module MX-4894/URC (IA5)	19	7
06 Extender Module MX-4893/URC (IA6)	21	8
07 Extender Module MX-4891/URC (IA7)	23	9
08 Extender Module MX-4889/URC (IA10)	25	10
09 Extender Module MX-4887/URC (IA12)	27	11
10 Attenuator, Fixed CN-1066/URC (IA14)	31	12
11 Voltage Divider TS-1955/URC (IA15)	33	13
12 Voltage Divider TS-1954/URC (IA16)	35	14
13 DummyLoad, ElectricalDA-340/URC (IA17)	37	15
14 Detector, Radio FrequencyDT-278/URC (IA18)	39	16
15 Cable Assembly, Radio Frequency CG-3126/U (IA20)	41	17
16 CableAssembly, RadioFrequencyCG-409G/U4in (IA21throughIA26)	41	17
17 Cable Assembly, Radio Frequency CG-2727/U5ftOin (IA27)	41	17
18 Maintenance Fixture MT-3039/URC (IA28)	43	18
19 Test Set, Radio TS-1956/URC (IA32)	45	19
1901 Test set, function (IA32A1)	47	20
190101 Test set subassembly (IA32A1A1)	51	21
190102 Test set subassembly (IA32A1A2)	53	22
1902 Cable Assembly, Power CX-9009/URC (IA32W7)	55	23
III. Special tools list (Not applicable)	56	
IV. National stock number and part number index	56	

SECTION I

INTRODUCTION

1. Scope

This manual lists spares and repair parts; special tools, special test, measurement, and diagnostic equipment (TMDE), and other special support equipment required for performance of general support maintenance of the MK-722/URC. It authorizes the requisitioning and issue of spares and repair parts as indicated by the source and maintenance codes.

2. General

This Repair Parts and Special Tools list is divided into the following sections:

a. *Section II. Repair Parts Lists.* A list of spares and repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in numeric sequence, with the parts in each group listed in figure and item number sequence.

b. *Section III. Special Tools List.* Not applicable.

c. *Section IV National Stock Number and Part Number Index.* A list, in National item identification number (NIIN) sequence, of all National stock numbers (NSN) appearing in the listings, followed by a list, in alphabetic sequence, of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns

a. *Illustration.* This column is divided as follows:

(1) *Figure number.* Indicates the figure number of the illustration on which the item is shown.

(2) *Item number.* The number used to identify item called out in the illustration.

b. *Source, Maintenance, and Recoverability (SMR) codes.*

(1) *Source code.* Source codes indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

<i>Code</i>	<i>Definition</i>
PA	Item procured and stocked for anticipated or known usage.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA and aircraft support items as restricted by AR 700-42.

(2) *Maintaince code.* Maintenance codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance.

<i>Code</i>	<i>Application/Explanation</i>
-------------	--------------------------------

O — Support item is removed, replaced, used at the organizational level.

H — Support item is removed, replaced, used at the general support level.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

<i>Code</i>	<i>Application/Explanation</i>
-------------	--------------------------------

H — The lowest maintenance level capable of com-

Code *Application/Explanation*

plete repair of the support item is the general support level.
Z —Nonreparable. No repair is authorized.

(3) *Recoverability code.* Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

<i>Recoverability code</i>	<i>Definition</i>
--------------------------------	-------------------

Z — Nonreparable item. When unserviceable, condemn and dispose at the level indicated in position 3.
H — Reparable item. When uneconomically repar- able, condemn and dispose at the general support level.

c. *National Stock Number.* Indicates the National stock number assigned to the item and will be used for requisitioning purposes.

d. *Part Number.* Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When a stock numbered item is re- quisitioned, the repair part received may have a different part number than the part being replaced.

e. *Federal Supply Code for Manufacturer (FSCM).* The FSCM is a f-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. *Description.* Indicates the Federal item name and, if required, a minimum description to identify the item.

g. *Unit of Measure (U/M).* Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical

abbreviation (e.g., ea, in, pr, etc). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. *Quantity Incorporated in Unit.* Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly.

4. Special Information

The following publications pertain to the MK-722/URC and its components:

TM 11-6625-623-12, Maintenance Kit, Electronic Equipment MK-722/URC

TM 11-6625-623-20P, Maintenance Kit, Electrical Equipment MK-722/URC

TM 11-6625-623-45, Maintenance Kit, Electronic Equipment MK-722/URC

5. How to Locate Repair Parts

a. When National stock number or part number is unknown.

(1) *First.* Using the table of contents, determine the functional group within which the item belongs. This is necessary since illustrations are prepared for functional groups and listings are divided into the same groups.

(2) *Second.* Find the illustration covering the functional group to which the item belongs.

(3) *Third.* Identify the item on the illustration and note the illustration figure and item number of the item.

(4) *Fourth.* Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. When National stock number or part number is known.


(1) *First.* Using the Index of National Stock Numbers and Part Numbers, find the pertinent National stock number or part number. This index is in NIIN sequence followed by a list of part numbers in alphabetic sequence, cross-referenced to the illustration figure number and item number.

(2) *Second.* After finding the figure and item number, locate the figure and item number in the repair parts list.

6. Abbreviations


Not applicable.

(Next printed page is 4.1)

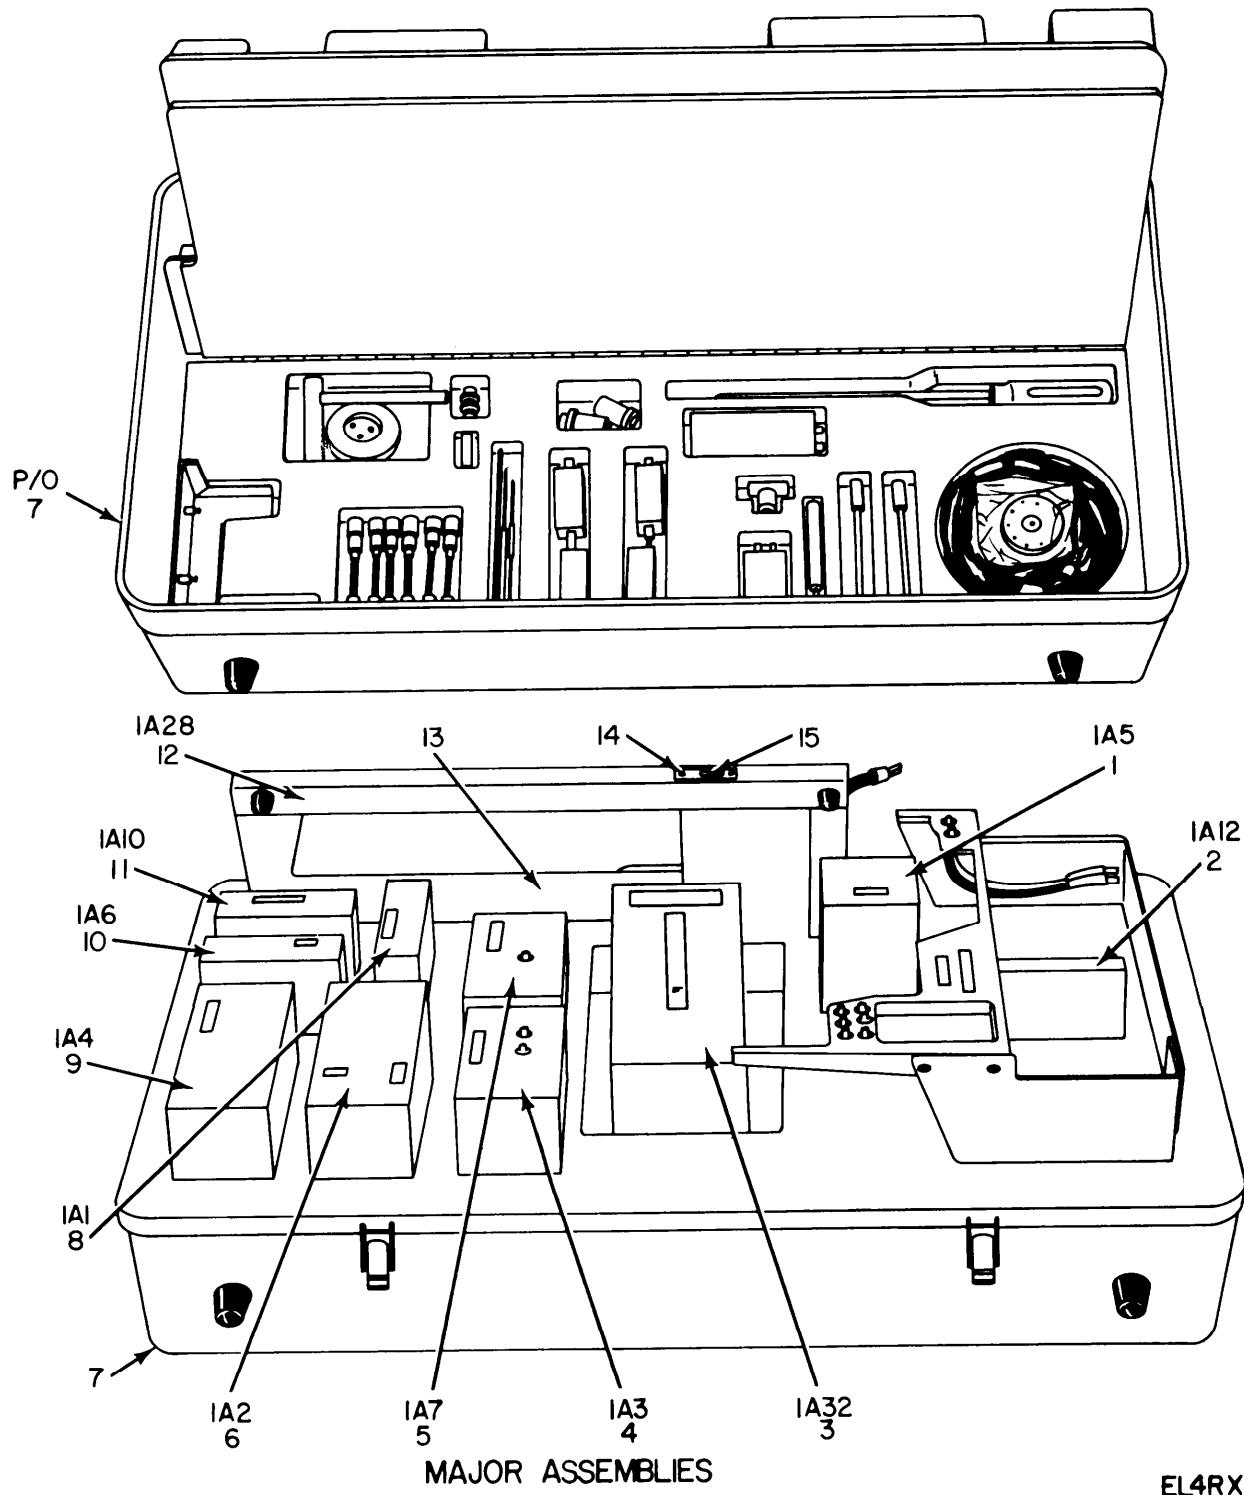

EL4RX001

Figure 1. Maintenance Kit, Electronic Equipment MK-722/URC (1) (Sheet 1 of 2).

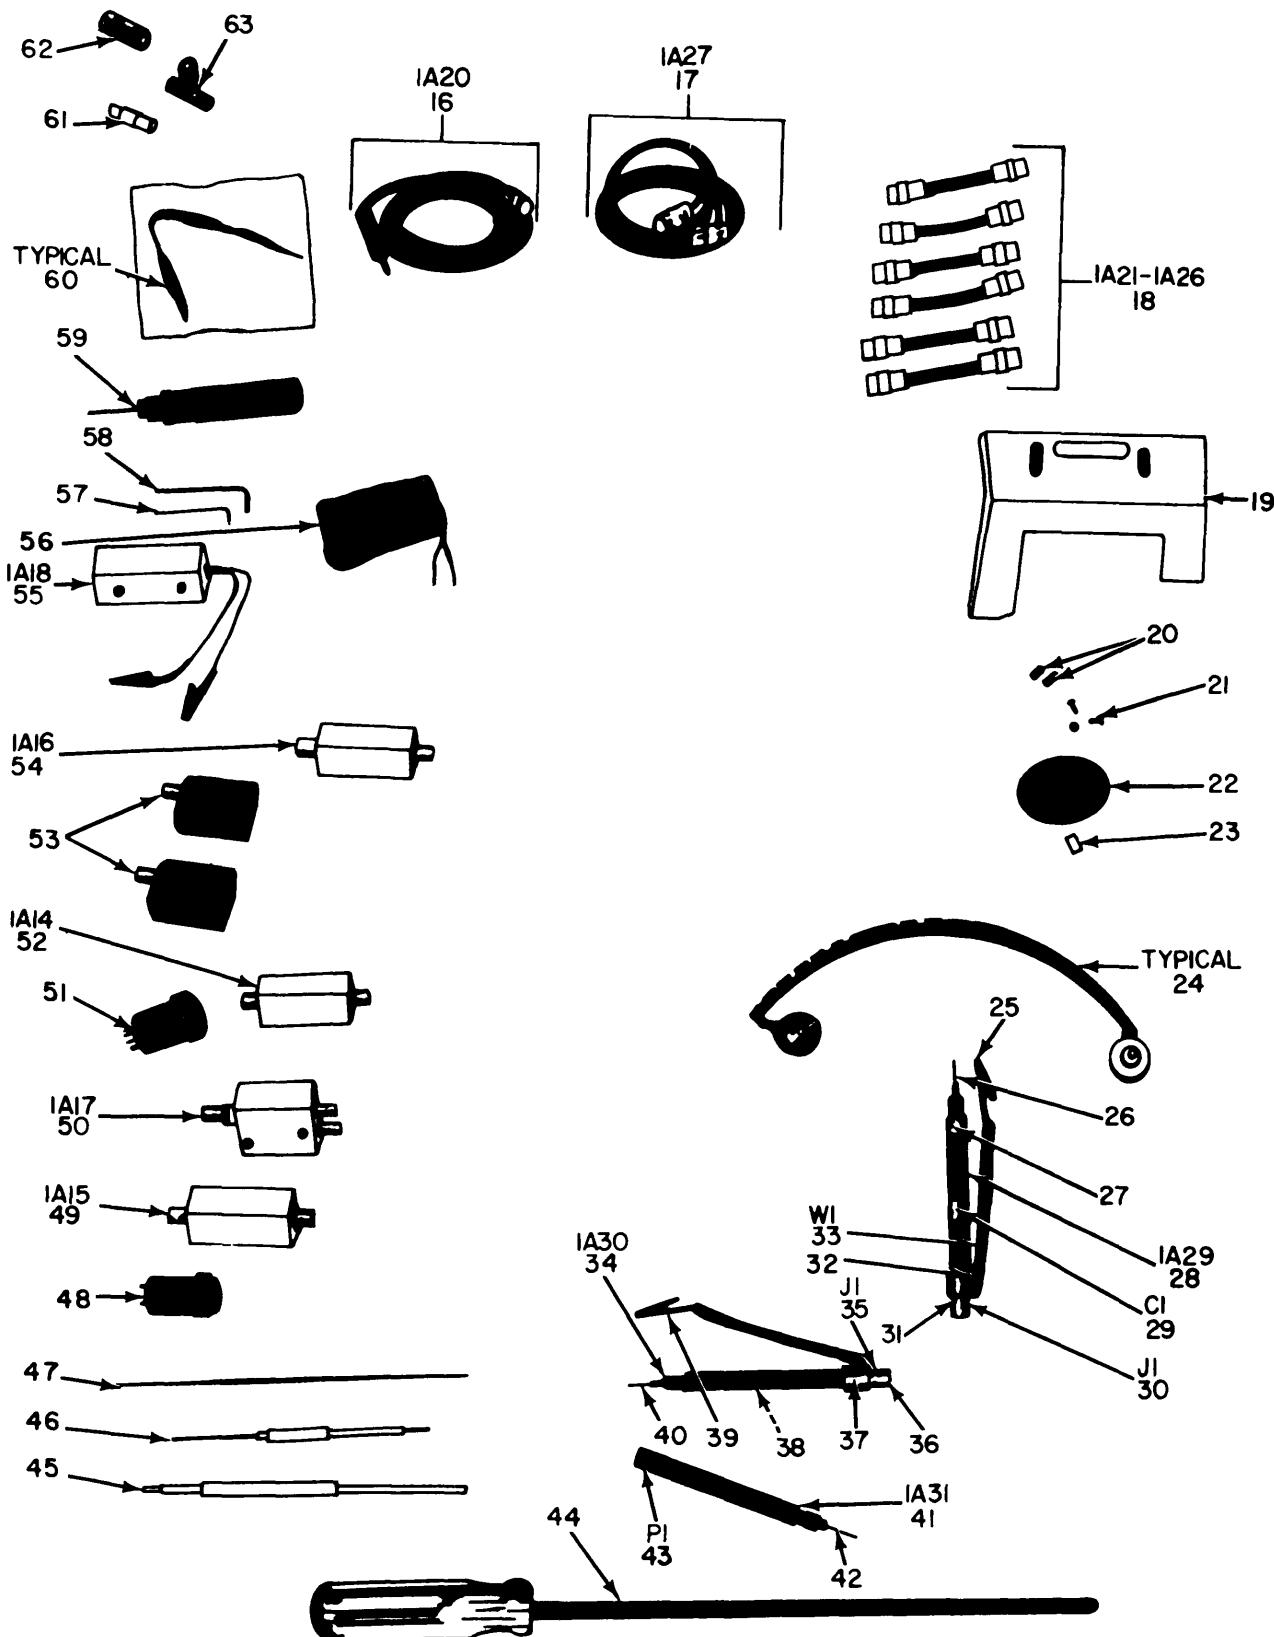


TEST AIDS

EL4RX002

Figure 1. Maintenance Kit, Electronic Equipment MK-722/URC (1) (Sheet 2 of 2)

SECTION II (1) ILLUSTRATION (A)		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) QTY IN	(8) INC IN UNIT
					FSCM	USABLE ON CODE U/M		
GROUP 00 MAINTENANCE KIT,ELECTRONIC								
EQUIPMENT MK-722/URC(1)								
1	1	PAOHH	6625-00-019-6306	MX4894URC	80058	ADAPTER,TEST	EA	1
1	2	PAOHH	6625-00-019-6301	MX4887URC	80058	ADAPTER,TEST	EA	1
1	3	PAOHH	6625-00-965-0188	TS1956URC	80058	TEST SET,RADIO	EA	1
1	4	PAOHH	6625-00-083-7311	MX4892URC	80058	TEST SET,ELECTRO	EA	1
1	5	PAOHH	6625-00-019-6310	MX4891URC	80058	ADAPTER,TEST	EA	1
1	6	PAOHH	6625-00-019-6311	MX4888URC	80058	ADAPTER,TEST	EA	1
1	7	XDHZZ		CY4066URC	80058	CASE,MAINT KIT	EA	1
1	8	PAOHH	6625-00-019-6304	MX4890URC	80058	PLUG-IN UNIT,ELE	EA	1
1	9	PAOHH	6625-00-019-6309	MX4895URC	80058	ADAPTER,TES	EA	1
1	10	PAOHH	6625-00-019-6305	MX4893URC	80058	ADAPTER,TEST	EA	1
1	11	PAOHH	6625-00-019-6303	MX4889URC	80058	ADAPTER,TEST	EA	1
1	12	PAOHH	6625-00-019-6318	MT3039URC	80058	MAINTENANCE FXTR,RF	EA	1
1	13	XDHZZ		756-4325-005	13499	CASE,CARRYING	EA	1
1	14	PAHZZ	5305-00-065-4587	P347-0018-00	77250	SCREW,MACHINE	EA	2
1	15	XDHZZ		554-5093-003	13499	PLATE, ID	EA	1
1	16	PAOHH	5995-00-985-8169	CG3126U	80058	CABLE ASSEMBLY,RF	EA	1
1	17	PAOHH	6625-00-964-2630	CG2727U5FT0IN	80058	CABLE ASSEMBLY,RF	EA	1
1	18	PAOHH	5995-00-985-7888	CG409GU4IN	80058	CABLE ASSEMBLY,RF	EA	6
1	19	XDOZZ		548-8014-003	13499	FRAME,AUTOPSNR	EA	1
1	20	XDHZZ		4-40X1-8	08664	SETSCREW	EA	2
1	21	PAHZZ	5305-00-054-5647	MS51957-13	96906	SCREW,MACHINE	EA	3
1	22	PAOZZ	5355-00-081-3957	548-3530-002	13499	DIAL,SCALE	EA	1
1	23	PAOZZ	5355-00-062-0949	549-0974-002	13499	POINTER,DIAL	EA	1
1	24	PAOZZ	5821-00-019-6290	546-6463-002	13499	EXTRACTOR,MODULE	EA	2
1	25	PAHZZ	5999-00-577-0994	30	76545	CLIP,ELECTRICAL	EA	1
1	26	XDOZZ		548-3487-002	13499	PROD,TEST-MODIFIED	EA	1
1	27	XDOZZ		2540-20-03	78189	TERMINAL,LUG	EA	1
1	28	PAOHH	6625-00-019-6312	548-3486-002	13499	PROD,TEST,NO. 1	EA	1
1	29	XHDZZ		7301	04222	CAPACITOR,FXD,CER	EA	1
1	30	PAHZZ	5935-00-665-5718	UG1094U	80058	CONNECTOR,RECEPT	EA	1
1	31	XDOZZ		548-3485-002	13499	ADAPTER,CONNECTOR	EA	1
1	32	PAOZZ	5310-00-209-1522	1220-02CSCADPL	78189	WASHER,LOCK	EA	1
1	33	PAHZZ	6145-00-284-0866	36109	75818	BRAID,WIRE	EA	2
1	34	PAOHH	6625-00-061-3649	548-3484-002	13499	PROD,TEST,NO. 2	EA	1
1	35	PAHZZ	5935-00-665-5718	UG1094U	80058	CONNECTOR,RECEPT	EA	1
1	36	XDOZZ		548-3485-002	13499	ADAPTER,CONNECTOR	EA	1
1	37	PAOZZ	5310-00-209-1522	1220-02CSCADPL	78189	WASHER,LOCK	EA	1
1	38	XDHZZ		2540-20-03	78189	TERMINAL,LUG	EA	1

TM11-6625-623-40P							
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	DESCRIPTION	(7) USABLE ON CODE	(8) QTY IN IN UNIT
1	39	PAHZZ	5999-00-577-0994	30	76545 CLIP,ELECTRICAL		EA 1
1	40	XDHZZ		548-3488-002	13499 PROD,TEST-MODIFIED		EA 1
1	41	PAOHH	6625-00-061-3648	548-3499-002	13499 PROD,TEST,NO. 3		EA 1
1	42	PAHZZ	5935-00-283-3825	105-608	74970 JACK,TIP		EA 1
1	43	XDOZZ		553-2546-002	13499 PROD,TEST-MODIFIED		EA 1
1	44	PAOZZ	5120-00-965-0287	130291NSHK	03705 SCREWDRIVER		EA 1
1	45	PAOZZ	5120-00-288-7781	6166	11242 ALIGNMENT TOOL		EA 1
1	46	PAOZZ	5120-00-288-7786	8606	72653 ALIGNMENT TOOL		EA 1
1	47	PAOZZ	5120-00-060-6423	547-2796-002	13499 ALIGNMENT TOOL		EA 1
1	48	PAOHH	6625-00-069-2690	TVS7	05276 ADAPTER,TEST		EA 1
1	49	PAOHH	6625-00-019-6313	TS1955URC	80058 VOLTAGE DIVIDER		EA 1
1	50	PAOHH	5821-00-019-6315	DA340URC	80058 DUMMY LOAD,ELECT		EA 1
1	51	PAOHH	6625-00-891-5128	TVS9	05276 ADAPTER,TEST		EA 1
1	52	PAOHH	5821-00-019-6317	CN1066URC	80058 ATTENUATOR,FIXED		EA 1
1	53	PAOHH	5935-00-910-9194	1645	05276 ADAPTER,CONNECTOR		EA 2
1	54	PAOHH	6625-00-019-6314	TS1954URC	80058 DIVIDER ASSEMBLY		EA 1
1	55	PAOHH	6625-00-019-6316	DT278URC	80058 DETECTOR,RF		EA 1
1	56	PAOZZ	8105-00-063-5060	104N4X6IN	06214 BAG,TEXTILE		EA 1
1	57	XDOZZ		S060CADPL	08664 KEY,SOCKET,HD SCREW		EA 1
1	58	PAOZZ	5120-00-223-6995	S096CADPL	08664 KEY,SOCKET,HD SCREW		EA 1
1	59	PAOZZ	5120-00-288-8853	DS096	08664 KEY,SOCKET,HD SCREW		EA 1
1	60	PAOZZ	5120-00-027-3339	SK604	06980 EXTRACTOR,ELEC		EA 2
1	61	PAOZZ	5935-00-280-1454	UG914U	80058 ADAPTER,CONNECTOR		EA 1
1	62	PAOZZ	5935-00-681-5013	UG491BU	80058 ADAPTER,CONNECTOR		EA 1
1	63	PAOZZ	5935-00-683-7892	UG274BU	80058 ADAPTER,CONNECTOR		EA 1

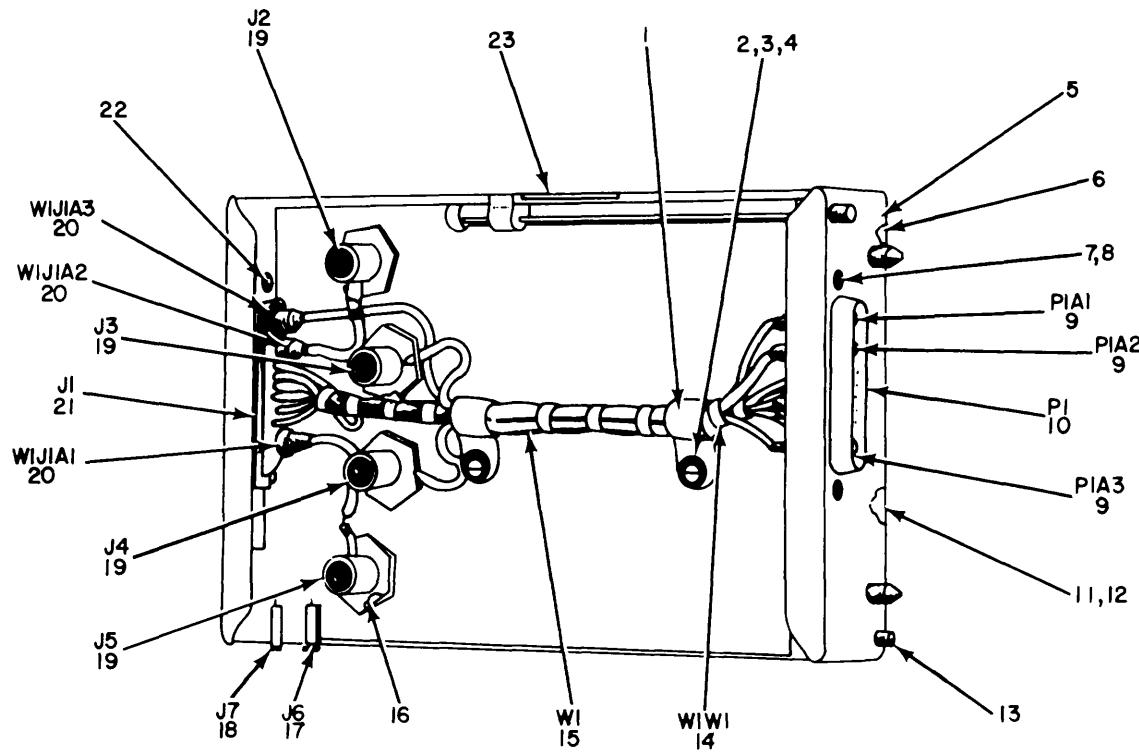

EL4RX003

Figure 2. Extender Module MX-4890/URC (1A1).

SECTION II				TM11-6625-623-40P							
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) FSCM	DESCRIPTION		(7) USABLE ON CODE	(8) QTY IN IN UNIT	(7) U/M	
GROUP 01 EXTENDER MODULE MX-4890/URC (1A1)											
2	1	XDHZZ		HP4N	09922	CLAMP,LOOP			EA	2	
2	2	PAHZZ	5310-00-857-5548	MS21044D04	96906	NUT,SELF-LOCKING			EA	2	
2	3	PAHZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE			EA	2	
2	4	PAHZZ3	5310-00-782-1349	310-0045-000	13499	WASHER,FLAT			EA	2	
2	5	XDHZZ		548-3470-003	13499	FRAME,FREQ DIVIDER			EA	1	
2	6	PAHZZ	5305-00-766-2422	MS51959-1	96906	SCREW,MACHINE			EA	2	
2	7	PAHZZ	5305-00-019-6293	549-0931-003	13499	SCREW,ASSEMBLED			EA	2	
2	8	XDHZZ		545-7531-003	13499	WASHER,FLAT			EA	2	
2	9	PAHZZ	5935-00-885-6505	DM53740-5000	71468	CONNECTOR,PLUG			EA	3	
2	10	PAHZZ	5935-00-811-1382	DBM13W3P	71468	CONNECTOR,RECEPT			EA	1	
2	11	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT,SELF-LOCKING			EA	4	
2	12	PAHZZ	5305-00-727-8833	MS51959-3	96906	SCREW,MACHINE			EA	2	
2	13	PAHZZ	5821-00-084-2344	549-0945-003	13499	RETAINER,SCREW			EA	2	
2	14	PAHZZ	6145-00-812-5034	RG1788U	80058	CABLE,RF			EA	8	
2	15	XDHHH		549-0966-000	13499	WIRING HARNESS			EA	1	
2	16	PAHZZ	5325-00-282-8157	SE34	90030	EYELET,METALLIC			EA	4	
2	17	PAHZZ	5935-00-686-9970	SKT10RED	98291	JACK,TIP			EA	1	
2	18	PAHZZ3	5935-00-806-2685	SKT10GY	98291	JACK,TIP			EA	1	
2	19	PAHZZ	5935-00-081-1236	29700	74868	CONNECTOR,RCPT			EA	4	
2	20	PAHZZ	5935-00-080-0268	DM53742-5000	71468	CONNECTOR,PLUG			EA	3	
2	21	PAHZZ	5935-00-089-1165	DBM13W3S	71468	CONNECTOR,RECEPT			EA	1	
2	22	PAHZZ	5305-00-763-3357	MS51959-6	96906	SCREW,MACHINE			EA	2	
2	23	XDHZZ		541-5962-002	13499	SLEEVE,SPACING			EA	2	


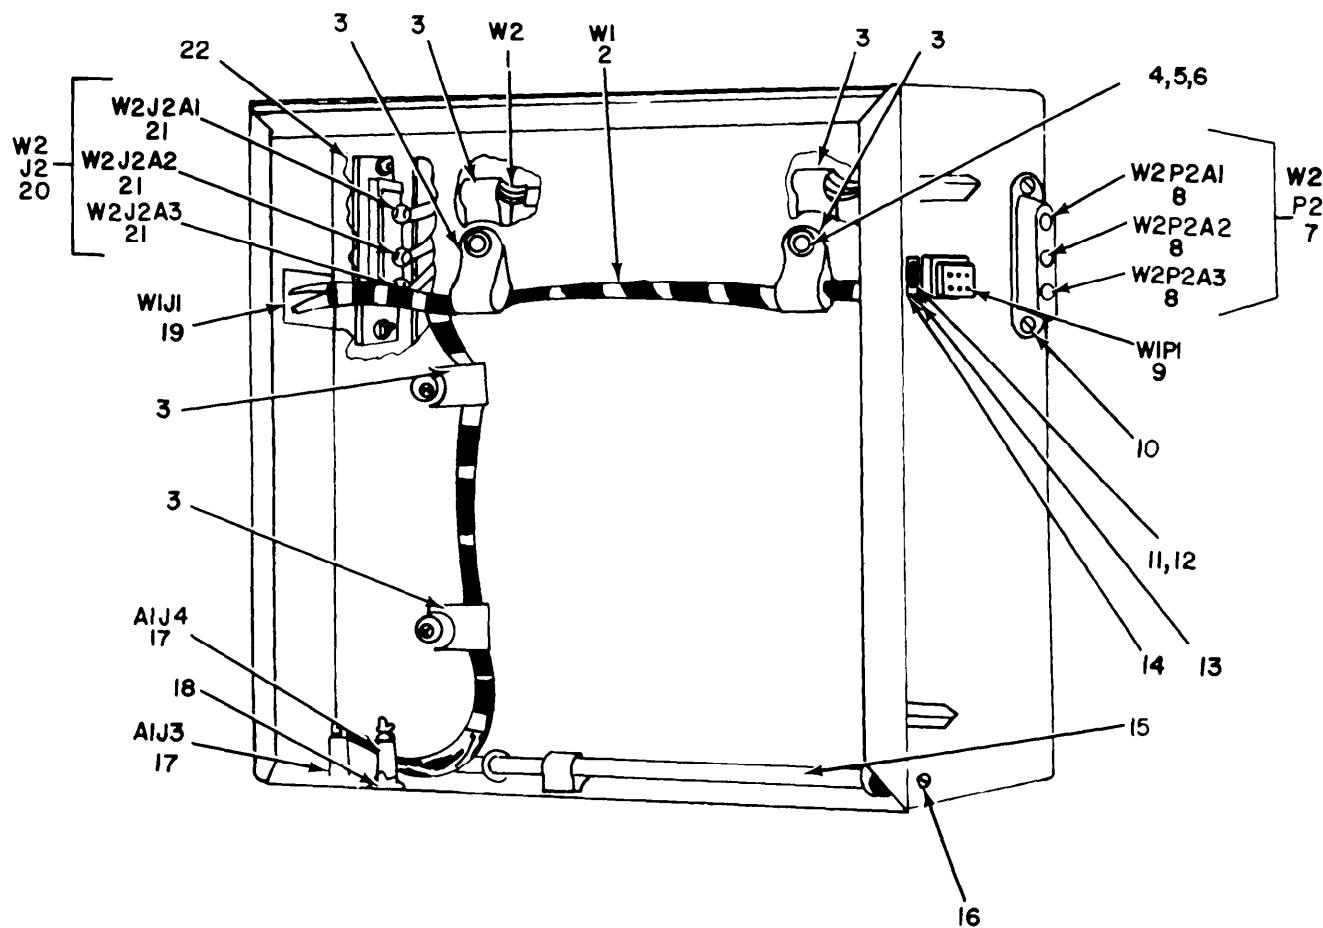


Figure 3. Extender Module MX-4888/URC (1A2).

EL4RX004


TM11-6625-623-40P							
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY IN IN UNIT
GROUP 02 EXTENDER MODULE MX-4888/URC (1A2)							
3	1	XDHZZ		548-3508-000	13499 WIRING HARNESS	EA	1
3	2	XDHZZ		548-3462-000	13499 WIRING HARNESS	EA	1
3	3	XDHZZ		HP2N	09922 CLAMP,LOOP	EA	6
3	4	PAHZZ	5310-00-857-5548	MS21044D04	96906 NUT,SLFKG,HEXAGON	EA	4
3	5	PAHZZ	5305-00-054-5649	MS51957-15	96906 SCREW,MACHINE	EA	2
3	6	PAHZZ	5310-00-782-1349	310-0045-00	79807 WASHER,FLAT	EA	6
3	7	PAHZZ	5935-00-089-6505	DAM3W3P	71468 CONNECTOR BODY	EA	1
3	8	PAHZZ	5935-00-885-6505	DM53740-5000	71468 CONNECTOR,PLUG	EA	3
3	9	PAHZZ	5935-00-710-1717	DE9P	71468 CONNECTOR,RECEPT	EA	1
3	10	PAHZZ	5305-00-766-2422	MS51959-1	96906 SCREW,MACHINE	EA	2
3	11	PAHZZ	5305-00-019-6293	549-0931-003	13499 SCREW,ASSEMBLED	EA	2
3	12	XDHZZ		545-7531-003	13499 WASHER,FLAT	EA	2
3	13	PAHZZ	5305-00-727-8833	MS51959-3	96906 SCREW,MACHINE	EA	4
3	14	PAHZZ	5305-00-763-3357	MS51959-6	96906 SCREW,MACHINE	EA	4
3	15	XDHZZ		541-5962-002	13499 SLEEVE,SPACING	EA	4
3	16	PAHZZ	5821-00-084-2344	549-0945-003	13499 RETAINER,SCREW	EA	2
3	17	PAHZZ	5935-00-686-9970	SKT10RED	98291 JACK,TIP	EA	2
3	18	PAHZZ	5305-00-054-5650	MS51957-16	96906 SCREW,MACHINE	EA	2
3	19	XDHZZ		DEF9S	71468 CONNECTOR,RCPT	EA	1
3	20	PAHZZ	5935-00-089-6921	DAMPF3W3S	71468 CONNECTOR,RECEPT	EA	1
3	21	PAHZZ	5935-00-080-0268	DM53742-5000	71468 CONNECTOR,PLUG	EA	3
3	22	PAHZZ	5310-00-622-1724	68-1660-26	72962 NUT,SELF-LOCKING	EA	8

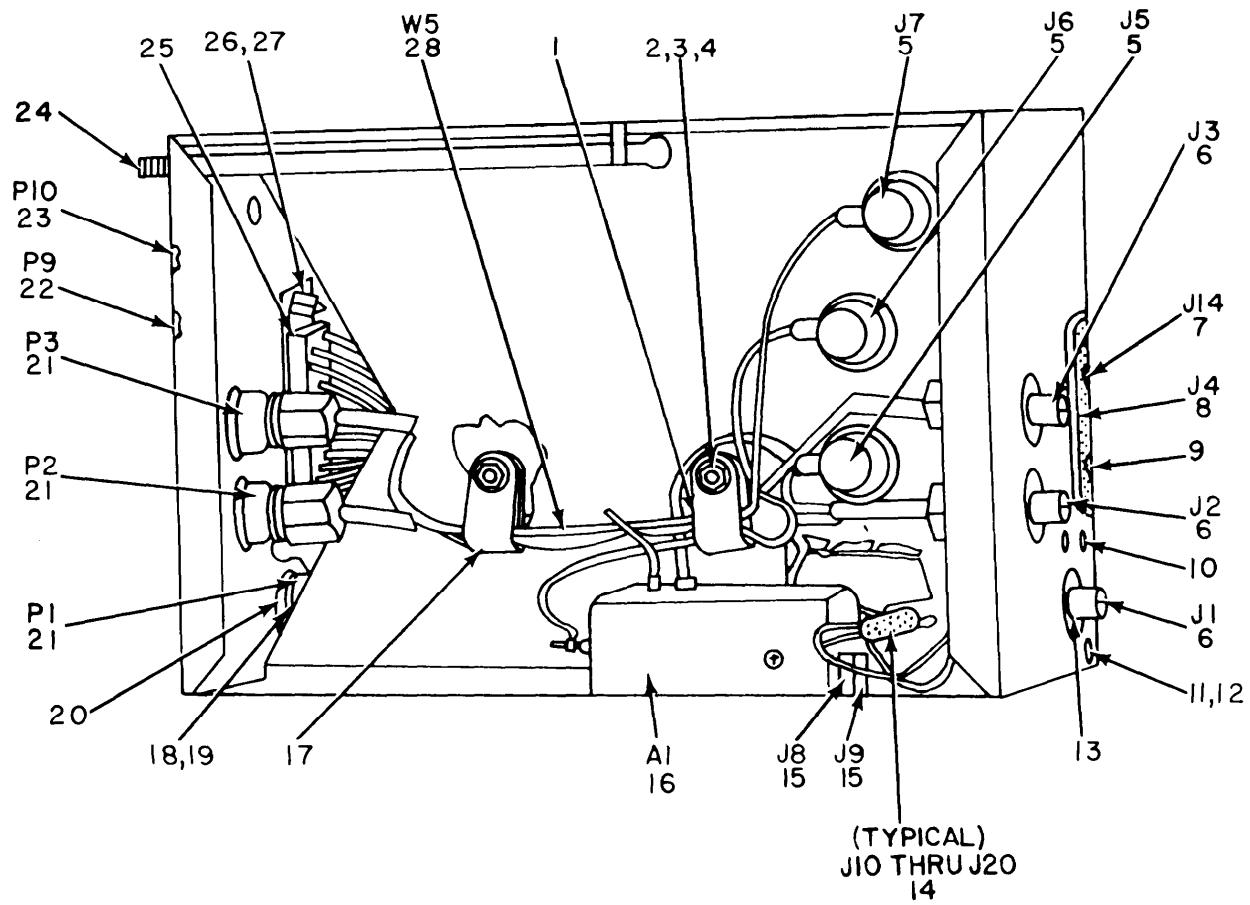

EL4RX005

Figure 4. Extender Module MX-4892/URC (1A3).


SECTION II				TM11-6625-623-40P							
(1) FIG NO	(A) ILLUSTRATION (B)	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) FSCM	DESCRIPTION	(7) USABLE ON	(8) QTY INC IN	(7) CODE	(8) U/M UNIT
GROUP 03 EXTENDER MOUDLE MX-4892/URC (1A3)											
4	1	PAHZZ	5340-00-619-7754	HP3N	09922	CLAMP,LOOP		EA	2		
4	2	PAHZZ	5310-00-857-5548	MS21044D04	96906	NUT,SELF-LOCKING		EA	2		
4	3	PAHZZ	5305-00-054-5651	MS51957-17	96906	SCREW,MACHINE		EA	2		
4	4	PAHZZ	5310-00-782-1349	310-0045-00	79807	WASHER,FLAT		EA	4		
4	5	PAHZZ	5935-00-081-1236	29700	74868	CONNECTOR,RCPT		EA	3		
4	6	PAHZZ	5935-00-685-9913	UG1051U	80058	CONNECTOR,RCPT		EA	3		
4	7	PAHZZ	5935-00-577-8715	DCF37S	71468	CONNECTOR,RCPT		EA	1		
4	8	XDHZZ		DBF25S	71468	CONNECTOR,RCPT		EA	1		
4	9	PAHZZ	5305-00-727-8833	MS51959-3	96906	SCREW,MACHINE		EA	1		
4	10	PAHZZ	5305-00-763-3357	MS51959-6	96906	SCREW,MACHINE		EA	2		
4	11	XDHZZ		541-5962-002	13499	SLEEVE,SPACING		EA	2		
4	12	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT,SELF-LOCKING		EA	4		
4	13	XDHZZ	5935-00-829-2612	01508A	94375	SHIELD,ELECTRICAL		EA	6		
4	14	XDHZZ		SKT10GY	98291	JACK,TIP		EA	11		
4	15	PAHZZ	5935-00-686-9970	SKT10RED	98291	JACK,TIP		EA	2		
4	16	PAHHH	5821-00-019-6308	548-8011-003	13499	DUMMY LOAD,ELECT		EA	1		
4	17	XDHZZ		HP4N	09922	CLAMP LOOP		EA	2		
4	18	XDHZZ		546-6889-002	13499	NUT,FLOAT-CONNECTOR		EA	3		
4	19	XDHZZ		546-3020-003	13499	WASHER,FLAT		EA	3		
4	20	PAHZZ	5325-00-291-9366	MS35489-11	96906	GROMMET,RUBBER		EA	1		
4	21	PAHZZ	5935-00-729-7305	UG1050AU	80058	CONNECTOR,RECEPT		EA	3		
4	22	PAHZZ	5935-00-259-4690	DB25P	71468	CONNECTOR,RECEPT		EA	1		
4	23	PAHZZ	5935-00-280-2268	DC37P	71468	CONNECTOR,RECEPT		EA	1		
4	24	PAHZZ	5821-00-084-2344	549-0945-003	13499	RETAINER,SCREW		EA	2		
4	25	PAHZZ	5305-00-766-2422	MS51959-1	96906	SCREW,MACHINE		EA	2		
4	26	PAHZZ	5305-00-019-6293	549-0931-003	13499	SCREW,ASSEMBLED		EA	2		
4	27	XDHZZ		545-7531-003	13499	WASHER,FLAT		EA	2		
4	28	XDHHH		548-3451-000	13499	WIRING HARNESS		EA	1		

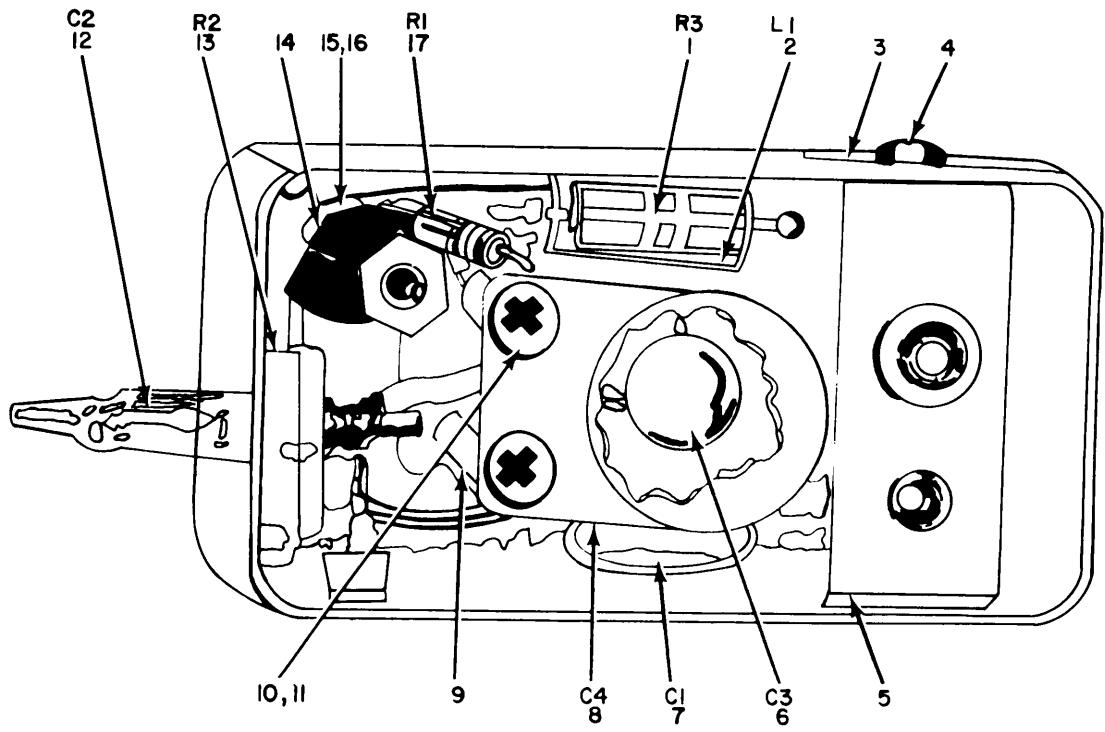

EL4RX006

Figure 5. I.F. Translator Load (1A3A1).

SECTION II							TM11-6625-623-40P		
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	USABLE ON	CODE	(7) QTY IN IN U/M	(8) QTY INC IN UNIT
GROUP 0301 I.F. TRANSLATOR LOAD (1A3A1)									
5	1	PAHZZ	5905-00-192-3988	RC20GF563K	81349 RESISTOR, FIXED			EA	1
5	2	PAHZZ	5950-00-595-8599	MS90539-12	96906 COIL, RADIO FREQ			EA	1
5	3	XDHZZ		549-0983-002	13499 CAN, SHIELD			EA	1
5	4	PAHZZ	5305-00-054-5636	MS51957-2	96906 SCREW, MACHINE			EA	2
5	5	XDHZZ		549-0981-002	13499 BRACKET, MOUNTING			EA	1
5	6	XDHZZ		33C1	56289 CAPACITOR, FXD, CER			EA	1
5	7	PAHZZ	5910-00-811-5081	CM05F121J03	81349 CAPACITOR, FIXED			EA	1
5	8	XDHZZ		557-018-1-8-50E	72982 CAPACITOR, VARIABLE			EA	1
5	9	XDHZZ		540-9039-003	13499 POST, ELEC-MECH			EA	2
5	10	PAHZZ	5305-00-054-5646	MS51957-12	96906 SCREW, MACHINE			EA	4
5	11	XDHZZ		310-0076-00	79807 WASHER, LOCK			EA	2
5	12	XDHZZ		DA785-002Q	71590 CAPACITOR, FXD, CER			EA	1
5	13	PAHZZ	5905-00-171-1985	RC20GF822K	81349 RESISTOR, FIXED			EA	1
5	14	XDHZZ		4040-2HOTTTINNED	77147 TERMINAL, LUG			EA	2
5	15	XDHZZ		540-9016-003	13499 POST, ELECT-MECH			EA	1
5	16	XDHZZ		310-0070-000	79807 WASHER, LOCK			EA	1
5	17	PAHZZ	5905-00-245-0023	RC20GF682K	81349 RESISTOR, FIXED			EA	1

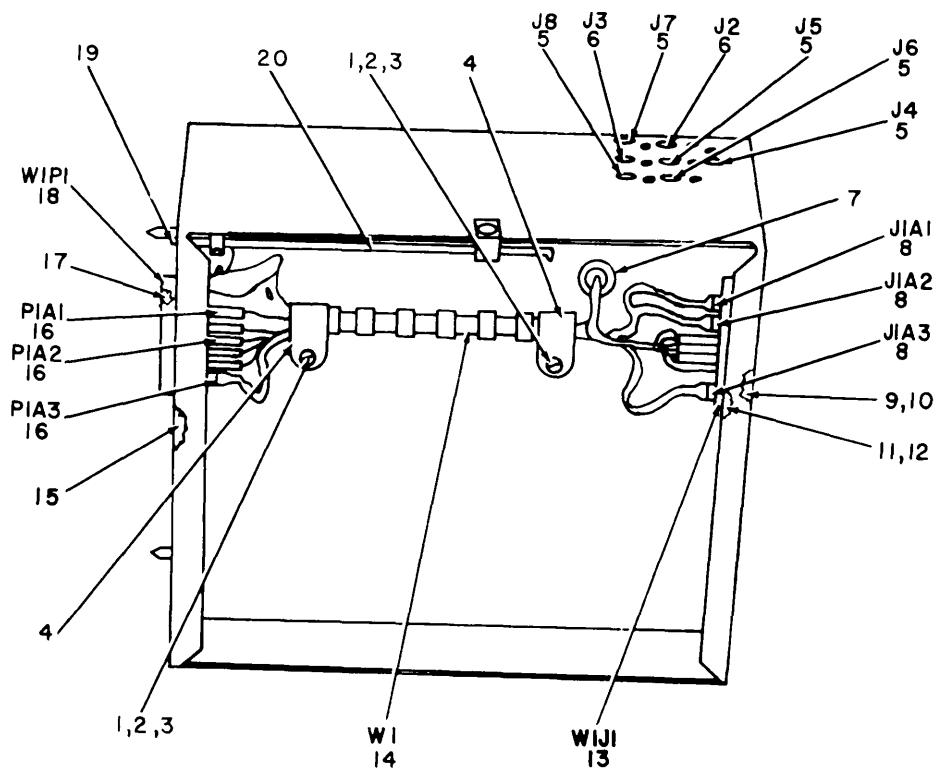

EL4RX007

Figure 6. Extender Module MX-4895/URC (1A4).

SECTION II		TM11-6625-623-40P							
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	USABLE	ON CODE	(7) U/M	(8) QTY INC IN UNIT
GROUP 04 EXTENDER MODULE MX-4895/URC (1A4)									
6	1	PAHZZ	5310-00-857-5548	MS21044D04	96906 NUT,SELF-LCKING			EA	2
6	2	PAHZZ	5305-00-054-5649	MS51957-15	96906 SCREW,MACHINE			EA	2
6	3	PAHZZ	5310-00-782-1349	310-0045-000	13499 WASHER,FLAT			EA	2
6	4	XDHZZ		HP4N	09922 CLAMP_LOOP			EA	2
6	5	XDHZZ		SKT10GY	98291 JACK,TIP			EA	5
6	6	PAHZZ	5935-00-686-9970	SKT10RED	98291 JACK,TIP			EA	2
6	7	PAHZZ	5325-00-174-5317	MS35489-4	96996 GROMMET,RUBBER			EA	1
6	8	PAHZZ	5935-00-080-0268	DM53742-5000	71468 CONNECTOR,PLUG			EA	3
6	9	PAHZZ	5305-00-766-2422	MS51959-1	96906 SCREW,MACHINE			EA	2
6	10	XDHZZ		545-7531-003	13499 WASHER,FLAT			EA	2
6	11	PAHZZ	5310-00-622-1724	68-1660-26	72962 NUT,SELF-LOCKING			EA	4
6	12	PAHZZ	5305-00-727-8833	MS51959-3	96906 SCREW,MACHINE			EA	2
6	13	PAHZZ	5935-00-089-1165	DBMF13W3S	71468 CONNECTOR,RECEPT			EA	1
6	14	XDHZZ		548-3458-000	13499 WIRING HARNESS			EA	1
6	15	PAHZZ	5305-00-019-6293	549-0931-003	13499 SCREW,ASSEMBLED			EA	2
6	16	PAHZZ	5935-00-885-6505	DM53740-5000	71468 CONNECTOR,PLUG			EA	3
6	17	PAHZZ	5305-00-763-3357	MS51959-6	96906 SCREW,MACHINE			EA	2
6	18	PAHZZ	5935-00-811-1382	DBM13W3P	71468 CONNECTOR,RECEPT			EA	1
6	19	PAHZZ	5821-00-084-2344	549-0945-003	13499 RETAINER,SCREW			EA	2
6	20	XDHZZ		541-5962-002	13499 SLEEVE,SPACING			EA	4

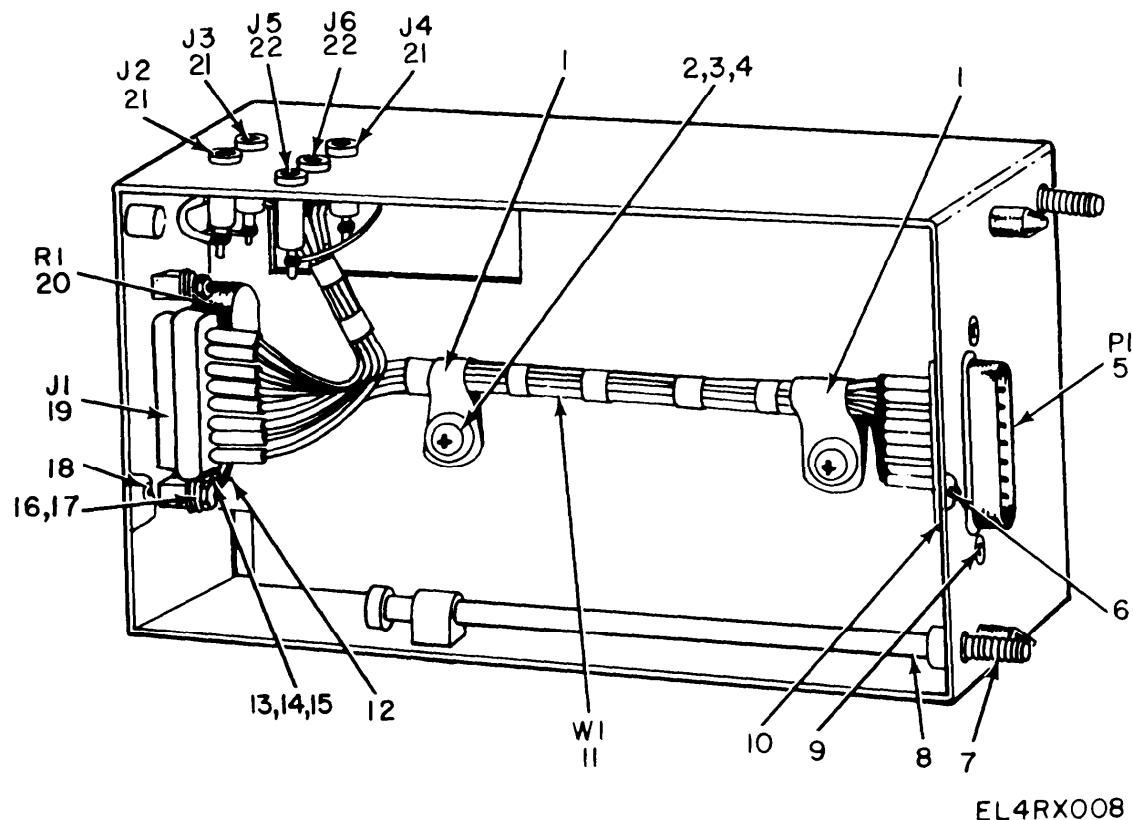


Figure 7. Extender Module MX-4894/URC (1A5).

SECTION II				TM11-6625-623-40P								
(1) FIG NO	(A) ILLUSTRATION (B)	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) FSCM	DESCRIPTION		USABLE	ON CODE	(7) QTY IN	(8) INC IN UNIT
GROUP 05 EXTENDER MODULE MX-4894/URC (1A5)												
7	1	PAHZZ	5340-00-619-7754	HP3N	09922	CLAMP,LOOP					EA	2
7	2	PAHZZ	5310-00-176-6621	22NM46	72962	NUT,SELF-LOCKING					EA	2
7	3	PAHZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE					EA	2
7	4	PAHZZ	5310-00-782-1349	310-0045-00	79807	WASHER,FLAT					EA	2
7	5	PAHZZ	5935-00-173-7748	DA15P	71468	CONNECTOR,RCPT					EA	1
7	6	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT,SELF-LOCKING					EA	3
7	7	PAHZZ	5821-00-084-2344	549-0945-003	13499	RETAINER,SCREW					EA	2
7	8	XDHZZ		541-5962-002	13499	SLEEVE,SPACING					EA	2
7	9	PAHZZ	5305-00-764-2966	MS51959-2	96906	SCREW,MACHINE					EA	4
7	10	PAHZZ	5305-00-019-6293	549-0931-003	13499	SCREW,ASSEMBLED					EA	2
7	11	XDHHH		548-3456-000	13499	WIRING HARNESS					EA	1
7	12	PAHZZ	5940-00-836-3536	4040-2HOTTINNED	77147	TERMINAL,LUG					EA	1
7	13	PAHZZ	5310-00-938-2013	MS35649-24	96906	NUT,PLAIN,HEXAGON					EA	1
7	14	PAHZZ	5305-00-763-3356	MS51959-5	96906	SCREW,MACHINE					EA	2
7	15	XDHZZ		310-0070-000	79807	WASHER,LOCK					EA	1
7	16	XDHZZ		502-4689-001	13499	WASHER,FLAT					EA	2
7	17	XDHZZ		545-7531-003	13499	WASHER,FLAT					EA	2
7	18	PAHZZ	5305-00-727-8833	MS51959-3	96906	SCREW,MACHINE					EA	2
7	19	PAHZZ	5935-00-484-4574	DAF15S	71468	CONNECTOR,RCPT					EA	1
7	20	PAHZZ	5905-00-060-0524	RW67V201	81349	RESISTOR,FIXED					EA	1
7	21	PAHZZ	5935-00-686-9970	SKT10RED	98291	JACK,TIP					EA	3
7	22	PAHZZ	5935-00-806-2685	SKT10GY	98291	JACK,TIP					EA	2

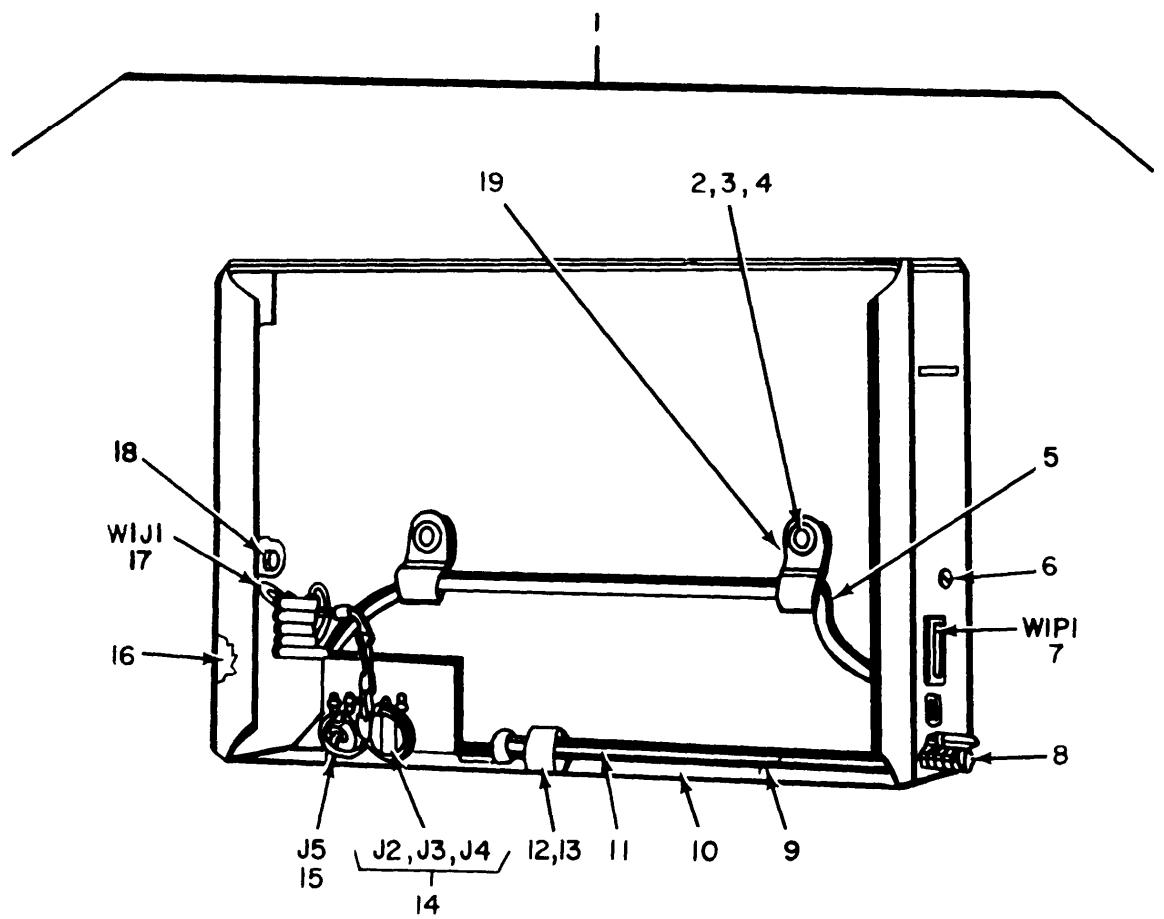


Figure 8. Extender Module MX-4893/URC (1A6) .

SECTION II				TM11-6625-623-40P							
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) FSCM	DESCRIPTION		USABLE ON		(7) CODE	(8) QTY IN IN UNIT
GROUP 06 EXTENDER MODULE MX-4893/URC (1A6)											
8	1	XDHHHH		548-3465-003	13499	FRAME,ELEC AMPL				EA	1
8	2	PAHZZ	5310-00-857-5548	MS21044D04	96906	NUT,SELF-LOCKING				EA	2
8	3	PAHZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE				EA	2
8	4	PAHZZ	5310-00-782-1349	310-0045-00	79807	WASHER,FLAT				EA	2
8	5	XDHHHH		548-3454-000	13499	WIRING HARNESS				EA	1
8	6	PAHZZ	5305-00-727-8833	MS51959-3	96906	SCREW,MACHINE				EA	2
8	7	PAHZZ	5935-00-710-1717	DE9P	71468	CONNECTOR,RECEPT				EA	1
8	8	PAHZZ	5821-00-084-2344	549-0945-003	13499	RETAINER,SCREW				EA	2
8	9	XDHZZ		541-5962-002	13499	SLEEVE,SPACING				EA	2
8	10	XDHZZ		548-3509-004	13499	FRAME,ELEC AMPL				EA	1
8	11	PAHZZ	5305-00-766-2422	MS51959-1	96906	SCREW,MACHINE				EA	2
8	12	PAHZZ	5305-00-019-6293	549-0931-003	13499	SCREW,ASSEMBLED				EA	2
8	13	XDHZZ		545-7531-003	13499	WASHER,FLAT				EA	2
8	14	PAHZZ	5935-00-806-2685	SKT10GY	98291	JACK,TIP				EA	3
8	15	PAHZZ	5935-00-686-9970	SKT10RED	98291	JACK,TIP				EA	1
8	16	PAHZZ	5305-00-763-3357	MS51959-6	96906	SCREW,MACHINE				EA	2
8	17	XDHZZ		DEF9S	71468	CONNECTOR,RCPT				EA	1
8	18	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT,SELF-LOCKING				EA	4
8	19	XDHZZ		HP4N	09922	CLAMP LOOP				EA	2

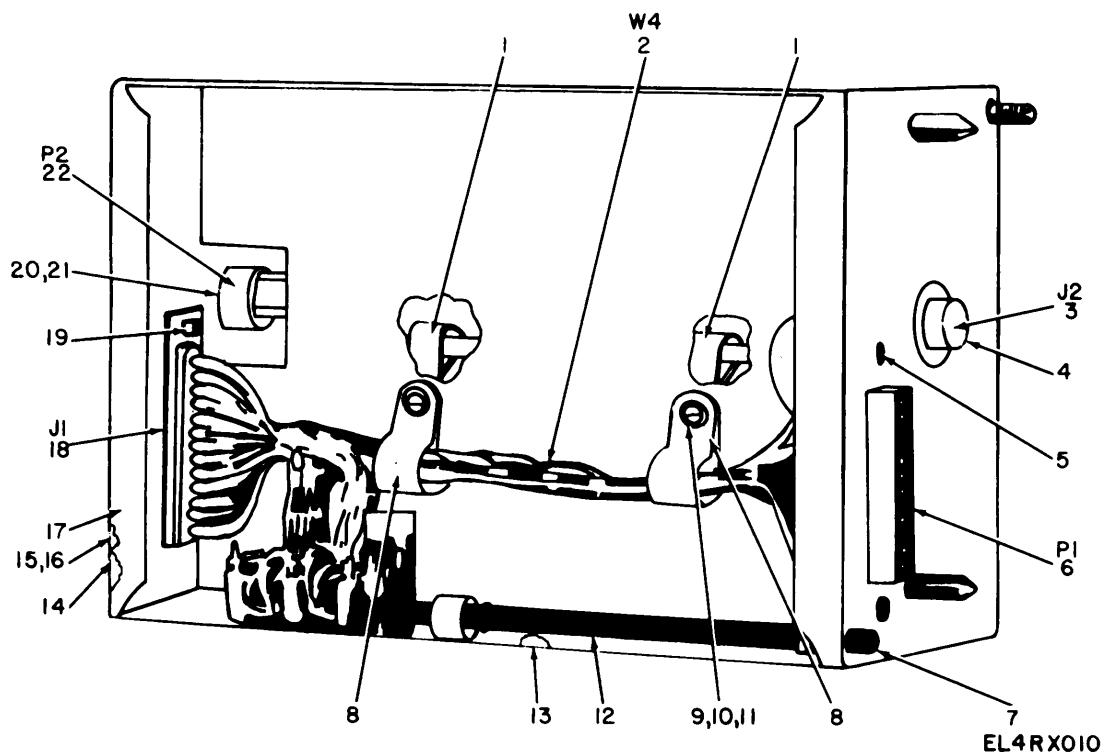


Figure 9. Extender Module MX-4891/URC (1A7).

SECTION II				TM11-6625-623-40P							
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) FSCM	DESCRIPTION		(7) USABLE ON	(8) CODE	(7) U/M	(8) QTY INC IN UNIT
GROUP 07 EXTENDER MODULE MX-4891/URC (1A7)											
9	1	XDHZZ		HP4N	09922	CLAMP LOOP			EA	2	
9	2	XDHZZ		548-3460-000	13499	WIRING, HARNESS			EA	1	
9	3	PAHZZ	5935-00-685-9913	UG1051U	80058	CONNECTOR, RCPT			EA	1	
9	4	PAHZZ	5935-00-829-2612	01508A	94375	SHIELD, ELECTRICAL			EA	2	
9	5	PAHZZ	5305-00-727-8833	MS51959-3	96906	SCREW, MACHINE			EA	2	
9	6	PAHZZ	5935-00-259-4690	DB25P	71468	CONNECTOR, RECEPT			EA	1	
9	7	PAHZZ	5821-00-084-2344	549-0945-003	13499	RETAINER, SCREW			EA	2	
9	8	XDHZZ		HP2N	09922	CLAMP, LOOP			EA	2	
9	9	PAHZZ	5310-00-857-5548	MS21044D04	96906	NUT, SELF-LOCKING			EA	2	
9	10	PAHZZ	5305-00-054-5650	MS51957-16	96906	SCREW, MACHINE			EA	2	
9	11	PAHZZ	5310-00-782-1349	310-0045-00	79807	WASHER, FLAT			EA	2	
9	12	XDHZZ		541-5962-002	13499	SLEEVE, SPACING			EA	2	
9	13	PAHZZ	5305-00-763-3357	MS51959-6	96906	SCREW, MACHINE			EA	2	
9	14	PAHZZ	5305-00-766-2422	MS51959-1	96906	SCREW, MACHINE			EA	2	
9	15	PAHZZ	5305-00-019-6293	549-0931-003	13499	SCREW, ASSEMBLED			EA	2	
9	16	XDHZZ		545-7531-003	13499	WASHER, FLAT			EA	2	
9	17	XDHZZ		548-3467-003	13499	FRAME, AMP, AM/AUDIO			EA	1	
9	18	XDHZZ		DBF25S	71468	CONNECTOR, RCPT			EA	1	
9	19	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT, SELF-LOCKING			EA	4	
9	20	XDHZZ		546-6889-002	13499	NUT, FLOAT, CONNECTOR			EA	1	
9	21	XDHZZ		546-3020-003	13499	WASHER, FLAT			EA	1	
9	22	PAHZZ	5935-00-729-7305	UG1050AU	80058	CONNECTOR, RECEPT			EA	1	

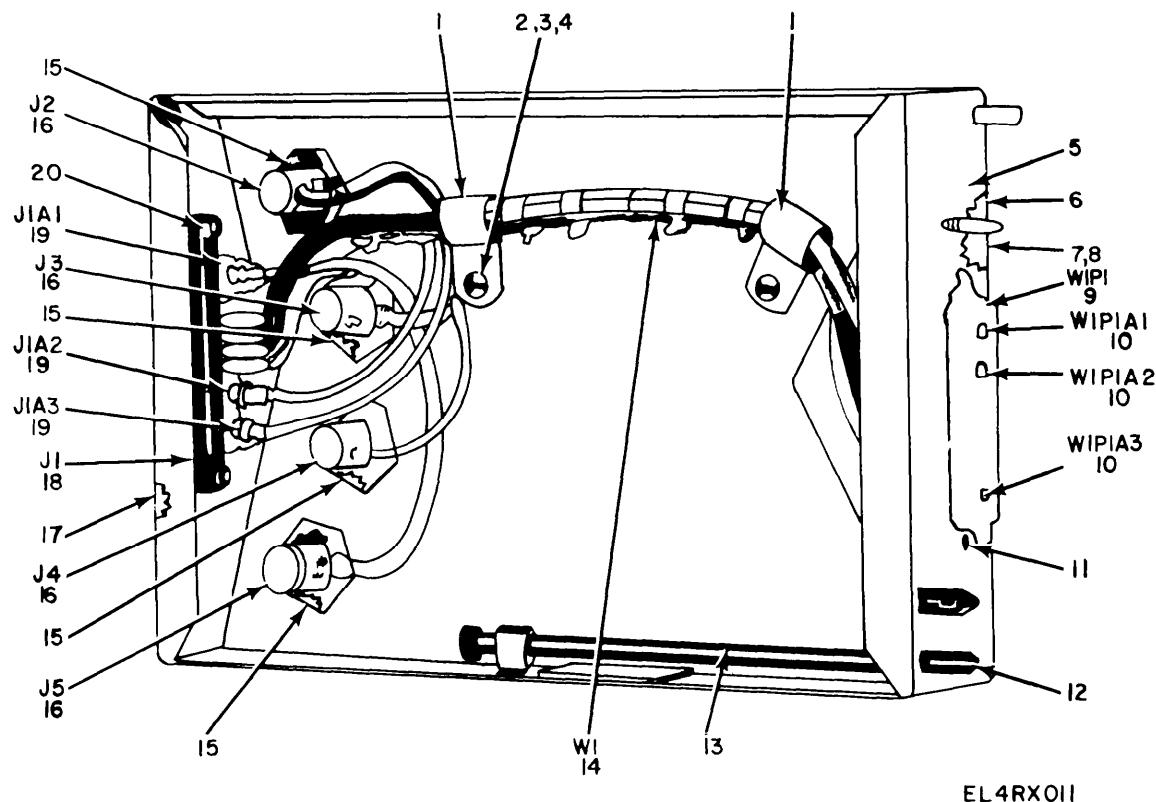


Figure 10. Extender Module MX-4889/URC (1A10).

SECTION II (1) ILLUSTRATION (A)		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
GROUP 08 EXTENDER MODULE MX-4889/URC								
(1A10)								
10	1	XDHZZ		HP4N	09922	CLAMP,LOOP	EA	2
10	2	PAHZZ	5310-00-857-5548	MS21044D04	96906	NUT,SELF-LOCKING	EA	2
10	3	PAHZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE	EA	2
10	4	PAHZZ	5310-00-782-1349	310-0045-00	79807	WASHER,FLAT	EA	2
10	5	XDHZZ		548-3469-002	13499	FRAME,FREQ STAB	EA	1
10	6	PAHZZ	5305-00-766-2422	MS51959-1	96906	SCREW,MACHINE	EA	2
10	7	PAHZZ	5305-00-019-6293	549-0931-003	13499	SCREW,ASSEMBLED	EA	2
10	8	XDHZZ		545-7531-003	13499	WASHER,FLAT	EA	2
10	9	PAHZZ	5935-00-811-1382	DBM13W3P	71468	CONNECTOR,RECEPT	EA	1
10	10	PAHZZ	5935-00-885-6508	DM53741	91146	CONNECTOR,INS,COAX	EA	3
10	11	PAHZZ	5305-00-727-8833	MS51959-3	96906	SCREW,MACHINE	EA	2
10	12	PAHZZ	5821-00-084-2344	549-0945-003	13499	RETAINER,SCREW	EA	2
10	13	XDHZZ		541-5962-002	13499	SLEEVE,SPACING	EA	2
10	14	XDHHH		548-3507-000	13499	WIRING,HARNESS	EA	1
10	15	PAHZZ	5325-00-282-8157	SE34	90030	EYELET,METALLIC	EA	4
10	16	PAHZZ	5935-00-081-1236	29700	74868	CONNECTOR,RCPT	EA	4
10	17	PAHZZ	5305-00-763-3357	MS51959-6	96906	SCREW,MACHINE	EA	2
10	18	PAHZZ	5935-00-089-1165	DBMF13W3S	71468	CONNECTOR,RECEPT	EA	1
10	19	PAHZZ	5935-00-080-0268	DM53742-5000	71468	CONNECTOR,PLUG	EA	3
10	20	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT,SELF-LOCKING	EA	4


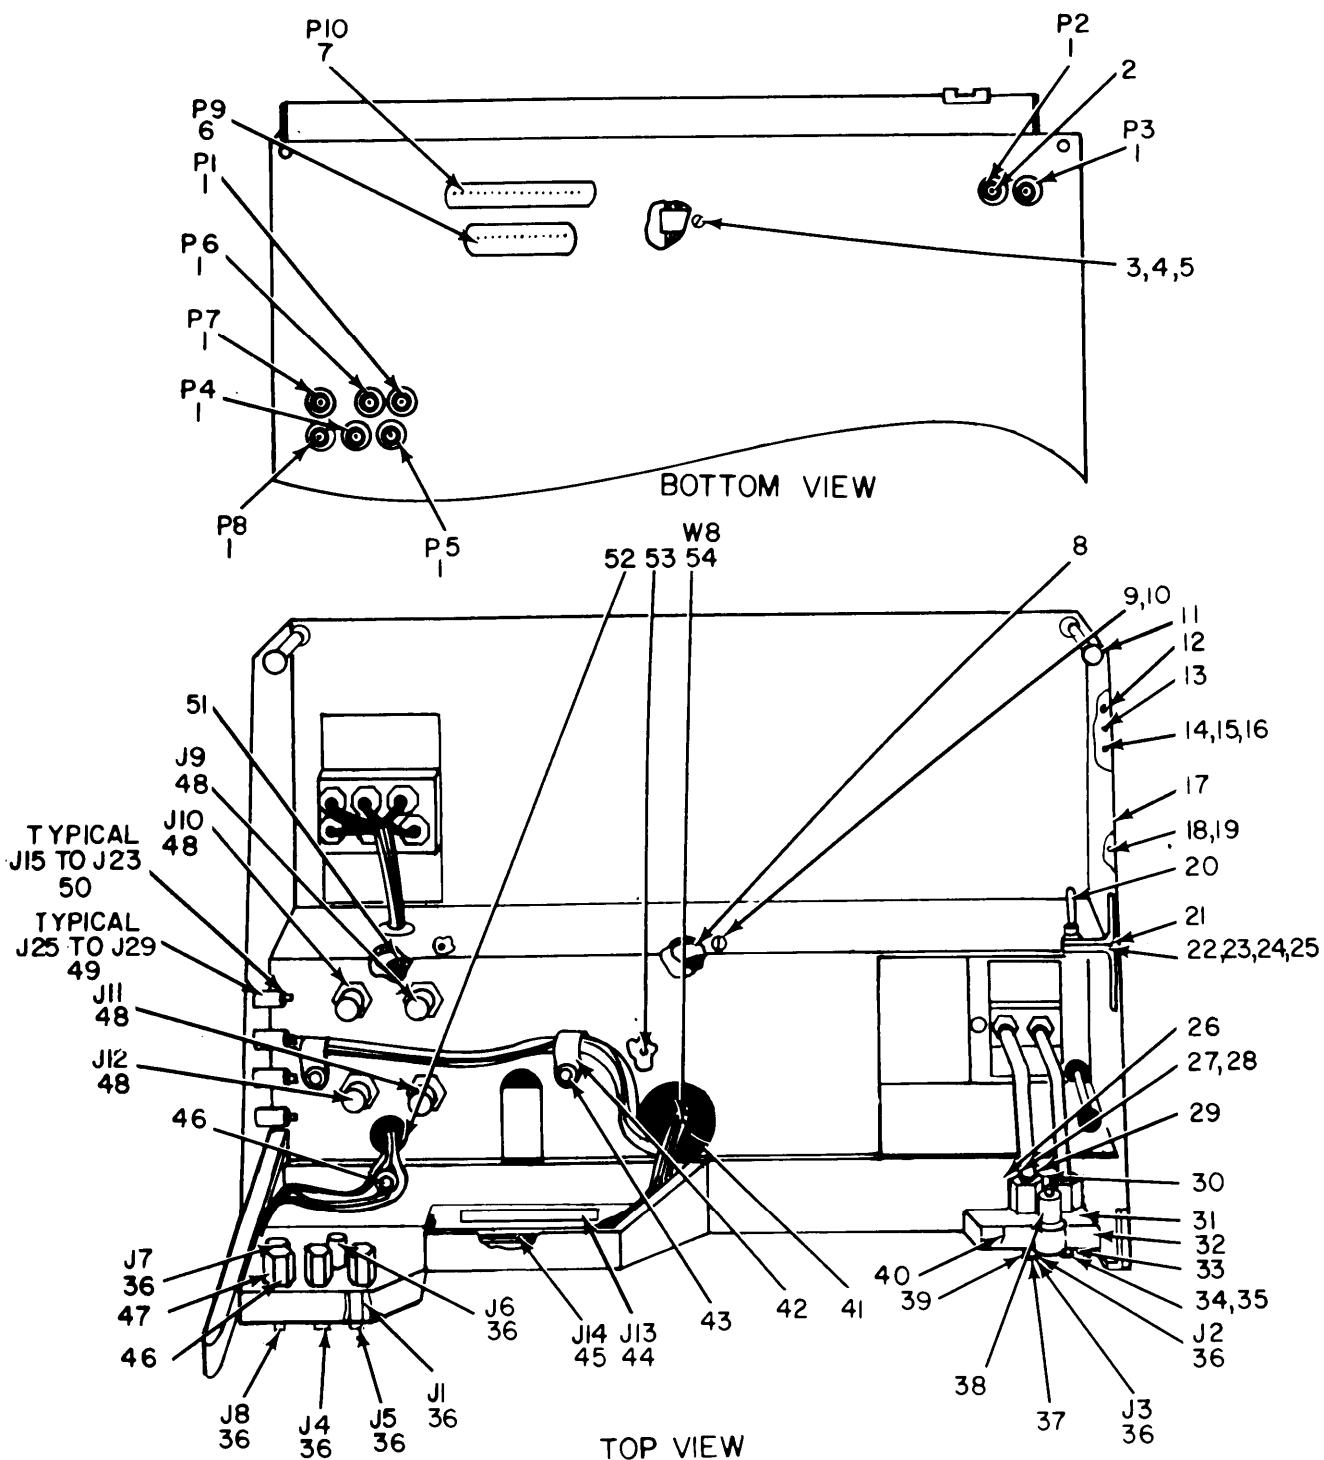


Figure 11. Extender Module MX-4887/URC (1A12).

EL4RX0I2

SECTION II (1) ILLUSTRATION (A)		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
TM11-6625-623-40P								
GROUP 09 EXTENDER MODULE MX-4887/URC								
(1A12)								
11	1	PAHZZ	5935-00-685-9913	UG1051U	80058	CONNECTOR,RCPT	EA	8
11	2	XDHZZ		01516A	94375	SHIELD,ELEC,CONN	EA	6
11	3	PAHZZ	5310-00-857-5548	MS21044D04	96906	NUT,SELF-LOCKING	EA	5
11	4	PAHZZ	5305-00-054-5649	MS51957-15	96906	SCREW,MACHINE	EA	2
11	5	PAHZZ	5310-00-782-1349	310-0045-00	79807	WASHER,FLAT	EA	7
11	6	PAHZZ	5935-00-259-4690	DB25P	71468	CONNECTOR,RECEPT	EA	1
11	7	PAHZZ	5935-00-280-2268	DC37P	71468	CONNECTR,RECEPT	EA	1
11	8	PAHZZ	5340-00-975-1440	HP6N	09922	CLAMP,LOOP	EA	1
11	9	PAHZZ	5305-00-770-2579	MS51959-15	96906	SCREW,MACHINE	EA	1
11	10	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT,SELF-LOCKING	EA	1
11	11	PAHZZ	5821-00-084-2344	549-0945-003	13499	RETAINER,SCREW	EA	4
11	12	PAHZZ	5305-00-766-2422	MS51959-1	96906	SCREW,MACHINE	EA	2
11	13	PAHZZ	5305-00-727-8833	MS51959-3	96906	SCREW,MACHINE	EA	6
11	14	PAHZZ	5305-00-019-6293	549-0931-003	13499	SCREW,ASSEMBLED	EA	4
11	15	XDHZZ		545-7531-003	13499	WASHER,FLAT	EA	4
11	16	PAHZZ	5365-00-180-6762	546-3025-003	13499	SPACER,SLEEVE	EA	2
11	17	XDHZZ		548-3516-005	13499	CHASSIS,TEST EQPT	EA	1
11	18	XDHZZ		548-3480-002	13499	PIN,LOCATING	EA	2
11	19	XDHZZ		502-1515-002	13499	WASHER	EA	2
11	20	PAHZZ	5935-00-224-5984	108-750-1	74970	PLUG,TIP	EA	1
11	21	XDHZZ		549-0975-002	13499	BRACKET,ANGLE	EA	1
11	22	XDHZZ		P313-0132-000	77250	NUT,PLAIN,HEXAGON	EA	2
11	23	PAHZZ	5305-00-770-2533	MS51959-13	96906	SCREW,MACHINE	EA	2
11	24	XDHZZ		310-0071-000	79807	WASHER,LOCK	EA	8
11	25	XDHZZ		310-0278-000	70318	WASHER,LOCK	EA	2
11	26	XDHZZ		P330-2296-00	77250	SCREW,MACHINE	EA	2
11	27	PAHZZ	5305-00-054-6651	MS51957-27	96906	SCREW,MACHINE	EA	7
11	28	XDHZZ		310-0046-00	79807	WASHER,FLAT	EA	9
11	29	XDHZZ		548-3531-005	13499	PLATE,MOUNTING	EA	1
11	30	PAHZZ	5340-00-290-4509	MS122159	96906	INSERT,SCREW,THREAD	EA	1
11	31	XDHZZ		549-0977-002	13499	PLATE,MTG-PRESSED	EA	1
11	32	XDHZZ		549-0976-002	13499	PLATE,MOUNTING	EA	1
11	33	PAHZZ	5821-00-908-1998	548-3534-002	13499	HOUSING,CAPTIVE	EA	2
11	34	PAHZZ	5305-00-054-6655	MS51957-31	96906	SCREW,MACHINE	EA	2
11	35	PAHZZ	5365-00-543-3443	340-0641-00	91314	SLEEVE,SPRING	EA	2
11	36	XDHZZ		UG105AU	80058	CONNECTOR,RCPT	EA	8
11	37	XDHZZ		546-6889-002	13499	NUT,FLOAT,CONNECTOR	EA	8
11	38	XDHZZ		2275	74863	SHIELD,ELEC,CONN	EA	2

(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	USABLE ON	CODE	U/M	(7) QTY IN	(8) INC IN UNIT
11	39	XDHZZ		546-3020-003	13499 WASHER, FLAT				EA	8
11	40	XDHZZ		01516A	94375 SHIELD, ELEC, CONN				EA	6
11	41	PAHZZ	5325-00-291-9366	MS35489-11	96906 GROMMET, RUBBER				EA	1
11	42	PAHZZ	5340-00-007-6040	HP5N	09922 CLAMP, LOOP				EA	3
11	43	PAHZZ	5305-00-770-2580	MS51959-16	96906 SCREW, MACHINE				EA	1
11	44	XDHZZ		DBF258	71468 CONNECTOR, RCPT				EA	1
11	45	PAHZZ	5935-00-577-8715	DCF37S	71468 CONNECTOR, RCPT				EA	1
11	46	PAHZZ	5821-00-785-6853	541-5187-002	13499 BUTTON CABLE				EA	2
11	47	PAHZZ	5305-00-054-5650	MS51957-16	96906 SCREW, MACHINE				EA	2
11	48	PAHZZ	5935-00-081-1236	29700	74868 CONNECTOR, RCPT				EA	4
11	49	PAHZZ	5935-00-686-9970	SKT10RED	98291 JACK, TIP				EA	5
11	50	PAHZZ	5935-00-806-2685	SKT-10GRAN	98291 JACK, TIP				EA	9
11	51	XDHZZ		HP4N	09922 CLAMP, LOOP				EA	1
11	52	PAHZZ	5325-00-276-4993	905	75543 GROMMET, RUBBER				EA	2
11	53	PAHZZ	5305-00-763-3357	MS51959-6	96906 SCREW, MACHINE				EA	4
11	54	XDHHH		548-3451-000	13499 WIRING, HARNESS				EA	1

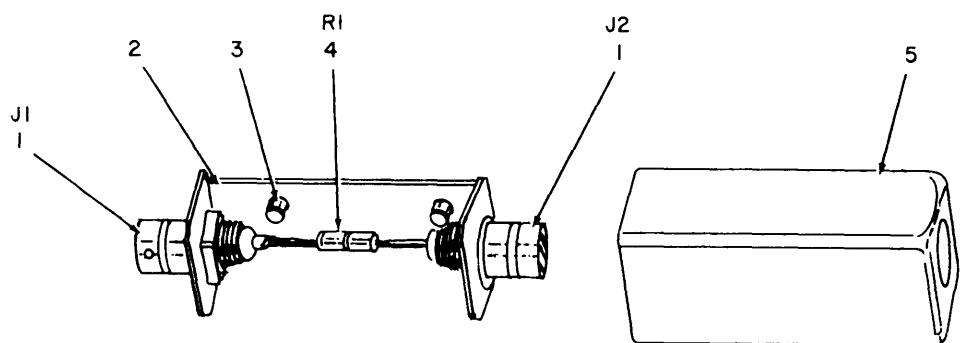


EL4RX013

Figure 12. Attenuator, Fixed CN-1066/URC (1A14).

TM11-6625-623-40P

(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY IN IN UNIT
GROUP 10 ATTENUATOR, FIXED CN-1066/URC (1A14)							
12	1	PAHZZ	5935-00-665-5718	UG1094U	80058 CONNECTOR,RECEPT	EA	2
12	2	XDHZZ		548-3527-002	13499 BRACKET,MOUNTING	EA	1
12	3	PAHZZ	5305-00-054-5636	MS51957-2	96906 SCREW,MACHINE	EA	2
12	4	PAHZZ	5905-00-279-3517	RC20GF510J	81349 RESISTOR,FIXED	EA	1
12	5	XDHZZ		548-3483-002	13499 CAN,SHIELD-MODIFIED	EA	1

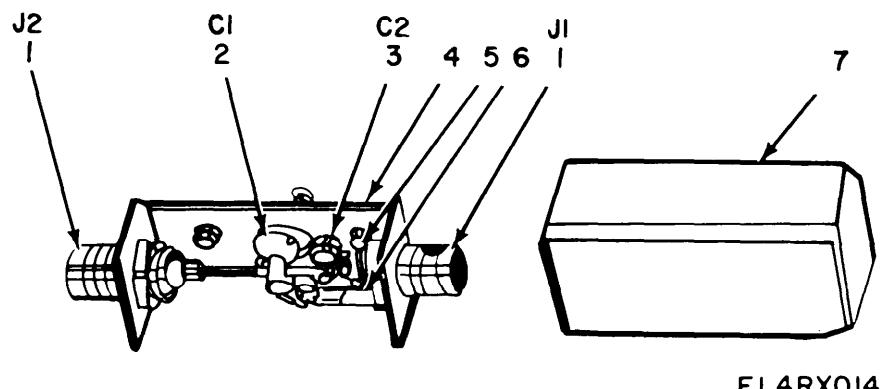


EL4RX014

Figure 13. Voltage Divider TS-1955/URC (1A15).

TM11-6625-623-40P

SECTION II (1) ILLUSTRATION (A)	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) (8) QTY INC IN UNIT		
						USABLE	ON CODE	U/M
				FSCM	GROUP 11 VOLTAGE DIVIDER TS-1955/URC (1A15)			
13	1	PAHZZ	5935-00-665-5718	UG1094U	80058 CONNECTOR,RECEPT	EA	2	
13	2	PAHZZ	5910-00-936-7405	CM05CD150J03	81349 CAPACITOR,FIXED MICA	EA	1	
13	3	PAHZZ	5910-00-060-1196	CM06F511J03	81349 CAPACITOR,FIXED	EA	1	
13	4	XDHZZ		548-3527-002	13499 BRACKET,MOUNTING	EA	1	
13	5	PAHZZ	5305-00-054-5636	MS51957-2	96906 SCREW,MACHINE	EA	2	
13	6	PAHZZ	5940-00-500-7227	31-759	02660 TERMINAL,LUG	EA	2	
13	7	XDHZZ		548-1299-002	13499 CAN,SHIELD	EA	1	

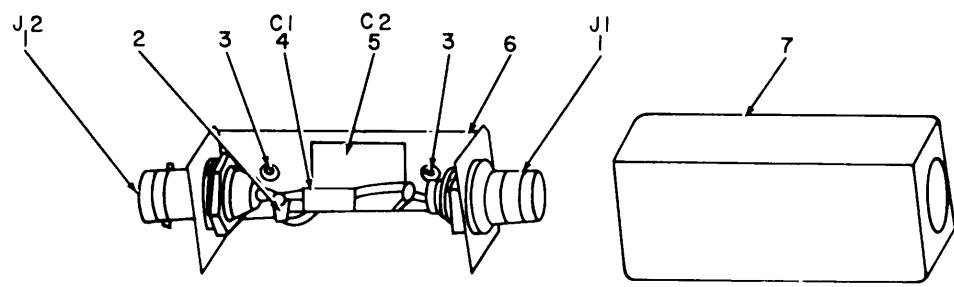


EL4RX015

Figure 14. Voltage Divider TS-1954/URC (1A16).

TM11-6625-623-40P


(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY IN IN UNIT
GROUP 12 VOLTAGE DIVIDER TS-1954/URC (1A16)							
14	1	PAHZZ	5935-00-665-5718	UG1094U	80058 CONNECTOR,RECEPT	EA	2
14	2	PAHZZ	5940-00-500-7227	31-759	02660 TERMINAL,LUG	EA	1
14	3	PAHZZ	5305-00-054-5636	MS51957-2	96906 SCREW,MACHINE	EA	2
14	4	PAHZZ	5910-00-984-8702	CM05E560J03	81349 CAPACITOR,FIXED	EA	1
14	5	XDHZZ		CM06F182J03	81349 CAPACITOR,FIXEDMICA	EA	1
14	6	XDHZZ		548-3527-002	13499 BRACKET,MOUNTING	EA	1
14	7	XDHZZ		548-1300-002	13499 CAN,SHIELD	EA	1

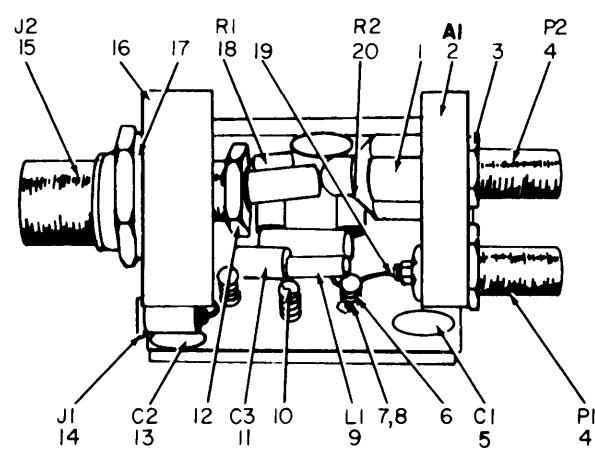

EL4RX016

Figure 15. Dummy Load, Electrical DA-340/URC (1A17).

SECTION II (1) ILLUSTRATION (A)		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
TM11-6625-623-40P								
GROUP 13 DUMMY LOAD,ELECTRICAL DA-3408URC								
(1A17)								
15	1	XDHZZ		2275	74863	SHIELD,ELEC,CONN	EA	1
15	2	XDHZZ		549-0988-003	13499	CHASSIS,ELECTRICAL	EA	1
15	3	PAHZZ	5310-00-187-0159	1218-02ZNPLSTL	78189	WASHER,LOCK	EA	2
15	4	PAHZZ	5935-00-729-7305	UG1050AU	80058	CONNECTOR,RECEPT	EA	2
15	5	XDHZZ		CM05E620J03	81349	CAPACITOR,FXD,MICA	EA	1
15	6	PAHZZ	5940-00-877-8430	TF300	98291	TERMINAL,FEEDTHRU	EA	3
15	7	XDHZZ		P343-0298-00	77250	SCREW,MACHINE	EA	6
15	8	XDHZZ		310-0075-00	79807	WASHER,LOCK	EA	4
15	9	PAHZZ	5950-00-932-2727	MS90539-08	96906	COIL,RADIO FREQ	EA	1
15	10	PAHZZ	5940-00-836-3536	4040-2	77147	TERMINAL,LUG	EA	3
15	11	XDHZZ		CC20CH040D	81349	CAPACITOR,FXD,CER	EA	1
15	12	PAHZZ	5310-00-530-9214	P313-0050-00	77250	NUT,PLAIN,HEXAGON	EA	1
15	13	PAHZZ	5910-00-460-0868	CN05F1101J03	81349	CAPACITOR,FXD,MICA	EA	1
15	14	PAHZZ	5935-00-808-9549	SKT5BCBLU	98291	JACK,TIP	EA	1
15	15	PAHZZ	5935-00-850-8876	M39012-19-0001	81349	CONNECTOR,RCPT	EA	1
15	16	XDHZZ		549-0978-002	13499	COVER,LOAD	EA	1
15	17	PAHZZ	5310-00-805-3214	1229-1-116	82423	WASHER,FLAT	EA	2
15	18	PAHZZ	5905-00-111-8372	RCR32G222JS	81349	RESISTOR,FXD,CMPSN	EA	1
15	19	PAHZZ	5940-00-877-8430	TF300	98291	TERMINAL,FEEDTHRU	EA	1
15	20	PAHZZ	5905-00-299-2038	RC32GF562K	81349	RESISTOR,FIXED	EA	1

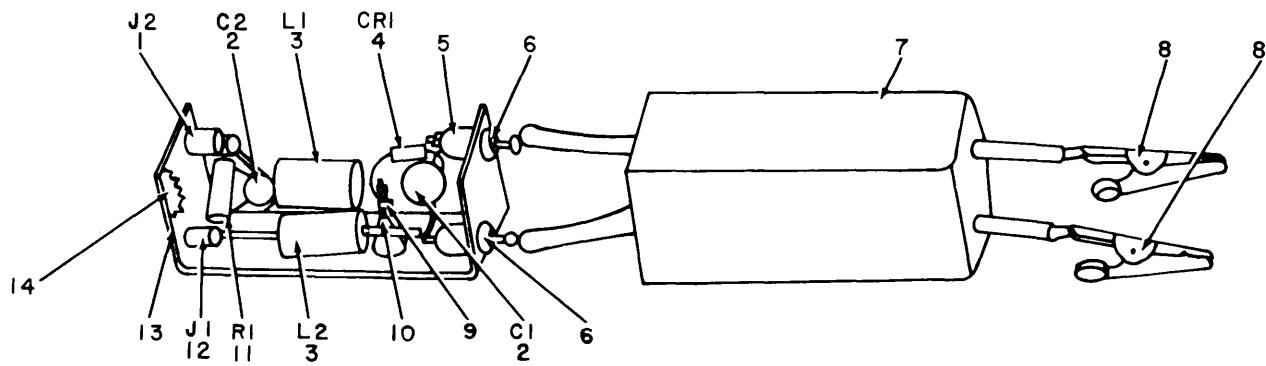

EL4RX017

Figure 16. Detector, Radio Frequency DT-278/URC (1A18).

SECTION II (1) ILLUSTRATION (A)		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
TM11-6625-623-40P								
GROUP 14 DETECTOR,RADIO FREQUENCY								
						DT-278/URC (1A18)		
16	1	PAHZZ	5935-00-615-8571	SKT5BCRED	98291	JACK,TIP	EA	1
16	2	PAHZZ	5910-00-838-9421	CK60AW102M	81349	CAPACITOR,FIXED	EA	2
16	3	PAHZZ	5950-00-686-6425	BS217	99800	COIL,RADIO FREQ	EA	2
16	4	PAHZZ	5961-00-466-3224	1N198	81349	SEMICONDUCTOR,DIODE	EA	1
16	5	PAHZZ	5940-00-557-1308	FTM2	98291	TERMINAL,FEEDTHRU	EA	2
16	6	XDHZZ		201-8	94375	CONTACT,ELECTRICAL	EA	2
16	7	XDHZZ		548-8010-002	13499	CAN,SHIELD-MODIFIED	EA	1
16	8	PAHZZ	5999-00-577-0994	30	76545	CLIP,ELECTRICAL	EA	2
16	9	PAHZZ	5940-00-877-8430	TF300	98291	TERMINAL,FEEDTHRU	EA	1
16	10	PAHZZ	5305-00-766-2422	MS51959-1	96906	SCREW,MACHINE	EA	1
16	11	XDHZZ		RC20GFU04J	81349	RESISTOR,FXD,CMPSN	EA	1
16	12	PAHZZ	5935-00-615-6736	SKT5BCBLK	98291	JACK,TIP	EA	1
16	13	XDHZZ		548-3536-002	13499	BRACKET,MOUNTING	EA	1
16	14	PAHZZ	5305-00-054-5636	MS51957-2	96906	SCREW,MACHINE	EA	2

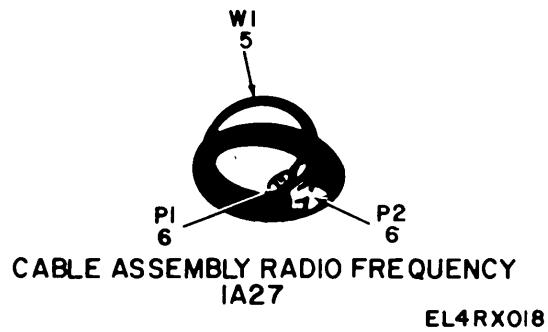
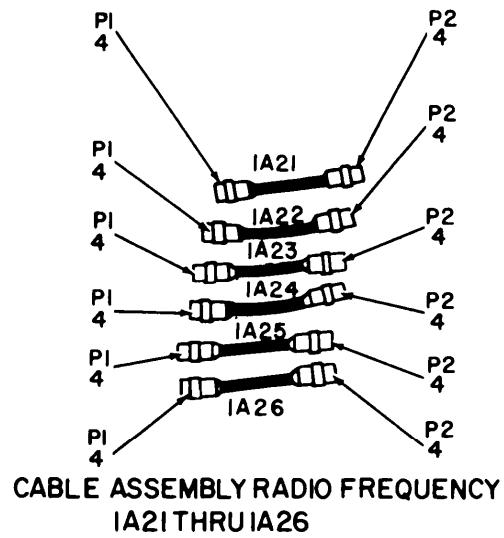
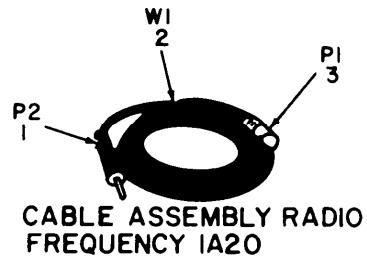


Figure 17. Cable Assemblies, Radio Frequency CG-3126/U (1A20), CG-409G/U41N (1A21, 1A22, 1A23, 1A24, 1A25, 1A26) and CG-2727/U5FTOIN (1A27).

SECTION II							TM11-6625-623-40P				
(1) ILLUSTRATION (A)	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	FSCM	USABLE ON	CODE	U/M	(7) (8) QTY INC IN UNIT	
					GROUP 15 CABLE ASSEMBLY,RADIO FREQUENCY						
					CG-3126/U (1A20)						
17	1	PAHZZ	5935-00-192-4753	PJ068	81349	PLUG,TELEPHONE				EA 1	
17	2	PAHZZ	6145-00-542-6092	RG58CU	80058	CABLE,RADIO FREQ				FT 8	
17	3	PAHZZ	5935-00-823-0487	MS35168-88E	96906	CONNECTOR,PLUG				EA 1	
					GROUP 16 CABLE ASSEMBLY,RADIO FREQUENCY						
					CG-409G/U4IN (1A21,1A22,1A23,1A24 ,1A25,1A26)						
17	4	PAHZZ	5935-00-823-0487	MS35168-88E	96906	CONNECTOR,PLUG				EA 12	
					GROUP 17 CABLE ASSEMBLY,RADIO FREQUENCY						
					CG-2727/U5FT0IN (1A27)						
17	5	PAHZZ	5995-00-985-8170	CG2449U4FT4IN	80058	CABLE,RF				EA 1	
17	6	PAHZZ	5935-00-823-0487	MS35168-88E	96906	CONNECTOR,PLUG				EA 2	

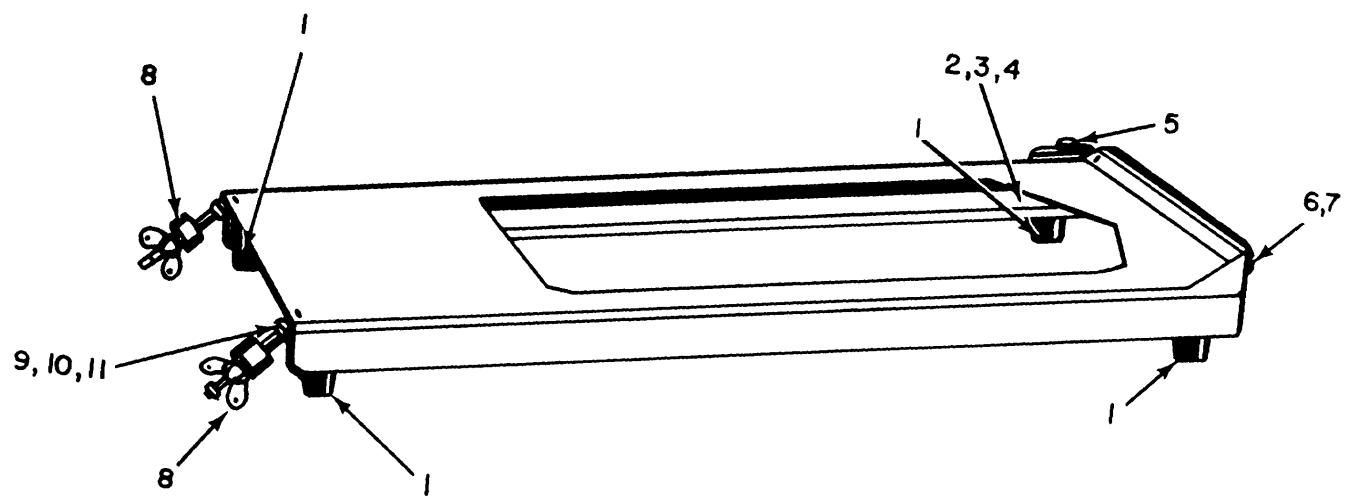


Figure 18. Maintenance Fixture MT-3039/URC (IA28).

EL4RX019

SECTION II				TM11-6625-623-40P											
(1) ILLUSTRATION (A)	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) FSCM	DESCRIPTION				(7) USABLE ON CODE	(8) QTY INC IN UNIT				
GROUP 18 MAINTENANCE FIXTURE MT-3039/URC															
(1A28)															
18	1	PAOZZ	5340-00-264-7182	747R	75543	BUMPER,RUBBER				EA	4				
18	2	PAHZZ	5310-00-271-4644	MS35649-64	96906	NUT,PLAIN,HEXAGON				EA	4				
18	3	PAHZZ	5305-00-054-6652	MS51957-28	96906	SCREW,MACHINE				EA	4				
18	4	XDHZZ		310-0046-00	79807	WASHER,FLAT				EA	4				
18	5	XDHZZ		549-0970-002	13499	PIN,SHLDR,HEADLESS				EA	2				
18	6	PAHZZ	5310-00-270-8810	MS35650-104	96906	WASHER				EA	2				
18	7	PAHZZ	5310-00-933-8120	MS35338-138	96906	WASHER,LOCK				EA	2				
18	8	XDHZZ		6047-001-000	81860	RETAINER,FR SHMT				EA	2				
18	9	PAHZZ	5310-00-271-4642	MS35649-44	96906	WASHER				EA	4				
18	10	PAHZZ	5305-00-763-7822	MS51959-14	96906	SCREW,MACHINE				EA	4				
18	11	PAHZZ	5310-00-933-8118	MS35338-135	96906	WASHER,LOCK				EA	4				



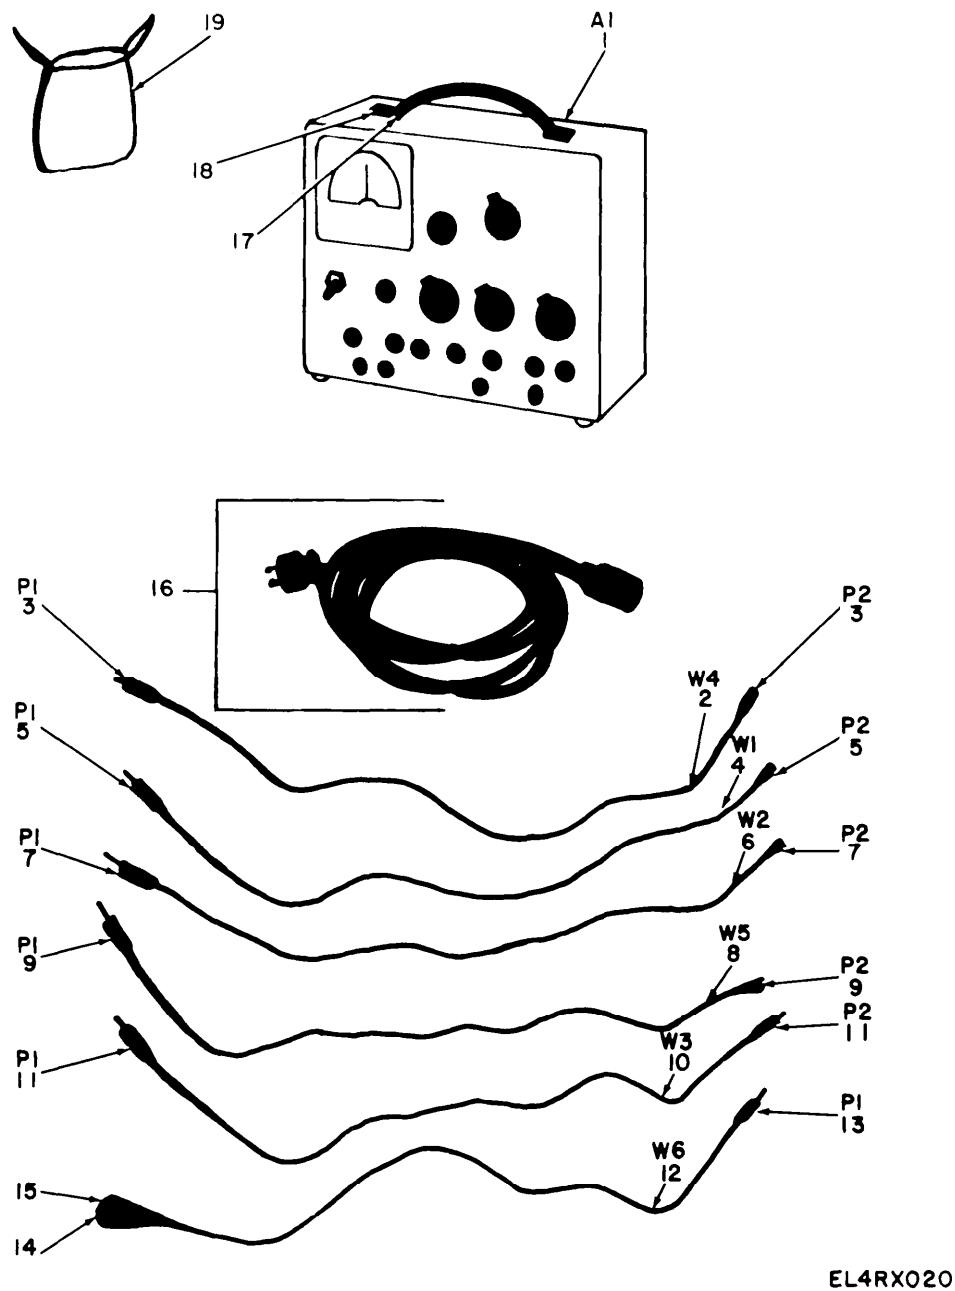


Figure 19. Test Set, Radio TS-1956/URC (1A32).

SECTION II				TM11-6625-623-40P							
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) FSCM	DESCRIPTION		(7) USABLE ON	(8) QTY INC IN UNIT	(7) U/M	
GROUP 19 TEST SET,RADIO TS-1956/URC (1A32)											
19	1	PAOHH	6625-00-893-6606	548-8001-005	13499	TEST SET,RADIO			EA	1	
19	2	PAOZZ	6625-00-965-0184	CX9014URC	80058	LEAD,TEST			EA	1	
19	3	PAHZZ	5935-00-578-3494	105-302	74970	PLUG,TIP			EA	2	
19	4	PAOZZ	6625-00-965-0181	CX9011URC	80058	LEAD,TEST			EA	1	
19	5	PAHZZ	5935-00-682-0586	105-306	74970	PLUG,TIP			EA	2	
19	6	PAOZZ	6625-00-965-0182	CX9012URC	80058	LEAD,TEST			EA	1	
19	7	PAHZZ	5935-00-857-3617	105-301	74970	PLUG,TIP			EA	2	
19	8	PAOZZ	6625-00-965-0187	CX9015URC	80058	LEAD,TEST			EA	1	
19	9	PAHZZ	5935-00-682-0587	105-307	74970	PLUG,TIP			EA	2	
19	10	PAOZZ	6625-00-965-0183	CX9013URC	80058	LEAD,TEST			EA	1	
19	11	PAHZZ	5935-00-682-0585	105-308	74970	PLUG,TIP			EA	2	
19	12	PAOZZ	6625-00-965-0186	CX9010URC	80058	LEAD,TEST			EA	1	
19	13	PAHZZ	5935-00-846-8236	105-303	74970	PLUG,TIP			EA	1	
19	14	XDHZZ		87BLK	76545	SLEEVE,RUBBER			EA	1	
19	15	PAHZZ	5599-00-838-1402	45	76545	CLIP,ELECTRICAL			EA	1	
19	16	PAOHH	5995-00-985-8173	CX9009URC	80058	CABLE ASSEMBLY			EA	1	
19	17	PAHZZ	5305-00-054-5635	MS51957-1	96906	SCREW,MACHINE			EA	2	
19	18	XDHZZ		553-9546-004	13499	PLATE, ID			EA	1	
19	19	XDOZZ		024-0252-000	13499	BAG,CLOTH			EA	1	

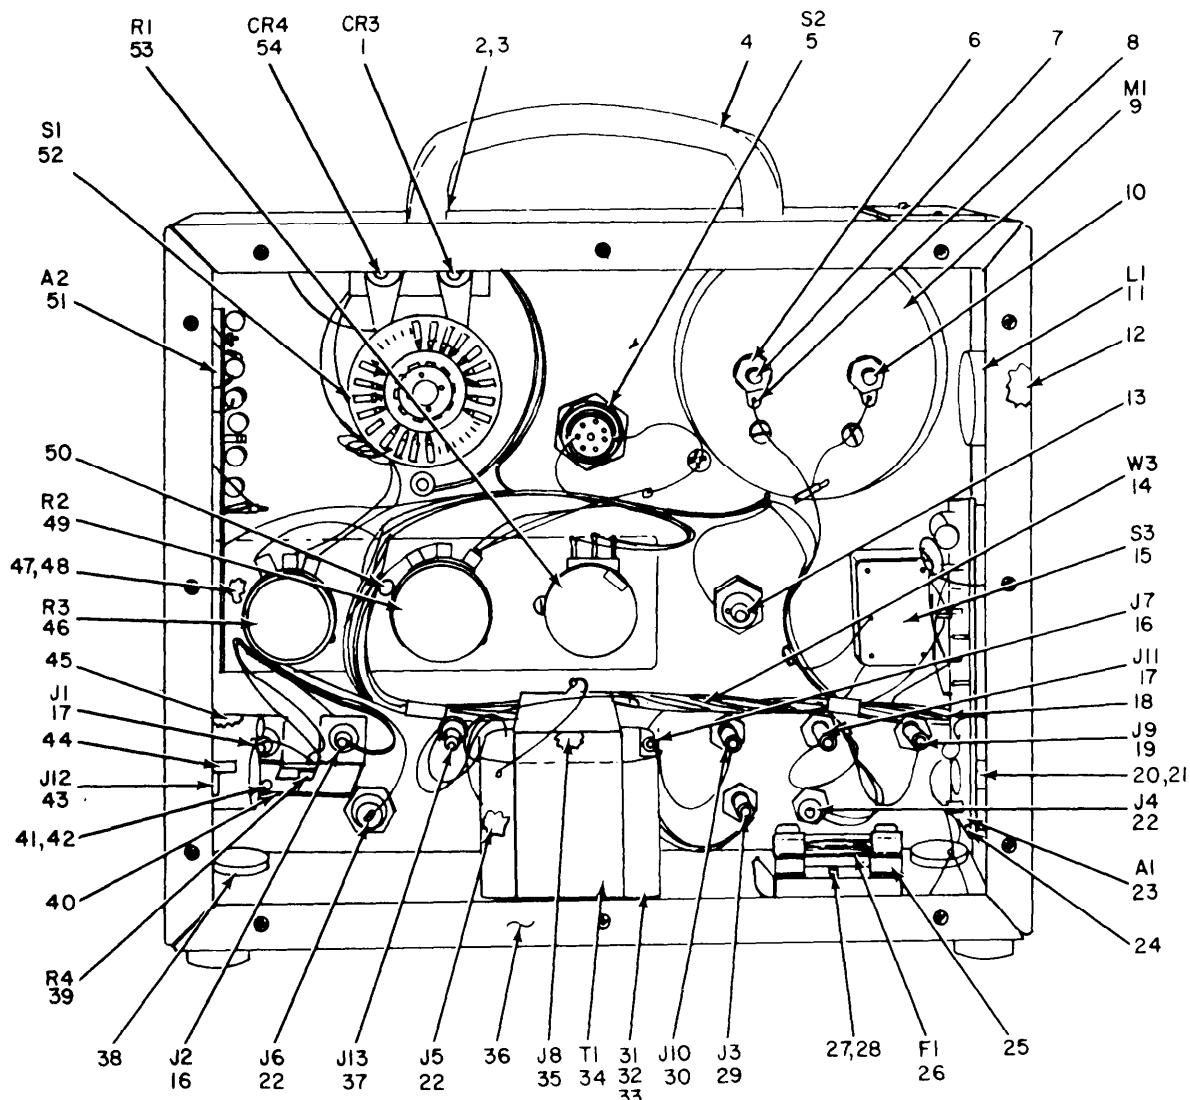

REAR VIEW

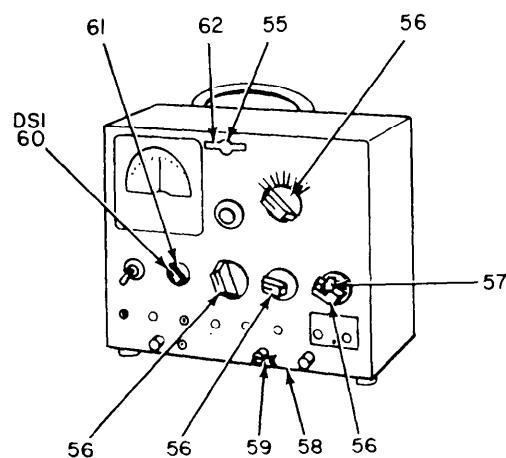


FRONT PANEL

EL4RX02I

Figure 20. Test Set, Function (1A32A1).

SECTION II		TM11-6625-623-40P								
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	DESCRIPTION	USABLE	ON CODE	(7) U/M	(8) QTY INC IN UNIT
GROUP 1901 TEST SET,FUNCTION (1A32A1)										
20	1	PAHZZ	5961-00-845-6456	1N1369A	81349	SEMICONDUCTOR,DIODE			EA	1
20	2	PAHZZ	5310-00-261-8278	MS35338-100	96906	WASHER,LOCK			EA	2
20	3	PAHZZ	5305-00-059-3656	MS51958-60	96906	SCREW,MACHINE			EA	2
20	4	XDHZZ		729	01016	HANDLE,BOW			EA	1
20	5	PAHZZ	5930-00-578-2325	MS25089-5CR	96906	SWITCH,PUSH			EA	1
20	6	PAOZZ	5310-00-184-8977	MS35338-98	96906	WASHER,LOCK			EA	6
20	7	XDOZZ		310-0082-00	79807	WASHER,LOCK			EA	2
20	8	PAOZZ	5940-00-665-5592	4012HOTTINNED	77147	TERMINAL,LUG			EA	3
20	9	PAHZZ	6625-00-218-6511	530-1-1	82386	AMMETER			EA	1
20	10	XDHZZ		P343-0328-00	77250	SCREW,MACHINE			EA	4
20	11	XDHZZ		MP206-18B	95105	COIL,RF			EA	1
20	12	PAHZZ	5305-00-763-6961	MS51959-26	96906	SCREW,MACHINE			EA	1
20	13	PAOZZ	6240-00-723-3378	NE2J	08805	LAMP,GLOW			EA	1
20	14	XDHHH		549-0635-000	13499	WIRING HARNESS			EA	1
20	15	PAHZZ	5930-00-655-1508	MS25100-23	96906	SWITCH,TOGGLE			EA	1
20	16	PAHZZ	5935-00-685-9416	MS16108-4A	96906	JACK,TIP			EA	2
20	17	PAHZZ	5935-00-578-3489	MS16108-2A	96906	JACK,TIP			EA	2
20	18	PAHZZ	5940-00-503-6764	31881	00779	TERMINAL,LUG			EA	1
20	19	PAHZZ	5935-00-685-9396	MS16108-1A	96906	JACK,TIP			EA	1
20	20	XDHZZ		540-9008-003	13499	POST,HEXAGON			EA	4
20	21	PAHZZ	5305-00-764-2966	MS51959-2	96906	SCREW,MACHINE			EA	4
20	22	PAHZZ	5935-00-665-5718	UG1094U	80058	CONNECTOR,RECEPT			EA	3
20	23	PAHHH	6625-00-903-3499	549-0648-003	13499	TEST SET SUBASSY			EA	1
20	24	PAHZZ	5305-00-054-5636	MS51957-2	96906	SCREW,MACHINE			EA	4
20	25	XDHZZ		350-231	75915	FUSE HOLDER			EA	1
20	26	PAOZZ	5920-00-280-5031	F02A250V1-4AS	81349	FUSE,CARTRIDGE			EA	1
20	27	XDHZZ		P313-0132-000	77250	NUT,PLAIN,HEXAGON			EA	1
20	28	PAHZZ	5305-00-770-2579	MS51959-15	96906	SCREW,MACHINE			EA	5
20	29	PAHZZ	5935-00-681-5690	MS16108-7A	96906	JACK,TIP			EA	1
20	30	PAHZZ	5935-00-768-4232	MS16108-8A	96906	JACK,TIP			EA	1
20	31	PAHZZ	5310-00-857-5548	MS21044D04	96906	NUT,SELF-LOCKING			EA	4
20	32	PAHZZ	5310-00-782-1349	310-0045-00	79807	WASHER,FLAT			EA	4
20	33	XDHZZ		310-0073-000	79807	WASHER,LOCK			EA	1
20	34	PAHZZ	5950-00-880-8164	B1541	80089	TRANSFORMER,POWER			EA	1
20	35	PAHZZ	5935-00-577-2338	MS16108-6A	96906	JACK,TIP			EA	1
20	36	XDHZZ		549-0652-005	13499	TEST SET,CHASSIS			EA	1
20	37	PAHZZ	5935-00-577-2336	MS16108-3A	96906	JACK,TIP			EA	1
20	38	XDHZZ		1871M83876E	14370	GROMMET,RUBBER			EA	8
20	39	PAHZZ	5905-00-755-5487	224P1-103	80294	RESISTOR,VARIABLE			EA	1

TM11-6625-623-40P							
(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY IN IN UNIT
20	40	XDHZZ		549-0636-002	13499 BRACKET,ANGLE		EA 1
20	41	PAHZZ	5310-00-622-1724	68-1660-26	72962 NUT,SELF-LOCKING		EA 2
20	42	PAHZZ	5305-00-054-5639	MS51957-5	96906 SCREW,MACHINE		EA 2
20	43	PAHZZ	5935-00-644-6750	7467	74545 SOCKET,PLUG-IN		EA 1
20	44	PAHZZ	5940-00-455-7441	4040-5HDSPL	77147 TERMINAL,LUG		EA 1
20	45	PAHZZ	5310-00-614-3500	68-1660-40	72962 NUT,SELF-LOCKING		EA 2
20	46	XDHZZ		RV4NAYSD501B	81349 RESISTOR,VARIABLE		EA 1
20	47	XDHZZ		P313-0062-00	13499 NUT,PLAIN,HEXAGON		EA 4
20	48	PAHZZ	5310-00-209-1522	1220-02CSCADPL	78189 WASHER,LOCK		EA 4
20	49	PAHZZ	5905-00-583-5152	RA20NASD500A	81349 RESISTOR,VARIABLE		EA 1
20	50	XDHZZ		2540-20-03	78189 TERMINAL,LUG		EA 1
20	51	PAHHH	6625-00-903-3498	549-5595-004	13499 TEST SET SUBASSY		EA 1
20	52	PAHZZ	5930-00-792-1528	24874-724LR2	82104 SWITCH,ROTARY		EA 1
20	53	PAHZZ	5905-00-539-5013	RV4NAYSD252A	81349 RESISTOR,VARIABLE		EA 1
20	54	PAHZZ	5961-00-848-7006	1N2995B	81349 SEMICONDUCTOR,DIODE		EA 1
20	55	PAHZZ	5310-00-976-0274	C13388SS010	78553 PUSH ON NUT		EA 2
20	56	PAOZZ	5355-00-778-4967	544-0779-004	13499 KNOB		EA 4
20	57	PAHZZ	5305-00-843-8522	8-32X3-166SPLINE 18-8SST	08664 SETSCREW		EA 4
20	58	XDHZZ		549-0642-003	13499 PANEL,FLOOR		EA 1
20	59	PAHZZ	5305-00-054-5647	MS51957-13	96906 SCREW,MACHINE		EA 14
20	60	PAOZZ	6210-00-805-3937	137-7336-9	72619 LIGHT,INDICATOR		EA 1
20	61	PAOZZ	6210-00-978-8463	137-931	72619 LENS,INDICATOR		EA 1
20	62	XDHZZ		280-2972-000	13499 INSIGNIA		EA 1

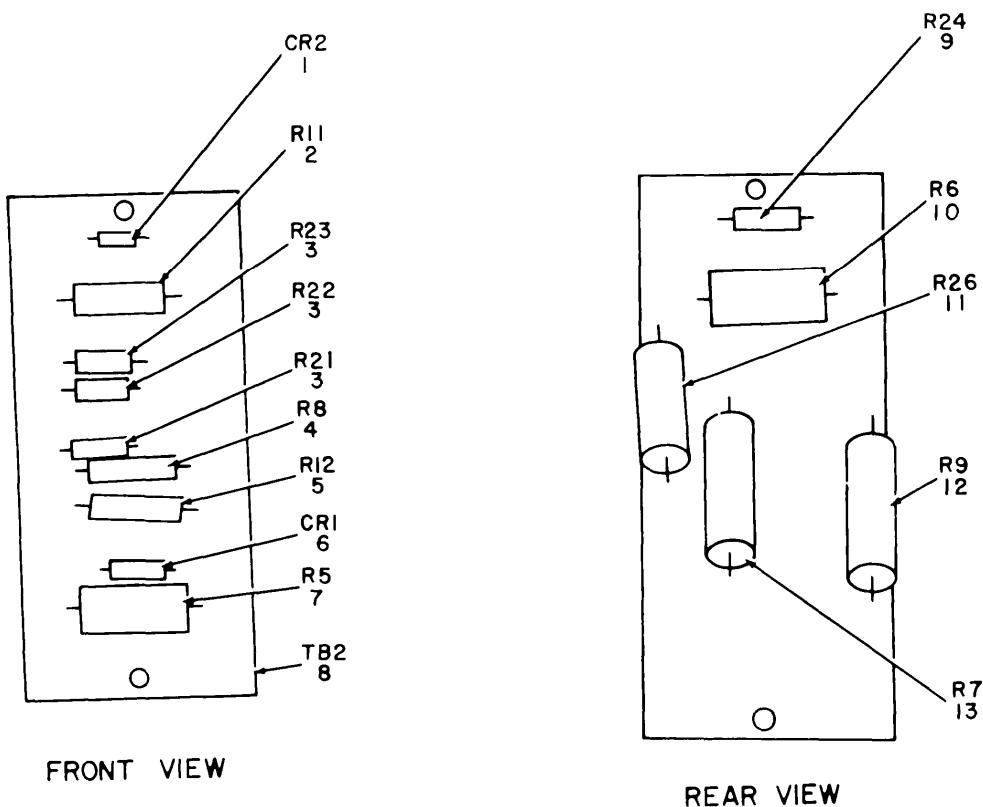

EL4RX022

Figure 21. Test Set Subassembly (1A32A1A1).

SECTION II				TM11-6625-623-40P							
(1) ILLUSTRATION (A)	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION			(7) USABLE ON	(8) QTY INC IN		
GROUP 190101 TEST SET SUBASSEMBLY											
(1A32A1A1)											
21	1	PAHZZ	5961-00-947-3115	SZ889	04713	SEMICONDUCTOR, DIODE		EA	1		
21	2	PAHZZ	5905-00-857-2445	RN65D8251F	81349	RESISTOR, FIXED		EA	1		
21	3	PAHZZ	5905-00-279-1894	RC20GF820J	81349	RESISTOR, FIXED		EA	3		
21	4	PAHZZ	5905-00-892-6475	RN65D1004F	81349	RESISTOR, FIXED		EA	1		
21	5	PAHZZ	5905-00-990-3029	RN65D7502F	81349	RESISTOR, FIXED		EA	1		
21	6	PAHZZ	5961-00-577-6085	1N647	81349	SEMICONDUCTOR, DIODE		EA	1		
21	7	PAHZZ	5905-00-279-1933	RC42GF221K	81349	RESISTOR, FXD, CMPSN		EA	1		
21	8	XDHZZ		549-0647-003	13499	TERMINAL BOARD		EA	1		
21	9	PAHZZ	5905-00-192-3988	RC20GF563K	81349	RESISTOR, FIXED		EA	1		
21	10	PAHZZ	5905-00-185-6580	RC42GF471K	81349	RESISTOR, FXD, CMPSN		EA	1		
21	11	PAHZZ	5905-00-279-2527	RC42GF223K	81349	RESISTOR, FXD, CMPSN		EA	1		
21	12	PAHZZ	5905-00-502-1030	RS514112101F	91637	RESISTOR, FXD, WW		EA	1		
21	13	PAHZZ	5905-00-828-5804	RS5-10001G	91637	RESISTOR, FIXED		EA	1		

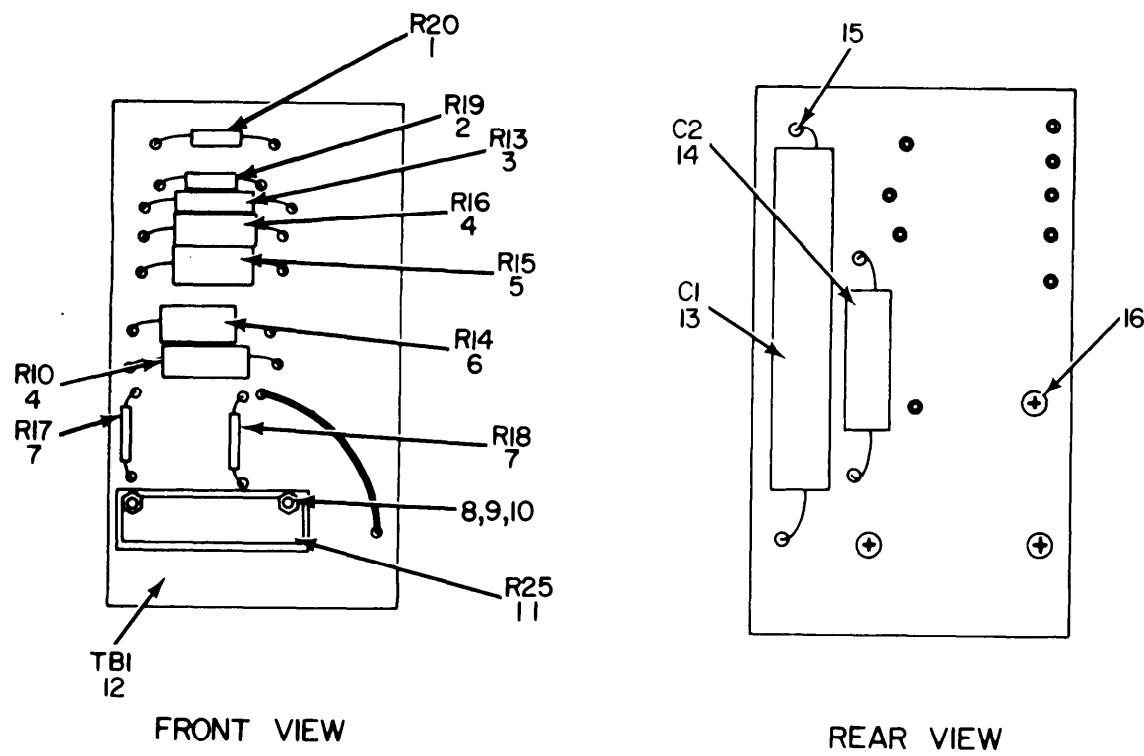


Figure 22. Test Set Subassembly (1A32A1A2).

EL4RX023

SECTION II (1) ILLUSTRATION (A)		(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY INC IN UNIT
TM11-6625-623-40P								
GROUP 190102 TEST SET SUBASSEMBLY								
(1A32A1A2)								
22	1	PAHZZ	5905-00-185-6946	RC20GF474K	81349	RESISTOR, FIXED	EA	1
22	2	PAHZZ	5905-00-185-8518	RC20GF103K	81349	RESISTOR, FIXED	EA	1
22	3	PAHZZ	5905-00-993-6010	RN65D1330F	81349	RESISTOR, FIXED SELECT	EA	1
22	3	PAHZZ	5905-00-088-2298	RN65D1470F	81349	RESISTOR, FIXED SELECT	EA	1
22	3	PAHZZ	5905-00-088-3354	RN65D1620F	81349	RESISTOR, FIXED SELECT	EA	1
22	3	PAHZZ	5905-00-993-6974	RN65D1780F	81349	RESISTOR, FIXED SELECT	EA	1
22	4	PAHZZ	5905-00-104-8347	RCR32G101JS	81349	RESISTOR, FXD,CMPSN	EA	2
22	5	PAHZZ	5905-00-773-4271	RB55CE10302B	81349	RESISTOR, FIXED	EA	1
22	6	PAHZZ	5905-00-772-1020	RB55CE82501B	81349	RESISTOR, FIXED	EA	1
22	7	PAHZZ	5905-00-892-6475	RN65D1004F	81349	RESISTOR, FIXED	EA	2
22	8	PAHZZ	5310-00-622-1724	68-1660-26	72962	NUT, SELF-LOCKING	EA	2
22	9	XDHZZ		P343-0303-00	77250	SCREW, MACHINE	EA	2
22	10	XDHZZ		310-0053-00	79807	WASHER, FLAT	EA	2
22	11	PAHZZ	5905-00-964-6489	236S1-503	80294	RESISTOR, VARIABLE	EA	1
22	12	XDHZZ		549-5594-004	13499	TERMINAL BOARD	EA	1
22	13	XDHZZ		CL24BQ250SP3	81349	CAPACITOR, ELCTLT	EA	1
22	14	PAHZZ	5910-00-483-4387	MILC39006-2	81349	CAPACITOR, ELCTLT	EA	1
22	15	PAHZZ	5940-00-877-8430	TF300	98291	TERMINAL, FEEDTHRU	EA	4
22	16	PAHZZ	5305-00-576-6002	P343-0298	77250	SCREW, MACHINE	EA	4

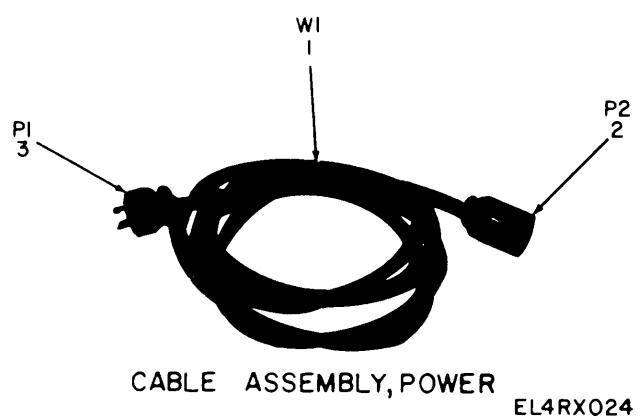


Figure 23. Cable Assembly, Power CX-9009/URC (1A32W7).

TM11-6625-623-40P

(1) FIG NO	(2) ITEM NO	(3) SMR CODE	(4) NATIONAL STOCK NUMBER	(5) PART NUMBER	(6) DESCRIPTION	(7) USABLE ON CODE	(8) QTY IN IN UNIT
				FSCM	GROUP 1902 CABLE ASSEMBLY,POWER CX-9009/URC (1A32W7)		
23	1	XDHZZ	30TYPESJ2-181-2G Y	24342	CABLE,POWER,ELEC	FT	1
23	2	PAHZZ	5935-00-149-3628	7464	CONNECTOR,PLUG	EA	1
23	3	PAHZZ	5935-00-259-9643	7429	CONNECTOR,PLUG	EA	1

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NOTE: LATEST NATIONAL STOCK NUMBER AND PART NUMBER ASSIGNMENTS ARE INCLUDED AT END OF INDEX

STOCK NUMBER	FIGURE NO	ITEM NO	STOCK NUMBER	FIGURE NO	ITEM NO
5340-00-007-6040	11	38	5821-00-084-2344	10	12
5821-00-019-6290	1	24	5821-00-084-2344	11	9
5305-00-019-6293	2	7	5905-00-088-2298	22	3
5305-00-019-6293	3	11	5905-00-088-3354	22	3
5305-00-019-6293	4	26	5935-00-089-1165	2	21
5305-00-019-6293	6	15	5935-00-089-1165	6	13
5305-00-019-6293	7	10	5935-00-089-1165	10	18
5305-00-019-6293	8	12	5935-00-089-6505	3	7
5305-00-019-6293	9	15	5935-00-089-6921	3	20
5305-00-019-6293	10	7	5935-00-149-3628	23	2
5305-00-019-6293	11	14	5905-00-171-1985	5	13
6625-00-019-6301	1	2	5935-00-173-7748	7	5
6625-00-019-6303	1	11	5325-00-174-5317	6	7
6625-00-019-6304	1	8	5310-00-176-6621	7	2
6625-00-019-6305	1	10	5365-00-180-6762	11	16
6625-00-019-6306	1	1	5905-00-185-6580	21	10
5821-00-019-6308	4	16	5905-00-185-6946	22	1
6625-00-019-6309	1	9	5905-00-185-8518	22	2
6625-00-019-6310	1	5	5310-00-187-0159	15	3
6625-00-019-6311	1	6	5905-00-192-3988	5	1
6625-00-019-6312	1	28	5905-00-192-3988	21	9
6625-00-019-6313	1	49	5935-00-192-4753	17	1
6625-00-019-6314	1	54	6625-00-218-6511	20	9
5821-00-019-6315	1	50	5120-00-223-6995	1	58
6625-00-019-6316	1	55	5935-00-224-5984	11	20
5821-00-019-6317	1	52	5905-00-245-0023	5	17
6625-00-019-6318	1	12	5935-00-259-4690	4	22
5120-00-027-3339	1	60	5935-00-259-4690	9	6
5305-00-054-5635	19	17	5935-00-259-4690	11	6
5305-00-054-5636	5	4	5935-00-259-9643	23	3
5305-00-054-5636	12	3	5340-00-264-7182	18	1
5305-00-054-5636	13	5	5310-00-270-8810	18	6
5305-00-054-5636	14	3	5310-00-271-4642	18	9
5305-00-054-5636	16	14	5310-00-271-4644	18	2
5305-00-054-5636	20	24	5325-00-276-4993	11	52
5305-00-054-5639	20	42	5905-00-279-1894	21	3
5305-00-054-5646	5	10	5905-00-279-1933	21	7
5305-00-054-5647	1	21	5905-00-279-2527	21	11
5305-00-054-5647	20	59	5905-00-279-3517	12	4
5305-00-054-5649	2	3	5935-00-280-1454	1	61
5305-00-054-5649	3	5	5935-00-280-2268	4	23
5305-00-054-5649	6	2	5935-00-280-2268	11	7
5305-00-054-5649	7	3	5920-00-280-5031	20	26
5305-00-054-5649	8	3	5935-00-283-3825	1	42
5305-00-054-5649	10	3	6145-00-284-0866	1	33
5305-00-054-5649	11	4	5120-00-288-7781	1	45
5305-00-054-5650	3	18	5120-00-288-7786	1	46
5305-00-054-5650	9	10	5340-00-290-4509	11	30
5305-00-054-5650	11	47	5325-00-291-9366	4	20
5305-00-054-5651	4	3	5325-00-291-9366	11	41
5305-00-054-6651	11	27	5905-00-299-2038	15	20
5305-00-054-6652	18	3	5940-00-455-7441	20	44
5305-00-054-6655	11	34	5910-00-460-0868	15	13
5305-00-059-3656	20	3	5940-00-500-7227	13	6
5905-00-060-0524	7	20	5940-00-500-7227	14	2
5910-00-060-1196	13	3	5905-00-502-1030	21	12
5120-00-060-6423	1	47			
6625-00-061-3648	1	41			
6625-00-061-3649	1	34			
5355-00-062-0949	1	23	5940-00-503-6764	20	18
8105-00-063-5060	1	56	5310-00-530-9214	15	12
5305-00-065-4587	1	14	6145-00-542-6092	17	2
6625-00-069-2690	1	48	5365-00-543-3443	11	35
5935-00-080-0268	2	20	5940-00-557-1308	16	5
5935-00-080-0268	3	21	5999-00-577-0994	1	25
5935-00-080-0268	6	8	5999-00-577-0994	1	39
5935-00-080-0268	10	19	5999-00-577-0994	16	8
5935-00-081-1236	2	19	5935-00-577-2336	20	37
5935-00-081-1236	4	5	5935-00-577-2338	20	35
5935-00-081-1236	10	16	5961-00-577-6085	21	6
5935-00-081-1236	11	48	5935-00-577-8715	4	7
5355-00-081-3957	1	22	5930-00-578-2325	20	5
6625-00-083-7311	1	4	5935-00-578-3489	20	17
5821-00-084-2344	2	13	5935-00-578-3494	19	3
5821-00-084-2344	3	16	5905-00-583-5152	20	49
5821-00-084-2344	4	24	5950-00-595-8599	5	2
5821-00-084-2344	6	19			
5821-00-084-2344	7	7			
5821-00-084-2344	8	8			
5821-00-084-2344	9	7			

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	FIGURE NO	ITEM NO	STOCK NUMBER	FIGURE NO	ITEM NO
5310-00-614-3500	20	45	5305-00-766-2422	8	11
5935-00-615-6736	16	12	5305-00-766-2422	9	14
5935-00-615-8571	16	1	5305-00-770-2533	11	23
5340-00-619-7754	4	1	5305-00-770-2579	11	9
5340-00-619-7754	7	1	5305-00-770-2579	20	28
5310-00-622-1724	2	11	5305-00-770-2580	11	43
5310-00-622-1724	3	22	5905-00-772-1020	22	6
5310-00-622-1724	4	12	5905-00-773-4271	22	5
5310-00-622-1724	6	11	5355-00-778-4967	20	56
5310-00-622-1724	7	6	5821-00-785-6853	11	46
5310-00-622-1724	8	18	5930-00-792-1528	20	52
5310-00-622-1724	9	19	6210-00-805-3937	20	60
5310-00-622-1724	10	20	5935-00-806-2685	2	18
5310-00-622-1724	11	10	5935-00-806-2685	7	22
5310-00-622-1724	20	41	5935-00-806-2685	7	22
5310-00-622-1724	20	41	5935-00-806-2685	8	14
5310-00-622-1724	22	8	5935-00-806-2685	11	50
5935-00-644-6750	20	43	5935-00-808-9549	15	14
5930-00-655-1508	20	15	5935-00-811-1382	2	10
5940-00-665-5592	20	8	5935-00-811-1382	6	18
5935-00-665-5718	1	30	5935-00-811-1382	10	9
5935-00-665-5718	1	35	5910-00-811-5081	5	7
5935-00-665-5718	12	1	6145-00-812-5034	2	14
5935-00-665-5718	13	1	5935-00-823-0487	17	3
5935-00-665-5718	14	1	5935-00-823-0487	17	4
5935-00-665-5718	20	22	5935-00-823-0487	17	6
5935-00-681-5013	1	62	5905-00-828-5804	21	13
5935-00-681-5690	20	29	5935-00-829-2612	4	13
5935-00-682-0585	19	11	5935-00-829-2612	9	4
5935-00-682-0586	19	5	5940-00-836-3536	7	12
5935-00-682-0587	19	9	5940-00-836-3536	15	10
5935-00-683-7892	1	63	5999-00-838-1402	19	15
5935-00-685-9396	20	19	5910-00-838-9421	16	2
5935-00-685-9416	20	16	5305-00-843-8522	20	57
5935-00-685-9913	4	6	5961-00-845-6456	20	1
5935-00-685-9913	9	3	5935-00-846-8236	19	13
5935-00-685-9913	11	1	5961-00-848-7006	20	54
5950-00-686-6425	16	3	5905-00-857-2445	21	2
5935-00-686-9970	2	17	5935-00-857-3617	19	7
5935-00-686-9970	3	17	5310-00-857-5548	2	2
5935-00-686-9970	4	15	5310-00-857-5548	4	2
5935-00-686-9970	6	6	5310-00-857-5548	6	1
5935-00-686-9970	7	21	5310-00-857-5548	8	2
5935-00-686-9970	8	15	5310-00-857-5548	9	9
5935-00-686-9970	11	49	5310-00-857-5548	10	2
5935-00-710-1717	3	9	5310-00-857-5548	11	3
5935-00-710-1717	8	7	5310-00-857-5548	20	31
6240-00-723-3378	20	13	5940-00-877-8430	15	6
5305-00-727-8833	2	12	5940-00-877-8430	15	19
5305-00-727-8833	3	13	5940-00-877-8430	16	9
5305-00-727-8833	4	9	5940-00-877-8430	22	15
5305-00-727-8833	6	12	5950-00-880-8164	20	34
5305-00-727-8833	7	18	5935-00-885-6505	2	9
5305-00-727-8833	8	6	5935-00-885-6505	3	8
5305-00-727-8833	9	5	5935-00-885-6505	6	16
5305-00-727-8833	10	11	5935-00-885-6508	10	10
5305-00-727-8833	11	13	6625-00-891-5128	1	51
5935-00-729-7305	4	21	5905-00-892-6475	21	4
5935-00-729-7305	9	22	5905-00-892-6475	22	7
5935-00-729-7305	15	4	6625-00-893-6606	19	1
5905-00-755-5487	20	39	6625-00-903-3498	20	51
5305-00-763-3356	7	14	6625-00-903-3499	20	23
5305-00-763-3357	2	22	5821-00-908-1998	11	33
5305-00-763-3357	3	14	5935-00-910-9194	1	53
5305-00-763-3357	4	10	5950-00-932-2727	15	9
5305-00-763-3357	6	17	5310-00-933-8118	18	11
5305-00-763-3357	8	16	5310-00-933-8120	18	7
5305-00-763-3357	9	13	5310-00-938-2013	7	13
5305-00-763-3357	10	17	5961-00-947-3115	21	1
5305-00-763-3357	11	53	6625-00-964-2630	1	17
5305-00-763-6961	20	12	5905-00-964-6489	22	11
5305-00-763-7822	18	10	6625-00-965-0181	19	4
5305-00-764-2966	7	9	6625-00-965-0182	19	6
5305-00-764-2966	20	21	6625-00-965-0183	19	10
5305-00-766-2422	2	6	6625-00-965-0184	19	2
5305-00-766-2422	3	10	6625-00-965-0186	19	12
5305-00-766-2422	4	25	6625-00-965-0187	19	8
5305-00-766-2422	6	9	6625-00-965-0188	1	3

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

STOCK NUMBER	FIGURE NO	ITEM NO	STOCK NUMBER	FIGURE NO	ITEM NO		
5120-00-965-0287	1	43	5995-00-985-8169	1	16		
5340-00-975-1440	11	8	5995-00-985-8170	17	5		
5310-00-976-0274	20	55	5995-00-985-8173	19	16		
6210-00-978-8463	20	61	5905-00-990-3029	21	5		
5910-00-984-8702	14	4	5905-00-993-6010	22	3		
5995-00-985-7888	1	18	5905-00-993-6974	22	3		
PART NUMBER	FSCM	FIG NO	ITEM NO	PART NUMBER	FSCM	FIG NO	ITEM NO
BS217	99800	16	3	HP4N	09922	2	1
B1541	80089	20	34	HP4N	09922	4	17
CC20CH040D	81349	15	11	HP4N	09922	6	4
CG2449U4FT4IN	80058	17	5	HP4N	09922	8	19
CG2727U5FT0IN	80058	1	17	HP4N	09922	9	1
CG3126U	80058	1	16	HP4N	09922	10	1
CG409GU4IN	80058	1	18	HP4N	09922	11	51
CK60A1W02M	81349	16	2	HP5N	09922	11	42
CL24BQ250SP3	81349	22	13	HP6N	09922	11	6
CM05E560J03	81349	14	4	MP206-18B	95105	20	11
CM05E620J03	81349	15	5	MS122159	96906	11	30
CM05F101J03	81349	15	13	MS16108-1A	96906	20	19
CM05F121J03	81349	5	7	MS16108-2A	96906	20	17
CM06F182J03	81349	14	5	MS16108-3A	96906	20	37
CM06F511J03	81349	13	3	MS16108-4A	96906	20	16
CN1066URC	80058	1	52	MS16108-6A	96906	20	35
CX9009URC	80058	19	16	MS16108-7A	96906	20	29
CX9010URC	80058	19	12	MS16108-8A	96906	20	30
CX9011URC	80058	19	4	MS21044D04	96906	3	4
CX9012URC	80058	19	6	MS21044D04	96906	2	2
CX9013URC	80058	19	10	MS21044D04	96906	4	2
CX9014URC	80058	19	2	MS21044D04	96906	6	1
CX9015URC	80058	19	8	MS21044D04	96906	8	2
CY4066URC	80058	1	7	MS21044D04	96906	9	9
C1338SS010	78553	20	55	MS21044D04	96906	10	2
DAF15S	71468	7	19	MS21044D04	96906	11	3
DAMF3W3S	71468	3	20	MS25089-5CR	96906	20	31
DAM3W3P	71468	3	7	MS25100-23	96906	20	5
DA15P	71468	7	5	MS35168-88E	96906	17	3
DA340URC	80058	1	50	MS35168-88E	96906	17	4
DA785-002Q	71590	5	12	MS35168-88E	96906	17	6
DBF25S	71468	4	8	MS35338-135	96906	18	11
DBF25S	71468	9	18	MS35338-138	96906	18	7
DBF258	71468	11	44	MS35489-11	96906	4	20
DBMF13W3S	71468	2	21	MS35489-11	96906	11	39
DBMF13W3S	71468	6	13	MS35489-4	96906	6	7
DBMF13W3S	71468	10	18	MS35649-24	96906	7	13
DBM13W3P	71468	2	10	MS35649-44	96906	18	9
DBM13W3P	71468	6	18	MS35649-64	96906	18	2
DBM13W3P	71468	10	9	MS35650-104	96906	18	6
DB25P	71468	4	22	MS51957-1	96906	19	17
DB25P	71468	9	6	MS51957-12	96906	5	10
DB25P	71468	11	6	MS51957-13	96906	1	21
DCF37S	71468	4	7	MS51957-13	96906	20	59
DCF37S	71468	11	45	MS51957-15	96906	2	3
DC37P	71468	4	23	MS51957-15	96906	3	5
DC37P	71468	11	7	MS51957-15	96906	6	2
DEF9S	71468	3	19	MS51957-15	96906	7	3
DEF9S	71468	8	17	MS51957-15	96906	8	3
DE9P	71468	3	9	MS51957-15	96906	10	3
DE9P	71468	8	7	MS51957-15	96906	11	4
DM53740-5000	71468	2	9	MS51957-16	96906	3	18
DM53740-5000	71468	3	8	MS51957-16	96906	9	10
DM53740-5000	71468	6	16	MS51957-16	96906	11	47
DM53741	91146	10	10	MS51957-17	96906	4	3
DM53742-5000	71468	2	20	MS51957-2	96906	5	4
DM53742-5000	71468	3	21	MS51957-2	96906	12	3
DM53742-5000	71468	6	8	MS51957-2	96906	13	5
DM53742-5000	71468	10	19	MS51957-2	96906	14	3
DS096	08664	1	59	MS51957-2	96906	16	14
DT278URC	80058	1	55	MS51957-27	96906	20	24
FTM2	98291	16	5	MS51957-28	96906	11	27
F02A250V1-4AS	81349	20	26	MS51957-31	96906	18	3
HP2N	09922	3	3	MS51957-5	96906	11	34
HP2N	09922	9	8	MS51958-60	96906	20	42
HP3N	09922	4	1	MS51959-1	96906	2	6
HP3N	09922	7	1	MS51959-1	96906	3	10

PART NUMBER	FSCM	FIG NO	ITEM NO	PART NUMBER	FSCM	FIG NO	ITEM NO
MS51959-1	96906	4	25	RN65D1470F	81349	22	3
MS51959-1	96906	6	9	RN65D1620F	81349	22	3
MS51959-1	96906	8	11	RN65D1780F	81349	22	3
MS51959-1	96906	9	14	RN65D7502F	81349	21	5
MS51959-1	96906	10	6	RN65D8251F	81349	21	2
MS51959-1	96906	11	12	RS5-10001G	91637	21	13
MS51959-1	96906	16	10	RS514112101F	91637	21	12
MS51959-13	96906	11	23				
MS51959-14	96906	18	10	RV4NAYSD501B	81349	20	46
MS51959-15	96906	11	9	RW67V201	81349	7	20
MS51959-15	96906	20	28				
MS51959-16	96906	11	43	SKT-10GRAN	98291	11	50
MS51959-2	96906	7	9	SKT10GY	98291	4	14
MS51959-2	96906	20	21	SKT10GY	98291	2	18
MS51959-26	96906	20	12	SKT10GY	98291	6	5
MS51959-3	96906	2	12	SKT10GY	98291	7	22
MS51959-3	96906	3	13	SKT10GY	98291	8	14
MS51959-3	96906	4	9				
MS51959-3	96906	6	12	SKT10RED	98291	2	17
MS51959-3	96906	7	18	SKT10RED	98291	3	17
MS51959-3	96906	8	6	SKT10RED	98291	4	15
MS51959-3	96906	9	5	SKT10RED	98291	6	6
MS51959-3	96906	10	11	SKT10RED	98291	7	21
MS51959-3	96906	11	13	SKT10RED	98291	8	15
MS51959-5	96906	7	14	SKT10RED	98291	11	49
MS51959-6	96906	2	22	SKT5BCBLK	98291	16	12
MS51959-6	96906	3	14	SKT5BCBLU	98291	15	14
MS51959-6	96906	4	10	SKT5BCRED	98291	16	1
MS51959-6	96906	6	17	SK604	06980	1	60
MS51959-6	96906	8	16	SZ889	04713	21	1
MS51959-6	96906	9	13	S060CADPL	08664	1	57
MS51959-6	96906	10	17	S096CADPL	08664	1	58
MS51959-6	96906	11	53	TF300	98291	15	6
MS90539-08	96906	15	9	TF300	98291	15	16
MS90539-12	96906	5	2	TF300	98291	16	9
MT3039URC	80058	1	12	TF300	98291	22	15
MX4887URC	80058	1	2	TS1954URC	80058	1	54
MX4888URC	80058	1	6	TS1955URC	80058	1	49
MX4889URC	80058	1	11	TS1956URC	80058	1	3
MX4890URC	80058	1	8	TVS7	05276	1	48
MX4891URC	80058	1	5	TVS9	05276	1	51
MX4892URC	80058	1	4	UG105AU	05276	1	51
MX4893URC	80058	1	10	UG1050AU	80058	4	21
MX4894URC	80058	1	1	UG1050AU	80058	9	22
MX4895URC	80058	1	9	UG1050AU	80058	15	4
NE2J	08805	20	13	UG1051U	80058	4	6
PJ068	81349	17	1	UG1051U	80058	9	3
P313-0050-00	77250	15	12	UG1051U	80058	11	1
P313-0062-00	13499	20	47	UG1094U	80058	1	30
P313-0132-000	77250	11	22	UG1094U	80058	1	35
P313-0132-000	77250	20	27	UG1094U	80058	12	1
P330-2296-00	77250	11	2	UG1094U	80058	13	1
P343-0298	77250	22	16	UG1094U	80058	14	1
P343-0298-00	77250	15	7	UG1094U	80058	20	22
P343-0303-00	77250	22	9	UG274BU	80058	1	63
P343-0328-00	77250	20	10	UG491BU	80058	1	62
P347-0018-00	77250	1	14	UG914U	80058	1	61
RA20NASD500A	81349	20	49	01508A	94375	4	13
RB55CE10302B	81349	22	5	01508A	94375	9	4
RB55CE82501B	81349	22	6	01516A	94375	11	2
RC20GFU04J	81349	16	11	01516A	94375	11	40
RC20GF103K	81349	22	2	024-0252-000	13499	19	19
RC20GF474K	81349	22	1	1N1369A	81349	20	1
RC20GF510J	81349	12	4	1N198	81349	16	4
RC20GF563K	81349	5	1	1N2995B	81349	20	54
RC20GF563K	81349	21	9	1N647	81349	21	6
RC20GF682K	81349	5	17				
RC20GF820J	81349	21	3	104N4X6IN	06214	1	56
RC20GF822K	81349	5	13	105-301	74970	19	7
				105-302	74970	19	3
				105-303	74970	19	13
RC32GF562K	81349	15	20	105-306	74970	19	5
RC42GF221K	81349	21	7	105-307	74970	19	9
RC42GF223K	81349	21	11	105-308	74970	19	11
RC42GF471K	81349	21	10	105-608	74970	1	42
RG178BU	80058	2	14	108-750-1	74970	11	20
RG58CU	80058	17	2	1218-02ZNPLSTL	78189	15	3
RN65D1004F	81349	21	4	1220-02CSCADPL	78189	1	32
RN65D1004F	81349	22	7	1220-02CSCADPL	78189	1	37
RN65D1330F	81349	22	3	1220-02CSCADPL	78189	20	48

PART NUMBER	FSCM	FIG NO	ITEM NO	PART NUMBER	FSCM	FIG NO	ITEM NO
130291NSHK	03705	1	44	545-7531-003	13499	4	27
137-7336-9	72619	20	60	545-7531-003	13499	6	10
137-931	72619	20	61	545-7531-003	13499	7	17
1645	05276	1	53	545-7531-003	13499	8	13
1871M83876E	14370	20	38	545-7531-003	13499	9	16
201-8	94375	16	6	545-7531-003	13499	10	8
22NM46	72962	7	2	545-7531-003	13499	11	15
224P1-103	80294	20	39	546-3020-003	13499	4	19
2275	74863	11	38	546-3020-003	13499	9	21
2275	74863	15	1	546-3020-003	13499	11	39
236S1-503	80294	22	11	546-3025-003	13499	11	16
24874-724LR2	82104	20	52	546-6463-002	13499	1	24
2540-20-03	78189	1	27	546-6889-002	13499	4	18
2540-20-03	78189	1	38	546-6889-002	13499	9	20
2540-20-03	78189	20	50	546-6889-002	13499	11	37
280-2972-000	13499	20	62	547-2796-002	13499	1	46
29700	74868	2	19	548-1299-002	13499	13	7
29700	74868	4	5	548-1300-002	13499	14	7
29700	74868	10	16	548-3451-000	13499	4	28
29700	74868	11	48	548-3451-000	13499	11	54
30	76545	1	25	548-3454-000	13499	8	5
30	76545	1	39	548-3456-000	13499	7	11
30	76545	16	8	548-3458-000	13499	6	14
30TYPESJ2-181-2GY	24342	23	1	548-3460-000	13499	9	2
31-759	02660	13	6	548-3462-000	13499	3	2
31-759	02660	14	2	548-3465-003	13499	8	1
				548-3467-003	13499	9	17
310-0045-00	79807	3	6	548-3469-002	13499	10	5
310-0045-00	79807	4	4	548-3470-003	13499	2	5
				548-3480-002	13499	11	18
310-0045-00	79807	7	4	548-3483-002	13499	12	5
310-0045-00	79807	8	4	548-3484-002	13499	1	34
310-0045-00	79807	9	11	548-3485-002	13499	1	31
310-0045-00	79807	10	4	548-3485-002	13499	1	36
310-0045-00	79807	11	5	548-3486-002	13499	1	28
310-0045-00	79807	20	32	548-3487-002	13499	1	26
310-0046-00	79807	11	28	548-3488-002	13499	1	40
310-0046-00	79807	18	4	548-3499-002	13499	1	41
310-0053-00	79807	22	10	548-3507-000	13499	10	14
310-0070-000	79807	5	16	548-3508-000	13499	3	1
310-0070-000	79807	7	15	548-3509-004	13499	8	10
310-0071-000	79807	11	24	548-3516-005	13499	11	17
310-0073-000	79807	20	33	548-3527-002	13499	12	2
310-0075-00	79807	15	8	548-3527-002	13499	13	4
310-0076-00	79807	5	11	548-3527-002	13499	14	6
				548-3530-002	13499	1	22
				548-3531-005	13499	11	29
310-0082-00	79807	20	7	548-3534-002	13499	11	33
310-0278-000	70318	11	25	548-3536-002	13499	16	13
				548-8001-005	13499	19	1
31881	00779	20	18	548-8010-002	13499	16	7
33C1	56289	5	6	548-8011-003	13499	4	16
340-0641-00	91314	11	35	548-8014-003	13499	1	19
350-231	75915	20	25	549-0635-000	13499	20	14
36109	75818	1	33	549-0636-002	13499	20	40
4-40X1-8	08664	1	20	549-0642-003	13499	20	58
4012HOTTINNED	77147	20	8	549-0647-003	13499	21	8
4040-2	77147	15	10	549-0648-003	13499	20	23
4040-2HOTTINNED	77147	5	14	549-0652-005	13499	20	36
4040-2HOTTINNED	77147	7	12	549-0931-003	13499	2	7
4040-5HDSPL	77147	20	44	549-0931-003	13499	3	11
45	76545	19	15	549-0931-003	13499	4	26
502-1515-002	13499	11	19	549-0931-003	13499	6	15
502-4689-001	13499	7	16	549-0931-003	13499	7	10
530-1-1	82386	20	9	549-0931-003	13499	8	12
540-9008-003	13499	20	20	549-0931-003	13499	9	15
540-9016-003	13499	5	15	549-0931-003	13499	10	7
540-9039-003	13499	5	9	549-0931-003	13499	11	14
541-5187-002	13499	11	46	549-0945-003	13499	2	13
541-5962-002	13499	2	23	549-0945-003	13499	3	16
541-5962-002	13499	3	15	549-0945-003	13499	4	24
541-5962-002	13499	4	11	549-0945-003	13499	6	19
541-5962-002	13499	6	20	549-0945-003	13499	7	7
541-5962-002	13499	7	8	549-0945-003	13499	8	8
541-5962-002	13499	8	9	549-0945-003	13499	9	7
541-5962-002	13499	9	12	549-0945-003	13499	10	12
541-5962-002	13499	10	13	549-0945-003	13499	11	11
544-0779-004	13499	20	56	549-0966-000	13499	2	15
545-7531-003	13499	2	8	549-0970-002	13499	18	5
545-7531-003	13499	3	12	549-0974-002	13499	1	23

PART NUMBER	FSCM	FIG NO	ITEM NO	PART NUMBER	FSCM	FIG NO	ITEM NO
549-0975-002	13499	11	21	68-1660-26	72962	7	6
549-0976-002	13499	11	32	68-1660-26	72962	8	18
549-0977-002	13499	11	31	68-1660-26	72962	9	19
549-0978-002	13499	15	16	68-1660-26	72962	10	20
549-0981-002	13499	5	5	68-1660-26	72962	11	10
549-0983-002	13499	5	3	68-1660-26	72962	20	41
549-0988-003	13499	15	2	68-1660-26	72962	22	8
549-5594-004	13499	22	12	68-1660-40	72962	20	45
549-5595-004	13499	20	51	729	01016	20	4
553-2546-002	13499	1	43	7301	04222	1	29
553-9546-004	13499	19	18	7429	74545	23	3
554-5093-003	13499	1	15	7464	74545	23	2
557-018-1-8-50E	72982	5	8	7467	74545	20	43
6047-001-000	81860	18	8	747R	75543	18	1
6166	11242	1	45	756-4325-005	13499	1	13
68-1660-26	72962	2	11	8-32X3-166SPLINE18-8SST	08664	20	57
68-1660-26	72962	3	22	8606	72653	1	46
68-1660-26	72962	4	12	87BLK	76545	19	14
68-1660-26	72962	6	11	905	75543	11	52

LATEST NATIONAL STOCK NUMBER ASSIGNMENTS

STOCK NUMBER	FIG NO	ITEM NO	STOCK NUMBER	FIG NO	ITEM NO
5905-00-104-8347	22	4	5935-00-768-4232	20	30
5905-00-111-8372	15	18	5310-00-782-1349	2	4
5310-00-184-8977	20	6	5310-00-782-1349	3	6
5310-00-209-1522	1	32	5310-00-782-1349	4	4
5310-00-209-1522	1	37	5310-00-782-1349	6	3
5310-00-209-1522	20	48	5310-00-782-1349	7	4
5310-00-261-8278	20	2	5310-00-782-1349	8	4
5325-00-282-8157	2	16	5310-00-782-1349	9	11
5325-00-282-8157	10	15	5310-00-782-1349	10	4
5120-00-288-8853	1	59	5310-00-782-1349	11	5
5961-00-466-3224	16	4	5310-00-782-1349	20	32
5910-00-483-4387	22	14	5310-00-805-3214	15	17
5935-00-484-4574	7	19	5935-00-850-8876	15	15
5905-00-539-5013	20	53	5310-00-857-5548	3	4
5305-00-576-6002	22	16	5910-00-936-7405	13	2
5935-00-577-8715	11	45			3

LATEST PART NUMBER ASSIGNMENTS

PART NUMBER	FSCM	FIG NO	ITEM NO	PART NUMBER	FSCM	FIG NO	ITEM NO
CM05CD150J03	81349	13	2	RCR32G222JS	81349	15	18
MILC39006-2	81349	22	14	PV4NAYSD252A	81349	20	53
MS35338-100	96906	20	2	SE34	90030	2	16
MS35338-98	96906	20	6	SE34	90030	10	15
M39012-19-0001	81349	15	15	1229-1-116	82423	15	17
RCR32G1U1JS	81349	22	4	310-0045-000	13499	2	4
				310-0045-000	13499	6	3

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703

DATE 10 July 1975

PUBLICATION NUMBER

TM 11-5840-340-12

DATE

23 Jan 74

TITLE

Radar Set AN/FPS-76

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

TEAR ALONG DOTTED LINE

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.	
2-25	2-28			Recommend that the installation antenna alignment procedure be changed throughout to specify a 2° IFF antenna lag rather than 1°.
3-10	3-3	3-1		REASON: Experience has shown that with only a 1° lag, the antenna servo system is too sensitive to wind gusting in excess of 25 knots, and has a tendency to rapidly accelerate and decelerate as it hunts, causing strain to the drive train. Hunting is minimized by adjusting the lag to 2° without degradation of operation.
5-6	5-8			Item 5, Function column. Change "2 db" to "3db."
				REASON: The adjustment procedure for the TRANS POWER FAULT indicator calls for a 3 db (500 watts) adjustment to light the TRANS POWER FAULT indicator.
				Add new step f.1 to read, "Replace cover plate removed in step e.1, above."
				REASON: To replace the cover plate.
		F03		Zone C 3. On J1-2, change "+24 VDC to "+5 VDC."
				REASON: This is the output line of the 5 VDC power supply. + 24 VDC is the input voltage.

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SSG I. M. DeSpirito 999-1776

SIGN HERE:

DA FORM 2028-2 1 AUG 74

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

HISA 1686-75

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN...JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

TM 11-6625-623-40P

DATE

25 July 78

TITLE

BE EXACT...PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE NO.

PARA-GRAPH

FIGURE NO.

TABLE NO.

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS



FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

TM 11-6625-623-40P

DATE

TITLE

BE EXACT. . .PIN-POINT WHERE IT IS

IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:

PAGE
NO.

PARA-
GRAPH

FIGURE
NO.

TABLE
NO.

TEAR ALONG DOTTED LINE

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 2028-2
1 AUG 74

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE
A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS



FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS



SOMETHING WRONG WITH THIS MANUAL?

**THEN. . .JOT DOWN THE
DOPE ABOUT IT ON THIS
FORM, TEAR IT OUT, FOLD
IT AND DROP IT IN THE
MAIL!**

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER

TM 11-6625-623-40P

DATE

TITLE

BE EXACT...PIN-POINT WHERE IT IS

**IN THIS SPACE TELL WHAT IS WRONG
AND WHAT SHOULD BE DONE ABOUT IT:**

TEAR ALONG DOTTED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS					
 <h1>SOMETHING WRONG WITH THIS MANUAL?</h1>					
<p>THEN. . . JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!</p>			<p>FROM: (YOUR UNIT'S COMPLETE ADDRESS)</p>		
			<p>DATE</p>		
PUBLICATION NUMBER		DATE		TITLE	
TM 11-6625-623-40P		25 July 78			
<p>BE EXACT. . . PIN-POINT WHERE IT IS</p>					
<p>IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:</p>					
PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.		
<p>TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER</p>				<p>SIGN HERE:</p>	

DA FORM 1 AUG 74 2028-2

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS



FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314



Commander
US Army Communications and
Electronics Materiel Readiness Command
ATTN: DRSEL-MA-Q
Fort Monmouth, New Jersey 07703

TEAR ALONG DOTTED LINE

FOLD BACK

By Order of the Secretary of the Army:

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Official:

J. C. PENNINGTON
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:

To be distributed in accordance with DA Form 12-36A, Section II, Direct and General Support Maintenance requirements for MK-7WURC.

This fine document...

Was brought to you by me:



Liberated Manuals -- free army and government manuals

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals

- Sincerely
Igor Chudov
<http://igor.chudov.com/>
- [Chicago Machinery Movers](http://chicagomachinerymovers.com)