

PYROTECHNIC SIGNALS

OPERATOR'S MANUAL

This copy is a reprint which includes current
pages from Change 1.

Supersedes TM 9-1370-206-10, 28 July 1978

Approved for public release, distribution is unlimited.

31 MARCH 1991

TM 9-1370-206-10

DEPARTMENT OF THE ARMY

WARNINGS

SIGNALS CONTAIN HAZARDOUS MATERIALS

KEEP away from FIRE

DON'T handle if damaged or parts are missing

Handle **CAREFULLY** and use *GLOVES and

FULL HELMET when possible.

AIM at all times **AWAY** from:

FACE-BODY-FRIENDLY TROOPS

BEFORE ITEMS ARE LAUNCHED check WIND to:

ACHIEVE HEIGHT FOR VISIBILITY

AVOID OVERHEAD OBSTACLES (foliage, etc.)

AVOID FALLOUT (rocket parts, etc.)

Maintain at least 453 elevation to launch.

**CHECK WIND TO AVOID FIRE, SMOKE INHALATION OR IRRITATION WITH ALL
PYROTECHNIC ITEMS.**

*Leather work gloves (basic issue)

U

AR 5302

Change)
No. 1)

HEADQUARTERS
DEPARTMENT OF THE ARMY
Washington, DC, 10 March 1992

**PYROTECHNIC SIGNALS
OPERATOR'S MANUAL**

TM 9-1370-206-10, 31 March 1991, is changed as follows:

1. Remove old pages and insert new pages as indicated below. New or changed material is indicated by a vertical bar in the margin of the page.

Remove pages

7 (8 blank)

None

35 (36 blank)

Insert pages

7 and 8


8-1 (8-2 blank)

35 (36 blank)

2. File this change sheet in front of the publication for reference purposes.

By Order of the Secretary of the Army:

Official:



MILTON H. HAMILTON
*Administrative Assistant to the
Secretary of the Army*
01893

GORDON R. SULLIVAN
*General, United States Army
Chief of Staff*


DISTRIBUTION:

To be distributed in accordance with DA Form 12-40-E, (Block 0721), Operator Maintenance Requirements for TM 9-1370-206-10.

Table of contents

CHAPTER I	UNPACKING	3
CHAPTER II	DESCRIPTION AND OPERATION	
Section 1.	Self Contained Ground Signals.....	9
Section 2.	Red Star Parachute Illumination Ground Signal	16
Section 3.	Illumination Ground Signals and Kits	19
Section 4.	Smoke and Illumination Marine Signal	28
CHAPTER III	MAINTENANCE (OPERATOR LEVEL).....	33

*This manual supersedes TM 9-1370-206-10, 28 July 1978, including all changes.

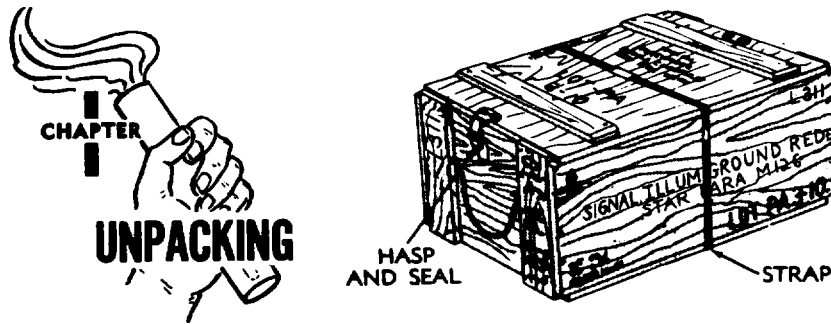


CHAPTER I. UNPACKING

WHEN READY FOR USE

CAUTION

KEEP BOXES SEALED-DUDS OR IMPROPER FUNCTIONING COULD OCCUR IF EXPOSED TO MOISTURE. OPEN JUST BEFORE USE.


- (1) Cut steel strapping carefully with metal shears to avoid springback. Remove and dispose of straps.
- (2) Cut metallic seal with pliers. Discard seal.
- (3) Turn hasp catch and open hasps on hinge and hasp boxes, or pull out on spring latch to release on spring latch boxes.

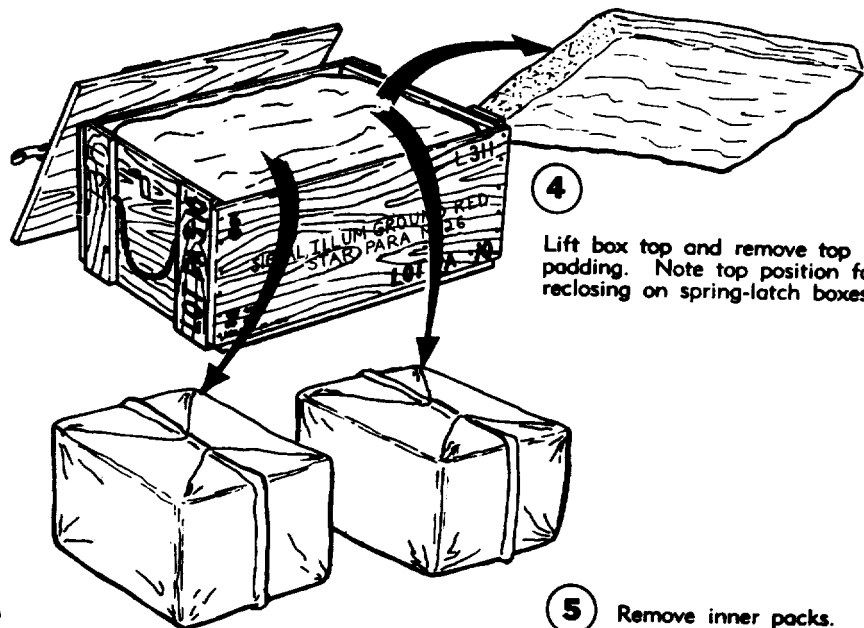

U
AR 5305


U
AR 5305

BARRIER BAG

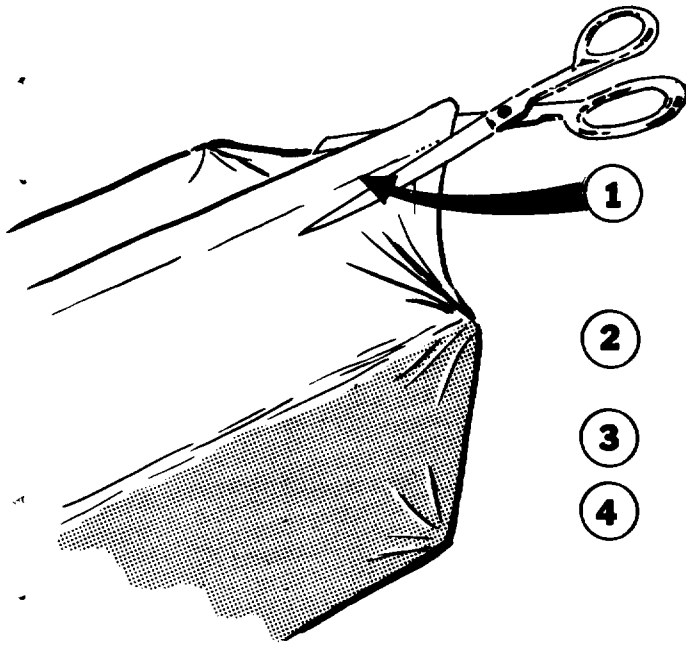

- (1) Cut barrier bag open along the edge with most free area cutting as close to sealed edge as possible.
- (2) Cut or remove tape and open inner container.
- (3) Remove padding, if any.
- (4) Remove items. If all items are not removed, close and reseal barrier bag with adhesive tape.

HERMETICALLY SEALED STEEL CONTAINER

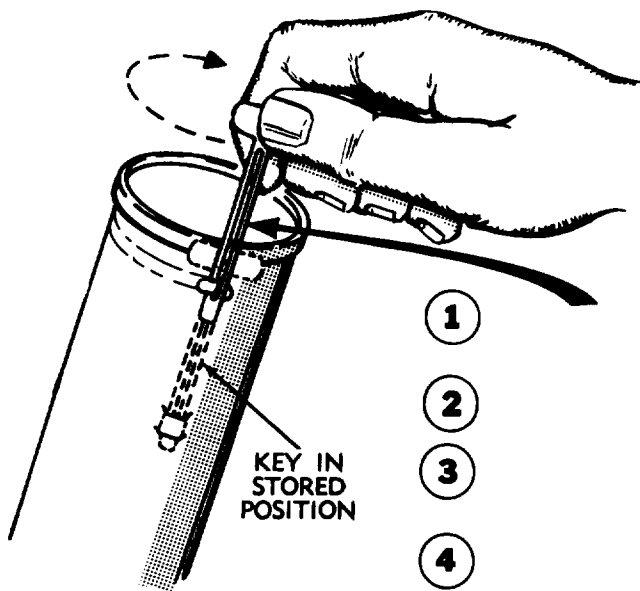


DO NOT OPEN HERMETICALLY SEALED (AIR TIGHT) CONTAINERS UNTIL READY FOR USE.

SIGNAL EXPOSED TO MOISTURE MAY NOT FUNCTION.

- (1) Using key attached to container, remove sealing strip.
- (2) Remove top of container.
- (3) Remove any padding pieces from container.
- (4) Remove item.

FIBER CONTAINER

FIBER CONTAINER

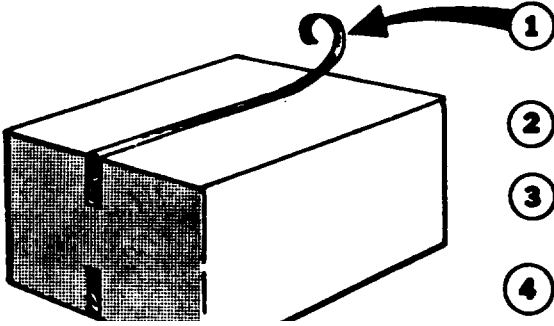


- (1) Remove adhesive tape.
- (2) Open top of container.
- (3) Remove any padding pieces from container.
- (4) Remove item.

SAVE ALL CONTAINERS - WHEN POSSIBLE - FOR REPACK

Change 1 7

U
AR 5308


PLASTIC CONTAINER, PA142 FOR FAMILY OF M125 PYROTECHNIC SIGNALS

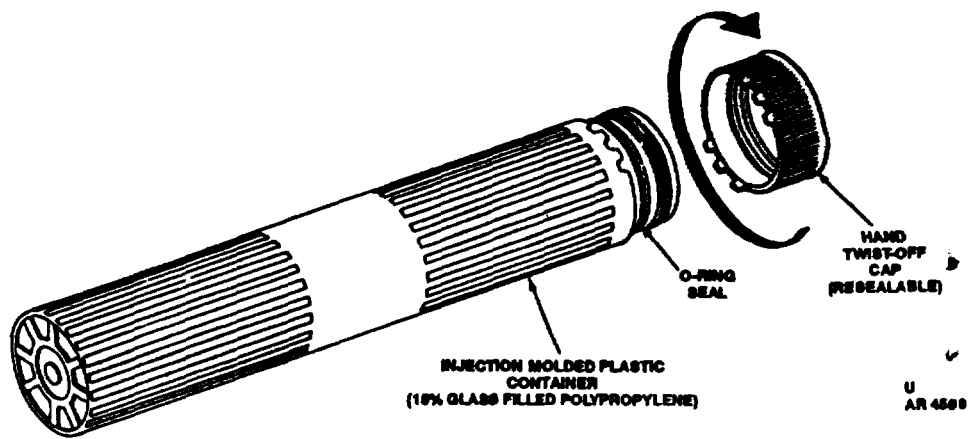

U
AR 4589

Change 1 8

PLASTIC PA142 CONTAINER IN M548 OVERPACK

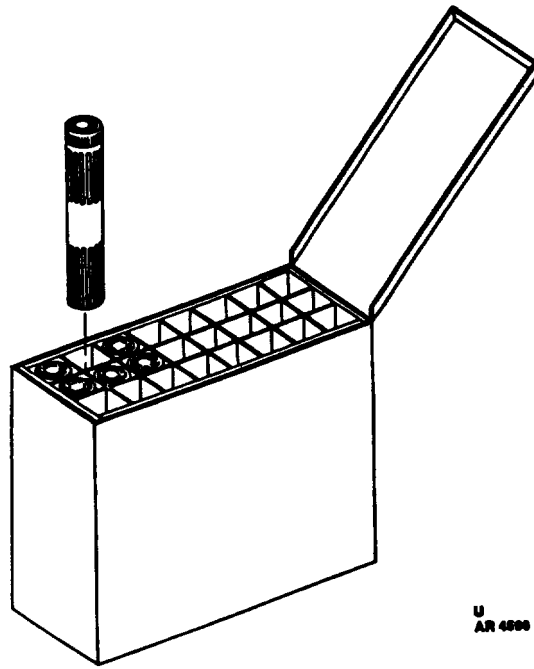

U
AR 4590

Change 1 8.1 (8.2 blank)


U
AR 4590

CHAPTER II. DESCRIPTION AND OPERATION


SECTION 1. SELF CONTAINED GROUND SIGNALS




M125A1	GREEN CLUSTER ILLUMINATION
M126A1	RED PARACHUTE ILLUMINATION
M127A1	WHITE PARACHUTE ILLUMINATION
M128A1	GREEN PARACHUTE SMOKE
M129A1	RED PARACHUTE SMOKE
M158	RED CLUSTER ILLUMINATION
M159	WHITE CLUSTER ILLUMINATION
M194	YELLOW PARACHUTE SMOKE
M195	GREEN PARACHUTE ILLUMINATION

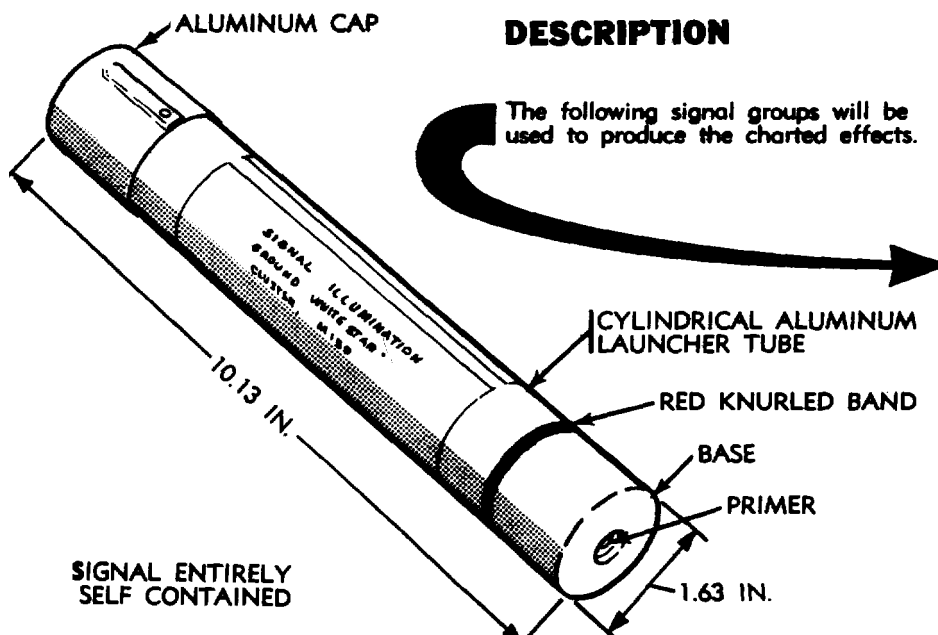


U
AR 5310

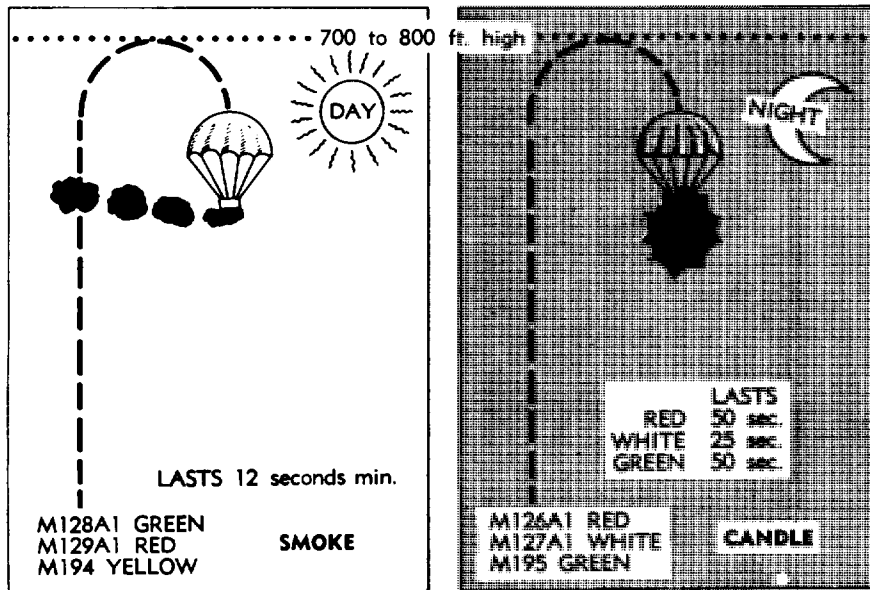


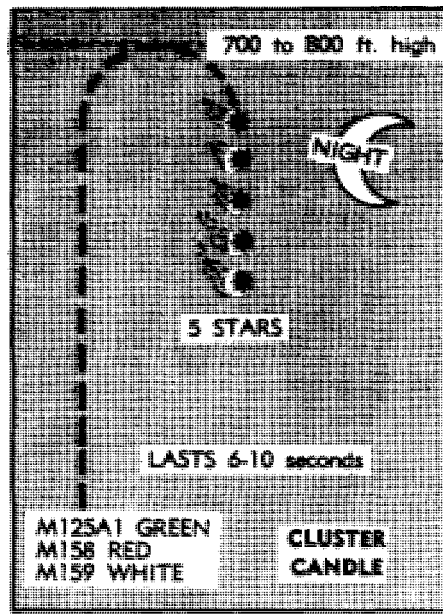



OPERATION

1 HOLD signal in LEFT hand

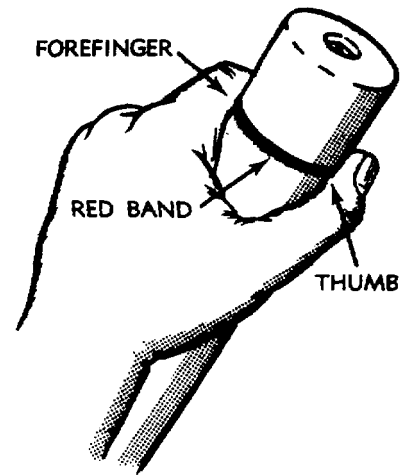

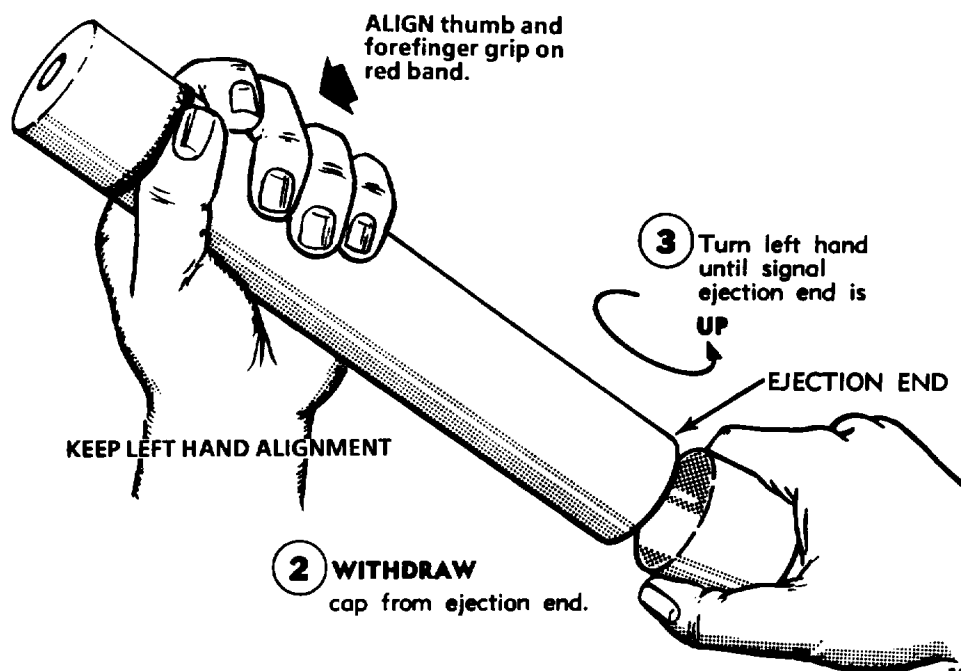

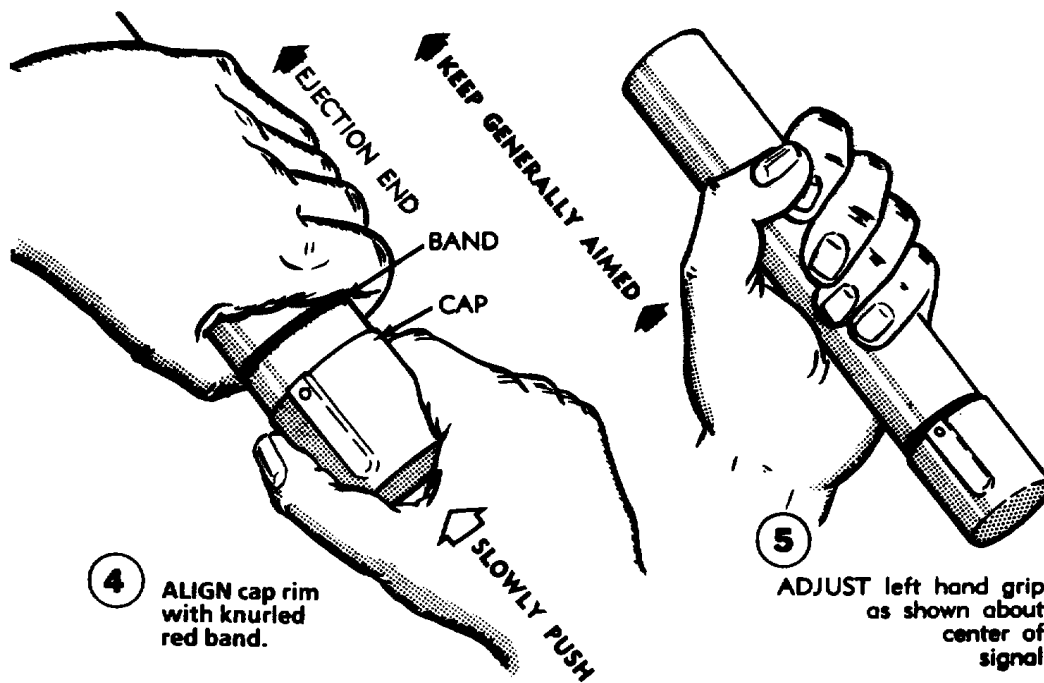

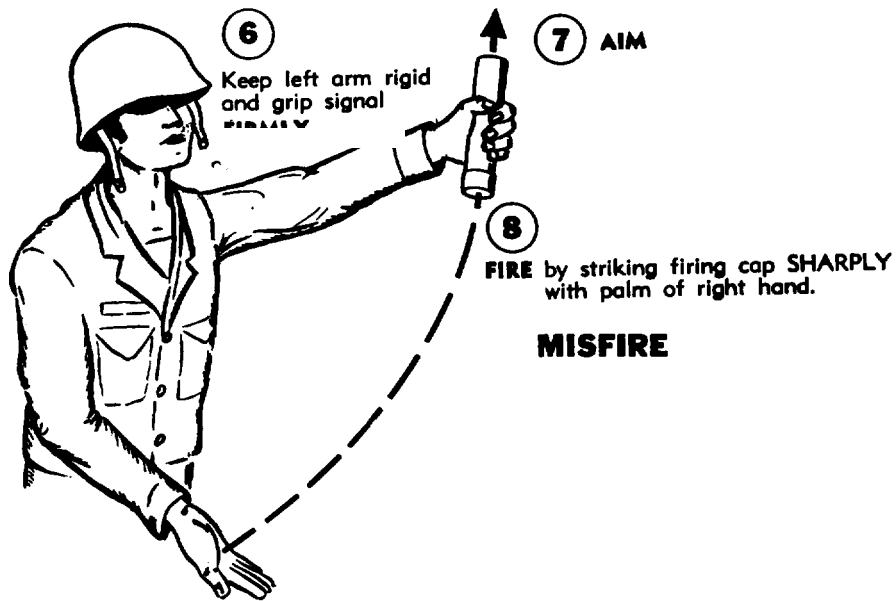



MISFIRE

- KEEP SIGNAL AIMED.
- PULL CAP BACK TO RED KNURLED BAND AND ROTATE 90'.
- MAKE TWO MORE ATTEMPTS TO FIRE.
- WAIT 30 SECONDS WITH ARM REMAINING RIGID AND SIGNAL AIMED OVERHEAD.
- RETURN CAP TO EJECTION END. TURN IN TO AMMUNITION SUPPLY POINT.

SECTION 2. RED STAR PARACHUTE ILLUMINATION GROUND SIGNAL M131


DESCRIPTION


This hand held signal illuminates the same as M126A1 except at an altitude of 1500 feet.

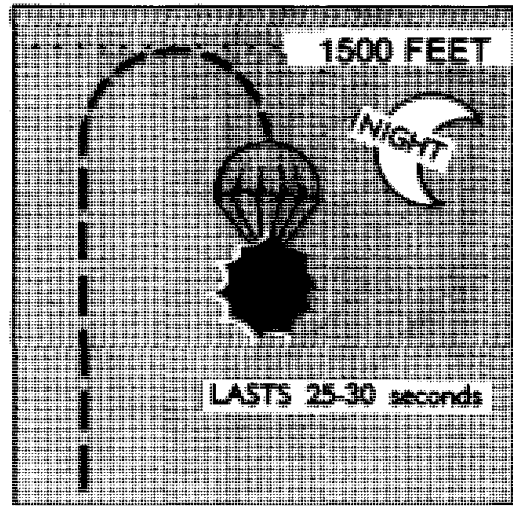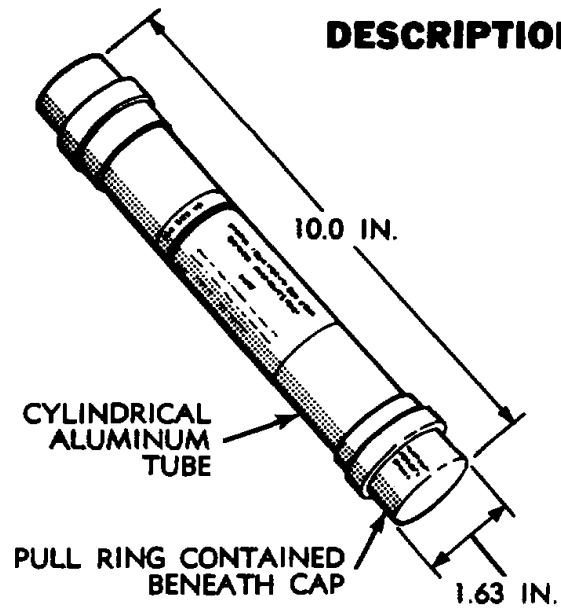

OPERATION

Hold signal firmly in left hand with ejection end away from body.

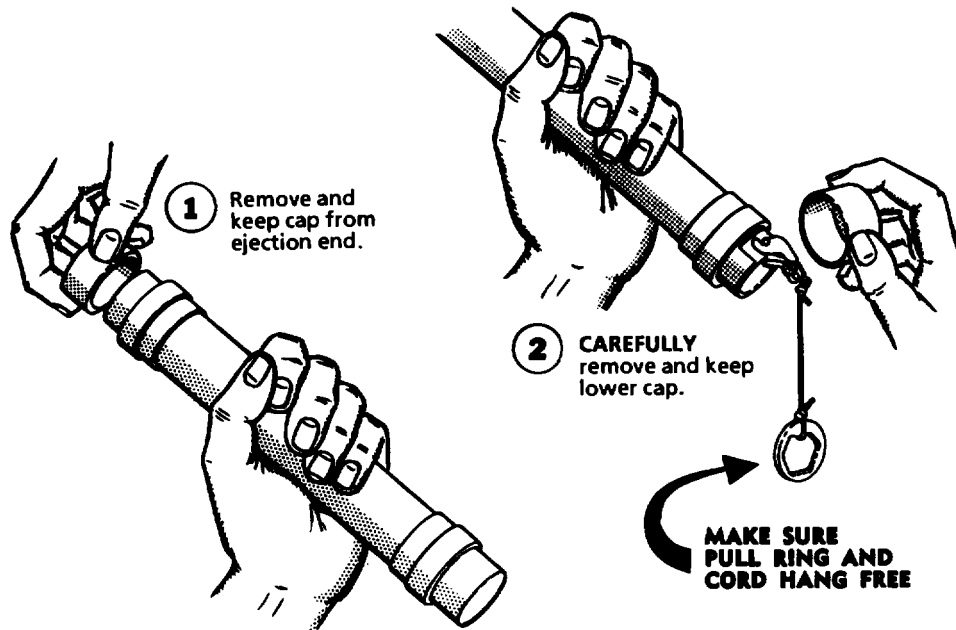

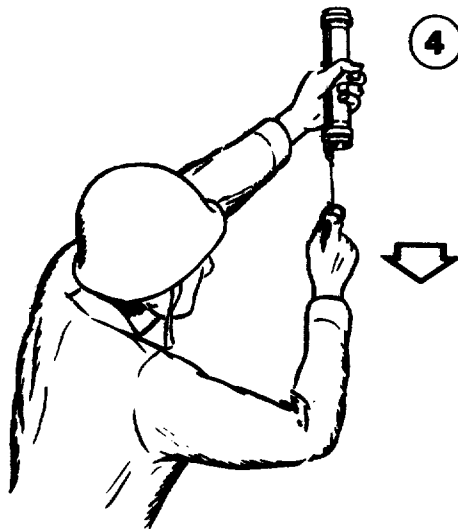

(3) Grasp signal FIRMLY with left hand. Keep arm rigid as shown.

(4) **AIM**

(5) Insert finger of right hand in pull ring and pull downward.

MISFIRE

- KEEP SIGNAL AIMED.
- WAIT 30 SECONDS WITH ARM REMAINING RIGID.
- CAREFULLY INSTALL BOTH CAPS. TURN IN TO AMMUNITION SUPPLY POINT.

SECTION 3. ILLUMINATION GROUND SIGNALS AND KITS

KIT 1. THREADED PROJECTOR (cloth bandoleer)

DESCRIPTION

Each of the signals listed below may be fired from a hand held projector while encompassed in a bandoleer.

- RED ILLUMINATION GROUND SIGNAL, M187
- WHITE ILLUMINATION GROUND SIGNAL, M188
- GREEN ILLUMINATION GROUND SIGNAL; M189
- AMBER ILLUMINATION GROUND SIGNAL, M190

The projector and the bandoleer plus seven signals make up the signal kit.

All signals may be obtained and fired separately.

5 seconds burning time-candle power **3200**


in kit form.....

RED PERSONNEL SIGNAL KIT, M185

(Contains only red signals).

VARIOUS COLOR SIGNAL KIT, M186


(Contains 3 red, 2 white and 2 green signals).

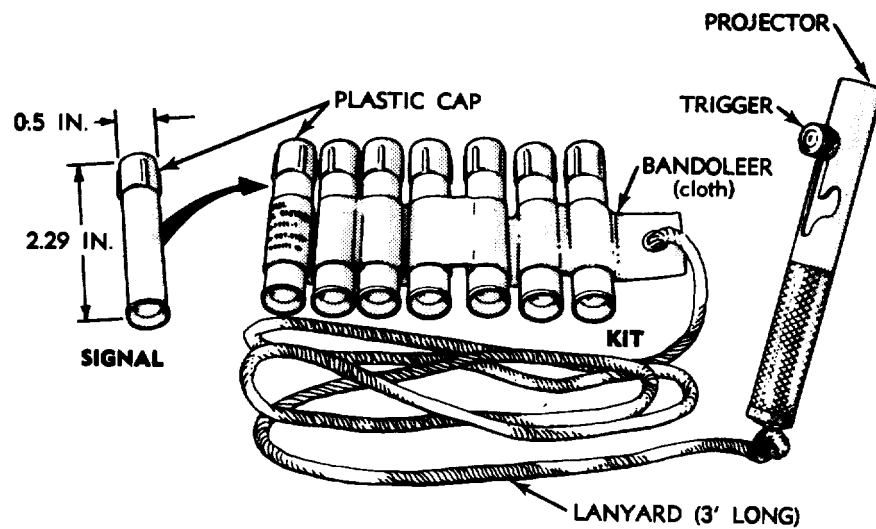


Caps protect threaded end of signal which attach to the projector.

OPERATION

- (1) Select signal by color, if bandoleer contains more than one signal of that color, use the one farthest from the lanyard.

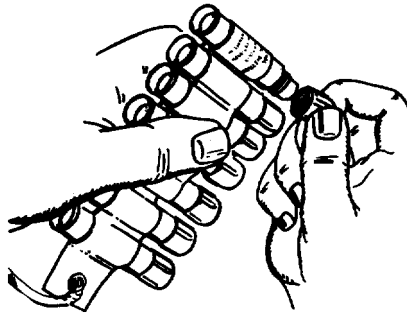

- (2) Remove and keep plastic cap.

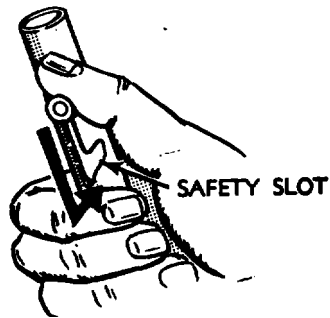


- (3) Cock projector firing pin by moving trigger to safety slot.

U
AR 5321

**KEEP
ON
TARGET**


4

Carefully thread projector
onto signal so as not to
dislodge trigger from
safety slot.

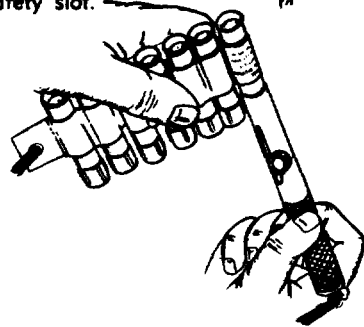

5

AIM CAREFULLY

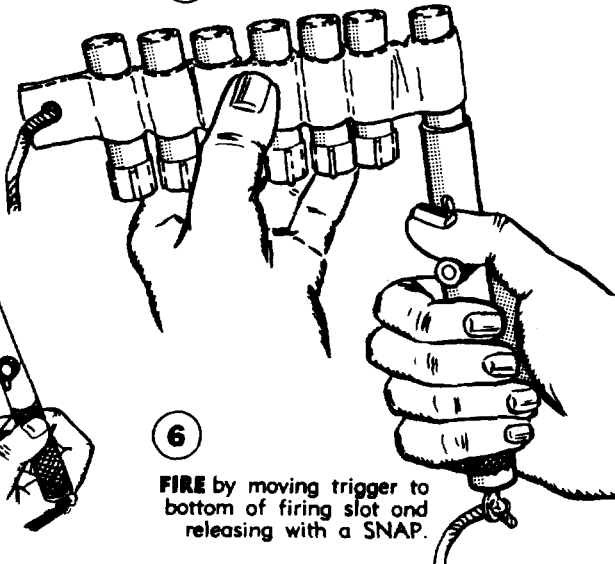

6

FIRE by moving trigger to
bottom of firing slot and
releasing with a SNAP.

- (7) If expended signal is on end of bandoleer, or if signals between expended signal and end have been used, cut bandoleer and discard waste.
- (8) **RETURN PARTIALLY USED KIT TO BARRIER BAG AND SEAL WITH TAPE.**



REPEAT STEP (6)

**IF SIGNAL STILL FAILS TO FIRE WAIT 10 SECONDS KEEPING SIGNAL AIMED.
REMOVE FROM PROJECTOR.
CUT SIGNAL FROM BANDOLEER.**

**REPLACE CAP.
TURN IN TO AMMUNITION SUPPLY POINT.**

KIT 2. FORCED FIT PROJECTOR (plastic bandoleer)

DESCRIPTION

Signals must be removed from bandoleer before firing.

- RED ILLUMINATION GROUND SIGNAL, M260

The projector and the bandoleer plus seven signals make up the signal kit.

All signals may be obtained and fired separately.


10 seconds burning time-candle power **10000**

in kit form.....


RED PERSONNEL DISTRESS SIGNAL KIT: A/P255-5A

(Contains only red signals).

THIS SIGNAL KIT IS A COMPONENT OF THE SRU-211P, VEST SURVIVAL KIT. AND CANNOT BE PROCURED SEPARATELY.

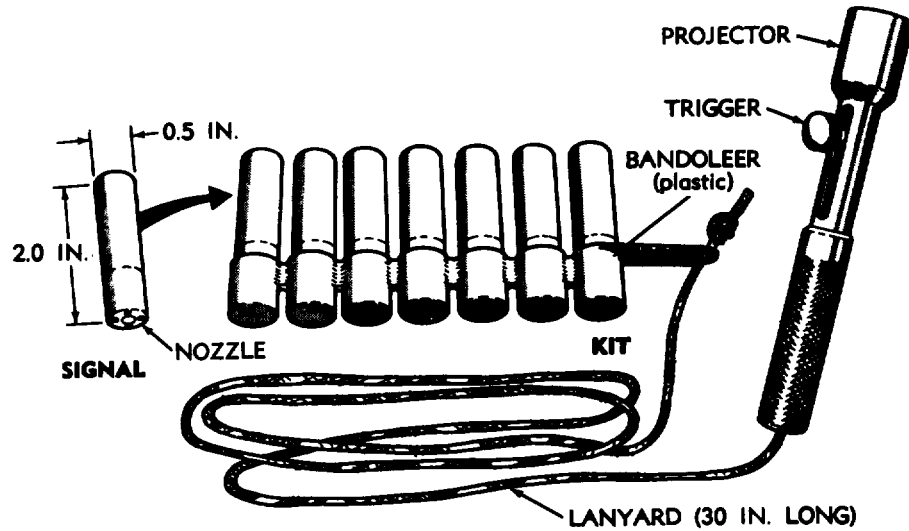

OPERATION

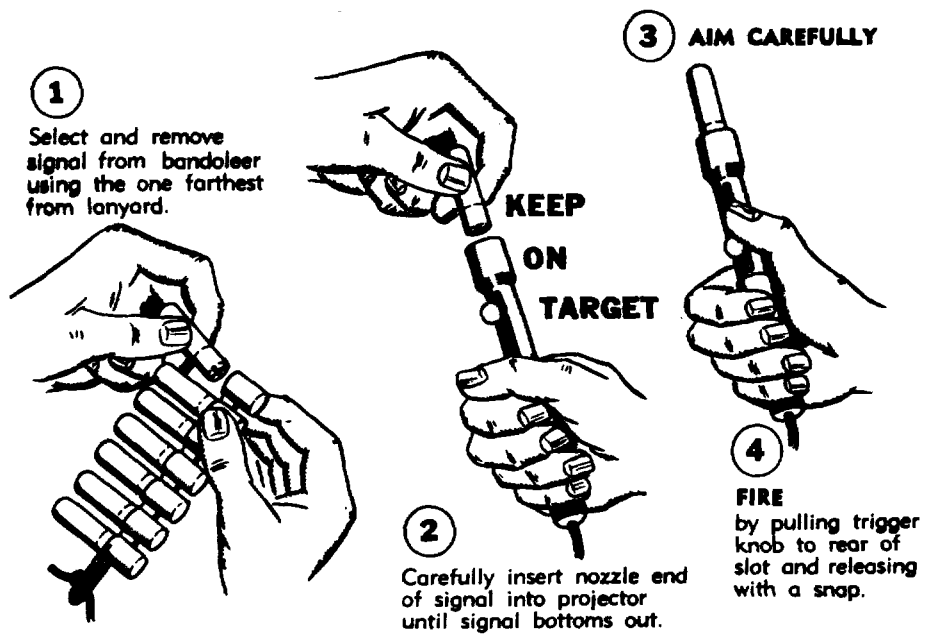

- (5) Retain bandoleer for future use.
- (6) RETURN PARTIALLY USED KIT TO PLASTIC BAG AND SEAL WITH TAPE.




REPEAT STEP (4)

**IF SIGNAL STILL FAILS TO FIRE WAIT 10 SECONDS KEEPING SIGNAL AIMED.
REMOVE FROM PROJECTOR.**

**REINSTALL IN BANDOLEER.
TURN IN TO AMMUNITION SUPPLY POINT.**

SECTION 4. SMOKE AND ILLUMINATION MARINE SIGNAL, AN-MK13 MOD O

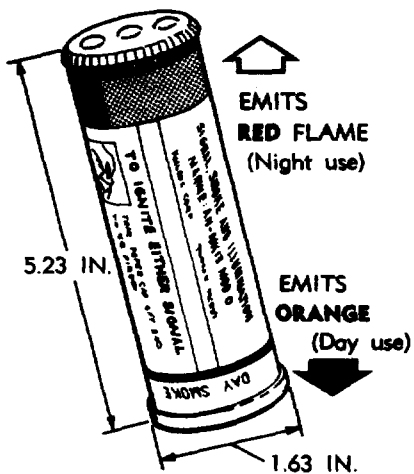

DESCRIPTION

A hand held signal which contains a signal for day use and a signal for night use. (Both ends useable)




The end of the signal used for day operations contains a non-serrated cap. The pull ring has no attached cord.

The DAY signal emits ORANGE smoke
Burning time 18-20 seconds


DESCRIPTION (continued)



For identification in darkness the night signal end cap is serrated and contains three bosses.




When the cap is removed from the night signal end the pull ring appears with an attached cord and washer.

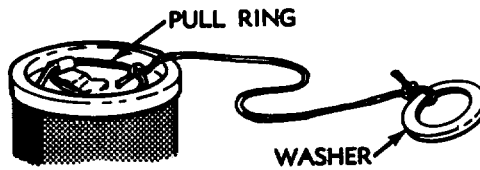

The NIGHT signal emits a RED FLAME
Candle power 3000 Burning time 18-20 seconds

OPERATION

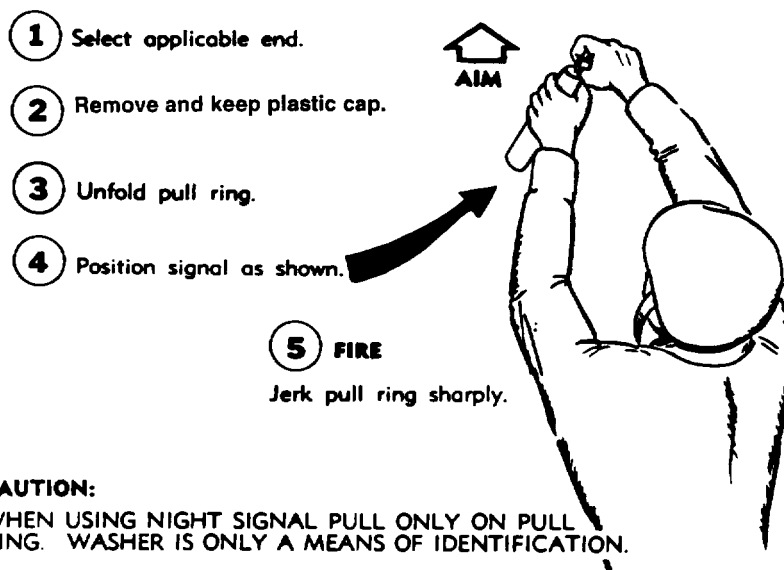

CAUTION:

WHEN USING NIGHT SIGNAL PULL ONLY ON PULL RING. WASHER IS ONLY A MEANS OF IDENTIFICATION.

CAUTION

WHEN USING NIGHT SIGNALL PULL ONLY ON PULL RING. WASHER IS ONLY A MEANS OF IDENTIFICATION.

- (6) If only one end of signal is used IMMERSE that end ONLY in oil or water to cool. DRY CAREFULLY
- (7) Place signal back in original packing (Retain for use of opposite end.)



KEEP SIGNAL AIMED
WAIT **30** SECONDS

REPLACE PLASTIC CAP.
TURN IN TO AMMUNITION SUPPLY POINT.

31 (32 blank)

U
AR 5331

CHAPTER III. MAINTENANCE (OPERATOR LEVEL)



ALL REPACKING SHOULD BE TIGHTLY WRAPPED. CLEARLY MARKED AND WATERPROOF

TURN IN UNUSED ITEMS TO AMMUNITION SUPPORT AREA AS SOON AS POSSIBLE. PROVIDE AS MUCH PROTECTION FOR THESE ITEMS BY REPACKING IN ORIGINAL CONTAINERS, IF AVAILABLE, OR EQUIVALENT IMPROVISED PACKING.

AVOID EXPOSURE TO....MOISTURE-DENTS-ETC.

To report errors
and omissions
or to suggest
improvements

DID YOU GET
MY SIGNALS?

PLEASE WRITE


COMMANDER
USA ARDEC
ATTN: SMCAR-LMB
Picatinny Arsenal, New Jersey 07806-5000

USE FORM DA 2028

WE NEED TO KNOW

MALFUNCTION REPORTS

SUBMIT MALFUNCTION REPORTS IN
ACCORDANCE WITH AR 70-1

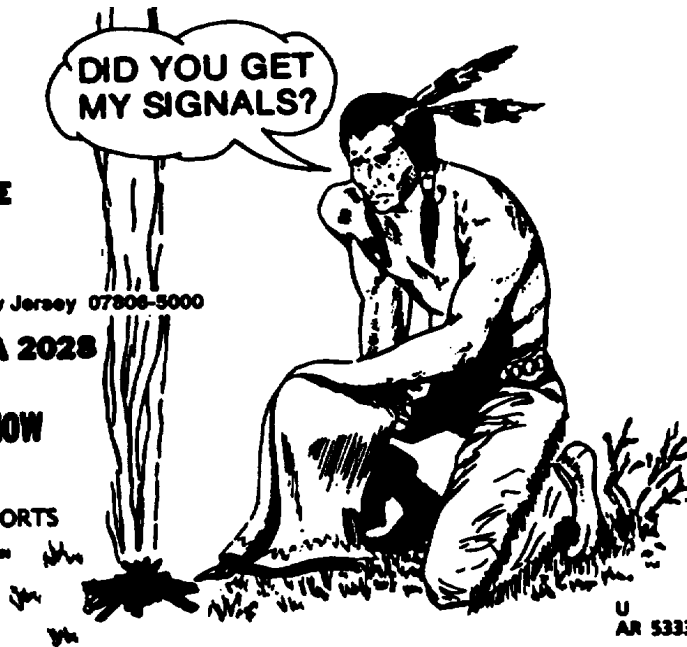

U
AR 5333

☆U.S. GOVERNMENT PRINTING OFFICE: 1994-300-4211/3056

U
AR 5333

Change 1 35 (36 blank)

Pyrotechnic Signals

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

THOMAS F. SIKORA
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION: To be distributed in accordance with DA Form 12-40-E, block 0721 Operator Maintenance requirements for Pyrotechnics.

TM 9-1370-206-10

U
AR 5300

[illegible]

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS
ARE OBSOLETE.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

The Metric System and Equivalents

Linear Measure

1 centimeter = 10 millimeters = .39 inch
 1 decimeter = 10 centimeters = 3.94 inches
 1 meter = 10 decimeters = 39.37 inches
 1 dekameter = 10 meters = 32.8 feet
 1 hectometer = 10 dekameters = 328.08 feet
 1 kilometer = 10 hectometers = 3,280.8 feet

Weights

1 centigram = 10 milligrams = .15 grain
 1 decigram = 10 centigrams = 1.54 grains
 1 gram = 10 decigrams = .035 ounce
 1 decagram = 10 grams = .35 ounce
 1 hectogram = 10 decagrams = 3.52 ounces
 1 kilogram = 10 hectograms = 2.2 pounds
 1 quintal = 100 kilograms = 220.46 pounds
 1 metric ton = 10 quintals = 1.1 short tons

Liquid Measure

1 centiliter = 10 milliliters = .34 fl. ounce
 1 deciliter = 10 centiliters = 3.38 fl. ounces
 1 liter = 10 deciliters = 33.81 fl. ounces
 1 dekaliter = 10 liters = 2.64 gallons
 1 hectoliter = 10 dekaliters = 26.42 gallons
 1 kiloliter = 10 hectoliters = 264.18 gallons

Square Measure

1 sq. centimeter = 100 sq. millimeters = .155 sq. inch
 1 sq. decimeter = 100 sq. centimeters = 15.5 sq. inches
 1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. feet
 1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. feet
 1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 acres
 1 sq. kilometer = 100 sq. hectometers = .386 sq. mile

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = .06 cu. inch
 1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. inches
 1 cu. meter = 1000 cu. decimeters = 35.31 cu. feet

Approximate Conversion Factors

<i>To change</i>	<i>To</i>	<i>Multiply by</i>	<i>To change</i>	<i>To</i>	<i>Multiply by</i>
inches	centimeters	2.540	ounce-inches	Newton-meters	.007062
feet	meters	.305	centimeters	inches	.394
yards	meters	.914	meters	feet	3.280
miles	kilometers	1.609	meters	yards	1.094
square inches	square centimeters	6.451	kilometers	miles	.621
square feet	square meters	.093	square centimeters	square inches	.155
square yards	square meters	.836	square meters	square feet	10.764
square miles	square kilometers	2.590	square meters	square yards	1.196
acres	square hectometers	.405	square kilometers	square miles	.386
cubic feet	cubic meters	.028	square hectometers	acres	2.471
cubic yards	cubic meters	.765	cubic meters	cubic feet	35.315
fluid ounces	milliliters	29.573	cubic meters	cubic yards	1.308
pints	liters	.473	milliliters	fluid ounces	.034
quarts	liters	.946	liters	pints	2.113
gallons	liters	3.785	liters	quarts	1.057
ounces	grams	28.349	liters	gallons	.264
pounds	kilograms	.454	grams	ounces	.035
short tons	metric tons	.907	kilograms	pounds	2.205
pound-feet	Newton-meters	1.356	metric tons	short tons	1.102
pound-inches	Newton-meters	.11296			

Temperature (Exact)

°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C
----	------------------------	----------------------------	---------------------	----

PIN: 014886-001

This fine document...

Was brought to you by me:



[Liberated Manuals -- free army and government manuals](#)

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap “watermarks” and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

<A HREF=<http://www.liberatedmanuals.com/>>Free Military and Government Manuals

- Sincerely
Igor Chudov
<http://igor.chudov.com/>
- [Chicago Machinery Movers](#)