TM 9-3413-223-15P

DEPARTMENT OF THE ARMY TECHNICAL MANUAL

OPERATOR'S

ORGANIZATIONAL, DIRECT SUPPORT, GENERAL
SUPPORT AND DEPOT MAINTENANCE REPAIR
PARTS AND SPECIAL TOOLS LIST

FOR

DRILLING MACHINE, UPRIGHT BENCH MOUNTED,

1/4 IN. CAPACITY, 2-1/4 SPINDLE TRAVEL,

1/4 HP, 115 V, 60 C, SGLE-PH (HIGH SPEED HAMMER CO,

MODEL R-53) (3413-221-8714)

This copy is a reprint which includes current pages from Change 1.

HEADQUARTERS, DEPARTMENT OF THE ARMY

OCTOBER 1969

CHANGE

No. 1

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 10 May 1973

Operator's

Organizational, Direct Support, General Support and Depot Maintenance Repair Parts and Special Tools List

for

DRILLING MACHINE, UPRIGHT BENCH MOUNTED,

1/4 IN. CAPACITY, 2-1/4 SPINDLE TRAVEL,

1/4 HP, 115 V, 60 C, SGLE-PH (HIGH SPEED

HAMMER CO, MODEL R-53)

(3413-221-8714)

This change is current as of 7 March 1973.

TM 9-3413-223-15P, 7 October 1969 is changed as follows:

Page 1. Paragraph 2a and 2b are superseded as follows

- a. Basic Issue Items List. Not applicable.
- *b.* Items Troop Installed or Authorized List. Not applicable.

Delete subparagraphs 2c and 2e.

Page 3, paragraph 4 is superseded as follows:

4. Components of the End Item

Parts included with the end item and considered as components of the end item configuration are listed in table 1.

Table 1. Components of the End Item.

Components CHUCK DRILL	Part No. 105	(FSCM) 28626
KEY DRILL CHUCK:	No. 3, S, 1	31549

Page 4, Paragraph 8 is superseded as follows:

8. Reporting of Equipment Publication Improvements

The reporting of errors, omissions, and recommendations for improving this publication by the individual user is encouraged. Reports should be submitted on DA Form 2028 (Recommended Changes to Publications) and forwarded direct to: Commander US Army Weapons Command, ATTN: AMSWE-MAS-SP, Rock Island, IL 61201.

Section II is rescinded.

Page 5. Section III is rescinded.

Page 6. Section V is rescinded.

CREIGHTON W. ABRAMS General, United States Army Chief of Staff

Official:

VERNE L. BOWERS Major General, United States Army The Adjutant General

Distribution:

Active Army:

DCSLOG (3) CNGB (1) TSG (1) COE (5) Dir of Trans (1) ACSC-E (1) USARADBD (2) CONARC (2) AMC (5) WECOM (10) MECOM (2) TACOM (2) ARADCOM (2) ARADCOM Rgn (2) OS Maj Comd (2) LOGCOMD (2) USACDCEC (10) Armies (3) except Seventh USA (5) Eighth USA (5) Corps (2) Div (3) Bde (1)

Regt/Gp/bat gp (2) Bn (1) WSMR (2) USATC (2) USAOC&S (10) USASCS (5) USATSCH (5) Gen Dep (2) AD (5) APG (1) Arsenals (5) MAAG (2) USABRL (1) AFIP (1) NLABS (2) Camp Stanley Stor Actv (1) Engr FLDMS (1) Sig FLDMS (1) Ft Knox FLDMS (10) Units org under fol TOE: 9-17 (2) 9-47 (2)

ARNG: State AG (3); Units—Same as Active Army, except allowance is one (1) copy each. USAR: None.

For explanation of abbreviations used, see AR 310-50.

*U.S. GOVERNMENT PRINTING OFFICE: 1973-769618/766

TECHNICAL MANUAL)
No. 9-3413-223-15P

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON 25, D.C. 7 October 1969

OPERATOR'S

ORGANIZATIONAL, DIRECT SUPPORT, GENERAL SUPPORT AND DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOL LISTS

FOR

DRILLING MACHINE, UPRIGHT, BENCH MOUNTED, 1/4 IN. CAPACITY, 2-1/4 IN. SPINDLE TRAVEL, 1/4 IN. HP, 115 V, 60 C, SGLE-PH (HIGH SPEED HAMMER CO, MODEL R-53) (3413-221-8714)

This manual is current to 24 September 1969

			Page
Section	I.	INTRODUCTION	1
	II.	BASIC ISSUE ITEMS LIST	- 4
	III.	PRESCRIBED LOAD ALLOWANCE	- 5
	IV.	ORGANIZATIONAL REPAIR PARTS	- 6
	V.	TOOLS AND SUPPORT EQUIPMENT	- 6
	VI.	DIRECT SUPPORT, GENERAL SUPPORT AND DEPOT REPAIR PARTS	- 7
		Repair Parts For: DRILLING MACHINE GROUP MOTOR GROUP	. 7 10
	VII.	FEDERAL STOCK NUMBER AND REFERENCE NUMBER INDEX	12
	VIII.	ILLUSTRATIONS	
		1. DRILLING MACHINE GROUP	
		2. MOTOR GROUP	14

i

 $^{^{\}ast}$ This manual supersedes SM ORD 7-8 SNL J-292, 17 January 1952, including changes.

Section I. INTRODUCTION

1. Scope

This manual lists basic issue items and repair parts required for the performance of operator, organizational, direct support, general support, and depot maintenance of the drilling machine.

2. General

This Basic Issue Items, Repair Parts and Special Tools list is divided into the following sections:

- a. Basic Issue Items—Section II. A list of items which accompany the drilling machine and are required by the operator/crew for installation, operation, or maintenance.
- b. Maintenance and Operating Supplies. Not applicable
- c. Prescribed Load Allowance (PLA)—Section III. A composite listing of repair parts and support equipment having quantitative allowances for initial stockage at the organizational level.
- d. Repair Parts-Section IV. A list of repair parts authorized for the performance of maintenance at the organizational level in figure and item number sequence.
- e. Took and Support Equipment—Section V. A list of tools and support equipment authorized for the performance of maintenance at the organizational level.
- f. Repair Parts-Section VI. A list of repair parts authorized for the performance of maintenance at the direct support, general support, and depot level in figure and item number sequence.
- g. Special Tools, Test and Support Equip. ment. Not applicable.
- h.. Federal Stock Number and Reference Number Index—Section VII. A list of Federal stock numbers in ascending numerical sequence, followed by a list of reference numbers appearing in all the listings, in ascending alphanumeric sequence, cross-referenced to the illustration figure number and item number.

3. Explanation of Columns

The following provides an explanation of columns in tabular lists in Section II through VI

- a. Source, Maintenance, and Recoverability Codes (SMR).
- (1) *Source code.* Indicates the selection status and source for the listed item. Source codes used are:

Code	Explanation
P	Applied to repair parts which are stocked in or supplied from GSA/DSA, or Army supply system and authorized for use at indicated maintenance categories.
M	Applied to repair parts which are not procured or stocked but are to be manufactured at indicated maintenance categories.
A	Applied to assemblies which are not pro-

- A Applied to assemblies which are not procured or stocked as such but are made up of two or more units, each of which carry indivdual stock numbers and descriptions and are procured and stocked and can be assembled by units at indicated maintenance categories.
- X Applied to parts and assemblies which are not procured or stocked; the mortality of which normally is below that of the applicable end item; and the failure of which should result in retirement of the end item from the supply system.
- X1 Applied to repair parts which are not procured or stocked, the requirement for which will be supplied by use of next higher assembly or component.
- X2 Applied to repair parts which are not stocked. The indicated maintenance category requiring such repair parts will attempt to obtain through cannibalization; if not obtainable through cannibalization, such repair parts will be requisitioned with supporting justification through normal supply channels.
- G Applied to major assemblies that are procured with PEMA funds for initial issue only to be used as exchange assemblies at DSU and GSU level. These assemblies will not be stocked above DSU and GSU level or returned to depot supply level.

1

TM 9-3413-223-15P

(2) Maintenance code. Indicates the lowest category of maintenance authorized to install the listed item. Maintenance level codes are:

Code	Explanation
С	Operator/Crew maintenance
0	Organizational maintenance
F	Direct support maintenance
Н	General support maintenance
D	Depot maintenance

(3) Recoverability code. Indicates whether unserviceable items should be returned for recovery or salvage. Items not coded are expendable. Recoverability codes are:

abic.	receverability codes are.
Code	Explanation
R	Applied to repair parts (assemblies and components) which are considered economically repairable at direct and general support maintenance levels. When the maintenance capability to repair these items does not exist, they are normally disposed of at the GS level. When supply consideration dictate, some of these repair parts may be listed for automatic return to supply for depot level repair as set forth in AR 710–50. When so listed, they will be replaced by supply on an ex-
T	change basis. Applied to high dollar value recoverable repair parts which are subject to special handling and are issued on an exchange basis. Such repair parts normally are repaired or overhauled at
U	depot maintenance activities. Applied to repair parts specifically selected for salvage by reclamation units because of precious metal content, critical materials, or high dollar value reusable casings or castings.

Note. When no code is indicated in the recoverability column, the part will be considered expendable.

- *b. Federal Stock Number.* Indicates the Federal stock number assigned to the item and will be used for requisitioning purposes.
- c. Description. Indicates the Federal item name and any additional description required. A part number or other reference number is followed by the applicable five-digit Federal supply code for manufacturers in parentheses.
- d. Unit of Measure (U/M). A two character alphabetic abbreviation indicating the amount or quantity of the item upon which the allowances are based, e.g., EA, PR, etc.

- e. Quantity Incorporated in Unit. Indicates the quantity of the item used in the assembly group.
- f. Quantity Furnished with Equipment. Indicates the quantity of an item furnished with the equipment (BIIL only).
- g. 15-Day Organizational Maintenance Allowance.
- (1) The allowance columns are divided into four subcolumns. Indicated in each subcolumn opposite the first appearance of each item is the total quantity of items authorized for the number of equipments supported. Subsequent appearances of the same item will have the letters "REF" in the allowance columns. Items authorized for use as required but not for initial stockage are identified with an asterisk in the allowance column.
- (2) The quantitative allowances for organizational level of maintenance represents one initial prescribed load for a 15-day period for the number of equipments supported. Units and organizations authorized additional prescribed loads will multiply the number of prescribed loads authorized by the quantity of repair parts reflected in the appropriate density column to obtain the total quantity of repair parts authorized.
- (3) Organizational units providing maintenance for more than 100 of these equipments shall determine the total quantity of parts required by converting the equipment quantity to a decimal factor by placing a decimal point before the next to the last digit of the number to indicate hundredths, and multiplying the decimal factor by the parts quantity authorized in the 51–100 allowance column. Example, authorized allowance for 51-100 equipments is 12; for 140 equipments multiply 12 by 1.40 or 16.80 rounded off to 17 parts required.
- (4) Subsequent changes to allowances will be limited as follows: No change in the range of items is authorized. If additional items are considered necessary, recommendation should be forwarded to Commanding General, U.S. Army Weapons Command, Rock Island, Illinois 61201, for exception or revision to the allowance list. Revisions to the range of items authorized will be based upon engineering ex-

perience, demand data, or The Army Equipment Record System (TAERS) information.

- h. 90-Day DS/GS Maintenance Allowances. Note. Allowances in GS Column are for GS maintenance only.
- (1) The allowance columns are divided into three sulcolumns. Indicated in each subcolumn, opposite the first appearance of each item, is the total quantity of items authorized for the number of equipments supported. Subsequent appearances of the same item will have the letters "REF" in the applicable allowance columns. Items authorized for use as required but not for initial stockage are identified with an asterisk in the allowance column.
- (2) The quantitative allowances for DS/GS levels of maintenance will represent initial stockage for a 30 day period for the number of equipments supported.
- (3) Determination of the total quantity of parts required for maintenance of more than 100 of these equipments can be accomplished by converting the equipment quantity to a decimal factor by placing a decimal point before the next to last digit of the number to indicate hundredths, and multiplying the decimal factor by the parts quantity authorized allowance for 51-100 allowance column. Example, authorized allowance for 51-100 is 40; for 150 equipments multiply 40 by 1.50 or 60 parts required.
- i. 1-Year Allowance Per 100 Equipments/ (Contingency Planning Purposes. This column indicates opposite the first appearance of each item the total quantity required for distribution and contingency planning purposes. The range of items indicate the total quantities of all authorized items required to provide for adequate support of 100 equipments for one year.
- *j. Depot Maintenance Allowance per 100 Equipments.* This column indicates opposite the first appearance of each item, the total quantity authorized for depot maintenance of 100 equipments. Subsequent appearances of the same item will have the letters "REF" in the allowance column. Items authorized for use as required but not for initial stockage are identified with an asterisk in the allowance column.

k. Illustration.

- (1) Figure number. Indicates the figure number of the illustration in which the item is shown
- (2) *Item number.* Indicates the callout number used to reference the item in the illustration.

4. Special Information

Not applicable.

5. How to Locate Repair Parts

- *a.* When Federal stock number or reference number is unknown:
- (1) First. Using the table of contents, determine the assembly group i.e. drilling machine, motor, within which the repair part belongs. This is necessary since illustrations are prepared for assembly groups and listings are divided into the same groups.
- (2) *Second.* Find the illustration covering the assembly group to which the repair part belongs.
- (3) *Third.* Identify the repair part on the illustration and note the illustration figure and item number of the repair part.
- (4) Fourth. Using the Repair Parts Listing, find the assembly group to which the repair part belongs and locate the illustration figure and item number noted on the illustration.
- *b.* When Federal stock number or reference number is known:
- (1) First. Using the Index of Federal Stock Numbers and Reference Numbers, find the pertinent Federal stock number or reference number. This index is in ascending FSN sequence followed by a list of reference numbers in ascending alpha-numeric sequence, cross referenced to the illustration figure number and item number.
- (2) Second. Using the Repair Part Listing, find the assembly group of the repair part and the illustration figure number and item number referenced in the Index of Federal Stock Numbers and Reference Numbers.

6. Abbreviations

Abbreviations	Explanation
brg	bearing
cap	capacity
cd-pltd	cadmium plated

TM 9-3413-223-15P

Abbreviations	Explanation
circ	circumference
corr-res-S	corrosion resistant steel
cond	conductor
elec	electric (al)
fl	flat
gnd	ground
hd	head
hdl	handle
incl	include(s) (ed) (sive) (ing)
It-duty	light duty
pt	point(s)
rad	radial, radius
rd	round
ru	rubber
S	steel
sgle	single
stght	straight
sr	single row
sw	
tapd	
TPI	
u/w	
	Unified coarse thread
vert	
w/	
w/o	without

7. Federal Supply Codes for Manufacturer's

Federal Supply Codes	Manufacturer's Services and Standards
02660	Amphencl Corp
12356	The Cincinnati Milling Machine Co.
24446	General Electric Co.
28626	High Speed Hammer Co., Inc.
31549	F. L. Jacobs Co.
33743	Howell Electric Motors Corp.
43991	Norma-Hoffman Bearings Corp.
81348	Federal Specifications Promulgated by
	General Services Administration

8. Recommendations for Maintenance Publication Improvements

Report of errors, omissions, and recommendations for improving this publication by the individual user is encouraged. Reports should resubmitted on DA Form 2028 (Recommended Changes to DA Publications) and forwarded direct to: Commanding General, Headquarters, U.S. Army Weapons Command, ATTN: AMSWE-SMM-P. Rock Island, Ill. 61201.

Section II. BASIC ISSUE ITEMS LIST

(1) Source,	(2)	(3)	(4)	(5)	(6)	(7)
Maint. and Recov. Code (a) (b) (c) Source Maint. Recov.	Federal Stock No.	Description Reference Number and Mfgs. Code	Unit of Issue	Qty. Inc. in Unit	Qty. Furn. with Equip. ig. No tem N		
		DRILLING MACHINE, UPRIGHT, BENCH MOUNTED, 1/4 IN. CA- PACITY, 2-1/4 IN. SPINDLE TRAVEL, 1/4 HP, 115 V, 60 C, SGLE-PH (HIGH SPEED HAM- MER CO, MODEL R-53) COM- PLETE WITH ONE DRILL CHUCK AND ONE DRILL CHUCK KEY					
-P- C	3030-356-8497	REPAIR PARTS BELT, ROUND RUBBER 1/4 DIA, 33 INSIDE CIRCLE DIA 135 (28626)	EA	1	1	2	1

SECTION III. PRESCRIBED LOAD ALLOWANCE

(1)	(2)	(3)		NT 7 T	
FEDERAL	DESCRIPTION	15-DAY ORGANIZATIONAL MAINT. ALLOWANCE			NAL
STOCK	DEFENDENCE NO AND MEDG CODE	(A) 1-5	(B)		
NO.	REFERENCE NO. AND MFRS. CODE	1-5	6-20	21-50	51-100
	THE FOLLOWING ITEMS W/ALLOWANCES ARE APPLI- CABLE TO ORGANIZATIONAL MAINTENANCE OF THE DRILLING MACHINE LISTED IN THIS MANUAL				
3030-356-8497	BELT, ROUND RUBBER 1/4 DIA, 33 INSIDE CIRCLE DIA 135 (28626)	*	2	2	4
3460-187-2199	CHUCK, DRILL 3-JAW KEY TYPE, PLAIN BRG, W/O ARBOR, NO. 1 JACOBS TAPER HOLE, 0 TO 1/4 CAP., LT-DUTY 105 (28626)	*	*	2	4
3460-264-5580	KEY, DRILL CHUCK JACOB'S DESIGN, KEY NO. 3, S 1 (31549)	*	*	2	4

(1)			(2)	(3)	(4)	(5)	(6)				(7)		
SOURCE							15 I	15 DAY ORGANIZATIONAL		NAL	ILLUSTRATION		
MAINT. A			FEDERAL	DESCRIPTION	UNIT	QTY.		JT. ALL					
RECOV. C	ODE		STOCK			INC.	(A)	(B)	(C)	(D)	(A)	(B)	
(A)	(B)	(C)	NO.	REFERENCE NO. AND MFR. CODE	OF	IN					FIGURE	ITEM	
SOURCE	MAINT.	RECOV.			ISSUE	UNIT	1-5	6-20	21-50	51-100	NO.	NO.	
				REPAIR PARTS									
Р	С		3030-356-8497	BELT, ROUND RUBBER 1/4 DIA, 33 INSIDE CIRCLE DIA 135 (28626)	EA	1	*	2	4	10	2	1	
SECTION '	V. TOOLS	AND SUPE	PORT EQUIPMENT										
(1)			(2)	(3)	(4)	(5)	(6)				(7)		
SOURCE							18 I	DAY ORG	ANIZATIO	NAL	ILLUSTR	ATION	
MAINT. A	ND		FEDERAL	DESCRIPTION	UNIT	QTY.	MAIN	T. ALL	OWANCE				
RECOV. C	ODE!		STOCK			INC.	(A)	(B)	(C)	(D)	(A)	(B)	
(A)	(B)	(C)	NO.	REFERENCE NO. AND MFR. CODE	OF	IN					FIGURE	ITEM	
SOURCE	MAINT.	RECOV.			ISSUE	UNIT	1-5	6-20	21-50	51-100	NO.	NO.	
				TOOLS AND SUPPORT EQUIPMENT									
Р	0		3460-187-2199	CHUCK, DRILL 3 JAW KEY TYPE, PLAIN BRG, W/O ARBOR, NO. 1 JACOBS TAPER HOLE, 0 TO 1/4 CAP., LT-DUTY 105 (28626)	EA	1	*	*	2	4			
P	0		3460-264-5580	KEY, DRILL CHUCK JACOBS DESIGN, KEY NO. 3, S 1 (31549)	EA	1	*	*	2	4			

(1) SOURCE		(2)	(3)		(4) (5) (6)		(7)			(8) 1-YR	(9) DEPOT	(10)				
MAINT AN RECOV CO (A) SOURCE	DDE (B)	(C) RECOV	FEDERAL STOCK NO.	DESCRIPTION (REFERENCE NUMBER & MFR. CODE USABLE ON CODE I		INC IN	ALLOW (A)	(B)	(C) 51-100	ALLOV	(B)	(C)	ALW PER 100 EQUIP	MAINT ALW PER 100 EQUIP	ILLUS (A) FIG NO.	TRATION (B) ITEM NO.
P	F		5305-959-2723	SCREW, MACHINE FL, CSK HD, CROSS RECESS DRIVE, 3/8-16UNC X 1 LG, CHROMATED	EA	1	*	*	*	*	*	*	*	*	1	1
P	F		3413-420-9092	COVER PLATE, PINION 97A (28626)	EA	1	*	*	*	*	*	*	*	*	1	2
P	D		3413-420-9100	PINION, FEED ASSEMBLY W/HDL 97 (28626)	EA	1							*	*	1	3
P	F		5310-484-1804	NUT, SELF LOCKING SPDL LOCK, 5/16-32UNEF	EA	1	*	*	*	*	*	*	20	*	1	4
P	D		3110-156-1850	100 (28626) BEARING, BALL, THRUST GND, SGLE DIRECTION, GROOVED RACE SURFACE, RIGID, SR, RE- TAINER TYPE, 0.4724 BORE, 0.9055 OD, 0.354 H	EA	3							18	*	1	5
P	D		3413-357-4050	DL12 (43991) SHAFT, SHOULDERED S, ONE END TAPD 5 DEG, OTHER END THD 5/16-32, 0.437 LARGEST SHAFT DIA 11.688 LG O/A 0.313 DIA X 0.563 LG FIRST SHOULDER STEP, 0.373 DIA X 1.750 LG SECOND SHOULDER STEP, TWO SPLINES 95 (28626)	EA	1							2	2	1	6
P	D		3110-156-1850	BEARING, BALL, THRUST GND SGLE DIRECTION, GROOVED RACE SURFACE, RIGID, SR, RE- TAINER TYPE 0.4724 BORE, 0.9055 OD, 0.354 H DL12 (43991)	EA	1							REF	REF	1	7
P	D		3413-420-9101	BUSHING, SPINDLE 96 (28626)	EA	1							*	*	1	8

(1) SOURCE		(2)	(3)	(4)	(5)	(6)			(7)			(8) 1-YR	(9) DEPOT	(10)	
MAINT A	ND	FEDERAL	DESCRIPTION	UNIT	QTY	30-DA	AY DS M	AINT	30-D	AY GS N	TAINT	ALW PER	MAINT	ILLUS	TRATION
RECOV C	ODE	STOCK		OF	INC	ALLOW	VANCE		ALLO	WANCE		100	ALW	(A)	(B)
(A)	(B) (C)	NO.	REFERENCE NUMBER & MFR. CODE USABLE ON CODE	MEAS	IN	(A)	(B)	(C)	(A)	(B)	(C)	EQUIP	PER 100	FIG	ITEM
SOURCE	MAINT RECOV				UNIT	1-20	21-50	51-100	1-20	21-50	51-100	CNTGCY	EQUIP	NO.	NO.
P	F	5310-524-0580	NUT, PLAIN, ROUND	EA	4	*	*	*	*	*	*	16	*	1	9
			DEPTH GAGE, ADJUSTING,												
			KNURLED												
			91 (28626)												
X2	D	3413-420-9099	HEAD, FEED ARM	EA	1									1	10
			71 (28626)												
P	D	3413-420-9098	COLUMN, FEED ARM	EA	1							*	*	1	11
			71A (28626)												
P	F	3413-420-9097	ROD, THREADED	EA	1	*	*	*	*	*	*	*	*	1	12
			DEPTH GA												
			87 (28626)												
P	F	5305-357-3543	SCREW, IDLER PULLEY	EA	1	*	*	*	*	*	*	10	*	1	13
			SHOULDER BRG												
			114 (28626)												
P	F	3413-420-9096	PULLEY, IDLER	EA	1	*	*	*	*	*	*	*	*	1	14
			00 (28626)												
P	F	5305-357-3546	SCREW, TAPERED, IDLER LINK	EA	1	*	*	*	*	*	*	10	*	1	15
			112 (28626)												
P	F	3413-420-9095	LINK, IDLER PULLEY	EA	1	*	*	*	*	*	*	*	*	1	16
			74 (28626)												
P	F	3413-420-9088	THUMB NUT, IDLER LINK	EA	1	*	*	*	*	*	*	*	*	1	17
			113 (28626)												
P	F	5315-484-1666	PIN, STRAIGHT HEADLESS	EA	1	*	*	*	*	*	*	15	*	1	18
			115 (28626)		_										
P	F	5305-292-8876	SCREW, MACHINE	EA	3	*	*	*	*	*	*	*	*	1	19
			RD HD, SLOT-DRIVE, S, CAD-PLTD,												
			1/4-20TPI UNC X 1/2 LG		_										
P	D	3413-420-9087	COVER PLATE, UPPER	EA	1							*	*	1	20
			120B (28626)		_										
P	D	5310-494-2636	NUT, PLAIN, HEXAGON	EA	1							*	20	1	21
			SPDL BRG												
_	_		124 (28626)												
P	D	3110-144-8505	BEARING, BALL, ANNULAR	EA	1							*	*	1	22
			GND, RAD, SR, NON-LOADING												

GROOVE, BOTH RINGS FLUSH,

8

	2412 002 150														
TM9-	-3413-223-15P		0 6603 DODE 1 5740 OD 0 470 M												
			0.6693 BORE, 1.5748 OD, 0.472 W O/A												
			AL49617-5 (12356)												
P	D	3413-420-9089		EA	1							*	*	1	23
P	D	3413-420-9009	80 (28626)	LA										1	23
P	D	3413-420-9090		EA	1							*	*	1	24
F	D	3413-420-9090	120A (28626)	EA	1									1	21
P	D	5310-494-2636	NUT, SELF LOCKING	EA	1							REF	REF	1	25
-	D	3310 131 2030	SPDL BRG	n.	-							ICEL	KEE	-	23
			124 (28626)												
P	D	3110-144-8505		EA								REF	REF	1	26
F	D	3110-144-0303	GND, RAD, SR, NON-LOADING	EA								KEP	KEF	1	20
			GROOVE BOTH RINGS FLUSH,												
			0.6693 BORE, 1.5748 OD, 0.472 W												
			O/A												
			AL 49617-5 (12356)												
P	D	3413-420-9093		EA	1							*	*	1	27
-	Б	3113 120 3033	4 STEP SPDL	DA.	-									-	27
			79 (28626)												
X1	D	3413-420-9094		EA	1									1	28
			73 (28626)												
P	F	5310-486-2449		EA	1	*	*	*	*	*	*	30	*	1	29
			DEPTH GAGE, LOCKING												
			90 (28626)												
P	D	5340-485-0923	SPRING, HELICAL, COMPRESSION	EA	1							5	*	1	30
			FEED ARM												
			108 (28626)												
X1	D	3413-420-9117	BASE, DRILLING MACHINE	EA	1										
			77 (28626)												
P	0	3460-187-2199	CHUCK, DRILL	EA	1	*	*	*	*	*	*	*	*		
			3 JAW KEY TYPE, PLAIN BRG,												
			W/O ARBOR, NO. 1 JACOBS TAPER												
			HOLE 0 TO 1/4 CAP., LT-DUTY												
			105 (28626)												
X2	D	3413-420-9108	COLUMN, TUBE	EA	1										
			73A1 (28626)												
P	F	3413-420-9091	COVER, GUARD BELT	EA	1	*	*	*	*	*	*	*	*		
			72 (28626)												
X2	D	3413-420-9107		EA	1										
			73A2 (28626)												
P	0	3460-264-5580	KEY, DRILL CHUCK	EA	1	*	*	*	*	*	*	*	*		
			JACOBS DESIGN, KEY NO. 3, S												
	_		1 (31549)	_				,							
P	F	3413-420-9110	NUT, PLAIN, KNURLED	EA	1	*	*	*	*	*	*	*	*		

SP GUARD THUMBNUT 122 (28626)

(1) SOURCE			(2)	(3)	(4)	(5)	(6)			(7)			(8) 1-YR	(9) DEPOT	(10)	
MAINT AN	ND		FEDERAL	DESCRIPTION	UNIT	QTY	30-DA	AY DS M	AINT	30-D2	AY GS N	MAINT ALW PER		MAINT	ILLUS	TRATION
RECOV CO	DDE		STOCK		OF	INC	ALLOW	VANCE		ALLO	WANCE		100	ALW	(A)	(B)
(A)	(B)	(C)	NO.	REFERENCE NUMBER & MFR. CODE USABLE ON CODE	MEAS	IN	(A)	(B)	(C)	(A)	(B)	(C)	EQUIP	PER 100	FIG	ITEM
SOURCE	MAINT	RECOV				UNIT			51-100				CNTGCY	EQUIP	NO.	NO.
														_		
P	D		5305-269-3211	SCREW, CAP, HEXAGON HEAD	EA	3	*	*	*	*	*	*	*	*		
				S, CAD-PLTD, 3/8-16UNC X 1 LG												
X1	D		3413-420-9109	TABLE, DRILLING MACHINE	EA	1										
				70A (28626)												
				REPAIR PARTS FOR												
				MOTOR GROUP												
P	С		3030-356-8497	BELT, ROUND RUBBER	EA	1	2	*	*	*	*	*	2	4	2	1
				1/4 DIA, 33 INSIDE CIRCLE DIA												
				135 (28626)												
P	F		3413-420-9106	PLUG, REAR PULLEY	EA	1	*	*	*	*	*	*	*	*	2	2
				149 (28626)												
P	F		5305-715-1213	SETSCREW	EA	2	*	*	*	*	*	*	*	*	2	3
				HEADLESS, SLOT-DRIVE,												
				OVAL PT, S, CAD-PLTD,												
				1/4-20UNC X 3/8 LG												
P	F		3413-420-9105		EA	1	*	*	*	*	*	*	*	*	2	4
				4 STEP												
				78 (28626)												
P	F		5305-464-7206	SCREW, CAP, HEXAGON HEAD	EA	3	*	*	*	*	*	*	*	*	2	5
P	F		5310-484-1803		EA	2	*	*	*	*	*	*	40	*	2	6
				ACORN												
				SP (28676)												
P	F		3413-420-9103		EA	1	*	*	*	*	*	*	*	*	2	7
				69 (28626)												
P	F		5305-715-1213		EA	5	REF	REF	REF	REF	REF	REF	REF	REF	2	8
				HEADLESS, SLOT DRIVE												
				OVAL PT, S, CAD-PLTD,												
				1/4-20UNC X 3/8 LG												
P	F	R	6105-134-5546	MOTOR, ELECTRIC	EA	1	*	*	*	*	*	*	5	*	2	9
				CAPACITOR START, AC, BALL												
				BRG, RIGID MOUNT SGLE-PH, 115												
				V, 60 C, 1/4 HP, 1725 RPM												
				11152 (33743)												
P	F		5305-043-1942	SCREW, CAP, HEXAGON HEAD S,	EA	2	*	*	*	*	*	*	*	*	2	10
				CAD OR ZINC-PLTD, 10-32 TPI NF,												
				FULL THD												

TM9-341	.3-223-15P															
Р	F	5930-356-8200	SWITCH, STARTING, MOTOR TOG- GLE, OPEN TYPE, DBL-BREAK CONTACTS, 110/220 V, AC, 1 HP, SGLE POLE, W/THERMAL OVER- LOAD RELAY HEATER ELEMENT CR1061-C (24446)	EA	1	*	*	*	*	*	*	*	*	2	11	
P	F	5930-365-9446	BOX, SWITCH, ELECTRICAL 2744705P1 (24446)	EA	1	*	*	*	*	*	*	*	*	2	12	
P	F	6145-089-5627	CORD, ELECTRICAL 0 TO 600 V, 3 COND, STRANDED, AWG 16, COTTON WRAP, SYN-RU JACKET TYPE SJ JC580 (81348)	EA	1	*	*	*	*	*	*	15	*	2	13	
p	F	5935-644-6900	CONNECTOR, PLUG, ELECTRICAL 1 CONNECTOR MATING END, STGHT, NON-LKG, CORR-RES FER- ROUS MTL SHELL, 2 MALE FL PARALLEL CONTACTS, 10 AMP- 250 V AND 15 AMP-125 V, AC/DC, PLASTIC CABLE ACCOMMODA- TION 61F4 (02660)	EA	1	*	*	*	*	*	*	15	*	2	14	
P	D	5305-360-7731	SETSCREW FILISTER HD, SLOT-DRIVE, HALF- DOG PT, 10-32NF X 23/64 LG, BR, ZINC-PLTD	EA	6							*	*	2	15	
P	D	5910-356-7710	CAPACITOR, MOTOR DRIVE 110 V, 60 C, AC 8753704G4 (24446)	EA	1							20	*	2	16	
P	D	5305-464-7208	SCREW, CAP, HEXAGON HEAD MOTOR MOUNT 134 (28626)	EA	3							*	*	2	17	
X1	D	3413-420-9102	MOUNT, MOTOR 68 (28626)	EA	1									2	18	

TM 9-3413-223-15P SECTION VII. INDEX-FEDERAL STOCK NUMBER AND REFERENCE NUMBER CROSS-REFERENCE TO FIGURE AND ITEM NUMBER

	ETCHDE	TODM		ETCUDE	TTEM		
STOCK NUMBER	FIGURE NO.	ITEM NO.	STOCK NUMBER	FIGURE NO.	ITEM NO.		
STOCK NOMBER	NO.	110.	STOCK NOMBER	110.	NO.		
3030-356-8497	2	1	3413-420-9117				
3110-144-8505	1	22	3460-187-2199				
	1	26	3460-264-5580				
3110-156-1850	1	5	5305-043-1942	2	10		
	1	7	5305-269-3211				
3413-357-4050	1	6	5305-292-8876	1	19		
3413-420-9087	1	20	5305-357-3543	1	13		
3413-420-9088	1	17	5305-357-3546	1	15		
3413-420-9089	1	23	5305-360-7731	2	15		
3413-420-9090	1	24	5305-464-7206	2	5		
3413-420-9091			5305-464-7208	2	17		
3413-420-9092	1	2	5305-715-1213	2	3		
3413-420-9093	1	27		2	8		
3413-420-9094	1	28	5305-959-2723	1	1		
3413-420-9095	1	16	5310-484-1803	2	6		
3413-420-9096	1	14	5310-484-1804	1	4		
3413-420-9097	1	12	5310-486-2449	1	29		
3413-420-9098	1	11	5310-494-2636	1	21		
3413-420-9099	1	10		1	25		
3413-420-9100	1	3	5310-524-0580	1	9		
3413-420-9101	1	8	5315-484-1666	1	18		
3413-420-9102	2	18					
3413-420-9103	2	7	5340-485-0923	1	30		
3413-420-9105	2	4	5910-356-7710	2	16		
3413-420-9106	2	2	5930-356-8200	2	11		
3413-420-9107			5930-365-9446	2	12		
3413-420-9108			5935-644-6900	2	14		
3413-420-9109			6105-134-5546	2	9		
3413-420-9110			6145-089-5627	2	13		
DECEDENCE	MFG	FIG	ITEM	REFERENCE	MFG	FIG	ITEM
REFERENCE NO.	CODE	NO.	NO.	NO.	CODE	NO.	NO.
NO.	CODE	NO.	NO.	NO.	CODE	NO.	NO.
AL49617-5	12356	1	22	61F4	02660	2	14
CR1061-C	24446	2	11	68	28626	2	18
DL12	43991	1	5	69	28626	2	7
		1	7	70A	28626		
JC580	81348	2	13	71	28626	1	10
SP	28626	2	6	71A	28626	1	11
1	31549			72	28626		
100	28626	1	4	73	28626	1	28
105	28626			73A1	28626		
108	28626	1	30	73A2	82626		
11152	33743	2	9	74	28626	1	16
112	28626	1	15	77	28626		
113	28626	1	17	78	28626	2	4
114	28626	1	13	79	28626	1	27
115	28626	1	18	80	28626	1	23
120A	28626	1	24	87	28626	1	12
120B	28626	1	20	8753704G4	24446	2	16
122	28626			90	28626	1	29
124	28626	1	21	91	28626	1	9
		1	25	95	28626	1	6
134	28626	2	17	96	28626	1	8
135	28626	2	1	97	28626	1	3
149	28626	2	2	97A	28626	1	2
2744705P1	24446	2	12	99	28626	1	14

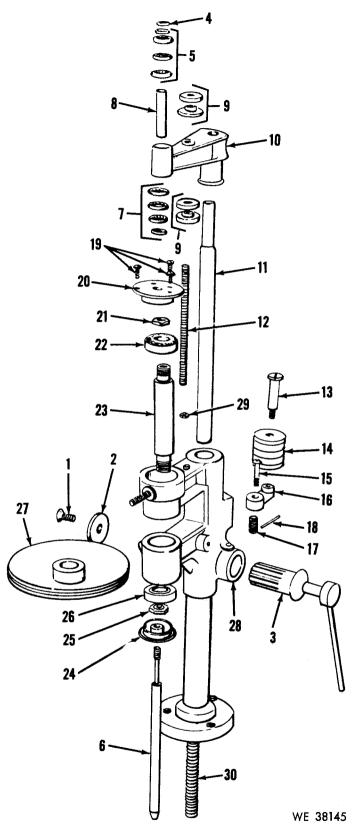


Figure 1. Drilling machine.

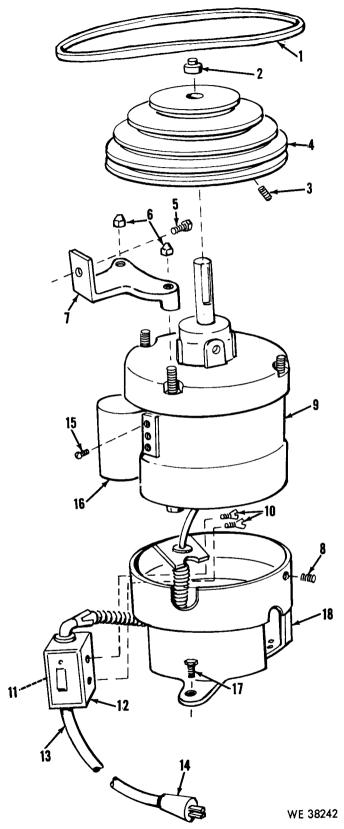


Figure 2. Drilling machine (motor group).

By Order of the Secretary of the Army:

W. C. WESTMORELAND, General, United States Army, Chief of Staff.

Official:

KENNETH G. WICKHAM, Major General, United States Army, The Adjutant General.

DISTRIBUTION:

Active Army:

DCSLOG (1) CNGB (1) CofSptS (1) Dir of Trans (1) ACSC-E (1) CofEngrs (6) TSG (1) USCONARC (3) USAMC (2) USAMEC (2) USAWECOM (75) USAASCOM (10) USACDCEC (10) ARADCOM (2) ARADCOM Rgn (2) OS Maj Comd (10) LOGCOMD (3) Armies (6) Corps (2) Div (3) Bde (1) Regt/Gp/Bat Gp (2) Gen Dep (2) Engr FLDMS (1) USABRL (1) Army Dep (5) **USAOC&S (10)** Ft Knox FLDMS (10) Arsenals (5) PG (2) MAAG (2) Sig FLDMS (1) USASCS (5) WSMR (2) USATAC (2) USATC (2) AFIP (1) Camp Stanley Storage Actv (1) USATSCH (5) NLABS (2) USARADBD (2)

Units org under fol TOE:

9-17 (2) 9-47 (2)

NG: State AG (3); Units same as active Army except allowance is one copy each unit.

USAR: None.

For explanation of abbreviations used, see AR 320-50.

TM 9-3413-223-15P— OPERATOR'S ORGANIZATIONAL, DIRECT SUPPORT, GENERAL SUPPORT AND DEPOT 1/4 HP, 115 V, 60 C, SGLE-PH (HIGH SPEED HAMMER CO, MODEL R-53)-1969 UPRIGHT, BENCH MOUNTED, 1/4 IN. CAPACITY, 2-1/4 IN. SPINDLE TRAVEL, MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST FOR DRILLING MACHINE,

This fine document...

Was brought to you by me:



<u>Liberated Manuals -- free army and government manuals</u>

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap "watermarks" and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

Free Military and Government Manuals

- SincerelyIgor Chudovhttp://igor.chudov.com/
- Chicago Machinery Movers