TECHNICAL MANUAL VOLUME 1 OF 2

TROUBLESHOOTING

DIRECT SUPPORT AND GENERAL SUPPORT LEVEL

ENGINE ASSEMBLY, DIESEL (MULTIFUEL):

NATURALLY ASPIRATED OR TURBOCHARGED,

FUEL-INJECTED, WATER-COOLED, 6-CYLINDER

MODELS: LD-465-1, NSN 2815-00-239-5824;
LD-465-1C, NSN 2815-00-134-4830; LDT-465-1C,
NSN 2815-00-103-2642; LDS-465-1, NSN 2815-00-075-0087;
LDS-465-1A, NSN 2815-00-239-5819; AND LDS-465-2,
NSN 2815-00-808-8011 AND CLUTCHES

NOTE:

THE STYLE OF THIS TM IS EXPERIMENTAL. IT IS BEING TRIED BY THE ARMY ONLY ON A LIMITED BASIS Chapter 1 General Information

Chapter 2
Troubleshooting
Approach

Chapter 3
Troubleshooting
Index

Chapter 4
Test Equipment
Procedures
Index

Chapter 5 Troubleshooting Roadmap

Chapter 6
Fault Symptom
Index

Chapter 7
Sample
Troubleshooting
Procedure

Chapter 8
Engine System
Troubleshooting

Chapter 9
Engine System
Support
Diagrams

Chapter 10 Engine System Test Procedure

WARNING

EXHAUST GASES CAN BE DEADLY

Exposure to exhaust gases produces symptoms of headache, dizziness, loss of muscular control, apparent drowsiness, and coma. Permanent brain damage or death can result from severe exposure.

Carbon monoxide occurs in the exhaust fumes of internal combustion engines, and becomes dangerously concentrated under conditions of inadequate ventilation. The following precautions must be observed to insure the safety of personnel whenever the engine is operated for maintenance purposes or tactical use.

Do not operate engine in an enclosed area unless it is adequately ventilated.

Do not idle engine for long periods without maintaining adequate ventilation.

Be alert at all times during engine operation for exhaust odors and exposure symptoms. If either are present, immediately ventilate working area. If symptoms persist, remove affected personnel from area and treat as follows: expose to fresh air; keep warm; do not permit physical exercise; if necessary, administer artificial respiration.

If exposed, seek prompt medical attention for possible delayed onset of acute lung congestion. Administer oxygen if available.

The best defense against exhaust gas poisoning is adequate ventilation.

WARNING

SERIOUS OR FATAL INJURY TO PERSONNEL MAY RESULT IF THE FOLLOWING INSTRUCTIONS ARE NOT COMPLIED WITH.

Diesel fuel is very flammable. Care must be used when choosing a place to work on fuel system. Keep engine about 50 feet away from an area where open flame, sparks, or smoking may cause a fire. Keep a fire extinguisher close by.

Fuel coming out of an injector nozzle under pressure can go through the skin. This can cause blood poisoning. Keep hands away from injector nozzle when doing test procedures.

Make sure engine has had at least an hour to cool down before working on cooling system. Due to high temperature of coolant, bad burns can occur if contact is made with skin.

* TM 9-2815-210-34-1

T.O.38G1-48-12-1

TECHNICAL MANUAL NO. TM 9-2815-210-34-1 TECHNICAL ORDER NO. 38G1-48-12-1 DEPARTMENTS OF THE ARMY
AND
THE AIR FORCE
WASHINGTON, DC, 3 April 1981

TECHNICAL MANUAL VOLUME 1 OF 2

TROUBLESHOOTING

DIRECT SUPPORT AND GENERAL SUPPORT LEVEL

ENGINE ASSEMBLY, DIESEL (MULTIFUEL): NATURALLY ASPIRATED

OR TURBOCHARGED, FUEL-INJECTED, WATER-COOLED, 6-CYLINDER

MODELS: LD-465-1, NSN 2815-00-239-5824;

LD-465-1C, NSN 2815-00-134-4830; LDT-465-1C,

NSN 2815-00-103-2642; LDS-465-1, NSN 2815-00-075-0087

LDS-465-1A, NSN 2815-00-239-5819; AND LDS-465-2,

NSN 2815-00-808-8011 AND CLUTCHES

REPORTING OF ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedure, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in the back of this manual direct to: Commander, US Army Tank-Automotive Command, ATTN: DRSTA-MB, Warren, Michigan 48090. A reply will be furnished to you.

TABLE OF CONTENTS

VOLUME 1 OF 2

									Par	agrap	h Page
СНАР	TER 1	. GENE	ERAL IN	FORM	ATION						
		Sc	оре						1	- 1	1 - 1
		Org	ganization	ı					1	- 2	1 - 1
*This	manual	togethe	r with	TM	9-2815-210-34-2-1,	3	April	1981;	and	TM	9-2815-210-34-
2-2, 3	April	1981, s	supersede	s TM	9-2815-210-34,	16	June	1978.			

TABLE OF CONTENTS-CONT

	Paragraph	Page
Troubleshooting Approach	1 - 3	1 - 1
CHAPTER 2. TROUBLESHOOTING APPROACH		
General Approach	2 - 1	2 - 1
Troubleshooting Index	2 - 2	2 - 1
Test Equipment Procedures Index	2 - 3	2 - 1
Troubleshooting Roadmap	2 - 4	2 - 1
Fault Symptom Index	2 - 5	2 - 1
Sample Troubleshooting Procedure	2 - 6	2 - 1
General	3 - 1	3 - 1
Index	3 - 2	3 - 1
General	4 - 1	4 - 1
Index	4 - 2	4 - 1
General	5 - 1	5 - 1
Roadmap CHAPTER 6. FAULT SYMPTOM INDEXES	5 - 2	5 - 1
General	6 - 1	6 - 1
Index	6 - 2	6 - 1
CHAPTER 7. SAMPLE TROUBLESHOOTING PROCEDURE		
General	7 - 1	7 - 1
Sample Detailed Procedure	7 - 2	7 - 1
Equipment Items Covered	8 - 1	8 - 1
Equipment Items Not Covered	8 - 2	8 - 1
General	9 - 1	9 - 1
General	10-1	10-1
Test Set-up	10-2	10-1
Test Procedure	10-3	10-1
VOLUME 2 OF 2		
Part 1 of 2		
(TM 9-2815-210-34-2-1)		
CHAPTER 1. GENERAL MAINTENANCE INFORMATION CHAPTER 2. PRELIMINARY PROCEDURES FOR ENGINE MAINTENANCE		
Section I. Scope		2 - 1
Section II. Preparation of Engine for Repair		2 - 1

TABLE OF CONTENTS-CONT

		Paragraph	Page
CHAPTER 3.	ENGINE DISASSEMBLY		
Section I.	Scope		3 - 1
Section II.	Removal of Engine Accessories		3 - 1
	Disassembly of Engine Assembly		3 - 129
	Part 2 Of 2		
	(TM 9-2815-210-34-2-2)		
CHAPTER 4.	CLEANING, INSPECTION, AND REPAIR		
Section I.	Scope		4 - 1
Section II.	General Cleaning, Inspection, and Repair		
	Procedures		4 - 1
Section III.	Cleaning, Inspection, and Repair of Engine		
	Components and Accessories		4 - 2
CHAPTER 5.	FINAL ASSEMBLY		
Section I.	Scope		5 - 1
Section II.	Assembly of Engine Assembly		5 - 1
CHAPTER 6.	DYNAMOMETER TESTS AND RUN-IN PROCEDURES		
Section I.	Scope		6 - 1
Section II.	Run-In, Tests, and Adjustments		6 - 1
APPENDIX A.	REFERENCES		A - 1
INDEX			Index 1

GENERAL INFORMATION

- 1-1. SCOPE. This volume shows you how to do troubleshooting at the direct support and general support levels of maintenance. The amount of troubleshooting you can do is based on what the Maintenance Allocation Chart says you can fix. Because of this, the only trouble symptoms you will find here are those that could be caused by faulty things you can fix.
- 1-2. ORGANIZATION. This volume has the information you will need to troubleshoot the engine. Chapter 2 tells you how to use the information in the other chapters of this volume to find what is wrong with the truck, and what you must do to fix it. Chapter 7 has a procedure that takes you step-by-step through a sample trouble-shooting procedure and shows you how to use the information to find the trouble and fix it.
- 1-3. TROUBLESHOOTING APPROACH. In order to find out what is causing the problem in the truck, you must use a good approach. A good approach just means a way of doing troubleshooting so you can find the problem and not get confused or lost. The following chapter describes how you can use the materials in this volume to troubleshoot with a good approach.

TROUBLESHOOTING APPROACH

- 2-1. GENERAL APPROACH. This chapter gives you instructions on how to use the troubleshooting material to help, you find and fix the trouble. In every system of the engine there can be faults or problems which will cause certain symptoms. Symptoms can be such things as unusual noise, vibration, or even complete failure of a system. This volume gives information for each system on which you can do troubleshooting to find faults and fix them. Before you troubleshoot a system, you should look at the troubleshooting indexes which will lead you to the information you need to help make your troubleshooting faster and easier. If you follow the instructions the right way, you will find those troubles you can fix. But, if you fix something and the trouble is still there, it means there is more than one trouble. If this happens, start all over again to find the other trouble.
- 2-2. TROUBLESHOOTING INDEX. The troubleshooting index, and instructions on how to use it are in chapter 3. Go to this index first because it tells you where to find troubleshooting roadmaps, fault symptom indexes, summary troubleshooting charts and support diagrams for each system.
- 2-3. TEST EQUIPMENT PROCEDURES INDEX. The test equipment procedures index, and instructions on how to use it are in chapter 4. This index tells you where to find tests which you can use to do your troubleshooting. It also tells you what equipment you will need to do the tests. If you have a STE/ICE (Simplified Test Equipment/ Internal Combustion Engine) Set (NSN 4910-00-124-2554), you may use it, where applicable, to do your troubleshooting. Refer to TM 9-4910-571-34&P.
- 2-4. TROUBLESHOOTING ROADMAP. A troubleshooting roadmap is given in chapter 5. If the system is made up of subsystems, these subsystems are also on the roadmap. Under the subsystem is a list of things which are the most likely causes of a fault symptom in that subsystem. If you have enough skill, you can troubleshoot these things on the engine without using the detailed troubleshooting procedures. So if you know enough about the engine to work on your own, use the roadmap for the system with the problem before you check the fault symptom index.
- 2-5. FAULT SYMPTOM INDEX. Fault symptom indexes and instructions on how to use them are in chapter 6. For each system of the engine, there is an index which gives you a list of the fault symptoms for that system. The index also tells you where to find the detailed troubleshooting procedures and what resources (tools/people) you need to do each procedure.
- 2-6. SAMPLE TROUBLESHOOTING PROCEDURE. A sample troubleshooting procedure is in chapter 7. This sample procedure will help you see the way detailed troubleshooting procedures are to be used.

TROUBLESHOOTING INDEX

- 3-1. GENERAL. This chapter has a troubleshooting index which covers every system of the engine on which you can do troubleshooting. The index tells you where to find all the other information you need to do your troubleshooting procedures.
- 3-2. INDEX. The troubleshooting index (figure 3-1) is divided into five columns that list the system, troubleshooting roadmap, fault symptoms, summary troubleshooting procedures, and system support diagrams. The following breakdown tells you what is in each column.
- a. System Column. This column gives a list of systems on the engine for which troubleshooting can be done at the direct support and general support maintenance levels.
- b. <u>Troubleshooting Roadmaps Column</u>. This column tells you where to find the troubleshooting roadmap for each listed system. These roadmaps are given in chapter 5.
- c. <u>Fault Symptom Index Column</u>. This column tells you where to find the trouble-shooting fault symptom index for each listed system. Fault symptom indexes are given in chapter 6.
- d. <u>Summary Troubleshooting Procedures Column</u>. This column tells you where to find the summary troubleshooting procedure for each listed system. Some systems do not have summary troubleshooting procedures, so the column will be left blank for those systems.
- e. System Support Diagrams Column. This column tells you where to find support diagrams for each listed system. Some systems do not have support diagrams, so the column will be left blank for those systems.

	SYSTEM	TROUBLE- SHOOTING ROADMAP	FAULT SYMPTOM INDEX	SUMMARY TROUBLE- SHOOTING PROCEDURES	SYSTEM SUPPORT DIAGRAMS
1	ENGINE	Figure 5-1	Table 6-1		Figure 9-1-9-4
					· · · · · · · · · · · · · · · · · · ·
	·				
)			
					!
	· · · · · · · · · · · · · · · · · · ·				
	NATIONAL CONTRACTOR OF THE PROPERTY OF THE PRO				
		· · · · · · · · · · · · · · · · · · ·			
П					
П					
П					
П					
				*	

TEST EQUIPMENT PROCEDURES INDEX

- 4-1. GENERAL. This chapter has a test equipment procedures index which tells you where to find the tests you need to do your troubleshooting.
- 4-2. INDEX. The test equipment procedures index is divided into three columns that list test equipment, tests, and figure numbers. The following breakdown tells you what is in each column.
- a. Test Equipment Column. This column tells you what kind of equipment you need to do your troubleshooting tests.
- b. <u>Tests Column</u>. This column tells you what tests are given in this manual. Next to each piece of test equipment are listed the tests that you can do with that equipment. This column also gives troubleshooting tests which can be done without using test equipment.
- c. Figure Column. This column tells you where you can find the tests in this manual.

	TEST EQUIPMENT	TESTS	FIGURE
1		Fuel Injector Nozzle	10-1
		*	
2			
3			
4			
5			
6			
7			
8			

Figure 4-1. Test Equipment Procedures Index

TROUBLESHOOTING ROADMAP

- 5-1. GENERAL. This chapter gives a troubleshooting roadmap for the engine for which you have detailed troubleshooting procedures. Figure 5-1 covers the roadmap for the detailed procedures.
- 5-2. ROADMAP. The roadmap gives a list of things which are most likely to cause a fault symptom in a system or subsystem. At least one of the items listed will be found to be bad when you do the detailed troubleshooting procedures for that system.

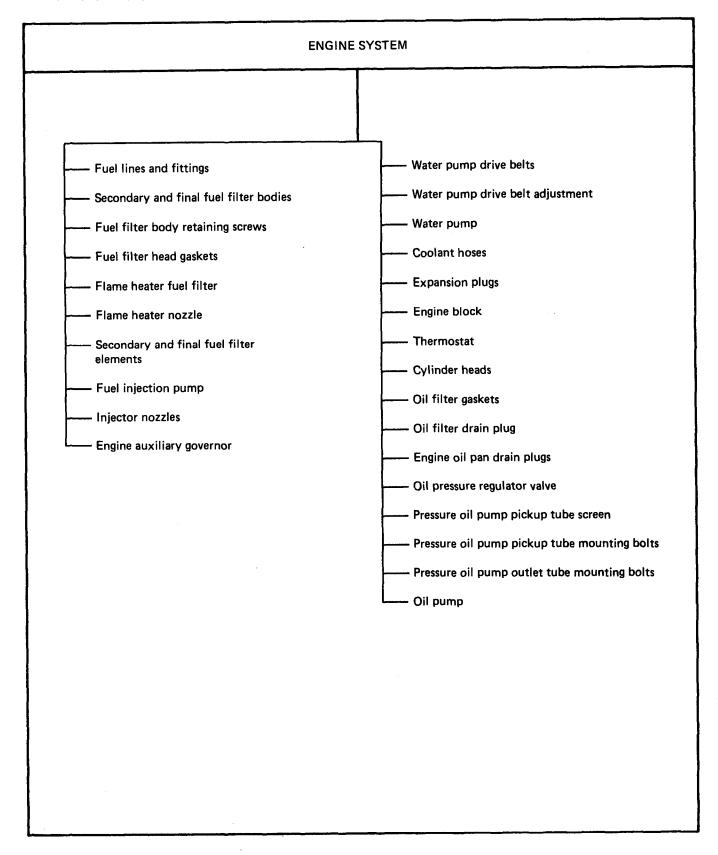


Figure 5-1. Troubleshooting Roadmap, Engine System

FAULT SYMPTOM INDEX

- 6-1. GENERAL. This chapter gives a troubleshooting fault symptom index for every system of the engine for which you have detailed troubleshooting procedures. The index is in table form (table 6-1) which gives you a quick way to check what material you have to use to do your troubleshooting.
- 6-2. INDEX. The index is divided into columns which give you information you need to help you do troubleshooting procedures. The following breakdown tells you what is in each column.
- a. <u>Subsystem Column</u>. If the main system is divided into subsystems, the subsystems will be listed in this column.
- b. <u>Symptom Column</u>. This column lists the symptoms, or problems for which detailed troubleshooting procedures are given.
- c. Summary Column. This column tells you where to find the summary trouble-shooting procedures for each symptom.
- d. <u>Detailed Column</u>. This column tells you where to find the detailed trouble-shooting procedure for each symptom.
- e. <u>Persons Column</u>. This column tells you how many people are needed to do the troubleshooting procedure.
- f. <u>Special Tools Column</u>. Any tools needed to do the troubleshooting procedure which are not included in your common tool kit are listed in this column.
- g. <u>Standard Tools Column</u>. A dot in this column means that tools found in your common tool kit are needed to do the troubleshooting procedure.
- h. <u>Materials Column</u>. This column tells you what materials are needed to do the troubleshooting procedure. These materials and how they will be issued will be decide by your maintenance officer.
- i. <u>Time Column</u>. This column tells you how much time you will need to do the detailed troubleshooting procedure. The time will be decided by your maintenance officer.

FAULT SYMPTOM INDEX

TABLE 6-1. ENGINE SYSTEM								
		CEDURE	RESOURCES REQ'D					
SUBSYSTEM	SYMPTOM	SUMMARY	DETAILED ·	PERSONS	SPECIAL TOOLS	STANDARD Z	MATERIALS	TIME
	Engine cranks but does not start		Figure 8-1	2			-	
	2. Engine runs too fast		Figure 8-2	1		•		
	 Water temperature gage reads above 200°F while running 		Figure 8-3	1		•		
	4. Low oil pressure		Figure 8-4	1		•		
•	5. Engine lacks power		Figure 8-5	1		•		

SAMPLE TROUBLESHOOTING PROCEDURE

- 7-1. GENERAL. This chapter gives a sample troubleshooting procedure. The purpose of the sample procedure is to help you see how detailed troubleshooting procedures, test equipment procedures, and summary troubleshooting procedures are used to find faults in a system.
- 7-2. SAMPLE DETAILED PROCEDURE. (See figure 7-1.) The sample detailed procedure given is the fuel system troubleshooting procedure for the symptom, STARTER MOTOR WILL NOT CRANK ENGINE. This symptom is one you will have when you try to start your truck and certain parts on the truck are not working correctly. In each numbered box, instructions are given which tell you what to do, and how to do it. A large dot is placed next to the "what-to-do" instructions, and small dots next to the "how-to-do-it" instructions.
- a. Box number 1 gives general instructions on getting the engine ready before you start to troubleshoot.
- b. Box number 2 gives fault isolation test instructions. In this case you are told to check starting system circuit for loose, burned, or broken leads and connections. These tests or checks are often referred to in detailed troubleshooting procedures to help you find the problem and fix it. After you do the tests or checks you read the question at the bottom of box number 2. If the starter system is not okay, the answer to the question is NO, so you go to the next box.
- c. Box number 3 gives you a corrective action. In this case the fault is burned or broken leads or connectors. The corrective action is what you do to fix the fault, which is to replace any burned or broken leads or connectors. If the engine still doesn't start after you do this, it could mean that there are other faults in the system. When this happens, go back to the beginning of the procedure and do each step again until you find the other faults.
- d. Sometimes the corrective actions given for a fault will tell you what to do to fix the fault, but will not give you detailed instructions on how to fix it. Instead, you will be told to refer to another volume in this manual for these instructions. Box number (4) is an example of this.

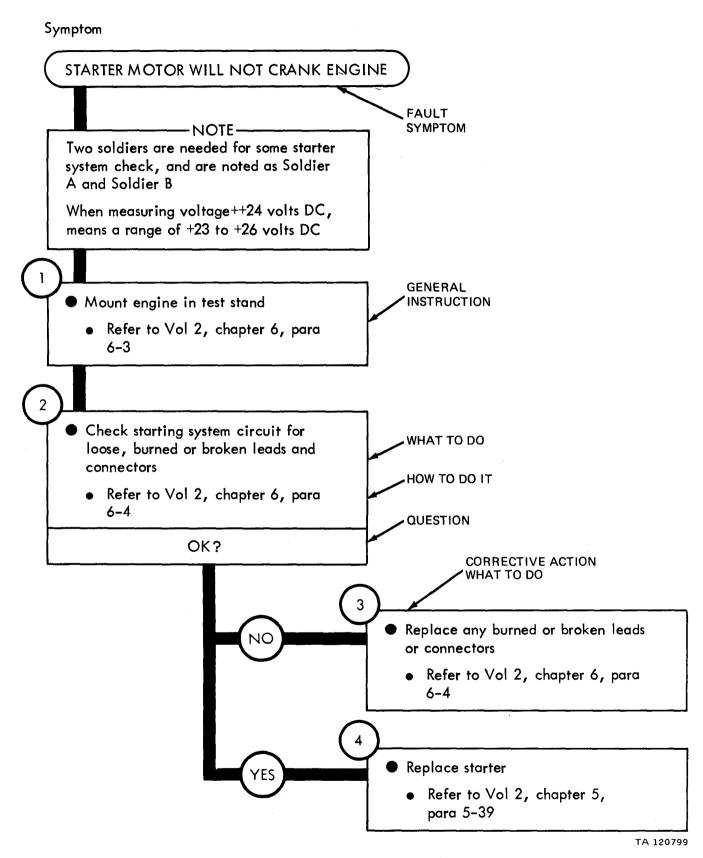


Figure 7-1. Sample Troubleshooting Procedure

ENGINE SYSTEM TROUBLESHOOTING

- 8-1. EQUIPMENT ITEMS COVERED. This chapter gives equipment troubleshooting procedures for the engine system, for which there are authorized corrective maintenance tasks at the direct support and general support maintenance levels.
- 8-2. EQUIPMENT ITEMS NOT COVERED. All equipment items for which corrective maintenance is authorized at the direct support and general support maintenance levels are covered in this chapter.

Symptom


ENGINE CRANKS BUT DOES NOT START

-WARNING-

Diesel fuel is very flammable. Care must be used when choosing a place to work on fuel system. Keep engine about 50 feet away from an area where open flame, sparks, or smoking may cause a fire. Keep a fire extinguisher close by

- 1
- Mount engine in test stand
 - Refer to Vol 2, chapter 6, para 6-3
- 2
- Check all fuel lines and fittings
 - Look for a crushed or broken line.
 See figure 9-1, 9-2, 9-3, or 9-4
 - Look for signs of fuel leaking from lines or fittings
 - Feel for loose fittings

Are all fuel lines and fittings OK?

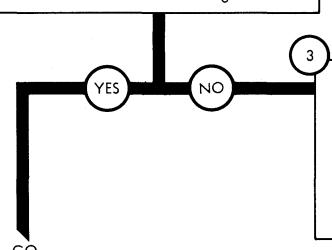

- Tighten loose or leaking fittings
- Replace bent, broken, or cracked fuel lines
 - Refer to Vol 2, chapter 3, para 3-5, 3-7, 3-8, 3-14, 3-20, or 3-21 and chapter 5, para 5-23, 5-31, 5-34, 5-35, 5-36, or 5-37

Fgure 8-1 (sheet 1 of 7)

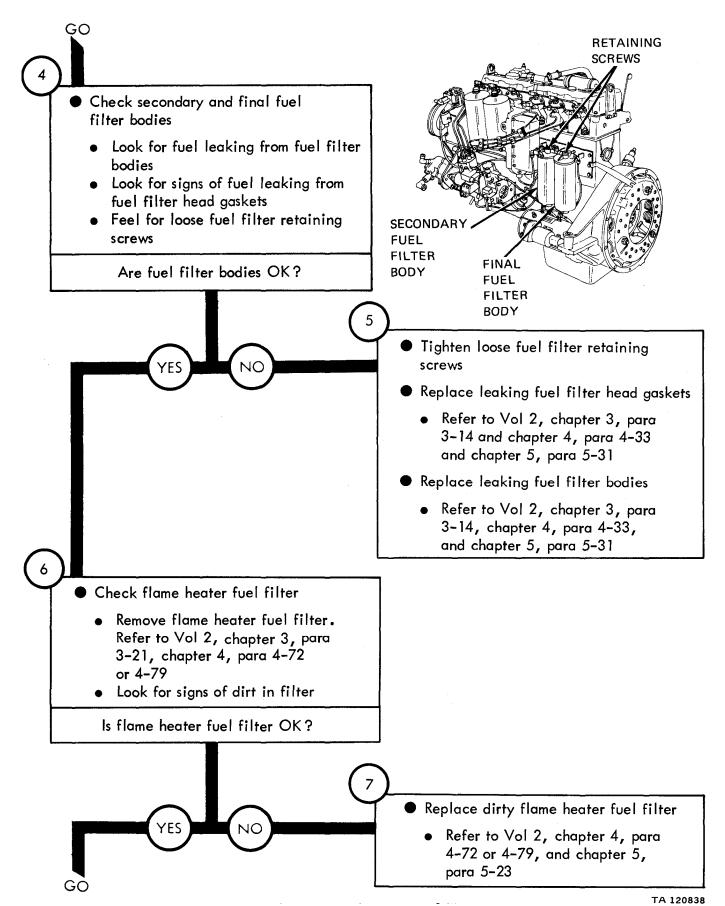


Figure 8-1 (sheet 2 of 7)

8 - 3

ТМ

Figure 8-1 (Sheet 3 of 7)

TA 120839

GO

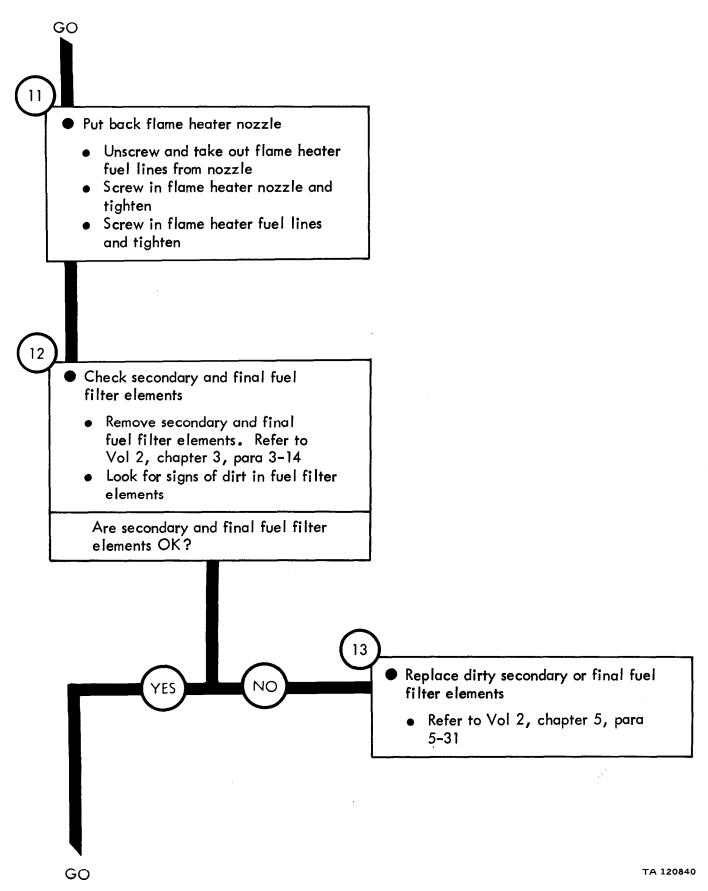


Figure 8-1 (Sheet 4 of 7)

-NOTE -

The following procedure will need the use of two soldiers. The lead soldier will be called Soldier A. The helper will be called Soldier B

- Check for fuel supply from fuel injection pump
 - SOLDIER A: Loosen one fuel

injector nozzle fitting

but do not take it off

SOLDIER B: Crank engine for 5

seconds. Refer to Vol 2, chapter 6,


para 6-6

SOLDIER A: See if fuel comes

out of fuel injector

nozzle fitting

Does fuel come out of fitting?

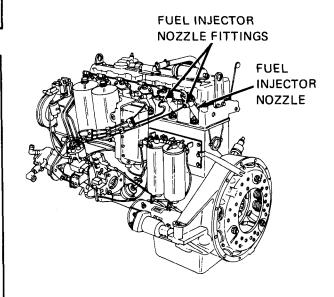

Replace fuel injection pump

16

- Take out all six injector nozzles
 - Refer to Vol 2, chapter 3, para
- Clean, inspect and repair all six injector nozzles
 - Refer to Vol 2, chapter 4, para 4-40

Are injector nozzles OK?

GÒ

 Refer to Vol 2, chapter 3, para 3-10, and chapter 5, para 5-33

Figure 8-1 (Sheet 5 of 7)


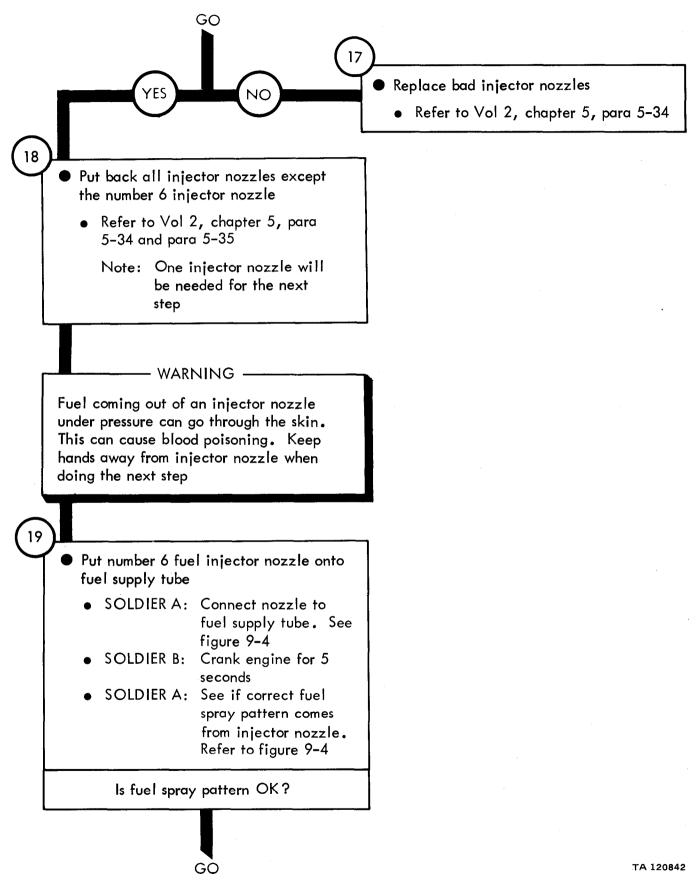


Figure 8-1 (Sheet 6 of 7)

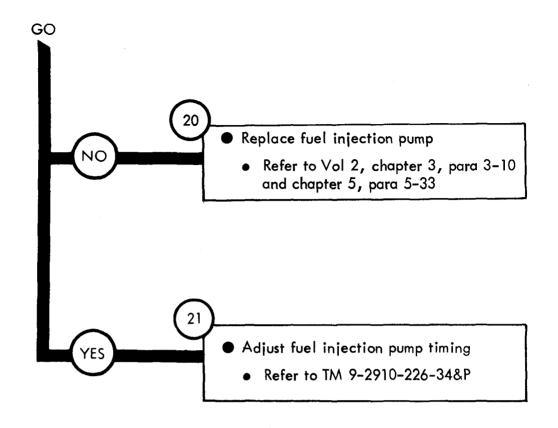

TA 120843

Symptom ENGINE RUNS TOO FAST Mount engine in test stand • Refer to Vol 2, chapter 6, para 2 Check fuel lines and fittings • Look for bent or crushed fuel lines or fittings. See figure 9-1, 9-2, 9-3, or 9-4 Are fuel lines and fittings OK? Replace crushed or broken fuel lines and fittings • Refer to Vol 2, chapter 3, para 3-5, 3-7, 3-8, 3-14, 3-20, or 3-21 and chapter 5, para 5-23, 5-31, 5-34, 5-35, 5-36, or 5-37 Adjust engine auxiliary governor Refer to TM 9-2910-226-34&P Does engine still run too fast? End troubleshooting procedure for engine runs to fast Repair or replace engine auxiliary governor Refer to TM 9-2910-226-34&P TA120844

Figure 8-2

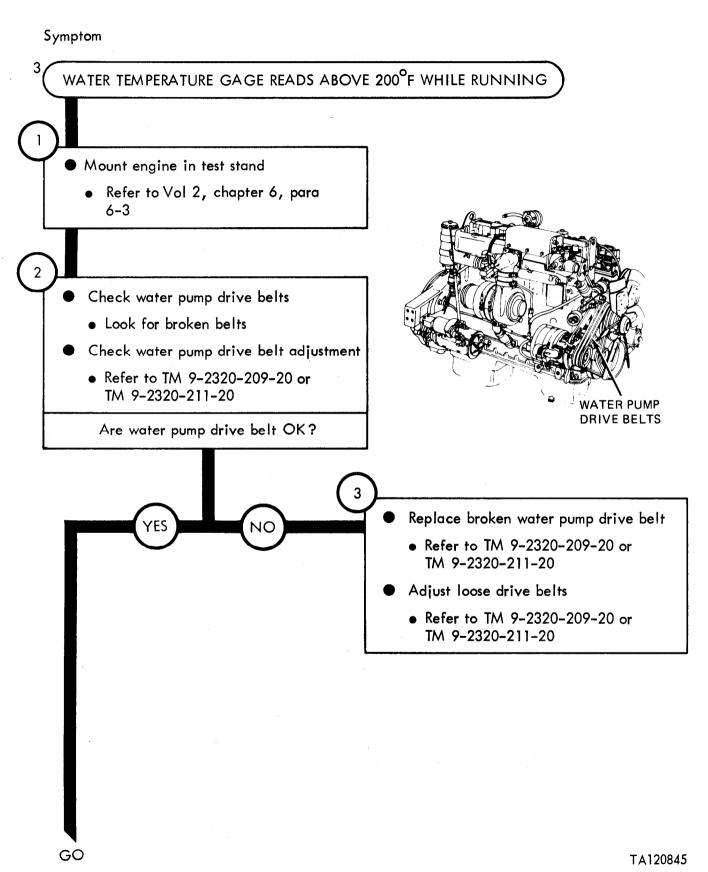


Figure 8-3 (Sheet 1 of 4)

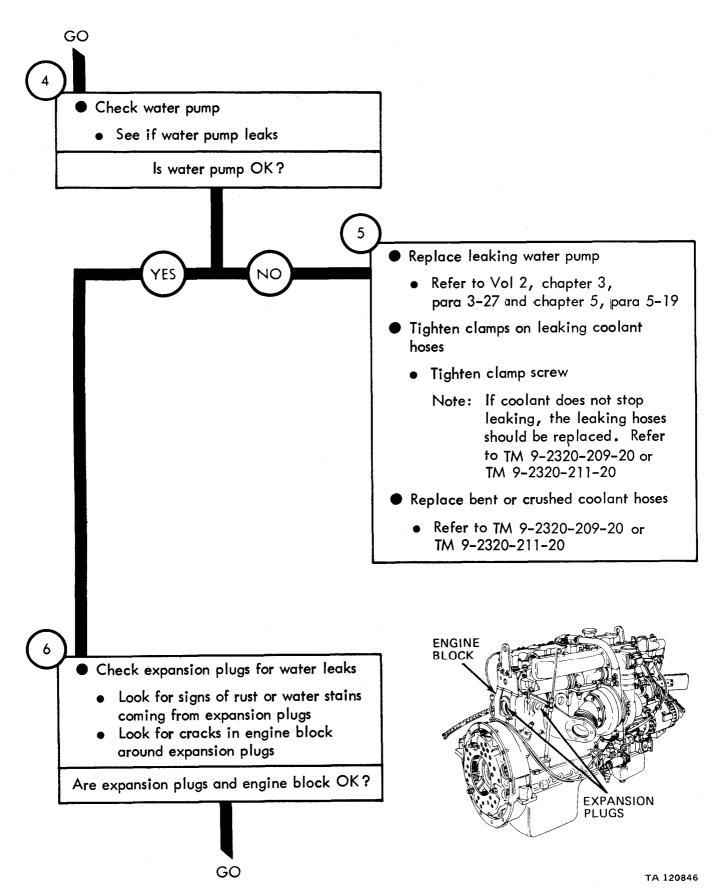


Figure 8-3 (Sheet 2 of 4)

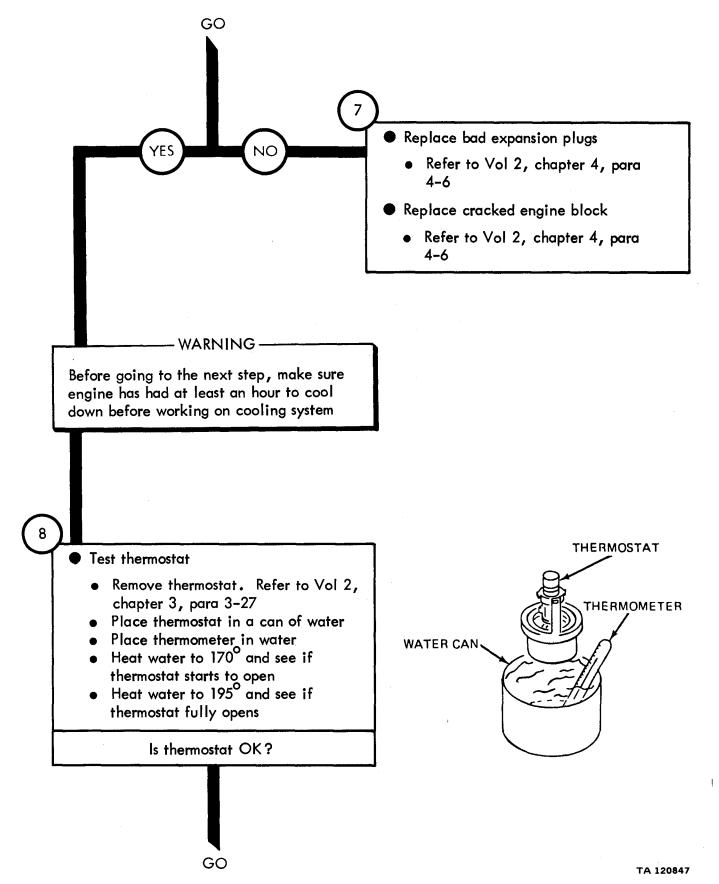


Figure 8-3 (Sheet 3 of 4)

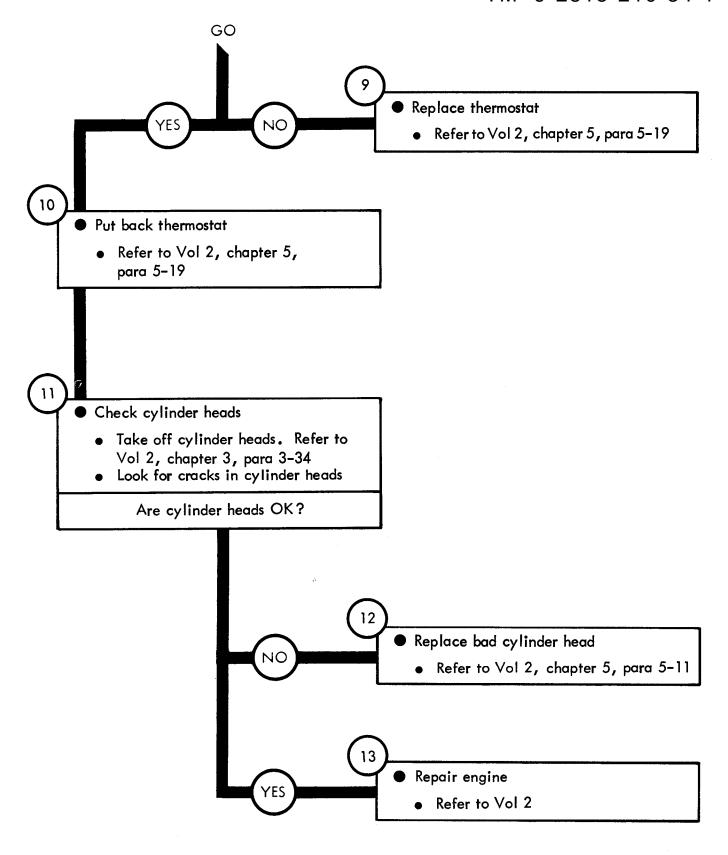


Figure 8-3 (Sheet 4 of 4)

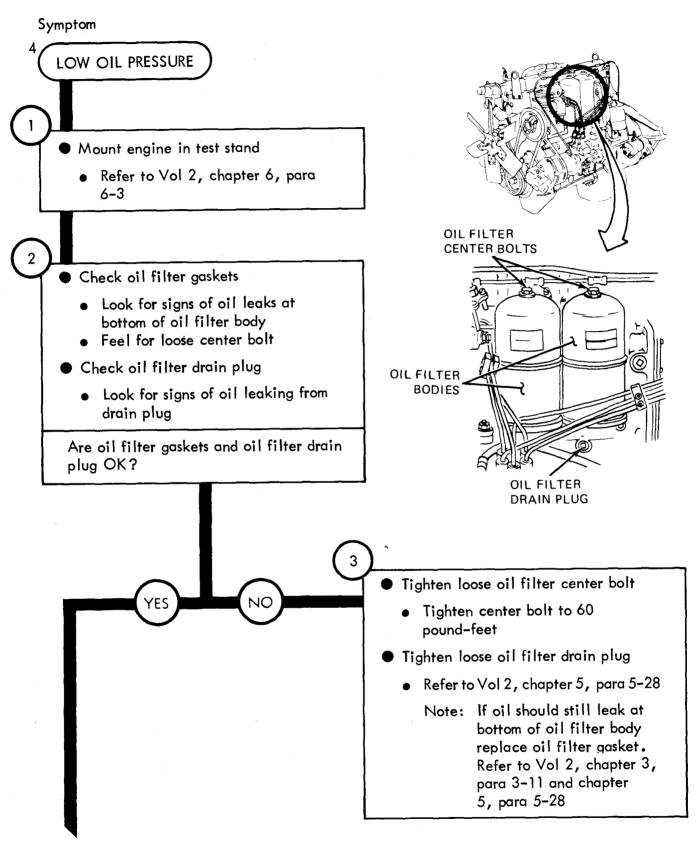


Figure 8-4 (Sheet 1 Of 5)

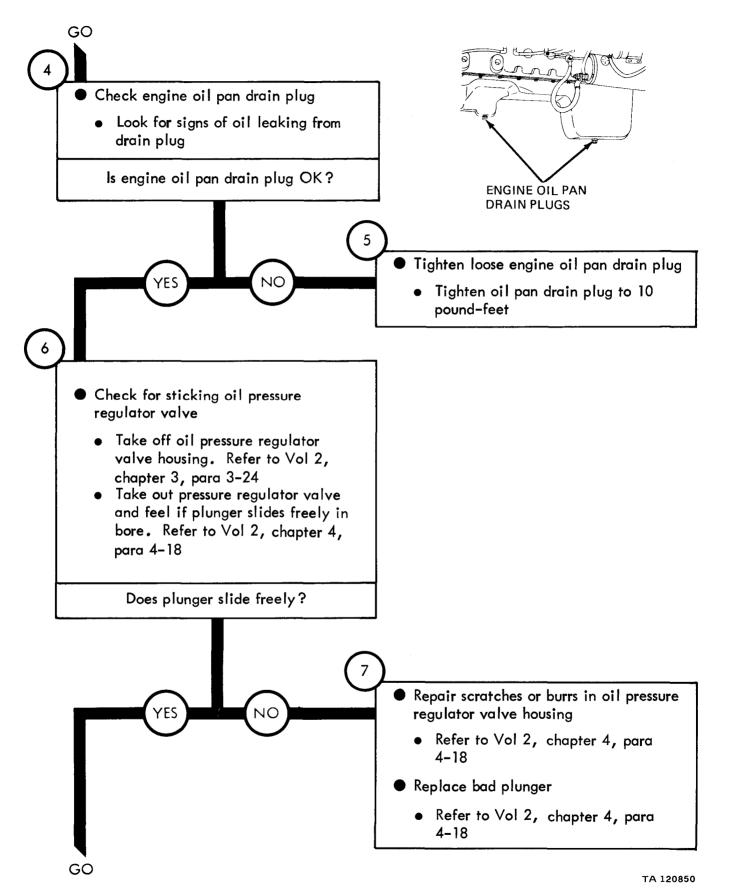


Figure 8-4 (Sheet 2 of 5)

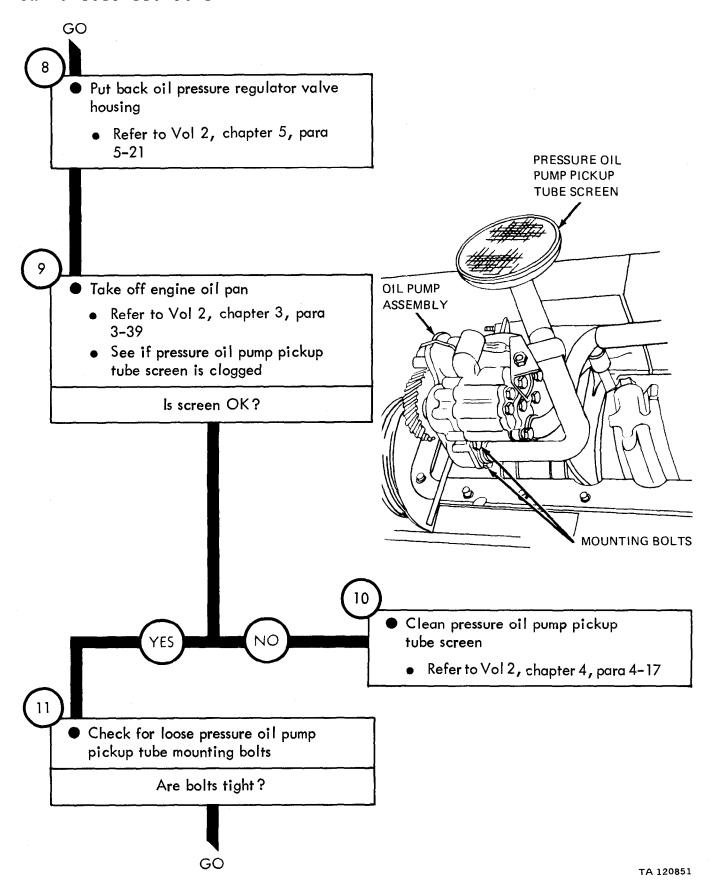


Figure 8-4 (Sheet 3 of 5)


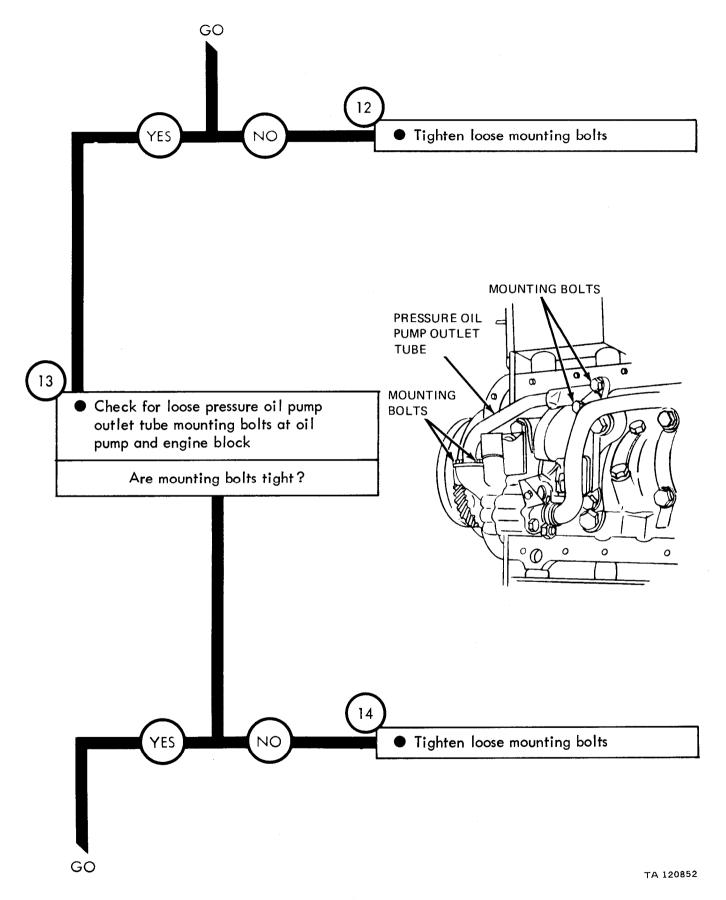


Figure 8-4 (Sheet 4 of 5)

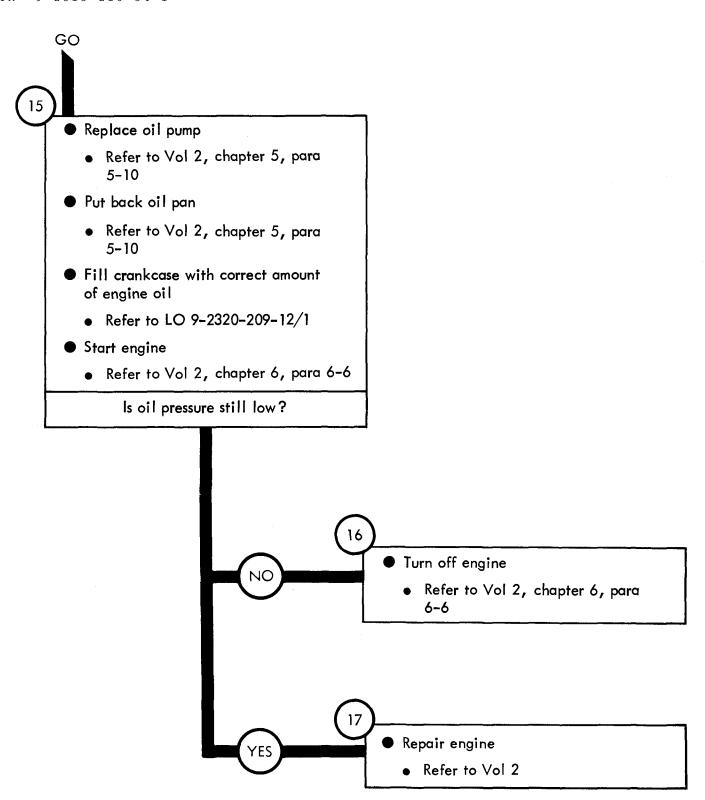

TA 120853

Figure 8-4 (Sheet 5 of 5)

Symptom

ENGINE LACKS POWER

-WARNING-

Diesel fuel is very flammable. Care must be used when choosing a place to work on fuel system. Keep engine about 50 feet away from an area where open flame, sparks, or smoking may cause a fire. Keep a fire extinguisher close by

SECONDARY RETAINING FUEL SCREWS FILTER




- Mount engine in test stand
 - Refer to Vol 2, chapter 6, para 6-3


2

GO

- Check secondary and final fuel filter bodies
 - Look for fuel leaking from fuel filter bodies
 - Look for signs of fuel leaking from fuel filter head gasket
 - Feel for loose retaining screw

Are fuel filter bodies OK?

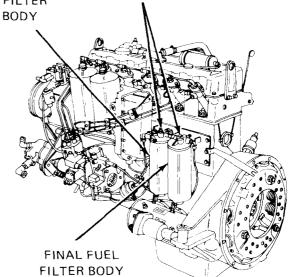

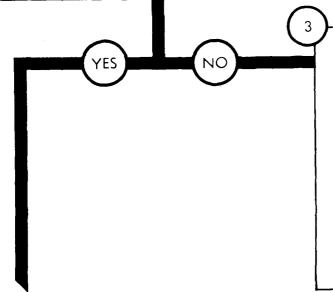

- Tighten fuel filter bodies
 - Tighten retaining screws
- Replace leaking fuel filter head gaskets
 - Refer to Vol 2, chapter 3, para 3-14 and chapter 4, para 4-33 and chapter 5, para 5-31
- Replace cracked or broken fuel filter bodies
 - Refer to Vol 2, chapter 3, para 3–14, chapter 4, para 4–33, chapter 5, para 5–31

Figure 8-5 (Sheet 1 of 3)


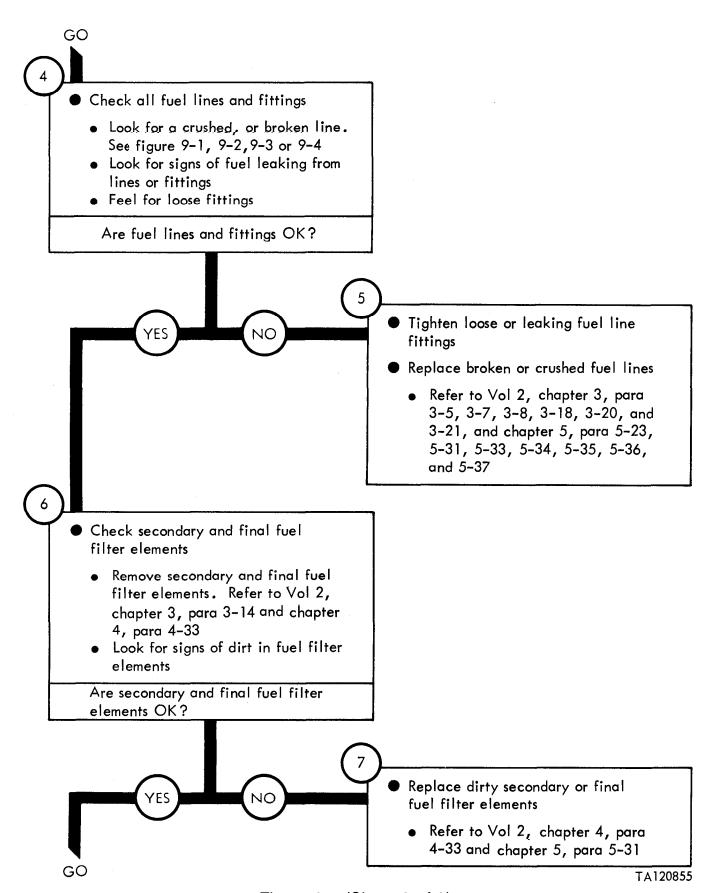



Figure 8-5 (Sheet 2 of 3)

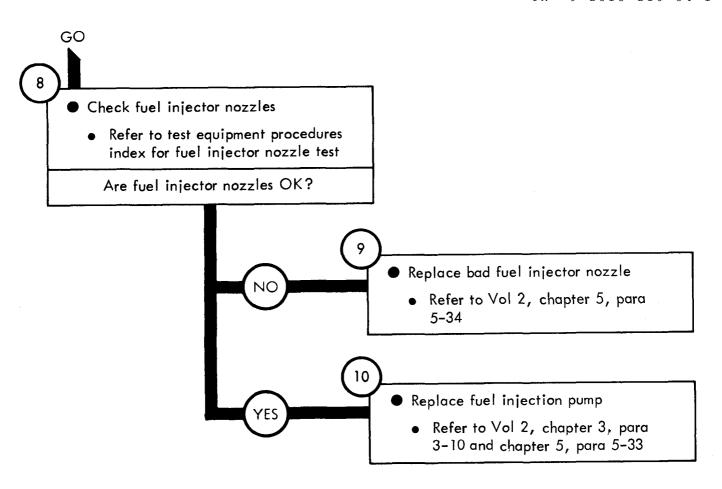

CHAPTER 9

ENGINE SYSTEM SUPPORT DIAGRAMS

9-1.GENERAL. This chapter gives the diagrams you need when doing trouble-shooting procedures in chapter 8. Figure 3-1 is a complete listing of all support diagrams used in this manual.

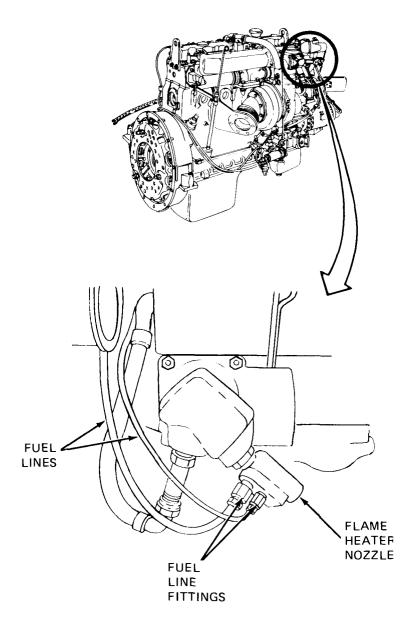

TA 120857


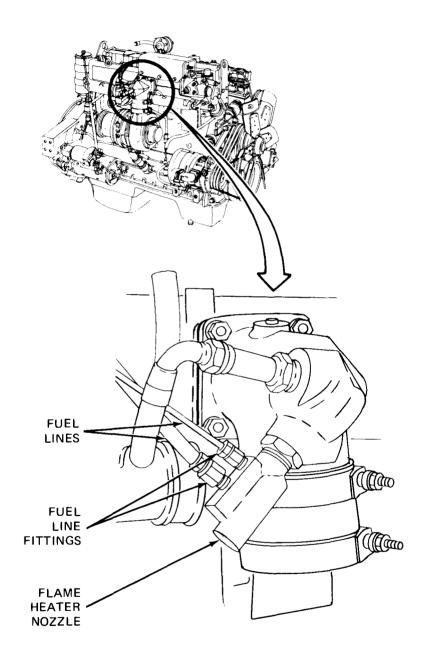


Figure 9-2. Flame Heater Nozzle, Fuel Lines, and Fittings for LDS-465-1, LDS-465-1A and LDS-465-2

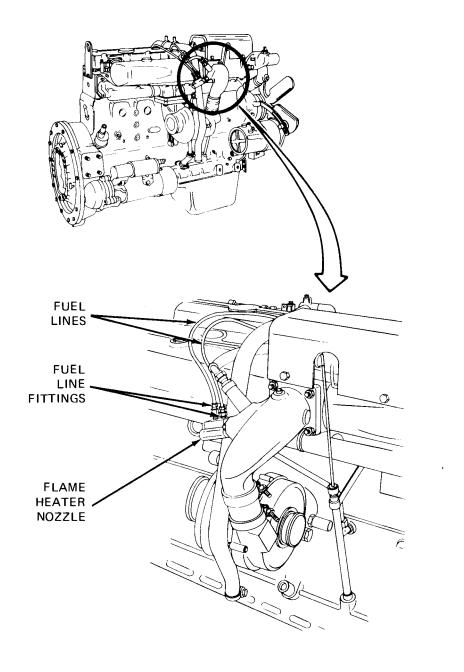

TA 120859

FIGURE 9-3. Flame Heater Nozzle, Fuel Lines, and Fittings for LDT-465-1

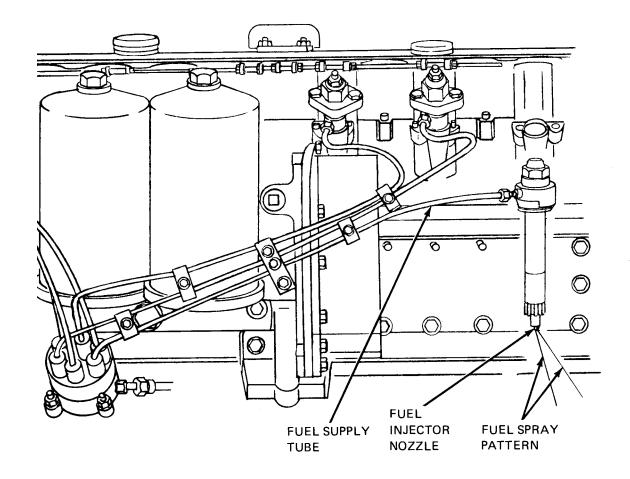


Figure 9-4. Fuel Injector Nozzle Spray Pattern

CHAPTER 10

ENGINE SYSTEM TEST PROCEDURE

- 10-1. GENERAL. This chapter gives test procedure for the tests given in chapter 8, for the engine system.
- 10-2. TEST SET-UP. Instructions for setup of test equipment and parts to be tested are given before the test procedures. Illustrations are used, when needed, to show you how to hook up the test equipment to the part to be tested.
- 10-3. TEST PROCEDURE. Detailed step-by-step instructions, in flow chart form, are given for each test. The procedure calls out the type of test and the condition of the engine system for each part of testing. The step-by-step test will lead you to the bad component or to a fault symptom within a related system. Reference is made to the fault symptom index, chapter 6, if the test shows a fault in another system.

TM

TA 120860

Figure 10-1 (Sheet 1 of 2)

GO

GO 2

Check fuel injector nozzles


 Loosen fuel injector nozzle fitting of one fuel injector nozzle and see if engine runs rougher

Note: If engine runs rougher the injector nozzle is OK

• Tighten fuel injector nozzle fitting

Note: Do procedure for all six fuel injector nozzle fittings

- Stop engine
 - Refer to Vol 2, chapter 6, para 6-6

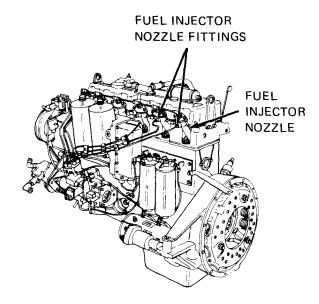

By Order of the Secretaries of the Army and the Air Force:

E. C. MEYER
General, United States Army
Chief of Staff

Official:

J. C. PENNINGTON
Major General, United States Army
The Adjutant General

LEW ALLEN, JR., General, USAF Chief of Staff

Official:

VAN L. CRAWFORD, JR., Colonel, USAF Director of Administration

Distribution:

 $To\ be\ distributed$ in accordance with DA Fom 12-38, Direct and General Support Maintenance requirements for 2-1/2-Ton Truck Cargo, 2-1/1-Ton Truck Van, 5-Ton Truck Chassis, 5-Ton Truck Van, and 5-Ton Truck Cargo, etc.

U.S. GOVRNMENT PRINTING OFFICE: 1994 0-154-882

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



SOMETHING WRONG WITH THIS PUBLICATION?

THEN... JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL! FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

CDR, 1st Bn, 65th ADA

Attn: SP4 Jane Idone

Key West, FL 33040

DATE SENT

Date sent in

PUBLICATION NUMBER

TM 9-2815-210-34-1

PUBLICATION DATE

3. Apr 81

PUBLICATION TITLE ENGINE ASSEMBLIES,

DIR. & GEN. SUPP. TROUBLESHOOTING

				DIN. & ULN. SOFF. INCODELSHOOTING
BE EXAC	PARA-	FIGURE	TABLE	IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
6-2	GRAPH	NO NO	6-1	Symptom 1, detailed procedure refers 6 figure 8-3. Should refer to Figure 8-1.
8-3		8-1 (Sheet 2 g 7)		Change illustration callorits. Reason: callorits for SECONDARY FUEL FILTER BODY and FINAL FUEL FILTER BODY are seversed.
8-12		8-3 (Sheet 3 G 4)		Box 1), sixth sentence reads "Heat water to 170° and see if thermostat opens. "Should read "Heat water to 170° and see if thermostat starts to open "
				SAMPLE
E	NAME GRAC	_		Autovon 222-224 Jane Idene

DA 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.


PS -- IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

FILL IN YOUR UNIT'S ADDRESS

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander U.S. Army Tank-Automotive Command ATTN: DRSTA-MB Warren, MI 48090

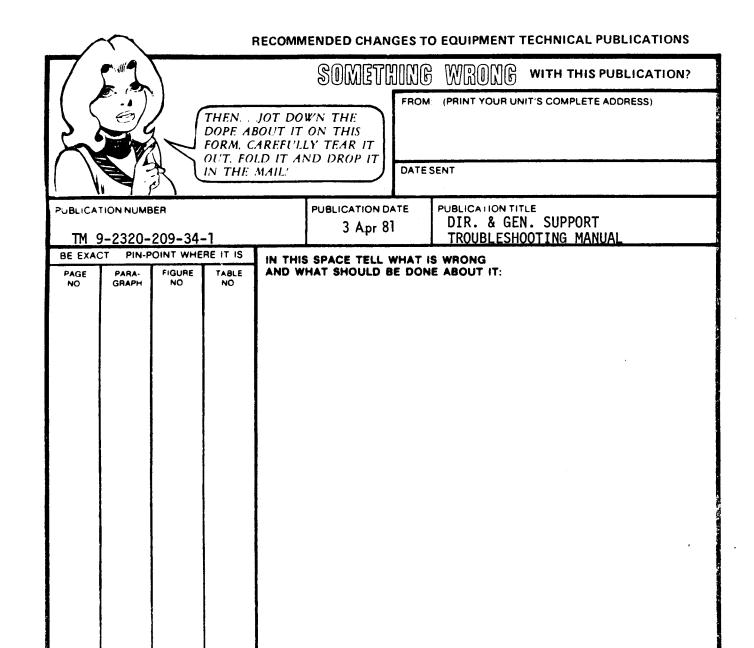

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

ILL IN YOUR	
<u> </u>	_

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commander U.S. Army Tank-Automotive Command ATTN: DRSTA-MB Warren, MI 48090

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

		SOMETHIC	B WRONG WITH THIS PUBLICATION?	
	THEN JOT DO DOPE ABOUT IT FORM, CAREFU DUT, FOLD IT A	OWN THE ON THIS LLY TEAR IT ND DROP IT	OM (PRINT YOUR UNIT'S COMPLETE ADDRESS)	
	N THE MAIL!	DA	TESENT	
PUBLICATION NUMBER TM 9-2815-210-34-1 PUBLICATION DATE ENGINE ASSEMBLIES, DIR. & GEN. SUPP. TROUBLESHOOTING				
BE EXACT. PIN-POINT WHER PAGE PARA FIGURE NO GRAPH NO	ירוו וחו	S SPACE TELL WHA HAT SHOULD BE D	T IS WRONG ONE ABOUT IT:	
			·	
PRINTED NAME GRADE OR TITLE A	NO TELEPHONE NUM	BER SIGN	HERE	

	FILL IN YOUR UNIT'S ADDRESS	
DEPART	TMENT OF THE ARMY	•
0	FFICIAL BUSINESS	

Commander U.S. Army Tank-Automotive Command ATTN: DRSTA-MB Warren. MI 48090

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS



SOMETHING WRONG

WITH THIS PUBLICATION?

THEN. JOT DOWN THE DOPE ABOUT IT ON THIS FORM, CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL! FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

PUBLICATION NUMBER

PUBLICATION DATE

PUBLICATION TITLE

3 Apr 81

DIR. & GEN. SUPPORT

TM 9-2320-209-34-1 TROUBLESHOOTING MANUAL BE EXACT. PIN-POINT WHERE IT IS IN THIS SPACE TELL WHAT IS WRONG TABLE NO AND WHAT SHOULD BE DONE ABOUT IT: FIGURE PAGE PARA-GRAPH NO

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

	FILL IN YOUR UNIT'S ADDRESS	
DEPART	MENT OF THE ARMY	-

OFFICIAL BUSINESS

Commander U.S. Army Tank-Automotive Command ATTN: DRSTA-MB Warren, MI 48090

FOLD BACK

THE METRIC SYSTEM AND EQUIVALENTS

LINEAR MEASURE

- 1 Centimeter = 10 Millimeters = 0.01 Meters = 0.3937 Inches
- 1 Meter= 100 Centimeters = 1000 Millimeters = 39.37 Inches
- 1 Kilometer=1000 Meters=0.621 Miles

WEIGHTS

- 1 Gram = 0.001 Kilograms = 1000 Milligrams = 0.035 Ounces
- 1 Kilogram = 1000 Grams = 2.2 Lb
- 1 Metric Ton = 1000 Kilograms = 1 Megagram = 1.1 Short Tons

LIQUID MEASURE

1 Milliliter=0.001 Liters=0.0338 Fluid Ounces 1 Liter=1000 Milliliters=33.82 Fluid Ounces

SQUARE MEASURE

- 1 Sq Centimeter≈100 Sq Millimeters= 0.155 Sq Inches 1 Sq Meter=10,000 Sq Centimeters=10.76 Sq Feet 1 Sq Kilometer=1,000,000 Sq Meters=0.386 Sq Miles

CUBIC MEASURE

1 Cu Centimeter = 1000 Cu Millimeters = 0.06 Cu Inches 1 Cu Meter = 1,000,000 Cu Centimeters = 35.31 Cu Feet

TEMPERATURE

 $5/9 ({}^{0}F - 32) = {}^{0}C$

2120 Fahrenheit is equivalent to 1000 Celsius 900 Fahrenheit is equivalent to 32.20 Celsius 320 Fahrenheit is equivalent to 00 Celsius 9/5 C0 + 32=F0

APPROXIMATE CONVERSION FACTORS

TO CHANGE	то	MULTIPLY BY
Inches	Centimeters	2.540
	Meters	
Yards	Meters	0.914
Miles	Kilometers	1.609
Square Inches	Square Centimeters	6.451
	Square Meters	
	Square Meters	
	Square Kilometers.	
	Square Hectometers	
	Cubic Meters	
	Cubic Meters	
	Milliliters	
	Liters	
	Liters	
	Liters	
	Grams	
	Kilograms	
	Metric Tons	
	Inch Kilopascals	
	Kilometers per Lite	
miles per nour	Kilometers per Hour	1.609

TO CHANGE	<u>TO</u>	MULTIPLY BY
Centimeters	Inches	0.394
Meters		
Meters		
Kilometers	Miles	0.621
Square Centimeters	Square Inches	0.155
Square Meters	Square Feet	10.764
Square Meters	Square Yards	1.196
Square Kilometers		
Square Hectometers		
Cubic Meters		
Cubic Meters		
Milliliters		
Liters		
Liters	Quarts	
Liters	Gallons	
Grams	Ounces	
Kilograms	Pounds	
Metric Tons	Short Tons	1.102
Newton-Meters		
Kilopascals	Pounds per Square I	nch . 0.145
Kilometers per Liter	Miles per Gallon .	2.354
Kilometers per Hour	Miles per Hour	0.621



This fine document...

Was brought to you by me:



<u>Liberated Manuals -- free army and government manuals</u>

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap "watermarks" and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

Free Military and Government Manuals

- SincerelyIgor Chudovhttp://igor.chudov.com/
- Chicago Machinery Movers