3 APRIL 1992

(Supersedes LO 5-2805-258-12,20 September 1989)

ENGINE, GASOLINE, 10 HP,
MILITARY STANDARD MODELS
MODEL 2A042-2, NSN 2805-00-952-3927)
MODEL 2A042-3, NSN 2805-00-872-5971)

References TM 9-2805-258-14, C9100-1 L and FM9-207

REPORTING OF ERRORS

You can improve this publication by calling attention to errors and by recommending improvements and stating your reasons for the recommendations. Your letter or DA Form 2028, Recommended Changes to Publications and Forms, should be mailed directly to Commander, US Army Troop Support Command, ATTN: AMSTR-MMTS, 4300 Goodfellow Boulevard, St. Louis, MO 631 20–1 798. A reply will be furnished directly to you.

NOTES

This LO is for crew/operator (C) or organizational (O) maintenance. Lube intervals (on-condition or hard time) and task hour times are based on normal hours of operation. Change the intervals if your lubricants are contaminated or if you are operating the equipment under adverse operating conditions. Lube more during constant use and less during periods of low activity. Adequate preservation precautions must be taken during inactive periods. Use correct grade of lubricant for seasonal temperature expected.

WARNING - Dry cleaning solvent PD-680 used to clean parts is potentially dangerous to personnel and property. Avoid repeated and prolonged skin contact. Do not use near open flame or excessive heat. Flash point of solvent is 100°F-138°F(38°C-60°C).

Clean parts with dry cleaning solvent PD-680 and dry before lubricating.

Before you start your lube service.

ALWAYS

NEVER

- a. Clean parts before lubricating.
- b. Use the lubrication order as your guide.
- a. Use wrong type/grade lubricant.
- b. Use too much lubricant.

The 10 HP military standard gasoline engine is not enrolled in the Army Oil Analysis Program (AOAP) HARD TIME INTERVALS APPLY.


DISTRIBUTION STATEMENT A - Approved for public release; distribution is unlimited.

*TOTAL TASK-HR		*TOTAL TASK-HR		
INTERVAL 8	TASK-HR 0.1	INTERVAL 500	TASK-HR 0.3	
50	0.5			

^{*}The time specified is the time required to perform all services at the particular interval (on-condition or hard time).

LUBRICANT . INTERVAL

INTERVAL . LUBRICANT

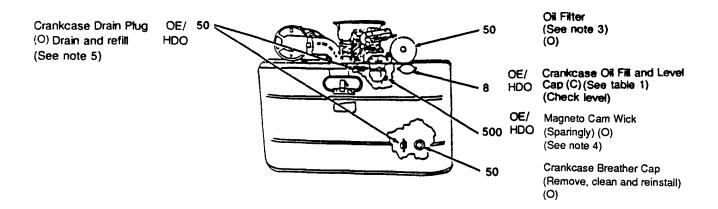

MODELS 2A042-2 AND 2A042-3

TABLE 1. Lubricant Table for 10 HP Military Standard Gasoline Engine

Temperature Range	Lubricant MIL. Symbol (NATO CODE) Specification	Capacity	Interval	Task–hour		
Above + 32°F (Above 0°C	OE/HDO 15/40 (0-1236) MIL-L-2104 OE/HDO 30 (0-238) MIL-L-2104	*2 1/2 qt or (2.375L)	50 hrs 25 hrs	0.5		
-10°F to + 40°F (-23°C to + 5°C)	OE/HDO 15/40 .(0-1236) ,MIL-L-2104	*2 1/2 qt or (2.375L)	50 hrs 25 hrs	0.5		
-65°F to 0°F (-50°C to -18°C)	OEA/APGPD-1 (D183) MIL-L46167	*2 1/2 qt or (2.375L)	50 hrs	0.5		
* Crankcase. ** Oil Can Points, See note 2.						

NOTES:

- 1. FOR OPERATION OF EQUIPMENT IN PROTRACTED COLD TEMPERATURE -10°F (-23°C). Remove lubricant prescribed in table 1 for temperatures above -10° F (-23° C). Clean parts with dry cleaning solvent PD-680. Relubricate with lubricants specified in table 1 for temperatures below -10°F (-23° C). For arctic operation refer to FM 9-207.
- 2. OIL CAN POINTS. Every 25 hours lubricate all exposed adjusting threads with OE/HDO.
- 3. OIL FILTER Element/Spin-on types. Oil filters shall be serviced/cleaned/changed as applicable when:
 - a. They are known to be contaminated, or clogged;
 - b. At prescribed on-condition or hard time intervals.
- 4. InSure cam wick is lubricated with OE/HDO (sparingly) whenever ignition contact points are replaced or adjusted.
- 5. CRANKCASE. Drain crankcase when hot. Every 50 hours drain and refill crankcase, operate engine for five minutes, check for leaks, check crankcase oil level and bring to full mark.

Copy of this lubrication order will remain with the equipment at all times; instructions herein are mandatory.

By Order of the Secretaries of the Army and Navy (Including the Marine Corps):

GORDON R. SULLIVAN General, United States Army Chief of Staff

Official: Milto H. Hamilton

MILTON H. HAMILTON Administrive Assistant to the Secretary of the Army

00917

DAVID E. BOTTORFF

Rear Admiral, CEC, US Navy
Commander
Navy Facilities Engineering Command

H.E. REESE

Deputy for Support

Marine Corps Research, Development and

Acquisition Command

DISTRIBUTION:

To be distributed in accordance with DA Form 12-25E, qty rqr block no. 4153.

♥ U.S. GOVERMENT PRINTING OFFICE : 1995 O - 386-730 (02305)

This fine document...

Was brought to you by me:



<u>Liberated Manuals -- free army and government manuals</u>

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap "watermarks" and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

Free Military and Government Manuals

- SincerelyIgor Chudovhttp://igor.chudov.com/
- Chicago Machinery Movers